NRC FORM 658
(9-1999)

U.S. NUCLEAR REGULATORY COMMISSION

TRANSMITTAL OF MEETING HANDOUT MATERIALS FOR IMMEDIATE PLACEMENT IN THE PUBLIC DOMAIN

This form is to be filled out (typed or hand-printed) by the person who announced the meeting (i.e., the person who issued the meeting notice). The completed form, and the attached copy of meeting handout materials, will be sent to the Document Control Desk on the same day of the meeting; under no circumstances will this be done later than the working day after the meeting.
Do not include proprietary materials.

DATE OF MEETING
10/21/2003

The attached document(s), which was/were handed out in this meeting, is/are to be placed in the public domain as soon as possible. The minutes of the meeting will be issued in the near future. Following are administrative details regarding this meeting:

Docket Number(s)	50-346
Plant/Facility Name	Davis-Besse
TAC Number(s) (if available)	
Reference Meeting Notice	2003-0761
Purpose of Meeting (copy from meeting notice)	Discuss the modification of the high pressure injection pumps.

NAME OF PERSON WHO ISSUED MEETING NOTICE	TITLE
Jon Hopkins	Senior Project Manager

OFFICE
NRR

DIVISION
DLPM

BRANCH
LPD3

Distribution of this form and attachments:
Docket File/Central File
PUBLIC

DF01

FirstEnergy.

Davis-Besse Nuclear Power Station

Modification of High Pressure Injection Pumps

1

FirstEnergy.

Agenda

- Opening Remarks..... Gary Leidich
- Modification Design..... Bob Schrauder
- Analysis and Qualification Testing .....Bob Coward, MPR
- Conclusion.....Gary Leidich

Gary Leidich
President and Chief Nuclear Officer - FENOC

2

FirstEnergy.

Opening Remarks

Gary Leidich

President and Chief Nuclear Officer - FENOC

FirstEnergy.

Desired Outcome

- NRC and the public gain confidence that pump modifications and associated testing and analysis ensure the HPI pumps will perform their required safety functions under all design conditions

FirstEnergy.

Overview

- Background
  - Implemented Building Block approach in 2002 that included assuring the health of plant systems
  - System Health Assurance identified the High Pressure Injection Pumps as an original design issue since fine particles from the Containment Emergency Sump could potentially damage the pumps during the loss-of-coolant accident (LOCA) recirculation mode
- Today
  - Present how these findings were resolved and provide assurance the HPI Pumps are capable of performing their design function

5

FirstEnergy.

Davis-Besse Restart Building Blocks

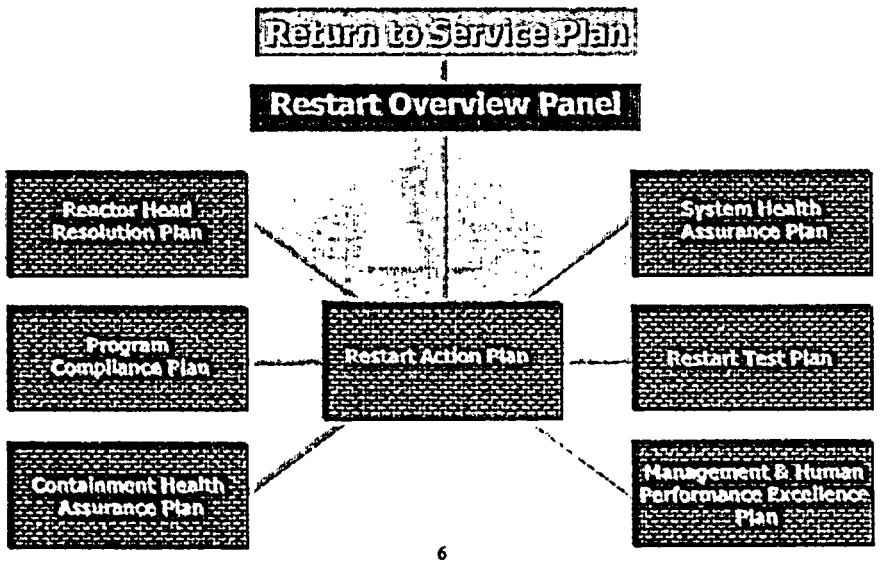

6

FirstEnergy.

Modification Design

Bob Schrauder
Director -Support Services

7

FirstEnergy.

High Pressure Injection Pumps

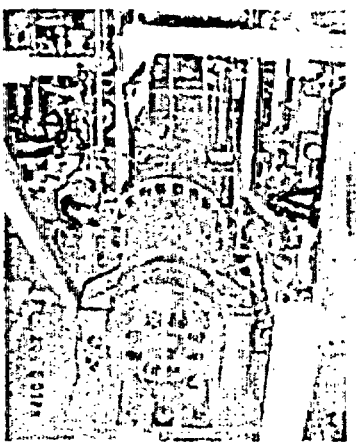

- Manufacturer
  - Babcock and Wilcox Canada
- Type
  - Horizontal, eleven stage centrifugal pumps
  - 600 HP electric motors
  - Hydrostatic bearing
- Design Pressure/Temperature
  - 2000 psig/ 300°F
- Design/Manufacture Code
  - ASME Pump & Valve Code, Class II, November 1968
- Surveillance Test/Inservice Testing
  - ASME Operation and Maintenance Code (1995 Edition with 1996 Addenda)
- This design is unique to Davis-Besse in domestic nuclear industry

8

FirstEnergy.

HPI Pump Operational Environment

- Borated Water Storage Tank Operation
  - Surveillance Testing
  - Initial Post-LOCA mode
- Sump Recirculation Operation
  - In post-LOCA recirculation mode operation, HPI pump suction is from Containment Emergency Sump through LPI pumps
  - Sump may contain debris from LOCA blowdown and containment spray actuation
  - HPI Pumps must be capable of operating with debris in the pump flow

FirstEnergy.

HPI Pump Original Design Issues

- System Health Assurance identified design issues
  - Hydrostatic bearing plugging
    - Bearing orifices are smaller than emergency sump strainer and could become plugged
    - Bearing pocket clearances are smaller than sump strainer
  - Close clearance wear
    - Preliminary rotordynamics analyses suggested increases in clearances due to wear by debris could lead to operation at critical speeds
    - Increased clearances will degrade pump hydraulic performance
  - Supply path to cyclone separator (seal water) could be smaller than sump strainer and may become plugged

FirstEnergy.

Original Hydrostatic Bearing

- Orifices in supply to hydrostatic bearing pockets are 0.109 inch diameter
- New containment emergency sump strainer has 0.188 inch diameter openings
- Orifices may plug with debris that passed through sump strainer, degrading bearing performance

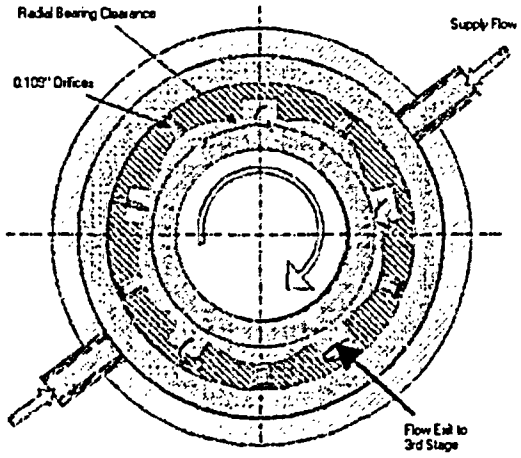

11

FirstEnergy.

Original Hydrostatic Bearing

- Bearing includes tight clearances (0.006 inch to 0.007 inch) at edges of pockets
- Debris in supply water may be larger than clearance and accumulate in the bearing pocket
- Degradation of bearing performance may impact pump operation

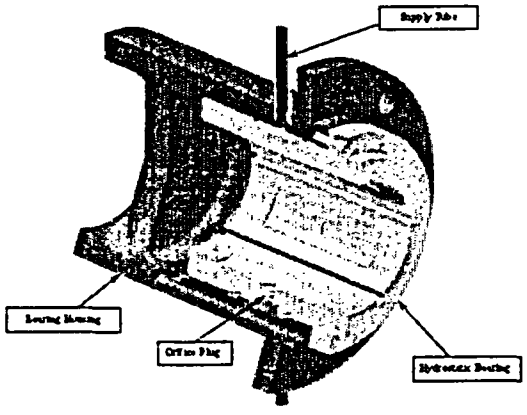

12

FirstEnergy

Close Clearances Wear

- Pump design includes tight clearances
  - –Central volute bushing (0.006 inch to 0.007 inch)
  - –Hydrostatic bearing (0.006 inch to 0.008 inch)
  - –Wear rings (0.009 inch to 0.010 inch)
- Debris in water may increase rate of wear of the fine clearances
  - –Increased clearances could result in operation at critical speeds
  - –Increased clearances could decrease hydraulic performance capability

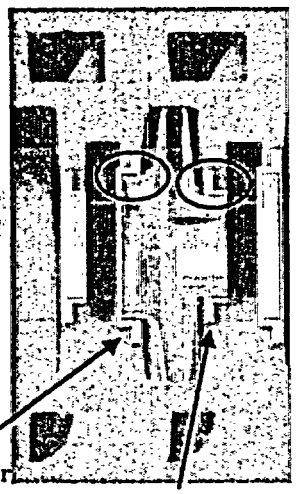

Suction Wear Ring

Discharge Wear Ring

FirstEnergy

HPI Pump Configuration

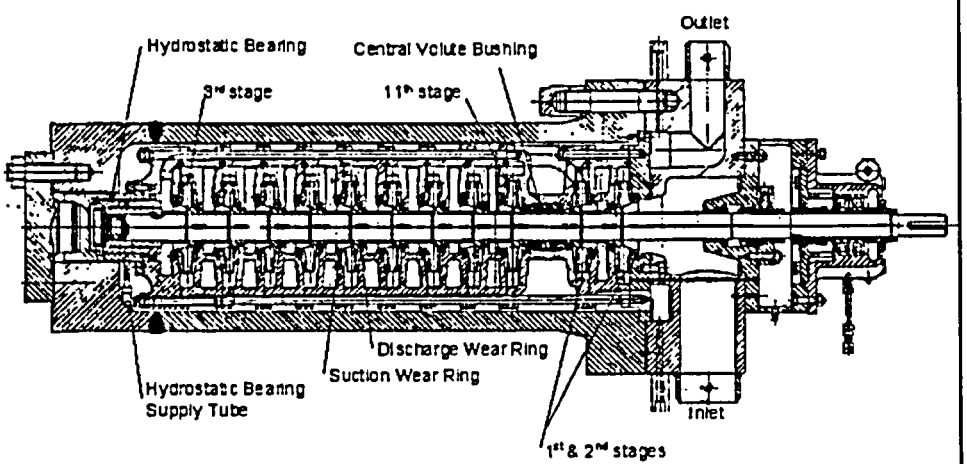

FirstEnergy.

HPI Pump Internal Assembly

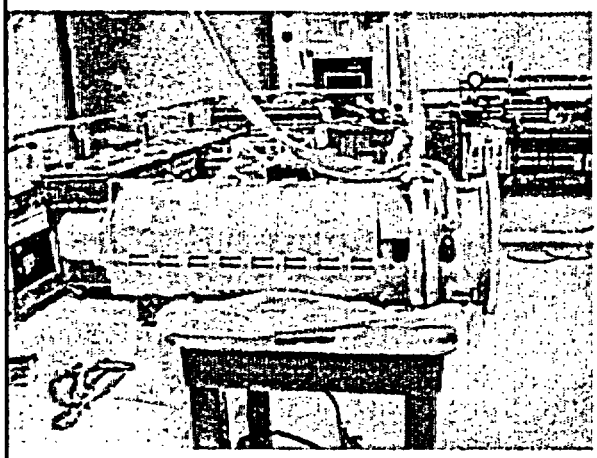

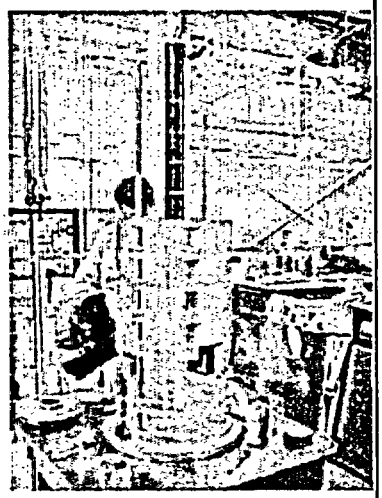

15

FirstEnergy.

HPI Pump Volute

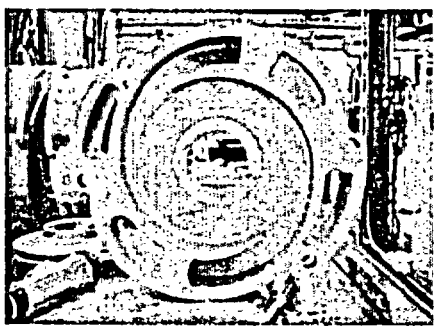

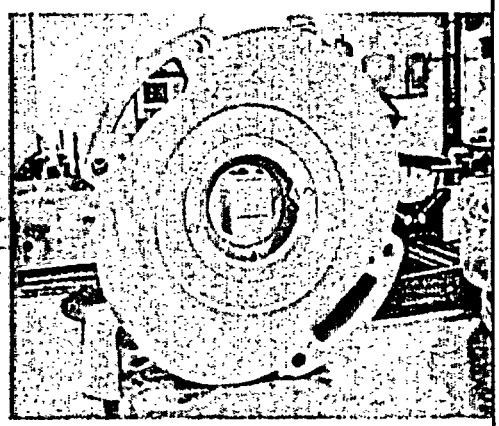



16

FirstEnergy

Original Hydrostatic Bearing

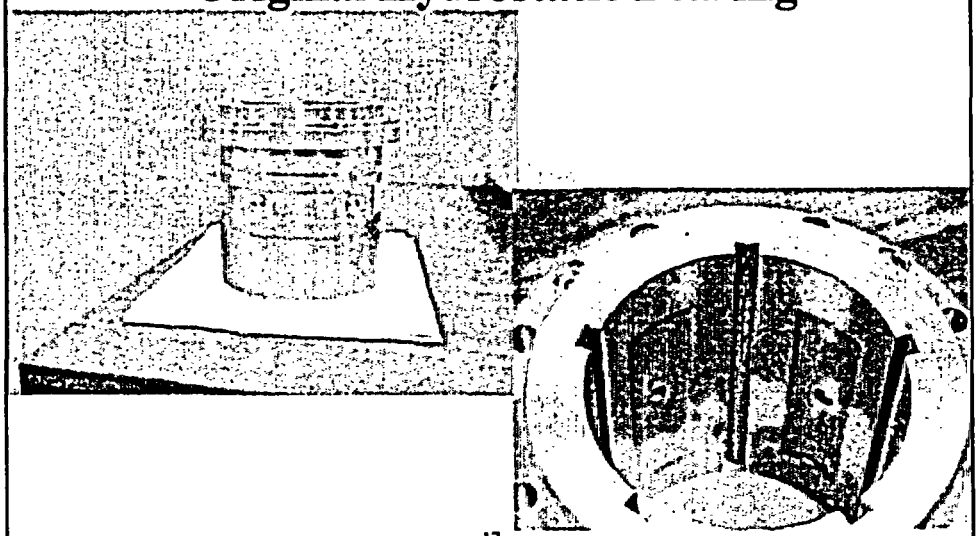

FirstEnergy

Resolution Objective

- Implement a resolution plan that fully resolves HPI pump debris issue that
  - Modifies only the HPI pump
  - Assures compliance with existing licensing basis, procedures, Updated Safety Analysis Report, and design basis documents
  - Meets requirements of Technical Specifications

FirstEnergy.

Initial Modification Approach

- Modifications
  - Install self-flushing strainer on volute to prevent plugging of hydrostatic bearing supply line orifice
  - Move supply line take-off to suction side of volute

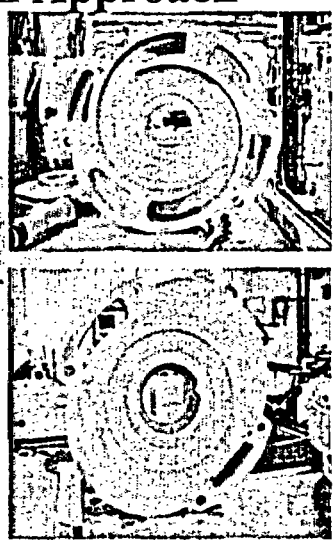

19

FirstEnergy.

Initial Modification Approach

- Key Assumptions to be verified
  - Strainer would be self-flushing and remain clear of debris
  - Debris larger than bearing clearance would be crushed by bearing and pass through clearance
  - Wear of close clearances would be minimal and uniform
  - Pump operation at critical speeds would not cause vibration or other operational challenges

20

FirstEnergy

Developmental Test Results

- The original test conditions were unrealistic – LBLOCA debris for SBLOCA operating conditions
- Several key assumptions proved invalid
  - Soft, larger debris became lodged in bearing pockets and orifices
  - Velocities in volute were not sufficient to keep finer strainers clear
  - Wear was greater than anticipated, particularly for soft components
  - Close clearances are subject to plugging

21

FirstEnergy

Revised Design Concept

- Three primary load carrying components: hydrostatic bearing, wear rings, and central volute bushing
- Rotordynamic analyses show several acceptable conditions
  - Functional hydrostatic bearing and bushing
  - Functional hydrostatic bearing and wear rings
  - Functional wear rings and bushing
- Use defense-in-depth approach and address all three components to ensure they function under debris loading

22

FirstEnergy

Revised Design Concept
(Continued)

- Use 50 mil strainer to protect hydrostatic bearing orifices
- Locate strainer on discharge side of impeller, close to wear ring to reduce concentration and size of debris reaching hydrostatic bearing
  - Wear ring acts as a strainer
  - Centrifugal effect on heavier debris maximized
  - Discharge side of volute maintains high velocity for all pump flows
  - Standard approach used by Pump Guinard for French PWRs

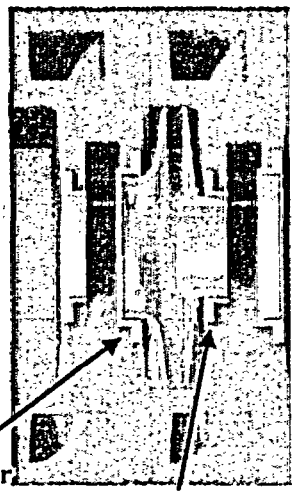

23

FirstEnergy

Volute Modifications

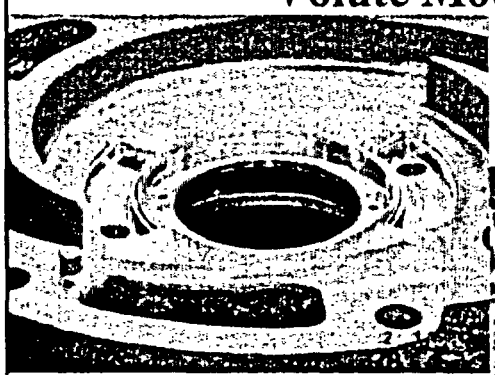

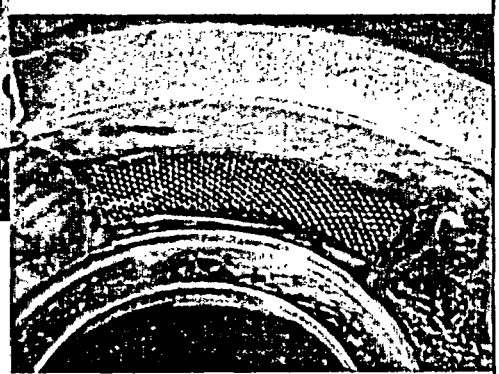

24

FirstEnergy.

Revised Design Concept
(Continued)

- Modify hydrostatic bearing to improve debris tolerance
  - –Add "escape" grooves to pocket
  - –Change rectangular pocket to "8" pocket based on Pump Guinard design

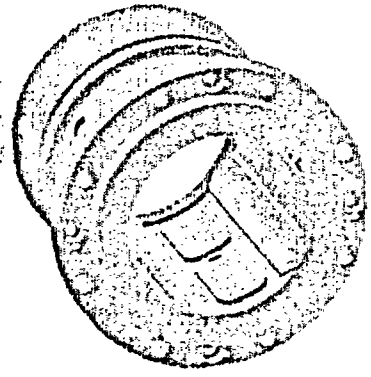

"8" Pocket Hydrostatic Bearing

25

FirstEnergy.

Revised Design Concept
(Continued)

- Hardface all critical wear surfaces: wear rings, bushing and shaft sleeve, hydrostatic bearing and sleeve

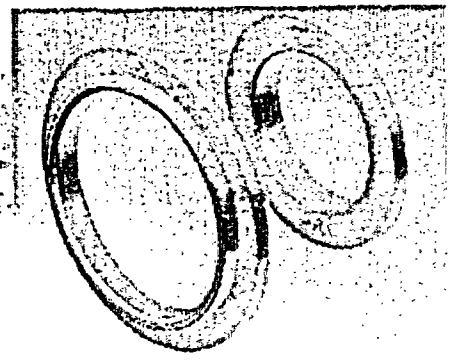

Suction and Discharge Wear Rings

26

FirstEnergy.

Analysis and Qualification Testing

Bob Coward
MPR Associates

FirstEnergy.

Modification Design Analyses

- Volute stress analysis
- Strainer stress analysis
- Hydrostatic bearing load carrying capability and stiffness
- Failure modes and effects analysis
- Hardfaced parts equivalency evaluations

FirstEnergy

Volute Finite Element Model

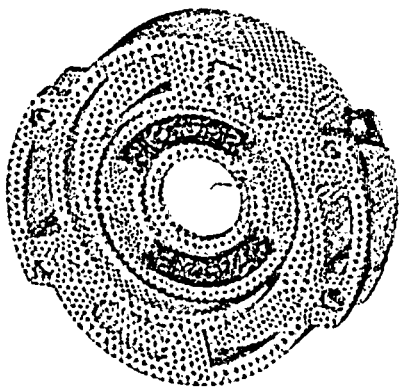

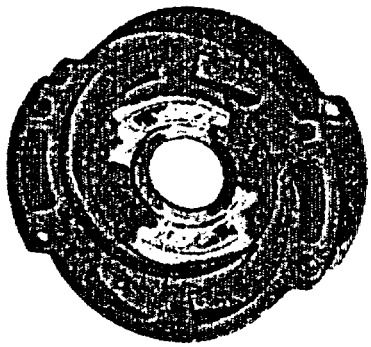

29

FirstEnergy

Strainer Finite Element Analysis
Stress

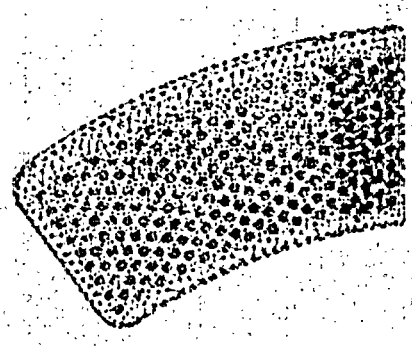

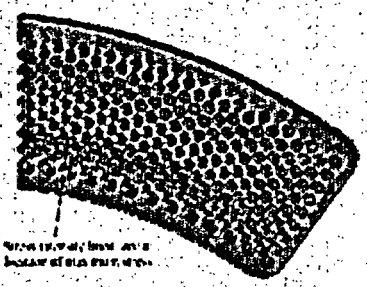

30

FirstEnergy.

Hydrostatic Bearing Analysis

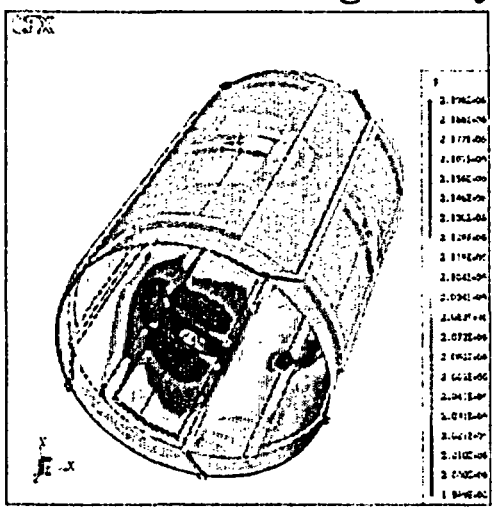

31

FENOC

FirstEnergy.

Failure Mode and Effects Analysis

- Considered all modifications to pump
- Evaluated potential failure modes for modification design
- Concluded no new failure modes are introduced

32

FENOC

FirstEnergy.

Qualification Testing Overview

- Use separate effects testing to evaluate pump internal components individually
  - Avoids contamination concerns
  - Addresses parts availability concerns
  - More flexible than full pump test
- Key elements of program included:
  - Fixture designs match critical characteristics of HPI pump
  - Full scale components
  - Debris characterization based on Davis-Besse containment
  - All testing in accordance with MPR's Quality Assurance Program

33

FENOC

FirstEnergy.

Qualification Testing Configuration

- Five test loops
  - Loop 1 – Suction Wear Ring
  - Loop 2 – Discharge Wear Ring
  - Loop 3 – Hydrostatic Bearing
  - Loop 4 – Central Volute Bushing
  - Loop 5 – Hydrostatic Bearing Supply Strainer
- 8000 gallon supply tank simulating sump (including debris) supplied Loops 1, 2, 4, 5
- Loop 3 (hydrostatic bearing) supplied through Loop 5 strainer

34

FENOC

FirstEnergy

Qualification Testing Objectives

Loop	Objectives
Suction Wear Ring & Discharge Wear Ring	Measure Clearance Increase and Measure Flow Rates
Hydrostatic Bearing	Measure Clearance Increase and Confirm Adequate Flow
Central Volute Bushing	Measure Clearance Increase and Measure Flow Rates
Hydrostatic Bearing Supply Strainer	Confirm Adequate Flow

35

FirstEnergy

Typical Test Loop

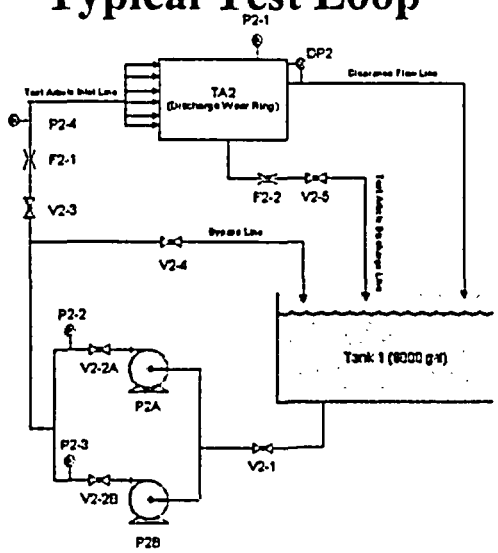

36

FirstEnergy.

Suction Wear Ring Test Fixture

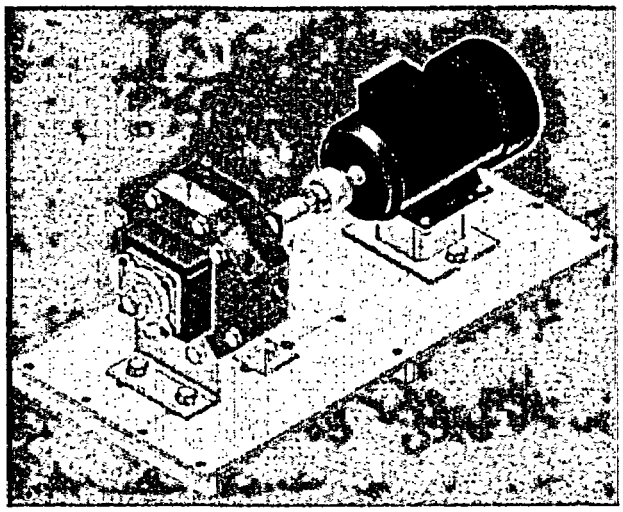

37

FirstEnergy.

Suction Wear Ring Test Fixture (Continued)

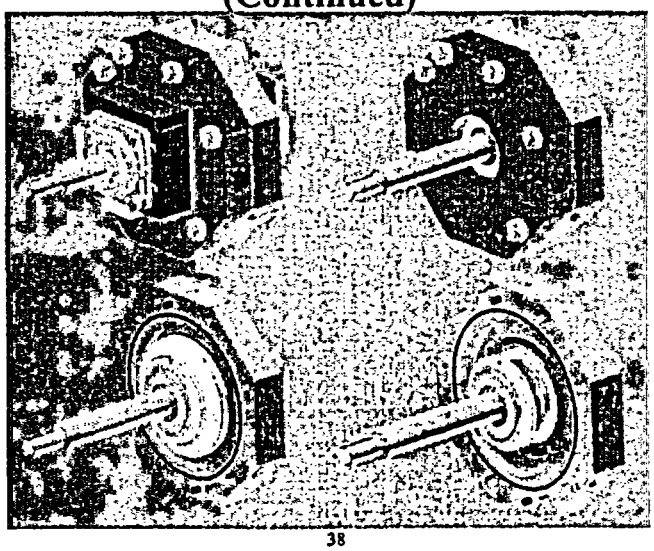

38

FirstEnergy.

Test Fixture Equivalency Evaluation

- Design Configuration
  - Verify test fixture dimensions and materials match the HPI pump internals
- Flow Fields
  - Hydraulic and Computational Fluid Dynamics (CFD) analysis of test fixtures compared to HPI pump
- Operating Conditions
  - Test flow rates and pressures consistent with HPI pump functions
- Debris Characteristics
  - Use types, sizes and quantities of the debris expected in LOCA

39

FirstEnergy.

CFD Modeling HPI and Loop 5 Pumps

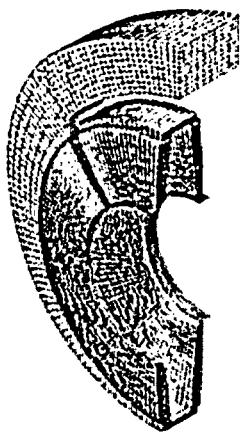

HPI Pump



Loop 5 Pump

40

FirstEnergy.

CFD Analysis Results

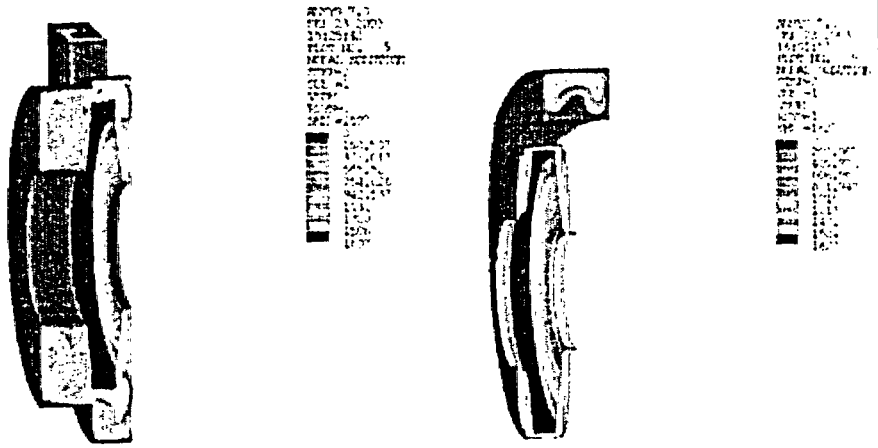

41

October 21, 2003 FENOC

FirstEnergy.

HPI Pump Operating Conditions

- SBLOCA operating conditions most challenging, but minimal debris
- LBLOCA most challenging debris, but not needed for short term cooling
- LBLOCA long term cooling (boron precipitation control) combines worst case debris with low flow/high head operation – testing performed for these operating conditions

42

October 21, 2003 FENOC

FirstEnergy.

Debris Characterization Approach

- Analyses based on debris generation and debris transport analyses for containment sump modification, as well as NRC-sponsored research
- Critical parameters, and their acceptance ranges, are defined for each debris type
- Commercial-off-the-shelf (COTS) materials selected to match critical characteristics
- Debris handling procedure addresses initial loading, sampling, and re-loading

43

FirstEnergy.

Debris Characterization Analysis

- Considered short term and long term debris generation
- Considered debris transport to sump strainer
- Particle sizes selected to increase pump degradation
- Debris "recipe" includes:
  - –Fiber (based on quantities after removal from containment)
  - –Rust
  - –Qualified and unqualified coatings
  - –Dirt and dust
  - –Concrete particles

44

FirstEnergy.

Conservatisms in Analysis

- No credit for filtering of small debris on sump strainer surfaces
- Particle/fiber sizes biased toward increasing potential for pump degradation
- All miscellaneous fibers assumed to transport to sump
- All unqualified coatings are assumed to fail and become debris in post-LOCA environment

45

FirstEnergy.

Suction Wear Ring Test Results

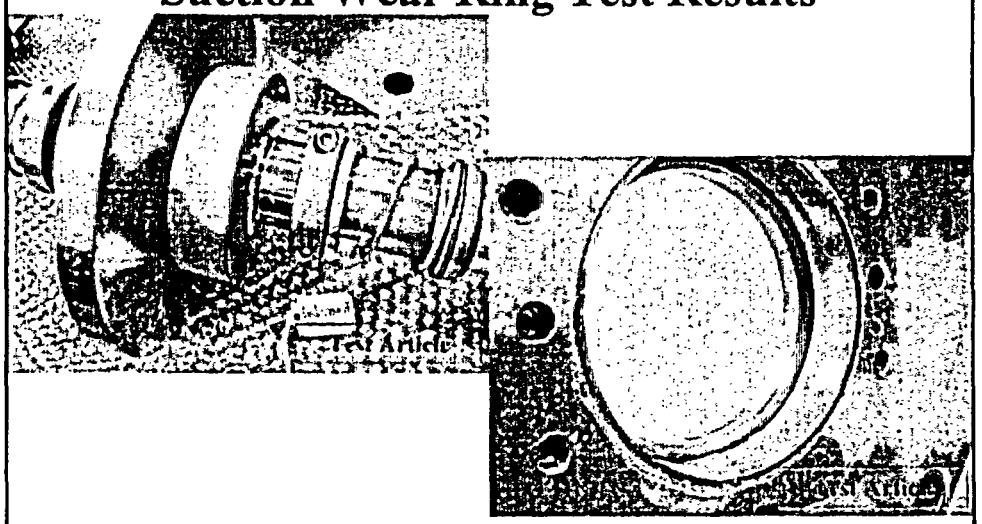

46

FirstEnergy.

Discharge Wear Ring Test Results

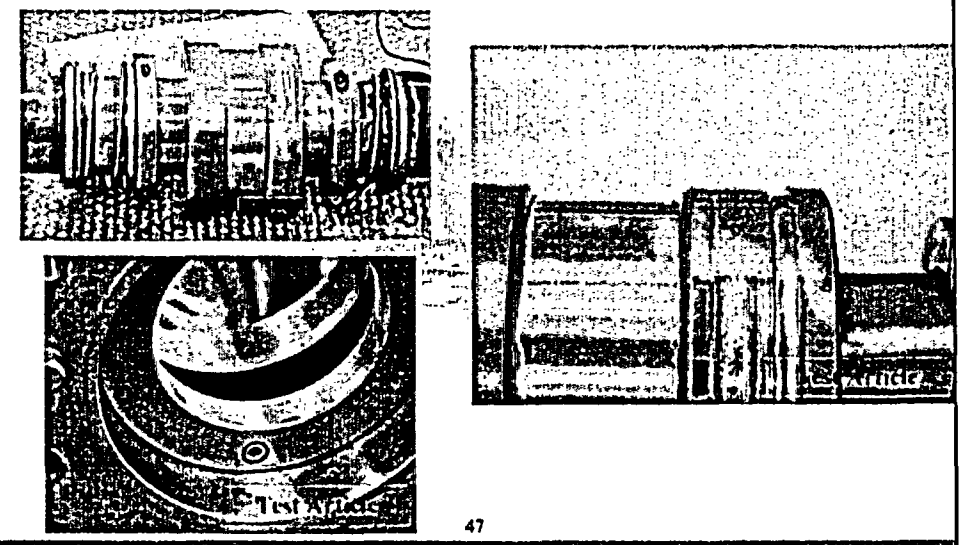

FirstEnergy.

Central Volute Bushing Test Results

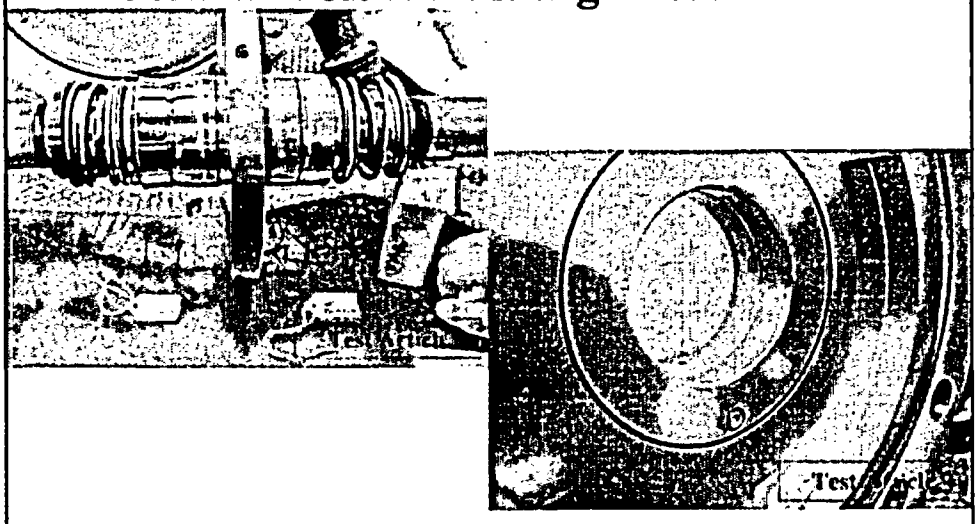

FirstEnergy.

Central Volute Bushing Test Results

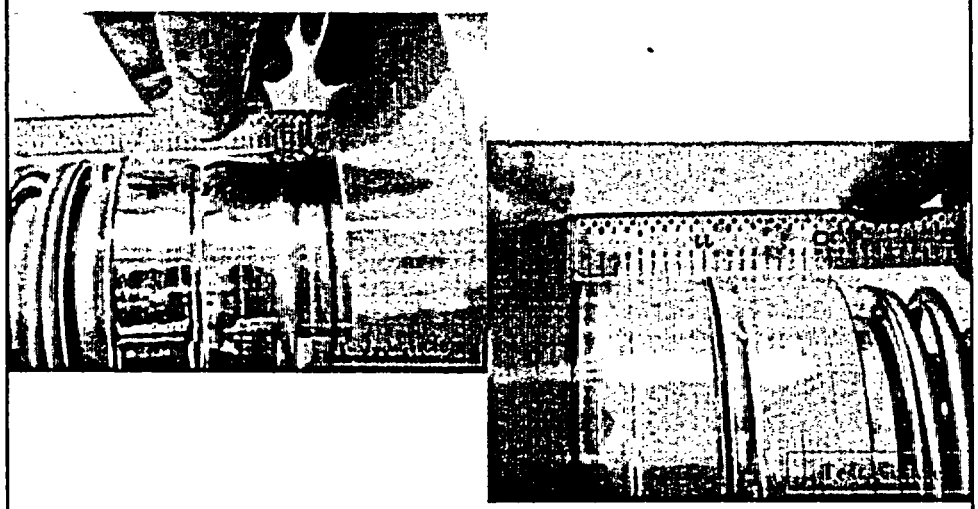

49

FirstEnergy.

Central Volute Bushing Test Results

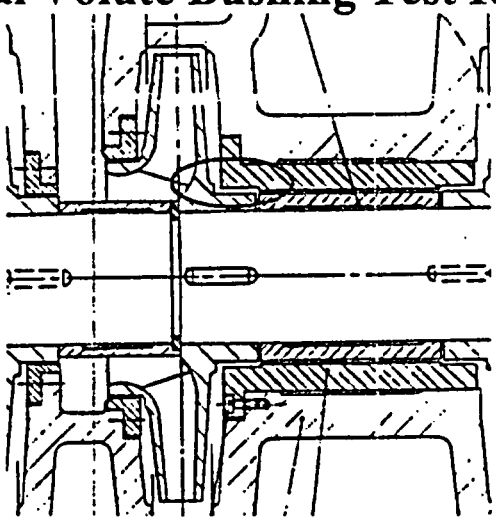

50

FirstEnergy.

Hydrostatic Bearing Test Results

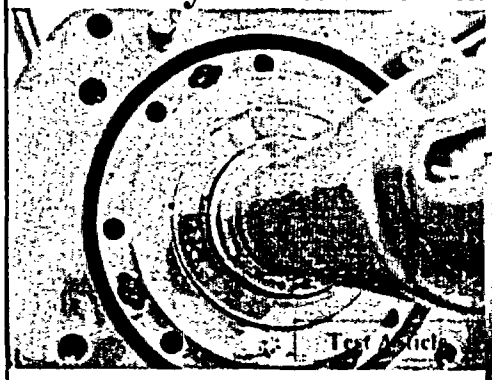

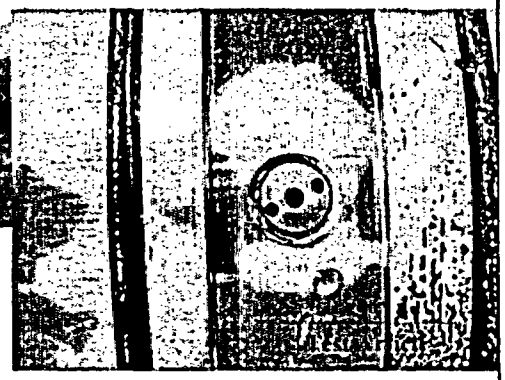

51

FirstEnergy.

Hydrostatic Bearing Test Results

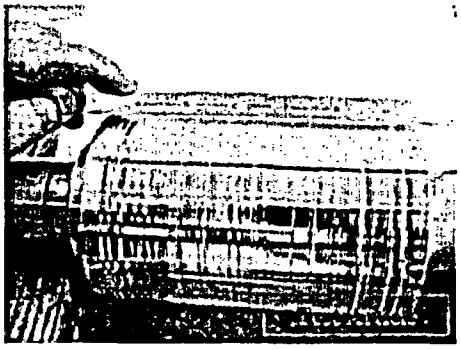

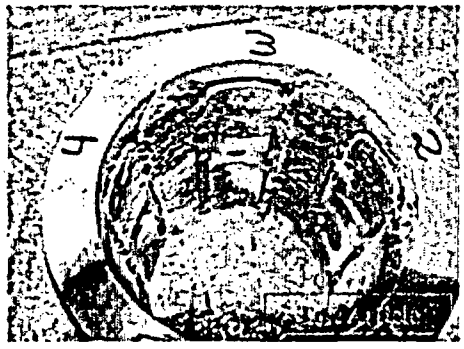

21 Days Testing

52

FirstEnergy.

Hydrostatic Bearing Test Results

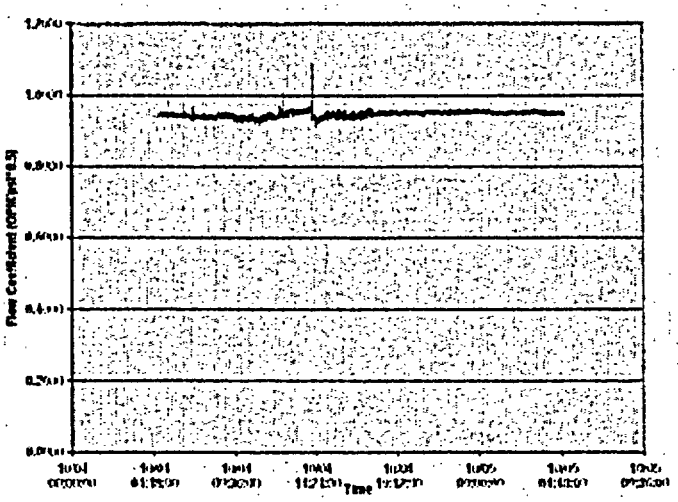

53

FirstEnergy.

Strainer Test Results

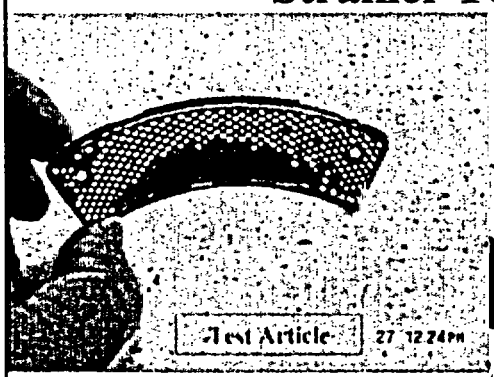

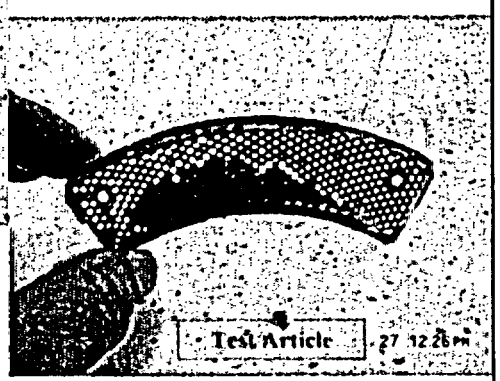

54

FirstEnergy.

Qualification Testing Results Summary

- Suction Wear Ring
  - Minimal wear on wear ring and impeller hub
  - Little impact on leakage flow
- Discharge Wear Ring
  - Minimal wear on wear ring
  - Abrasive "grooving" on impeller hub from plugging, small wear elsewhere on hub
  - Essentially no impact on pump performance

FirstEnergy.

Qualification Testing Results Summary (Continued)

- Central Volute Bushing
  - Minimal wear on bushing
  - Abrasive wear on shaft sleeve from plugging
  - Leakage flow depends on plugging and axial extent of abrasive wear
- Hydrostatic Bearing
  - Minimal wear on bearing
  - Abrasive wear on shaft sleeve
  - Bearing flow remained adequate (~ 5% decrease)
- Strainers
  - Essentially constant flow throughout test

FirstEnergy.

Performance Analyses

- Rotordynamics Analysis
  - To demonstrate that vibration levels for the worn condition of all pump parts are acceptable
  - Preliminary analysis results show acceptable results
- Hydraulic Analysis
  - To demonstrate the pump hydraulic performance in the worn condition is acceptable
  - Preliminary analysis results show considerable margin

57

FirstEnergy.

Rotordynamics Analysis Model

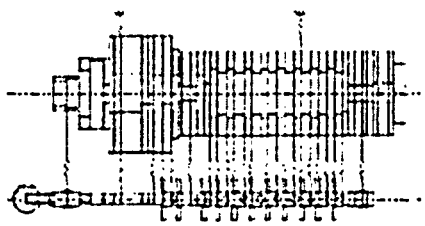

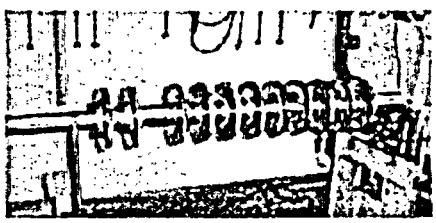

58

FirstEnergy.

Critical Speed Analysis

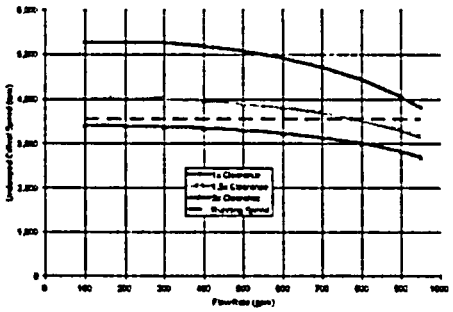

Original Hydrostatic Bearing

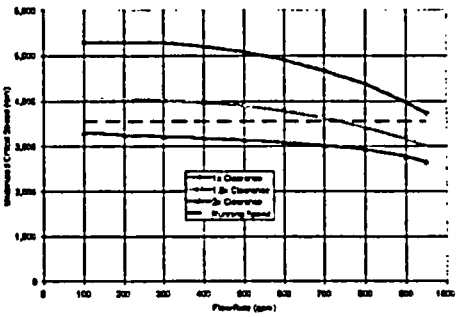

Replacement Hydrostatic Bearing

59

FirstEnergy.

Forced Response Analysis

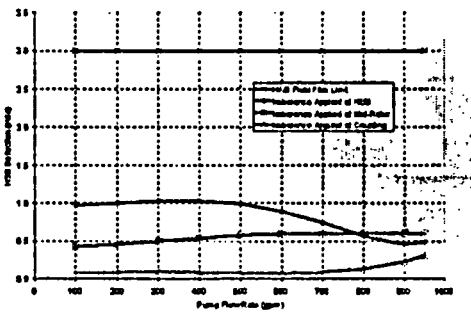

75% Central Volute Bushing Length

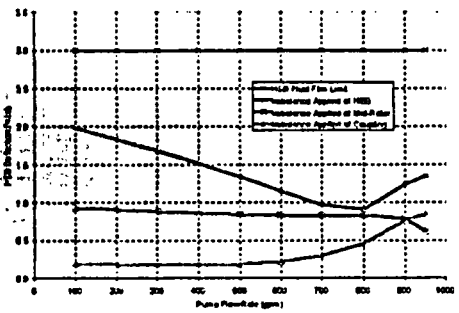

50% Central Volute Bushing Length

60

FirstEnergy.

Hydraulic Performance Analysis

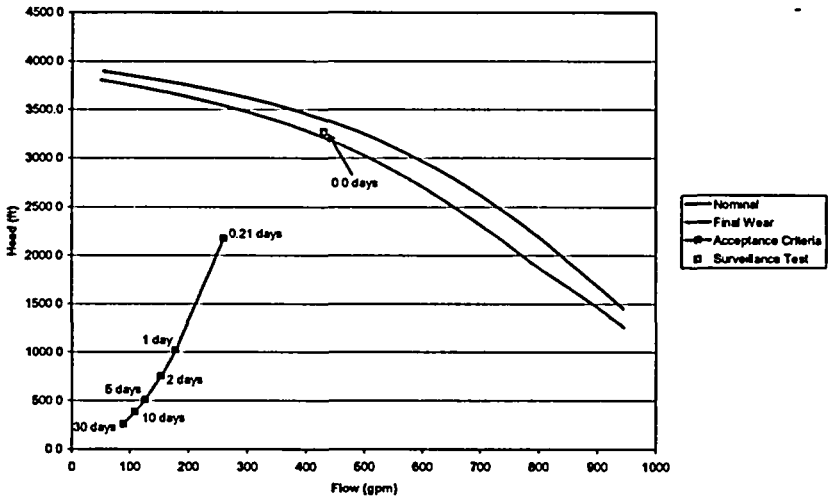

61

FirstEnergy.

French Experience

- French PWRs use similar class pump for make-up/HPI
- Nuclear Safety Authority requested validation pumps would operate satisfactorily in emergency conditions
  - –Comprehensive testing performed in 1980-1981
  - –Pump design modified to increase debris tolerance
- Main design features were:
  - –Moved hydrostatic bearing take-off to discharge side of volute
  - –Hardfaced close clearances
  - –Modified hydrostatic bearing pocket design to "H" bearing
  - –Replaced central volute bushing with hydrostatic bearing

62

FirstEnergy.

French Experience
(Continued)

- Davis-Besse HPI Pump modifications comparable to French modifications, with additional measures to improve debris tolerance

FirstEnergy.

Overall Approach Summary

Concern	Modifications	Testing	Analysis
HSB orifice and pocket plugging	•Installed strainer to filter debris •Moved HSB take-off to low debris location •Included debris escape grooves in HSB pockets	•Mock-up testing of strainer demonstrated adequate flow •Mock-up testing of HSB demonstrated adequate flow	•Completed structural analysis of volute/strainer •Completed HSB hydraulic analysis •FMEA •Completed evaluation of mock-up fixtures
Close clearance wear	•Installed replacement hardfaced parts to minimize wear	•Mock-up testing of new parts determined worn condition •In-plant testing of worn pump demonstrated acceptable performance	•Rotordynamics analysis demonstrated worn condition and new HSB are acceptable •Hydraulic analysis demonstrated worn condition is acceptable

FirstEnergy

Major Project Conservatisms

- Defense-in-depth approach to ensure satisfactory pump performance
- Mock-up testing did not include filtering effect of discharge wear ring for hydrostatic bearing flow
- Mock-up testing maintained initial debris concentrations for entire test – extreme measures were required to prevent settling and hideout
- All miscellaneous debris assumed to be transportable fiber
- Simulated coating materials in mock-up testing significantly stronger than containment coatings

65

FirstEnergy

Project Status

- Modification design completed, finalizing design change package
- Mock-up testing completed, finalizing data analysis
- Preliminary rotordynamic and hydraulic analysis completed, awaiting finalization of test report
- Pump modifications in progress

66

FirstEnergy.

Conclusion

Gary Leidich
President and Chief Nuclear Officer - FENOC

67

FirstEnergy.

Conclusion

- Modifications, along with associated analysis and testing, demonstrates that the HPI pumps will perform their safety functions

68