

NUREG/CR-7106 ORNL/TM-2011/298

# Generation of a Broad-Group HTGR Library for Use with SCALE

Office of Nuclear Regulatory Research

#### AVAILABILITY OF REFERENCE MATERIALS IN NRC PUBLICATIONS

NRC Reference Material	Non-NRC Reference Material
As of November 1999, you may electronically access NUREG-series publications and other NRC records at NRC's Public Electronic Reading Room at <u>http://www.nrc.gov/reading-rm.html.</u> Publicly released records include, to name a few, NUREG-series publications; <i>Federal Register</i> notices; applicant, licensee, and vendor documents and correspondence; NRC correspondence and internal memoranda; bulletins and information notices; inspection and investigative reports; licensee event reports; and Commission papers and their attachments. NRC publications in the NUREG series, NRC regulations, and <i>Title 10, Energy</i> , in the Code of <i>Federal Regulations</i> may also be purchased from one of these two sources. 1. The Superintendent of Documents U.S. Government Printing Office Mail Stop SSOP Washington, DC 20402–0001 Internet: bookstore.gpo.gov Telephone: 202-512-1800 Fax: 202-512-2250 2. The National Technical Information Service Springfield, VA 22161–0002 www.ntis.gov 1–800–553–6847 or, locally, 703–605–6000	Documents available from public and special technical libraries include all open literature items, such as books, journal articles, and transactions, <i>Federal</i> <i>Register</i> notices, Federal and State legislation, and congressional reports. Such documents as theses, dissertations, foreign reports and translations, and non-NRC conference proceedings may be purchased from their sponsoring organization. Copies of industry codes and standards used in a substantive manner in the NRC regulatory process are maintained at— The NRC Technical Library Two White Flint North 11545 Rockville Pike Rockville, MD 20852–2738 These standards are available in the library for reference use by the public. Codes and standards are usually copyrighted and may be purchased from the originating organization or, if they are American National Standards, from— American National Standards Institute 11 West 42 <sup>nd</sup> Street New York, NY 10036–8002 www.ansi.org 212–642–4900
A single copy of each NRC draft report for comment is available free, to the extent of supply, upon written request as follows: Address: U.S. Nuclear Regulatory Commission Office of Administration Publications Branch Washington, DC 20555-0001 E-mail: DISTRIBUTION.RESOURCE@NRC.GOV Facsimile: 301–415–2289 Some publications in the NUREG series that are posted at NRC's Web site address http://www.nrc.gov/reading-rm/doc-collections/nuregs are updated periodically and may differ from the last printed version. Although references to material found on a Web site bear the date the material was accessed, the material available on the date cited may subsequently be removed from the site.	Legally binding regulatory requirements are stated only in laws; NRC regulations; licenses, including technical specifications; or orders, not in NUREG-series publications. The views expressed in contractor-prepared publications in this series are not necessarily those of the NRC. The NUREG series comprises (1) technical and administrative reports and books prepared by the staff (NUREG–XXXX) or agency contractors (NUREG/CR–XXX), (2) proceedings of conferences (NUREG/CP–XXXX), (3) reports resulting from international agreements (NUREG/IA–XXXX), (4) brochures (NUREG/BR–XXXX), and (5) compilations of legal decisions and orders of the Commission and Atomic and Safety Licensing Boards and of Directors' decisions under Section 2.206 of NRC's regulations (NUREG–0750).

**DISCLAIMER:** This report was prepared as an account of work sponsored by an agency of the U.S. Government. Neither the U.S. Government nor any agency thereof, nor any employee, makes any warranty, expressed or implied, or assumes any legal liability or responsibility for any third party's use, or the results of such use, of any information, apparatus, product, or process disclosed in this publication, or represents that its use by such third party would not infringe privately owned rights.



Protecting People and the Environment

# Generation of a Broad-Group HTGR Library for Use with SCALE

Manuscript Completed: August 2011 Date Published: June 2012

Prepared by: R.J. Ellis, D.J. Lee\*, D. Wiarda, M.L. Williams, U. Mertyurek

Oak Ridge National Laboratory Managed by UT-Battele, LLC Oak Ridge, TN 37831-6170

\*Formerly of Oak Ridge National Laboratory

Don Algama, NRC Project Manager

NRC Job Code N6841

Office of Nuclear Regulatory Research

#### ABSTRACT

With current and ongoing interest in high temperature gas reactors (HTGRs), the U.S. Nuclear Regulatory Commission (NRC) anticipates the need for nuclear data libraries appropriate for use in applications for modeling, assessing, and analyzing HTGR reactor physics and operating behavior. The objective of this work was to develop a broad-group library suitable for production analyses with SCALE for HTGR applications. Several interim libraries were generated from SCALE fine-group 238- and 999-group libraries, and the final broad-group library was created from Evaluated Nuclear Data File/B Version ENDF/B-VII Release 0 cross-section evaluations using new ORNL methodologies with AMPX, SCALE, and other codes. Furthermore, intermediate resonance (IR) methods were applied to the HTGR broadgroup library, and lambda factors and f-factors were incorporated into the library's nuclear data files. A new version of the SCALE BONAMI module named BONAMI-IR was developed to process the IR data in the new library and, thus, eliminate the need for the CENTRM/PMC modules for resonance selfshielding. This report documents the development of the HTGR broad-group nuclear data library and the results of test and benchmark calculations using the new library with SCALE. The 81-group library is shown to model HTGR cases with similar accuracy to the SCALE 238-group library but with significantly faster computational times due to the reduced number of energy groups and the use of BONAMI-IR instead of BONAMI/CENTRM/PMC for resonance self-shielding calculations.

#### FOREWORD

In recognizing the need for nuclear data appropriate for HTGR applications, a robust and versatile broadgroup nuclear data library for use with SCALE was generated for the U.S. Nuclear Regulatory Commission. An HTGR-appropriate 81-group energy structure was selected with energy boundaries that are a subset of the standard SCALE 238-group structure. This nuclear data library is intended for HTGR applications. The final broad-group library was generated directly from ENDF/B-VII files using the latest methodology, and the intermediate resonance parameters, lambda factors and f-factors for important nuclides were included in the new library.

# **CONTENTS**

#### Page

AE	STRACT		iii
FO	REWORD		v
CC	NTENTS		vii
LIS	ST OF FIGU	JRES	ix
LIS	ST OF TAB	LES	xi
AC	KNOWLE	DGMENTS	xiii
AC	CRONYMS	AND ABBREVIATIONS	xv
1.	INTRODU	CTION	1
		RES AND METHODOLOGY FOR GENERATING HTGR LIBRARIES	
		DUCTION TO LIBRARIES S RELATED TO HTGR NEUTRONICS AND NUCLEAR DATA	
		S AND TECHNIQUES	
		RIML	
	2.3.2	Creating a Multigroup Library	4
		RATION OF LIBRARIES FROM ENDF/B-VII FILES	
		MEDIATE RESONANCE CONSIDERATIONS	
		IR method	
		Library generation	
	2.5.3	Library testing	11
		NG OF BONAMI-IR DURING IMPLEMENTATION INTO SCALE	
		ARY OF LIBRARY GENERATION METHODS	
		DATA LIBRARIES DUCTION	
		RATING BROAD-GROUP LIBRARIES	
		RIPTION OF THE BROAD-GROUP LIBRARIES	
	3.3.1	Library 81A	
	3.3.2	Library 81B	
	3.3.3	Library 81B2	
	3.3.4	Library 81B3	
	3.3.5	Library 81C	
4.	COMPARI	SON OF RESULTS WITH THE SCALE BROAD-GROUP LIBRARIES	
		Y AND RECOMMENDATIONS	
		CES	

APPENDIX A DESCRIPTION OF INTERMEDIATE RESONANCE METHOD IN SCALE A.1 Intermediate Resonance Approximation A.2 Computation Of Hydrogen-Equivalent Lambda Factors	A-3
APPENDIX B INPUT FILE FOR RADIAL CORE MODEL 999-GROUP (VHTR) MODEL	B-1
APPENDIX C INPUT FOR GENERATING CENTRM POINTWISE FLUX WEIGHTING FUNCTIONS	C-1
	<b>D</b> 1
APPENDIX D INPUT FOR TEST2R3_MG: SAMPLE JAPANESE HTTR BENCHMARK CASE .	D-1
APPENDIX E SCHEMATIC DIAGRAMS OF THE HTTR BENCHMARK CASE	E-1
APPENDIX F IR F-FACTOR	. F-1

# **LIST OF FIGURES**

#### <u>Page</u>

Figure 2.1.	Work flow for AMPX master library creation.	5
Figure 2.2.	AMPX sequence for producing neutron multigroup data	6
Figure 2.3.	Comparison of CENTRM pointwise flux weighting functions for the HTGR temperatures	8
Figure 3.1.	Comparison of HTGR spectra in 999-group calculations for a range of temperatures	15
Figure 3.2.	Comparison of HTGR spectra in 238- and 999-group calculations.	16
Figure 3.3.	Comparison of HTGR spectra (238 group and 999 group) in the 1 to 10 eV region	17
Figure 3.4.	HTGR spectra in the 10 to 100 eV region: comparison of fine-group solutions	18
Figure 3.5.	HTGR spectra in the 10 to 100 eV range for broad and fine group libraries.	18
Figure 3.6.	HTGR 238-group spectrum in the 10 to 100 eV region: broad-group comparisons	19

# LIST OF TABLES

Table 2.1.	Background cross sections for Bondarenko factors of <sup>238</sup> U	
	Assessing the IR-methods improvement to the library: HTR pin-cell test problem	
	Infinite homogeneous medium of 1.26% enriched LEU and H; background	
	XS ~ 100 b and temperature 300K	
Table 2.4.	Infinite homogeneous medium of 1.26% enriched LEU and H; background	
	$XS \sim 50$ b and temperature 300K	
Table 2.5.	Infinite homogeneous medium of 1.26% enriched LEU and H; background	
	XS ~ 25 b	12
Table 2.6.	Simplified PWR pin cell 3.34% enriched $UO_2$ , pitch = 1.44 cm; pellet	
	OR = 1.44 cm; temperature 300K	12
Table 2.7.	Double-het HTR pin cell and temperature 300K	13
Table 3.1.	Neutron energy group structure comparisons for 999-, 238-, and 81-group	20
Table 4.1.	keff comparisons for MG KENO homogeneous cell HTGR model	
Table 4.2.	k <sub>eff</sub> comparisons for homogeneous 1-D radial model	41
Table 4.3.	k <sub>eff</sub> results for HTTR benchmark case 1	
Table 4.4.	k <sub>eff</sub> results for HTTR benchmark case 2	
Table 4.5.	k <sub>eff</sub> results for HTR-10 pebble unit cell (1200K fuel, 900K coolant)	
Table 4 6.	k <sub>eff</sub> results for HTR-10 pebble unit (300K)	
Table 4.7.	k <sub>eff</sub> results for HTR-10 full core	

#### ACKNOWLEDGMENTS

This project was supported by the U.S. Nuclear Regulatory Commission, Office of Nuclear Regulatory Research. The authors are grateful for the assistance and support of Don Algama of the NRC Office of Nuclear Regulatory Research. The authors are grateful for the support and guidance of ORNL project managers Mike Dunn and Steve Bowman. The authors thank Harold Smith, Germina Ilas, and Matthew Jessee of ORNL and Don Carlson of NRC for their technical reviews. Also, thanks are extended to Angie Alford and Debbie Weaver for their efforts in preparing this manuscript for publication.

# **ACRONYMS AND ABBREVIATIONS**

1-D	one dimensional
2-D	two dimensional
3-D	three dimensional
AMPX	Analytical Methods Nuclear Cross-Section Processing Computer Code System
ASME	American Society of Mechanical Engineers
CE	continuous energy
CENTRM	Continuous Energy Transport Module
DCS	data control system
ENDF	evaluated nuclear data file
ENDF/B-VII.0	evaluated nuclear data file version VII
HTGR	high temperature gas reactor
HTR	high temperature reactor
HTS	heat transport system
HTTR	High Temperature Engineering Test Reactor
HX	heat exchanger
IR	intermediate resonance
LWR	light-water reactor
MOC	method of characteristics
MWd/te U	megawatt-days per metric ton of uranium
MWt	megawatt thermal
NGNP	next generation nuclear plant
NPP	nuclear power plant
NR	narrow resonance
NRC	U.S. Nuclear Regulatory Commission
OE	operating experience
ORNL	Oak Ridge National Laboratory
P&IC	pressure and inventory control
PBR	pebble bed reactor
pcm	parts per hundred thousand (cent mille)
PSA	probabilistic safety assessment
PW	pointwise
PWR	pressurized water reactor
RB	reactor building
RG	regulatory guide
SAS1X	SCALE <u>Shielding Analysis S</u> equence <u>1X</u>
SDC	shutdown cooling
SF	spent fuel
VHTR	very high temperature reactor
WR	wide resonance
XML	extensible markup language

### **1. INTRODUCTION**

Analyses and simulations for high temperature gas reactor (HTGR) models require appropriate nuclear data libraries. In order to perform timely production calculations, a suitable broad-group neutron energy structure is required. Calculations using the broad-group library need to provide results comparable to calculations performed with fine-group libraries or continuous energy calculations.

Until now, most broad-group libraries have been prepared or generated with the intention of being suitable for light water reactors (LWRs). In this work, it is the goal to generate a broad-group nuclear data library for use in the Oak Ridge National Laboratory (ORNL) SCALE code system [1,2] for HTGR applications. Several broad-group HTGR cross-section libraries were produced with SCALE modules (e.g. MALOCS) or through the use of AMPX [3,4] modules. The selection of a suitable broad-group neutron energy structure resulted from analysis and assessment of HTGR neutron spectra and features of neutron resonances and reactions. The final HTGR 81-group library produced in this work was generated directly from ENDF/B-VII nuclear data files using ORNL library generation techniques and procedures. In addition, intermediate resonance (IR) treatment methods were applied to generate intermediate resonance (IR) parameters (including lambda factors and f-factors) that were added to the library. Furthermore, some additions and augmentations were made to the SCALE code software (in particular, BONAMI-IR) to implement the capability to utilize the IR parameters. The 81-group library is expected to be released in SCALE 6.2.

This report provides details of the process in which the broad-group structure of neutron energy group boundaries was determined. In addition, testing of model scenarios and benchmark calculations were completed using SCALE for a range of representative HTGR-related models. The results from SCALE calculations using the new HTGR broad-group libraries were compared with similar calculations using fine-group and ultra fine-group libraries and also with continuous energy KENO and MCNP [5] model results.

## 2. PROCEDURES AND METHODOLOGY FOR GENERATING HTGR LIBRARIES

The methodology for producing a broad-group nuclear data library for HTGR applications in SCALE modeling and simulation utilized AMPX and SCALE software modules in conjunction with analysis and interpretation of calculated relevant neutron spectra.

#### 2.1 INTRODUCTION TO LIBRARIES

For this work, the main goal was to create an efficient and effective broad-group nuclear data library that would be suitable for use with SCALE HTGR models for production cases ranging from room temperature to 2000 K. The standard SCALE ENDF/B-VII cross-section library for reactor analysis contains 238 neutron energy groups. Recently, a fine-group library was generated, using a HTGR weighting function, with nuclear data in 999 neutron energy groups. An HTGR broad-group library with 81 energy groups was produced from this 999-group library. The libraries discussed in this report are all based on ENDF/B-VII nuclear data files.

#### 2.2 ISSUES RELATED TO HTGR NEUTRONICS AND NUCLEAR DATA

HTGRs operate under conditions quite different from LWRs and pressurized heavy water reactors (PHWRs) for which many nuclear data libraries have been generated. The nuclear data libraries for HTGRs generally need to be suitable for the higher temperatures and characteristic neutron flux spectra that are generated in these reactors. There are special neutron resonances and material concerns associated with HTGR neutronics. Usually, fine group structure is needed in the nuclear data libraries so that all the neutron absorption, capture, and fission processes are appropriately simulated.

In order to generate a broad-group nuclear data library suitable for HTGR models, careful establishment of neutron energy boundaries is required such that major resonances and reactions will be treated properly. Various broad-group neutron energy structures were considered and assessed in this work, with reference to earlier broad multigroup libraries. The results of SCALE model scenarios with broad-group nuclear data libraries were compared against cases utilizing fine-group SCALE nuclear data libraries (238 and 999 groups). These cases were also compared against MCNP and KENO continuous energy simulations to assess the appropriateness of the broad-group libraries.

#### 2.3 CODES AND TECHNIQUES

SCALE was used in this work in conjunction with AMPX [3,4] and other nuclear data codes, such as RIML [8]. Monte Carlo calculations with MCNP and SCALE/KENO were used in addition to deterministic neutron transport simulations. Representative HTGR pin cell and full core models were analyzed. Furthermore, a series of HTGR benchmark model scenarios were assessed with the different nuclear data libraries to test the suitability of the newly generated broad-group nuclear data libraries. In addition to using ENDF/B-VII data files with appropriate weighting functions to generate broad-group nuclear data for use with HTGRs, appropriate nuclide-dependent Bondarenko IR f-factors and lambda factors were implemented with the nuclear data. Necessary modifications to implement the IR methodology in SCALE were performed and used in the analyses.

#### 2.3.1 RIML

RIML [8] is a code for generating IR parameters, self-shielded cross sections, subgroup levels and weights, and the associated AMPX master libraries. RIML is a control module composed of three separate programs: RILAMB, IRVING, and SUBGR. RILAMB generates IR parameters for the homogeneous mixtures and self-shielded cross sections as a function of background cross section for the homogeneous and heterogeneous geometries. Self-shielded cross sections are converted into the Bondarenko factors and into the resonance integral table. IR parameters and Bondarenko factors are to be included or replaced in the master AMPX library using IRVING. SUBGR uses the resonance integral table created by RILAMB to generate the subgroup levels and weights. These subgroup data can be used in a transport lattice code, such as DeCART, which uses the subgroup method to self-shield resonance group cross sections.

The wide and the narrow resonance (NR) approximations have been combined [10], together forming an IR approximation that is good for the resonance range from a few electron volts up to 100 keV. IR parameters can be used to interpolate between the narrow and wide resonance approaches. Because nearly all deterministic transport codes use multigroup cross sections, utilizing between 30 and 300 groups, it is very important to use the appropriate approximations to estimate the effective group self-shielded cross section.

Many kinds of methods have been developed for the resonance treatment in this energy range. However, in many cases the basic approach for the resonance treatment is similar. The self-shielded cross sections are tabularized in advance as a function of some parameter such as background cross section by using various methods. One of the typical methods is to obtain the self-shielded cross sections by solving the continuous or ultrafine group slowing-down equation and to obtain the corresponding background cross section to complete the self-shielded cross-section table.

The CENTRM/PMC codes are used to estimate the self-shielded group cross sections by solving the slowing-down equation with the continuous energy cross sections and integrating the continuous energy flux and cross section over each group. These effective self-shielded group cross sections are used in SCALE multigroup/transport codes (e.g. NEWT, KENO) directly. The SCALE CENTRM/PMC codes can be used to obtain the self-shielded group cross-section table through a slight modification and a combination with a module to generate the corresponding background cross section.

The program RILAMB (<u>Resonance Integral and Lambda</u>) has been developed to compute IR parameters and self-shielded cross-section tables using the results from CENTRM/PMC in the SCALE system. IR parameters are generated for a set of homogeneous mixtures, and self-shielded group cross-section tables are generated for the specified homogeneous and heterogeneous geometries. The program IRVING uses the self-shielded cross-section tables to generate Bondarenko factors and resonance integral tables. IRVING replaces the original NR Bondarenko factors in the master AMPX library and adds the IR parameters.

#### 2.3.2 Creating a Multigroup Library

A flow diagram is presented in Figure 2.1 to illustrate the automated procedure to generate the AMPX master library from ENDF/B evaluations.

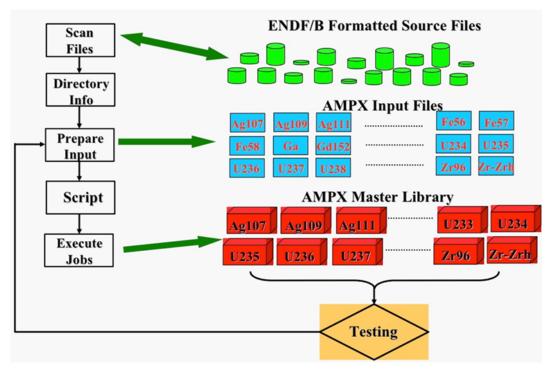


Figure 2.1. Work flow for AMPX master library creation.

#### 2.4 GENERATION OF LIBRARIES FROM ENDF/B-VII FILES

In this ORNL process, the input files are generated automatically using extensible markup language (XML) templates. The general flow of creating the nuclear data in this methodology is depicted in Figure 2.2. The AMPX modules and utility codes employed in this process are described below and shown in the flowchart.

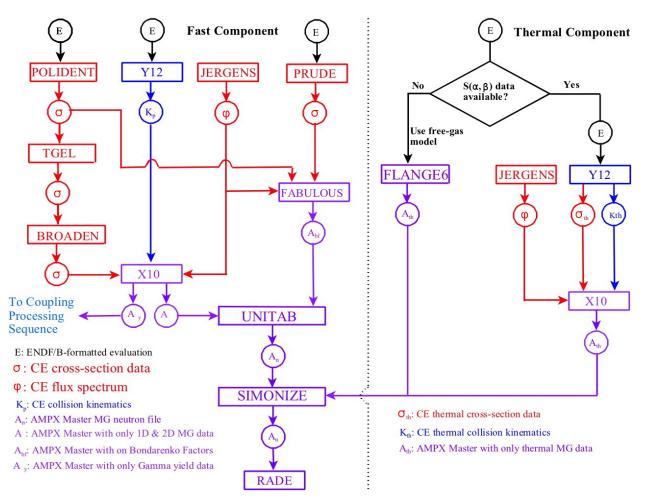


Figure 2.2. AMPX sequence for producing neutron multigroup data.

The following AMPX modules are used in the process to produce a neutron multigroup library.

**POLIDENT:** Creates pointwise cross-section data at 0 K from the ENDF/B-VII data files. For resonance nuclides, POLIDENT contains a procedure that determines a point energy mesh in the resolved resonance region and calculates the cross sections on that energy mesh. The pointwise data are stored as x-y values on a linear-linear grid.

**TGEL:** When all of the cross-section data are produced on a linear-linear grid, the sum of a group of linear functions is itself linear; however, simply linearizing the data that are given in an evaluation does not lead to this consistency. To ensure consistency, the total cross section and other "redundant" reactions (e.g., fission, inelastic) are formed by summing the partial values. This module is used to ensure that all redundant reactions are equal to the sum of the partial reactions.

BROADEN: This module is used to Doppler broaden the cross-section data.

**PRUDE:** For nuclides with unresolved resonance data, this module is run to produce point averaged cross sections that are a function of temperature and background cross section (background cross sections are discussed in more detail in Section 2.5). The background cross section is simply defined as the cross section per unit atom of a nuclide of the mixture (other than the nuclide itself) in which the nuclide

is mixed. In the sequences that were prepared, temperatures of 293, 900, and 2100 K were chosen, along with background values of  $10^{-6}$ , 1, 10, 100, 1000,  $10^4$ ,  $10^5$ ,  $10^6$ , and  $10^8$  barns.

**FABULOUS:** For all nuclides, the point data from PRUDE (if applicable) and POLIDENT are passed to this module with the weighting spectrum file. FABULOUS uses the same temperatures and background cross sections described for PRUDE to numerically Doppler broaden the functions exterior to the unresolved region, after which the functions are spliced together with the appropriate unresolved functions. These spliced functions are then used in a numerical scheme that calculates Bondarenko factors for all nuclides for elastic scattering, capture, fission, and total cross sections.

**UNITAB and SIMONIZE:** These modules are used to combine partial master libraries generated by FLANGE6, FABULOUS, and X10 into a cohesive AMPX MG master library for a given evaluation. The module combines the data into one AMPX MG master library after recalculating and renormalizing the data.

JERGENS: This module is used to generate the flux used to collapse point-wise data to MG format.

**Y12:** This module reads an ENDF/B evaluation and produces tabular double-differential collision kinematics data for all reactions. The functions it produces tell what particles are produced and at what energies and directions when a reaction is encountered at some source energy point. The output from Y12 is an AMPX tabular kinematics file.

**X10:** The weighting spectrum, the point data from BROADEN, and the kinematics data from Y12 are passed to X10. X10 produces a group-averaged AMPX master library.

**FLANGE6:** This module is used to produce thermal scattering matrices at 293, 600, 900, 1200, and 2100 K based on the free-gas scattering model.

RADE: This module is used to perform internal consistency checks on the AMPX master library.

To generate the 999-group library, we used the AMPX JERGENS module to generate a smooth weighting spectrum that has the form of a Maxwellian–1/E–fission spectrum–1/E above 10 MeV. For the 81-group library 81B3 and 81C, we used a custom flux as the weighting function. Figure 2.3 shows the pointwise flux generated in CENTRM (from the HTGR prismatic fuel SCALE input case listed in Appendix C) for two representative temperatures. The pointwise flux data (approximately 16,000 data points) at a temperature of 1800 K was chosen to be the weighting function for the generation from the ENDF/B-VII nuclear data files [11] of the 81-group library.

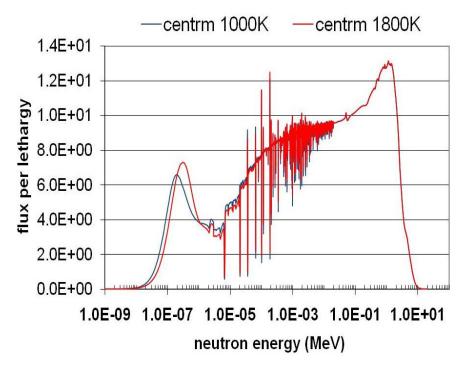


Figure 2.3. Comparison of CENTRM pointwise flux weighting functions for the HTGR temperatures.

#### 2.5 INTERMEDIATE RESONANCE CONSIDERATIONS

This section is a summary of the new methods and data that were added as an IR treatment in the new library. The resonance data in SCALE 6.1 and all earlier versions of SCALE were based on the neutron spectrum from the narrow resonance approximation. With the new IR methods applied for selected isotopes (e.g., <sup>238</sup>U), new Bondarenko factor tables were generated based on a more rigorous neutron flux spectrum. In addition, IR parameters (lambda factors) have been added for the evaluation of background cross sections in the resonance treatment with the IR approximation.

#### 2.5.1 IR method

The effective shielded cross section in a resonance group g can be written [10] as

$$\sigma_{x,g} = \frac{\int\limits_{\Delta u_g} \sigma_x(u)\phi(u)du}{\int\limits_{\Delta u_g} \phi(u)du}.$$

where  $\emptyset$  = flux and u = lethargy.

In the narrow resonance (NR) approach, the neutron spectrum is simply inversely proportional to the total cross section:

$$\phi(u) = \frac{\text{constant}}{\Sigma_{t}(u)}.$$

In a more sophisticated IR method, the flux spectrum can be written as

$$\phi(u) = \frac{\sigma_b}{\sigma_a(u) + \sigma_b}$$

where a background cross section is defined as

$$\sigma_b = \frac{1}{N_r} \sum_{i=all} N_i \lambda_i \sigma_{p,i} ,$$

 $N_r$  is the atomic number density of the resonance nuclide,  $N_i$  is the atomic number density of isotope *i*,  $\lambda_i$  is the IR parameter of isotope *i*, and  $\sigma_{p,i}$  is the potential cross section of isotope *i*. In case of heterogeneous problems, the background cross section can be adjusted as below using the equivalence theory:

$$\sigma_b \to \sigma_b + \sigma_e$$

where  $\sigma_e$  is the escape cross section,

$$\sigma_e = \frac{1}{N_r} \frac{a(1-c)}{\bar{l}},$$

in which a is the Bell factor, c is the Dancoff factor, and  $\overline{l}$  is the mean chord length of fuel region.

#### 2.5.2 Library generation

As shown above, in order to apply the IR method, the resonance integrals of isotopes selected for IR treatment need to be recalculated either by using the IR definition of flux spectrum or using a neutron slowing-down solver such as CENTRM. The lambda factors also need to be generated for implementation in a new library to allow for the application of the IR method in the BONAMI-IR module in SCALE.

#### New Bondarenko factors

The Bondarenko factors of given resonance materials are computed using a pointwise (PW) flux spectrum for an infinite homogeneous mixture of the resonance nuclide combined with hydrogen. The hydrogen concentration in the mixture is varied to obtain the desired  $\sigma_b$  values corresponding to different degrees of self-shielding for the particular resonance material. The temperature of the resonance material is also varied to account for the impact of Doppler broadening on self-shielding. CENTRM was used to calculate the PW flux in the homogeneous media for each hydrogen concentration (i.e.,  $\sigma_b$ ) and resonance Doppler temperature, for each resonance nuclide of interest. PMC was used to compute the corresponding selfshielded cross sections. The Bondarenko factor is the ratio of the self-shielded cross section from PMC divided by the infinitely dilute (unshielded) cross section in the library. For example in the case of <sup>238</sup>U, CENTRM/PMC was run for three Doppler temperatures of 293, 900, and 2000 K and 93 different hydrogen concentrations. This corresponds to 3 X 93 = 279 CENTRM/PMC cases. The Bondarenko factors at the desired background cross section values ( $\sigma_b$ ) in the library were interpolated from these results. Table 2.1 shows the final background cross section values for which <sup>238</sup>U Bondarenko factors are tabulated in the library. The Bondarenko factors for other resonance materials were generated similarly, but different hydrogen concentrations may have been used.

Background cross section (barns)	Background cross section (barns)	Background cross section (barns)
1.00E-06	1.20E+02	1.00E+05
1.00E+00	1.60E+02	1.00E+08
1.00E+01	3.20E+02	
1.50E+01	6.40E+02	
2.00E+01	1.00E+03	
3.00E+01	2.00E+03	
4.00E+01	5.00E+03	
6.00E+01	1.00E+04	
8.00E+01	2.00E+04	

Table 2.1. Background cross sections for Bondarenko factors of <sup>238</sup>U

From the CENTRM/PMC outputs of these cases, the effective cross sections of <sup>238</sup>U have been collected and converted to Bondarenko factor tables using the following definition:

$$f_{x,g}(T_f,\sigma_b) = \frac{\sigma_{x,g,eff}(T_f,\sigma_b)}{\sigma_{x,g,\infty}}$$

where *f* is the Bondarenko factor,  $T_f$  is the fuel temperature,  $\sigma_{x,g,eff}$  is the effective cross section of type x, and  $\sigma_{x,g,\infty}$  is the infinitely dilute cross section. These factors have been tabulated in the library at three temperatures (293, 900, and 2000 K) and 19 background cross sections (1 × 10<sup>-6</sup>, 10, 15, 20, 30, 40, 60, 80, 120, 160, 320, 640, 1000, 2000, 5000, 10,000, 20,000, 1 × 10<sup>6</sup>, and 1 × 10<sup>8</sup> barns). Before this modification to the process, the original library had Bondarenko factors for only nine background cross sections.

#### Lambda factors

Lambda factors are also called hydrogen equivalence parameters and are calculated in the following procedure:

- 1) Compute a  $\sigma_{a,g}^{238}$  table as a function of  $\sigma_{b,g}^{238}$  by changing the particle number density of hydrogen for a homogeneous mixture at the fixed  $^{238}U(N^{238})$  particle number density. The calculation of the effective cross sections has been done in CENTRM/PMC and RIML has been used for the processing of the data.
- 2) Compute the slowing-down calculation for a mixture of  $^{238}U(N^{238})$ ,  $^{1}H(N^{1})$  and a target nuclide x  $(N^{x})$ , and obtain a new  $\sigma_{a,g}^{238}$  (CENTRM/PMC).
- 3) Read the corresponding  $\sigma_{b,g}^{238}$  from the prepared  $\sigma_{a,g}^{238}$  table (RIML).
- 4) Calculate the hydrogen equivalence parameter of the isotope x using the following equation (RIML), where  $\sigma_p$  is the potential cross section (refer to Appendix A).

$$\lambda_g^x = \frac{\sigma_{b,g}^{238} N^{238} - N^{238} \lambda_g^{238} \sigma_p^{238} - N^1 \lambda_g^1 \sigma_p^1}{N^x \sigma_p^x}.$$

The above procedure has been applied to all the isotopes in the old library, and the calculated lambda factors have been added to a new library at MT=2000. The lambda factors have been generated for a single fuel temperature of 300K.

#### 2.5.3 Library testing

A simple HTGR pin cell has been used for testing the implemented method. In the model, the fuel kernels in the compact have been homogenized with graphite. The calculated k-effective values are summarized in Table 2.2 as a function of pin pitches. The fuel temperature used for testing is 900 K to match the cross-section data for the continuous energy calculations with KENO. NR and IR results from XSDRN are compared with continuous energy KENO (CE KENO), which is considered the reference solution in lieu of measured data, and with CENTRM, which is the reference method for generating the IR factors. In other words, BONAMI-IR results cannot be expected to be better than the CENTRM results. Note that the large differences between NR and CENTRM/CE KENO are expected. They demonstrate the inadequacy of the NR methodology for thermal systems, which is the reason for developing the IR method.

The results presented in Table 2.2 and the following tables in this section are based on preliminary investigations in the development of the IR methodology. The calculated results for the final method in Section 4 provide validation of the 81-group library for real world HTGR applications.

		238-Group KENO							
Pitch (cm)	CE KENO	BONAMI-NR	∆k (pcm) vs. CE KENO	BONAMI-IR	∆k (pcm) vs. CE KENO	CENTRM (n2d=0,ibr=3)	∆k (pcm) vs. CE KENO	NR vs. CENTRM ∆k (pcm)	IR vs. CENTRM ∆k (pcm)
1.5	0.97725	1.17518	19793	0.97398	-327	0.97587	-138	19931	-189
2.0	1.21413	1.39732	18319	1.20669	-744	1.20919	-494	18813	-250
2.5	1.38634	1.53469	14835	1.37588	-1046	1.37967	-667	15502	-379

Table 2.2. Assessing the IR-methods improvement to the library: HTR pin-cell test problem

For the 238-group library, the nuclear data library with IR treatment is significantly improved over the old library with the NR approach.

#### 2.6 TESTING OF BONAMI-IR DURING IMPLEMENTATION INTO SCALE

As part of the process of implementing IR treatment into BONAMI (also called BONAMI-IR), several comparisons were made between BONAMI-IR, standard BONAMI (BONAMI-NR), CENTRM, and continuous energy KENO. The BONAMI-IR calculations used a new IR-relevant 238-group library (238ir) that was generated using the HTGR CENTRM weighting function. The results presented in Tables 2.3–2.5 were calculated with XSDRN for an infinite homogeneous medium of very low enriched uranium (LEU) and hydrogen with different background cross sections. Table 2.6 presents results for a simplified PWR pin cell, and Table 2.7 compares results for a doubly heterogeneous HTGR pin cell. The agreement between the BONAMI-IR and the CE KENO results is generally on the same order as the CENTRM results and significantly better than that of BONAMI-NR, with the exception of Table 2.6. The discrepancy between MG KENO/CENTRM and CE KENO for LWR pin cells has been previously observed with the standard SCALE V7-238 library and is under investigation. Note that the BONAMI-IR and CENTRM results are consistent. The fact that the BONAMI-NR result is better for this case is most likely due to a cancellation of errors.

Table 2.3.Infinite homogeneous medium of 1.26% enriched LEU and H; background<br/>XS  $\sim$  100 b and temperature 300K

Code	BONAMI method	MG XS library	Eigenvalue	∆k (pcm) Diff from CE KENO
CE KENO	_	_	$1.09394 \pm 0.00021$	_
CENTRM	IR	238ir	1.09508	114
BONAMI	IR	238ir	1.09648	254
BONAMI	NR	238	1.10282	888

# Table 2.4.Infinite homogeneous medium of 1.26% enriched LEU and H; background<br/>XS ~ 50 b and temperature 300K

Code	BONAMI method	MG XS library	Figenvalue	
CE KENO	_	_	$1.05673 \pm 0.00019$	-
CENTRM	IR	238ir	1.05855	182
BONAMI	IR	238ir	1.05560	-113
BONAMI	NR	238	1.06525	852

Table 2.5. Infinite homogeneous medium of 1.26% enriched LEU and H; background XS ~ 25 b

Code	BONAMI method	MG XS library	Eigenvalue	∆k (pcm) Diff from CE KENO
CE KENO	_	-	$0.95583 \pm 0.00020$	_
CENTRM	IR	238ir	0.95861	278
BONAMI	IR	238ir	0.95812	229
BONAMI	NR	238	0.96553	970

Table 2.6.Simplified PWR pin cell 3.34% enriched UO2, pitch = 1.44 cm; pellet OR = 1.44 cm;<br/>Temperature 300K

Code	BONAMI method	MG XS library	Eigenvalue	∆k (pcm) Diff from CE KENO
CE KENO	_	_	$1.35578 \pm 0.00022$	_
MG KENO/CENTRM	IR	238ir	$1.34903 \pm 0.00018$	-675
MG KENO/BONAMI-IR	IR	238ir	$1.34714 \pm 0.00019$	-864
BONAMI/ XSDRN	NR	238	1.34948	-630

Code	MG XS library	Eigenvalue	∆k (pcm) Diff from CENTRM double-het
XSDRN/CENTRM	238ir	1.29596	_
XSDRN/BONAMI-IR	238ir	1.29797	201

Table 2.7. Double-het HTR pin cell and temperature 300K

#### 2.7 SUMMARY OF LIBRARY GENERATION METHODS

Several methods of nuclear data library generation were employed in this work. The MALOCS utility module in SCALE was used to condense existing SCALE nuclear data libraries into appropriate broad-group energy structures using HTGR case-calculated weighting functions (based on case neutron flux distributions). This procedure was used in the creation of the interim broad-group libraries 81A, 81B, and 81B2. The other major methodology for creation of a nuclear data library is to generate it directly from ENDF/B data files, using continuous energy (pointwise) weighting functions, such as generated with CENTRM. This process was used to generate the recent 999-group library for SCALE (with independent weighting function) and was used in generating a new IR-relevant 238-group library using the HTGR CENTRM weighting function. The 81B3 broad-group library was also generated in this manner, using the neutron energy group structure of 81B2, but with the CENTRM generated weighting function rather than the neutron flux from 999- and 238-group SCALE HTGR model calculations.

To provide additional computational efficiency by removing the need to use CENTRM/PMC for unit cell calculations, the final broad-group libraries were enhanced and augmented with IR lambda factors and f-factors. These IR-enhanced nuclear data libraries were used in case calculations for HTGR models using a developmental version of SCALE in which the new IR features can be accessed and used in cases as discussed in the following section.


## 3. NUCLEAR DATA LIBRARIES

#### **3.1 INTRODUCTION**


The SCALE 6.1 code system includes both pointwise (PW) and multigroup (MG) libraries processed from ENDF/B-VII nuclear data files using SCALE and the AMPX code system. The PW data are used for two distinct functions in SCALE. First, they are used for three-dimensional (3D) continuous-energy (CE) Monte Carlo calculations with KENO. Second, they are used in the one-dimensional (1-D) CENTRM CE discrete ordinates code to compute pointwise flux spectra for generating self-shielded MG cross sections. The PW nuclear data are stored on a very fine energy mesh so that the value at any energy can be linearly interpolated with an error of less than 0.1%.

Figure 3.1 presents a comparison of neutron spectra calculated with SCALE for a representative HTGR homogeneous prismatic fuel model case input, "vhtr" (listed in Appendix B), using a 999-group ENDF/B-VII library at three different representative temperatures of 300 K, 900 K, and 1700 K. In addition, the 999-group HTGR neutron spectrum at 1700 K is compared with a 238-group spectrum at the same temperature in Figure 3.2. The 238-group ENDF/B-VII library is the most current and generally recommended library in SCALE 6.1. The 999-group library has been developed and used internally at ORNL for various studies [6]. This 999-group library allows calculations to be performed with an ultra fine neutron energy mesh, allowing multigroup calculations that more closely resemble continuous energy representations. Note that the 238-group structure is a subset of the 999-group structure, i.e., the boundaries of the 238-group structure align with boundaries in the 999-group structure.

Figure 3.2 compares the 238-group and the 999-group neutron flux spectra calculated for the SCALE vhtr input model (listed in Appendix B) at a temperature of 1700K. As seen in the figure, the spectra are very similar for the main characteristics. However, the 999-group spectra, by virtue of its near-continuous energy fine group aspects shows more detail and structure in the resolved and unresolved resonance regions.

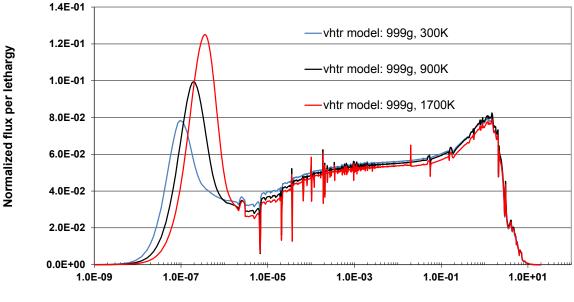

Neutron energy (MeV)




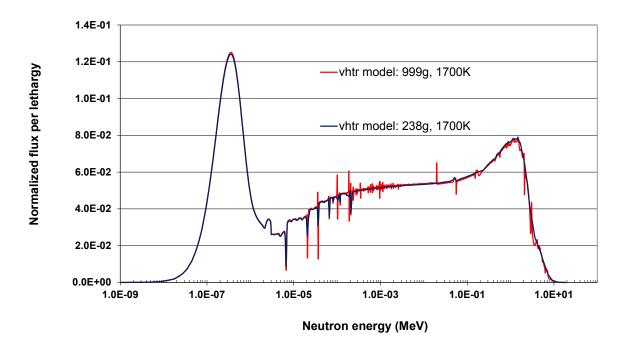



Figure 3.2. Comparison of HTGR spectra in 238- and 999-group calculations.

In this report, neutron flux spectra are plotted in two ways, with the y-axis for both methods representing the neutron flux level divided by the lethargy of the energy group bins (the natural log of the ratio of the bin upper energy to the bin lower energy). The first plotting method (used in Figure 3.1) plots the flux per unit lethargy against the average bin neutron energy. The other plotting method is to use histograms for the full neutron energy bin with each bin ranging from its lower to higher neutron energy limits.

Figure 3.3 provides more detail of the neutron spectra calculated with SCALE using 238- and 999-group nuclear data libraries in Figure 3.2 over the energy range of 1 to 10 eV, which includes the large neutron capture resonance at 6.7 eV for <sup>238</sup>U reactions. The agreement in this large neutron capture resonance between the 238-group and the 999-group neutron flux representations with SCALE is quite good for HTGR simulation cases. Small differences are evident between the solutions due to the much finer neutron energy group structure in the 999-group nuclear data library. Note that the broad peak between 2 to 3 eV in this and other figures is not physical. It is caused by truncation of the thermal scattering at 3 eV in the SCALE multigroup (MG) libraries. This phenomenon is more noticeable for graphite. The impact on calculations is typically negligible, because there are no important resonances at this energy. The SCALE team has plans to address this problem in the near future.

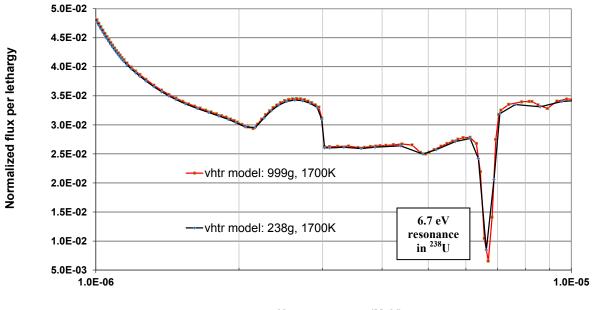

Neutron energy (MeV)



#### 3.2 GENERATING BROAD-GROUP LIBRARIES

In this project, a number of interim broad-group nuclear data libraries were generated in 81 neutron energy groups; a previous study of the efficacy of nuclear data libraries for use in modeling VHTRs considered broad-group libraries with 72 and 79 groups [7]. Several broad-group neutron energy structures were devised by adding several judiciously placed energy bins to the library energy structure starting with that of the 72-group structure. The first 81-group broad-group library (81A) was a subset of the 999-group ultra fine group library with the neutron energy boundaries selected to capture the important resonances and features in the HTGR spectrum. The second broad-group structure (81B3) was established by shifting energy group boundaries in 81A that did not align with the 238-group structure so that the energy boundaries in 81B are a subset of the standard SCALE fine-group 238-group library energy bin boundaries.

Figure 3.4 compares the fine detail in the 238- and 999-group flux solutions for the HTGR prismatic fuel case for the 10 to 100 eV neutron energy range in the spectra. As can be seen, the 999-group flux solution shows deeper flux dips in the narrow resonances followed by increases in flux level at the lower energy side of the resonances, which is consistent with the somewhat reduced cross section that would be in effect. This is clearly evident for the 36 eV  $(3.6 \times 10^{-5} \text{ MeV})$  neutron resonance region seen in the middle of Fig. 3.4.


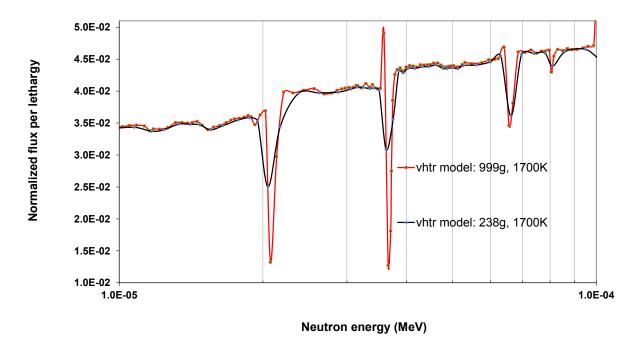


Figure 3.4. HTGR spectra in the 10 to 100 eV region: comparison of fine-group solutions.

In Figure 3.5, histograms representing the 81 group neutron flux spectra solutions for the 81A and 81B3 nuclear data libraries in the 10 to 100 eV neutron energy range are displayed in addition to the spectra from Fig. 3.4 to show the applicability of the chosen group energy structures to the resonances and details of the calculated multigroup neutron spectra.

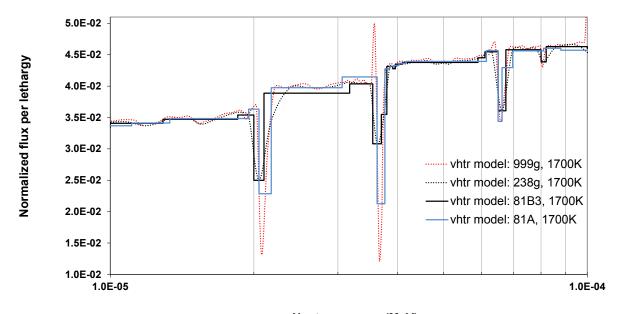

Neutron energy (MeV) Figure 3.5. HTGR spectra in the 10 to 100 eV range for broad and fine group libraries.

Recall that the energy structure in library 81A is a subset of the 999-group library energy structure, while the 81B3 energy structure is a subset of the 238-group SCALE fine-group library (which is also a subset of the 999-group library). As would be expected, the flux dips in the 81A spectrum agree more closely with the 999-group spectrum while the 81B3 spectrum is similar to the 238-group spectrum. The comparison in Figure 3.5 is illustrated in a different way in Figure 3.6 by using a fine-group histogram for the 999-group solution in the 10 to 100 eV range.

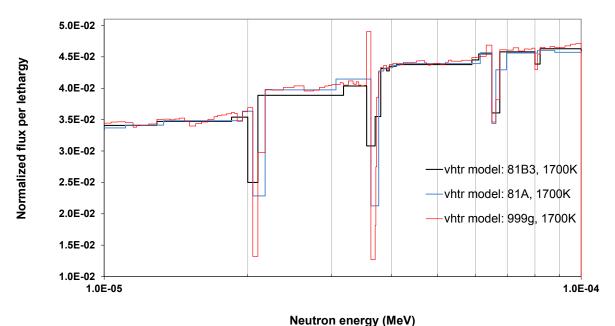


Figure 3.6. HTGR 238-group spectrum in the 10 to 100 eV region: broad-group comparisons.

In Figure 3.6 the 999-group fine-group spectrum plotted in histogram format shows the details also seen in the curves in Figs. 3.4 and 3.5. Although differences can be seen between the 81A and 81B3 spectra, the energy boundaries for both 81-group libraries are adequately positioned to address the major HTGR-related resonances for prismatic and pebble bed fuels.

#### 3.3 DESCRIPTION OF THE BROAD-GROUP LIBRARIES

#### 3.3.1 Library 81A

Library 81A was developed by condensing the new 999-group library with the SCALE module MALOCS using a 999-group neutron flux solution as a weighting function. The neutron-energy structure for 81A was selected from the available 999 neutron energy group boundaries, with care taken to select boundaries that surround major resonances and neutron spectrum features for HTGRs. Table 3.1 compares the energy group boundaries for the 999-group, the 238-group, and the various 81-group libraries.

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
2.000E+07	1	1	1	1
1.964E+07	2		1	1
1.900E+07	3	-		
1.845E+07	4	-		
1.790E+07	5	-		
1.733E+07	6	2	-	
1.691E+07	7			
1.649E+07	8	-		
1.608E+07	9	-		
1.568E+07	10	3	-	
1.508E+07	11	5		
1.492E+07	11			
1.455E+07	13	4	_	
1.435E+07 1.419E+07	13	4		
1.384E+07	14	5	_	
1.384E+07 1.350E+07	13			
	10	-		
1.317E+07	17	6	_	
1.284E+07	18	0		
1.252E+07 1.221E+07	20	-		
		-		
1.191E+07	21	-		
1.162E+07	22	-		
1.133E+07	23			
1.105E+07	24	-		
1.078E+07	25			
1.051E+07	26			
1.025E+07	27	7	_	
1.000E+07	28	7		_
9.753E+06	29	-	2	
9.512E+06	30	-		
9.278E+06	31	-		
9.048E+06	32	-		
8.825E+06	33	-		
8.607E+06	34	-		
8.395E+06	35	0	4	2
8.187E+06	36	8	2	2
7.985E+06	37	4	3	
7.788E+06	38	-		
7.596E+06	39	4		
7.408E+06	40	4		
7.225E+06	41	4		
7.047E+06	42	4		
6.873E+06	43	4		
6.703E+06	44	-		
6.592E+06	45	0	4	2
6.434E+06	46	9	4	3
6.376E+06	47	-	4	
6.219E+06	48			

Table 3.1. Neutron energy group structure comparisons for 999-, 238-, and 81-group

Upper neutron	999-group	SCALE	<b>91</b> A. guoung	81B3,C groups
energy (eV)	structure	238-group structure	81A groups	
6.065E+06	49	Structure		
5.916E+06	50			
5.770E+06	51			
5.627E+06	52			
5.488E+06	53			
5.353E+06	54			
5.221E+06	55			
5.092E+06	56			
4.966E+06	57			
4.882E+06	58			
4.800E+06	59	10		4
4.724E+06	60			
4.607E+06	61			
4.493E+06	62			
4.398E+06	63			
4.304E+06	64	11		
4.183E+06	65		5	
4.066E+06	66			
3.965E+06	67			
3.867E+06	68			
3.772E+06	69			
3.679E+06	70			
3.588E+06	71			
3.499E+06	72			
3.413E+06	73			
3.329E+06	74			
3.247E+06	75			
3.166E+06	76			
3.080E+06	77			
3.000E+06	78	12		5
2.932E+06	79		6	
2.865E+06	80			
2.794E+06	81			
2.725E+06	82			
2.658E+06	83			
2.592E+06	84	1		
2.535E+06	85	1		
2.479E+06	86	13	1	6
2.466E+06	87		7	1
2.385E+06	88			
2.365E+06	89			
2.354E+06	90	14	1	7
2.307E+06	91		8	1
2.231E+06	92			
2.176E+06	93			
2.123E+06	94			
2.070E+06	95			
2.019E+06	96			
1.969E+06	97			
1.921E+06	98			
1.850E+06	99	15	]	8

Upper neutron energy (eV)	999-group structure	SCALE 238-group	81A groups	81B3,C groups
	100	structure		
1.827E+06	<u>100</u> 101			
1.782E+06	101			
1.738E+06				
1.695E+06	<u>103</u> 104			
1.653E+06				
1.612E+06	105			
1.572E+06	106			
1.536E+06	107	16	_	
1.500E+06	108	16	0	_
1.461E+06	109		9	
1.423E+06	110	17	_	0
1.400E+06	111	17	_	9
1.356E+06	112	18	_	
1.317E+06	113	19		
1.287E+06	114	20	-	
1.250E+06	115	20		
1.225E+06	116		_	
1.200E+06	117	21		
1.165E+06	118			
1.136E+06	119		_	
1.108E+06	120	22		
1.100E+06	121			
1.070E+06	122			
1.040E+06	123			
1.010E+06	124	23		
1.003E+06	125			
9.800E+05	126			
9.616E+05	127			
9.400E+05	128			
9.200E+05	129	24		
9.072E+05	130		10	
9.000E+05	131	25		10
8.874E+05	132			
8.750E+05	133	26		
8.611E+05	134	27		
8.506E+05	135			
8.403E+05	136			
8.301E+05	137	]		
8.200E+05	138	28	1	
8.100E+05	139	1		
8.002E+05	140	1		
7.904E+05	141	1		
7.808E+05	142	1		
7.730E+05	143	1		
7.653E+05	144	1		
7.576E+05	145	1		
7.500E+05	146	29	1	
7.427E+05	147			
7.335E+05	148	1		
7.244E+05	149	1		
7.154E+05	150	1		

Upper neutron	999-group	SCALE		81B3,C groups
energy (eV)	structure	238-group	81A groups	orbo, e groups
		structure		
7.065E+05	151			
6.926E+05	152	20	_	
6.790E+05	153	30	_	
6.700E+05	154	31		
6.622E+05	155			
6.545E+05	156			
6.468E+05	157			
6.393E+05	158			
6.313E+05	159			
6.235E+05	160			
6.158E+05	161			
6.081E+05	162			
6.000E+05	163	32		
5.891E+05	164			
5.784E+05	165			
5.730E+05	166	33		
5.672E+05	167			
5.614E+05	168			
5.557E+05	169			
5.500E+05	170	34		
5.432E+05	171			
5.365E+05	172			
5.299E+05	173			
5.234E+05	174			
5.173E+05	175			
5.113E+05	176			
5.054E+05	177			
4.995E+05	178	35	-	
4.920E+05	179	. 55		
4.845E+05	180			
4.772E+05	181			
4.700E+05	181	36	-	
4.650E+05	182	50		
4.601E+05	183	•		
4.553E+05	184	•		
4.505E+05	185	1		
4.303E+05 4.452E+05	186	1		
4.452E+05 4.400E+05	187	27	-	
4.400E+05 4.349E+05		37		
	189	4		
4.299E+05	190	-		
4.249E+05	191	20	4	
4.200E+05	192	38		4
4.138E+05	193	ł	11	
4.076E+05	194		4	
4.000E+05	195	39		11
3.938E+05	196			
3.877E+05	197			
3.829E+05	198	ļ		
3.782E+05	199	]		
3.735E+05	200	]		
3.688E+05	201	<u> </u>		

Upper neutron	999-group	SCALE 238-group	81A groups	81B3,C groups
energy (eV)	structure	structure	0 1	
3.643E+05	202			
3.597E+05	203			
3.553E+05	204			
3.508E+05	205			
3.465E+05	206			
3.422E+05	207			
3.379E+05	208			
3.337E+05	209			
3.300E+05	210	40		
3.264E+05	211			
3.228E+05	212			
3.192E+05	213			
3.157E+05	214			
3.122E+05	215			
3.088E+05	216			
3.053E+05	217			
3.020E+05	218			
2.985E+05	219			
2.972E+05	220			
2.945E+05	221			
2.909E+05	222			
2.873E+05	223			
2.837E+05	224			
2.802E+05	225			
2.767E+05	226			
2.732E+05	227			
2.700E+05	228	41		
2.670E+05	229			
2.641E+05	230			
2.612E+05	231			
2.584E+05	232			
2.555E+05	233			
2.527E+05	234			
2.500E+05	235			
2.472E+05	236			
2.442E+05	237			
2.411E+05	238			
2.381E+05	239			
2.352E+05	240			
2.323E+05	241			
2.294E+05	242			
2.265E+05	243			
2.237E+05	244			
2.209E+05	245			
2.182E+05	246			
2.155E+05	247			
2.128E+05	248			
2.102E+05	249			
2.076E+05	250			
2.050E+05	251			
2.024E+05	252			

Upper neutron	999-group	SCALE 238-group	81A groups	81B3,C groups
energy (eV)	structure	structure		
2.000E+05	253	42		
1.962E+05	254			
1.926E+05	255			
1.902E+05	256			
1.878E+05	257			
1.855E+05	258			
1.832E+05	259			
1.809E+05	260			
1.786E+05	261			
1.764E+05	262			
1.742E+05	263			
1.721E+05	264			
1.699E+05	265			
1.678E+05	266			
1.657E+05	267			
1.637E+05	268	1		
1.616E+05	269			
1.596E+05	270			
1.576E+05	271			
1.557E+05	272			
1.538E+05	273			
1.519E+05	274			
1.500E+05	275	43	-	
1.481E+05	276	15		
1.463E+05	277			
1.445E+05	278			
1.426E+05	279			
1.409E+05	280			
1.391E+05	280			
1.374E+05	282			
1.357E+05	283			
1.340E+05	284			
1.323E+05	285			
1.307E+05	283			
1.291E+05	280			
1.291E+03 1.283E+05	287	44	-	
1.269E+05	288		12	-
1.255E+05	289		12	
1.235E+03 1.241E+05	290			
1.241E+05 1.228E+05	291 292			
1.228E+03 1.213E+05	292			
1.197E+05	293			
1.197E+05	294 295			
1.168E+05	293			
1.153E+05	296			
1.133E+05 1.139E+05	297			
1.139E+05	298			
1.1125E+05 1.111E+05	300			
	300			
1.096E+05				
1.082E+05	302			
1.068E+05	303			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
1.054E+05	304	structure		
1.040E+05	305			
1.027E+05	306			
1.013E+05	307			
1.000E+05	308	45	-	12
9.804E+04	309	43		12
9.652E+04	310			
9.502E+04	310			
9.355E+04	312			
9.210E+04	312			
9.067E+04	313			
9.007E+04 8.926E+04	314			
8.788E+04	313			
8.652E+04	317			
	317	46	_	
8.500E+04	318	40		
8.374E+04				
8.250E+04	320	47	_	
8.200E+04	321	47		
8.074E+04	322			
7.950E+04	323			
7.835E+04	324			
7.722E+04	325			
7.610E+04	326	10	_	
7.500E+04	327	48		
7.399E+04	328	10	_	
7.300E+04	329	49		
7.200E+04	330			
7.081E+04	331			
6.965E+04	332			
6.851E+04	333			
6.738E+04	334			
6.641E+04	335			
6.545E+04	336			
6.451E+04	337			
6.358E+04	338			
6.267E+04	339	1		
6.177E+04	340	1		
6.088E+04	341	- ^	-	
6.000E+04	342	50		
5.912E+04	343	4		
5.826E+04	344	ļ		
5.740E+04	345	ļ		
5.656E+04	346	ļ		
5.551E+04	347			
5.448E+04	348			
5.347E+04	349			
5.248E+04	350		_	
5.200E+04	351	51		
5.099E+04	352		1	
5.000E+04	353	52		
4.905E+04	354			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
4.812E+04	355	structure		
4.721E+04	356			
4.631E+04	357			
4.565E+04	358			
4.500E+04	359	53	-	
4.446E+04	360			
4.393E+04	361			
4.340E+04	362			
4.288E+04	363			
4.237E+04	364			
4.186E+04	365			
4.136E+04	366			
4.087E+04	367			
4.042E+04	368			
3.998E+04	369			
3.955E+04	370			
3.912E+04	371			
3.869E+04	372			
3.827E+04	373			
3.786E+04	374			
3.744E+04	375			
3.704E+04	375			
3.663E+04	370			
3.624E+04	378			
3.584E+04	378			
3.545E+04	379 380			
3.507E+04	380			
3.468E+04	381			
3.431E+04	383			
3.367E+04	385			
3.304E+04	385			
3.243E+04	385			
3.183E+04	387			
3.136E+04	388			
3.090E+04	389			
3.045E+04	389	•		
3.000E+04	390	54	-	
2.962E+04	391 392		13	-
2.962E+04 2.924E+04	392	•	15	
2.924E+04 2.887E+04	393	•		
2.887E+04 2.850E+04	394 395	•		
2.830E+04 2.812E+04	395	•		
2.812E+04 2.774E+04	396	•		
2.774E+04 2.737E+04	397	•		
2.737E+04 2.700E+04	398	•	14	-
2.700E+04 2.653E+04	400	•	14	
2.605E+04 2.606E+04	400 401	1		
2.580E+04 2.580E+04	401 402	1		
		1		
		•		
		55	-	12
2.552E+04 2.520E+04 2.500E+04	403 404 405	55	-	13

Upper neutron energy (eV)	999-group structure	SCALE 238-group	81A groups	81B3,C groups
2.479E+04	406	structure	15	
2.450E+04	400	-	15	
2.418E+04	407 408	-		
2.388E+04	403			
2.358E+04	409			
2.314E+04	410			
2.271E+04	412			
2.229E+04	412			
2.188E+04	414			
2.139E+04	415	-		
2.092E+04	415	-		
2.045E+04	417	-		
2.000E+04	418	-		
1.965E+04	419	-		
1.931E+04	420	-		
1.900E+04	420			
1.900E+04	421	-		
1.841E+04	422			
1.812E+04	423			
1.783E+04	424			
1.755E+04	423			
1.727E+04	420			
1.700E+04	427	56	-	14
1.674E+04	428	50		14
1.649E+04	430			
1.623E+04	430			
1.599E+04	431			
1.574E+04	432	-		
1.550E+04	434			
1.527E+04	435	-		
1.503E+04	436	-		
1.476E+04	437	-		
1.450E+04	437	-	16	-
1.424E+04	439	-	10	
1.398E+04	440	-		
1.373E+04	441	1		
1.348E+04	442	1		
1.346E+04	443	1		
1.300E+04	444	57	1	15
1.266E+04	445	1 2,		
1.234E+04	446	1		
1.202E+04	447	1		
1.171E+04	448	1		
1.142E+04	449	1		
1.114E+04	450			
1.086E+04	451			
1.060E+04	452			
1.031E+04	453	1		
1.003E+04	454	1		
9.763E+03	455	1		
9.500E+03	456	58	1	16

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
9.307E+03	457	structure		
9.119E+03	458			
8.975E+03	459			
8.834E+03	460			
8.694E+03	461			
8.557E+03	462			
8.422E+03	463			
8.289E+03	464			
8.159E+03	465			
8.030E+03	466	59	_	
7.908E+03	467			
7.787E+03	468			
7.669E+03	469			
7.552E+03	470			
7.437E+03	471			
7.323E+03	472			
7.212E+03	473			
7.102E+03	474			
6.954E+03	475			
6.809E+03	476			
6.667E+03	477			
6.528E+03	478			
6.392E+03	479			
6.258E+03	480			
6.128E+03	481			
6.000E+03	482	60	-	
5.879E+03	483			
5.761E+03	484			
5.645E+03	485			
5.531E+03	486			
5.400E+03	487			
5.250E+03	488			
5.100E+03	489			
4.960E+03	490			
4.850E+03	491			
4.740E+03	492			
4.620E+03	493			
4.500E+03	494			
4.400E+03	495			
4.307E+03	496			
4.202E+03	497			
4.099E+03	498			
3.998E+03	499			
3.900E+03	500	61	]	
3.819E+03	501			
3.740E+03	502	62		
3.707E+03	503		17	]
3.616E+03	504			
3.527E+03	505			
3.440E+03	506			
3.355E+03	507			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
3.272E+03	508	structure		
3.191E+03	509			
3.112E+03	510			
3.035E+03	511			
3.000E+03	512	63	18	17
2.935E+03	513			- /
2.871E+03	514			
2.808E+03	515			
2.747E+03	516			
2.679E+03	517			
2.613E+03	518			
2.580E+03	519	64	-	18
2.532E+03	520		19	
2.485E+03	521			
2.435E+03	522	1		
2.386E+03	523			
2.337E+03	525			
2.290E+03	525	65	-	19
2.249E+03	526	. 05	20	17
2.200E+03	527	66		20
2.158E+03	528		21	20
2.116E+03	529		21	
2.075E+03	530			
2.035E+03	531			
2.004E+03	532			
1.973E+03	533			
1.943E+03	534			
1.914E+03	535			
1.885E+03	536			
1.856E+03	537			
1.828E+03	538			
1.800E+03	539	67	-	21
1.772E+03	540			21
1.744E+03	541	1		
1.716E+03	542	1		
1.689E+03	543	1		
1.662E+03	544	1		
1.636E+03	545	1		
1.610E+03	546	1		
1.585E+03	547	1		
1.550E+03	548	68	1	
1.525E+03	549			
1.500E+03	550	69	1	
1.482E+03	551			
1.464E+03	552	1		
1.446E+03	553	1		
1.429E+03	554	1		
1.411E+03	555	1		
1.394E+03	556	1		
1.377E+03	557	1		
1.361E+03	558	1		

Upper neutron energy (eV)	999-group structure	SCALE 238-group	81A groups	81B3,C groups
1.344E+03	559	structure		
1.328E+03	560		22	
1.312E+03	561		22	
1.296E+03	562			
1.290E+03	563			
1.265E+03	564			
1.249E+03	565			
1.234E+03	566			
	567			
1.213E+03	568			
1.191E+03	569			
1.171E+03		70	-	
1.150E+03	570	70		
1.137E+03	571			
1.125E+03	572			
1.112E+03	573			
1.100E+03	574			
1.087E+03	575			
1.075E+03	576			
1.063E+03	577			
1.051E+03	578			
1.040E+03	579			
1.028E+03	580			
1.017E+03	581			
1.005E+03	582			
9.940E+02	583			
9.829E+02	584			
9.720E+02	585			
9.611E+02	586			
9.555E+02	587			
9.500E+02	588	71		22
9.360E+02	589			
9.221E+02	590			
9.085E+02	591			
8.950E+02	592			
8.818E+02	593			
8.688E+02	594			
8.559E+02	595			
8.433E+02	596			
8.308E+02	597			
8.185E+02	598			
8.064E+02	599			
7.945E+02	600			
7.827E+02	601			
7.712E+02	602			
7.598E+02	603			
7.485E+02	604			
7.400E+02	605	1		
7.316E+02	606			
7.232E+02	607			
7.150E+02	608			
7.069E+02	609			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
6.988E+02	610	, ser accur e		
6.909E+02	611			
6.830E+02	612	72		
6.765E+02	613			
6.700E+02	614	73	1	
6.585E+02	615		23	
6.471E+02	616			
6.359E+02	617			
6.250E+02	618			
6.142E+02	619			
6.036E+02	620			
5.932E+02	621			
5.830E+02	622			
5.745E+02	623			
5.662E+02	624			
5.581E+02	625			
5.500E+02	626	74	1	23
5.435E+02	627	, .		
5.370E+02	628			
5.306E+02	629			
5.243E+02	630			
5.180E+02	631			
5.118E+02	632			
5.057E+02	633			
4.997E+02	634			
4.937E+02	635			
4.879E+02	636			
4.821E+02	637			
4.763E+02	638			
4.706E+02	639			
4.650E+02	640			
4.595E+02	641			
4.540E+02	642			
4.470E+02	643			
4.400E+02	644			
4.332E+02	645			
4.265E+02	646	1		
4.199E+02	647	1		
4.134E+02	648	1		
4.070E+02	649	]		
4.007E+02	650			
3.944E+02	651			
3.883E+02	652			
3.823E+02	653	1		
3.764E+02	654			
3.705E+02	655			
3.648E+02	656			
3.591E+02	657	1		
3.536E+02	658	1		
3.471E+02	659	1		
3.408E+02	660	]		

Upper neutron energy (eV)	999-group structure	SCALE 238-group	81A groups	81B3,C groups
3.345E+02	661	structure		
3.284E+02	662			
3.224E+02	663			
3.165E+02	664			
3.107E+02	665			
3.050E+02	666	75	-	
2.999E+02	667	15		
2.999E+02 2.948E+02	668			
2.948E+02 2.899E+02	669			
2.850E+02	670	76	-	
2.801E+02	671	/0	24	
2.754E+02	672		24	
2.707E+02	673			
2.661E+02	674			
2.615E+02	675			
2.571E+02	676			
	677			
2.527E+02				
2.484E+02	678			
2.442E+02	679	77	-	24
2.400E+02	680	77	25	24
2.367E+02	681		25	
2.333E+02	682			
2.301E+02	683			
2.269E+02	684			
2.237E+02	685			
2.206E+02	686			
2.175E+02	687			
2.145E+02	688			
2.122E+02	689	70	_	25
2.100E+02	690	78	26	25
2.088E+02	691	70	26	2(
2.075E+02	692	79	27	26
2.036E+02	693		27	
1.999E+02	694		20	_
1.962E+02	695	90	28	27
1.925E+02	696	80		27
1.892E+02	697	0.1	4	20
1.860E+02	698	81		28
1.835E+02	699			
1.811E+02	700			
1.786E+02	701			
1.763E+02	702			
1.739E+02	703			
1.716E+02	704			
1.693E+02	705			
1.670E+02	706			
1.650E+02	707			
1.625E+02	708			
1.600E+02	709			
1.575E+02	710			
1.550E+02	711			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
1.525E+02	712	structure		
1.500E+02	713			
1.475E+02	714			
1.450E+02	715			
1.425E+02	716			
1.400E+02	717			
1.375E+02	718			
1.350E+02	719			
1.325E+02	720			
1.301E+02	721			
1.280E+02	722			
1.260E+02	723			
1.240E+02	724			
1.220E+02	725	82	-	
1.205E+02	726		29	
1.190E+02	727	83	-	29
1.170E+02	728		30	-
1.150E+02	729	84		30
1.130E+02	730			20
1.105E+02	731			
1.080E+02	732	85	_	
1.063E+02	733		31	
1.038E+02	734		51	
1.013E+02	735			
1.000E+02	736	86	-	31
9.750E+01	737			51
9.500E+01	738			
9.250E+01	739			
9.000E+01	740	87	-	
8.800E+01	741		32	
8.600E+01	742			
8.400E+01	743			
8.200E+01	744	88	-	32
8.100E+01	745		33	52
8.000E+01	746	89		33
7.945E+01	747			
7.889E+01	748	1		
7.745E+01	749	1		
7.600E+01	750	90	1	
7.400E+01	751	1		
7.200E+01	752	91	1	
6.975E+01	753	1	34	1
6.750E+01	754	92	1 -	34
6.625E+01	755	1	35	1
6.500E+01	756	93	36	35
6.322E+01	757	1		
6.144E+01	758	1	37	1
6.122E+01	759	1		
6.100E+01	760	94	1	36
6.000E+01	761	1		20
5.900E+01	762	95	1	37

5.620E+01           5.340E+01           5.270E+01           5.200E+01           5.130E+01           5.060E+01	763 764 765 766	structure 96		
5.340E+01 5.270E+01 5.200E+01 5.130E+01 5.060E+01	764 765 766	96	-	
5.270E+01 5.200E+01 5.130E+01 5.060E+01	765 766			
5.200E+01 5.130E+01 5.060E+01	766	1		
5.130E+01 5.060E+01		97		
5.060E+01	767			
	768	98		
4.990E+01	769			
4.920E+01	770	99		
4.875E+01	771			
4.830E+01	772	100		
4.808E+01	773			
4.785E+01	774			
4.743E+01	775			
4.700E+01	776	101		
4.610E+01	777	101		
4.520E+01	778	102	-	
4.460E+01	779	10-		
4.400E+01	780	103	-	
4.320E+01	781	105		
4.240E+01	782	104		
4.170E+01	783	101	38	
4.100E+01	784	105	50	38
4.030E+01	785	105	39	50
3.960E+01	786	106		39
3.935E+01	787	100	40	57
3.910E+01	788	107	10	40
3.855E+01	789	107	41	
3.800E+01	790	108	11	41
3.763E+01	791	100	42	
3.727E+01	792			
3.713E+01	793			
3.700E+01	794	109		42
3.625E+01	795	109	43	
3.550E+01	796	110	15	43
3.505E+01	797	110		15
3.460E+01	798	111	1	
3.418E+01	799			
3.375E+01	800	112	1	
3.350E+01	801			
3.325E+01	802	113	1	
3.250E+01	803			
3.175E+01	804	114	1	44
3.150E+01	805	- • •		
3.125E+01	806	115	1	
3.063E+01	807		44	1
3.000E+01	808	116	1	
2.951E+01	809			
2.902E+01	810			
2.826E+01	811			
2.750E+01	812	117	1	
2.625E+01	813			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
2.500E+01	814	118		
2.375E+01	815			
2.250E+01	816	119	-	
2.175E+01	817		45	
2.100E+01	818	120		45
2.050E+01	819	120	46	
2.000E+01	820	121		46
1.950E+01	820	121	47	
1.900E+01	822	122		
1.875E+01	823	122		
1.850E+01	824	123	-	47
1.805E+01	825	125		+/
1.760E+01	825			
1.730E+01	820			
1.700E+01	828	124	-	
1.650E+01	829	124		
1.600E+01	830	125	_	
1.555E+01	830	123		
1.510E+01	832	126	-	
1.475E+01	833	120		
1.475E+01 1.440E+01	833	127	-	
1.40E+01	835	127		
1.408E+01 1.375E+01	835	128	-	
1.375E+01 1.333E+01	830	128	48	_
1.335E+01 1.290E+01	838	129	40	48
1.290E+01 1.240E+01	839	129		40
1.240E+01 1.190E+01	839	130	-	
1.190E+01	840	150		
1.170E+01 1.150E+01	842	131	-	
1.109E+01	842	151	49	
1.068E+01	844		49	
	845			
1.034E+01		132	-	49
1.000E+01 9.550E+00	<u>846</u> 847	132		49
		122	-	
9.100E+00	<u>848</u> 849	133		
8.708E+00				
8.315E+00	850			
8.208E+00	851	124	4	
8.100E+00	852	134		
7.625E+00	853	125	4	
7.150E+00	854	135	50	-
7.075E+00	855	126	50	50
7.000E+00	856	136	<i>E</i> 1	50
6.875E+00	857	127	51	<i>E</i> 1
6.750E+00	858	137	50	51
6.625E+00	859	120	52	50
6.500E+00	860	138	50	52
6.375E+00	861	120	53	52
6.250E+00	862	139	4	53
6.000E+00	863	140		
5.850E+00	864			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
5.700E+00	865	structure		
5.550E+00	866			
5.400E+00	867	141	-	
5.250E+00	868			
5.044E+00	869			
5.000E+00	870	142	-	54
4.875E+00	871		54	
4.750E+00	872	143		
4.500E+00	873			
4.300E+00	874			
4.150E+00	875			
4.000E+00	876	144	-	
3.928E+00	877			
3.830E+00	878			
3.730E+00	879	145	1	
3.620E+00	880			
3.500E+00	881	146	1	
3.300E+00	882	-		
3.150E+00	883	147	-	
3.050E+00	884	148	-	55
3.000E+00	885	149	55	
2.970E+00	886	150	56	56
2.920E+00	887		57	
2.870E+00	888	151	-	57
2.820E+00	889	-		
2.770E+00	890	152	1	
2.720E+00	891			
2.670E+00	892	153	1	
2.620E+00	893			
2.570E+00	894	154	1	
2.520E+00	895			
2.470E+00	896	155		
2.425E+00	897			
2.380E+00	898	156	1	
2.340E+00	899			
2.300E+00	900	157	1	
2.255E+00	901		58	7
2.210E+00	902	158		58
2.165E+00	903			
2.120E+00	904	159	]	
2.060E+00	905			
2.000E+00	906	160	]	
1.970E+00	907			
1.940E+00	908	161		
1.900E+00	909			
1.860E+00	910	162		
1.815E+00	911			
1.770E+00	912	163		
1.725E+00	913			
1.680E+00	914	164		
1.635E+00	915			

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
1.590E+00	916	165		
1.545E+00	917		59	-
1.500E+00	918	166	_	59
1.450E+00	919	167	-	0,2
1.400E+00	920	168	-	
1.350E+00	921	169	-	
1.300E+00	922	170	-	
1.250E+00	923	171	1	
1.225E+00	924	172	1	
1.200E+00	925	173	1	60
1.175E+00	926	174	60	
1.150E+00	927	175	-	
1.140E+00	928	176	1	
1.130E+00	929	177	1	
1.120E+00	930	178	1	61
1.110E+00	931	179	61	
1.100E+00	932	180	1	
1.090E+00	933	181	1	
1.080E+00	934	182	1	
1.070E+00	935	183	1	
1.060E+00	936	184	1	
1.050E+00	937	185	1	
1.040E+00	938	186	1	
1.030E+00	939	187	1	
1.020E+00	940	188		
1.010E+00	941	189	1	
1.000E+00	942	190		
9.750E-01	943	191	62	62
9.500E-01	944	192		
9.250E-01	945	193		
9.000E-01	946	194		
8.764E-01	947			
8.500E-01	948	195	1	
8.000E-01	949	196	1	
7.500E-01	950	197		
7.000E-01	951	198		
6.826E-01	952			
6.500E-01	953	199		
6.250E-01	954	200	63	63
6.000E-01	955	201		
5.500E-01	956	202		
5.316E-01	957			
5.000E-01	958	203		
4.500E-01	959	204		
4.140E-01	960		64	
4.000E-01	961	205		64
3.750E-01	962	206	65	65
3.668E-01	963		66	
3.500E-01	964	207		66
3.250E-01	965	208	67	67
3.000E-01	966	209		

Upper neutron energy (eV)	999-group structure	SCALE 238-group structure	81A groups	81B3,C groups
2.750E-01	967	210	68	68
2.500E-01	968	211	69	69
2.250E-01	969	212	70	70
2.000E-01	970	213	71	71
1.840E-01	971			
1.750E-01	972	214		
1.500E-01	973	215	72	72
1.250E-01	974	216		
1.000E-01	975	217	73	73
9.000E-02	976	218		
8.000E-02	977	219		
7.000E-02	978	220	74	74
6.000E-02	979	221		
5.000E-02	980	222	75	75
4.000E-02	981	223	76	76
3.000E-02	982	224	77	77
2.530E-02	983	225	78	78
2.100E-02	984		79	
1.850E-02	985			
1.450E-02	986			
1.000E-02	987	226	]	79
7.500E-03	988	227	80	80
5.000E-03	989	228	]	
4.000E-03	990	229	]	
3.000E-03	991	230	81	81
2.500E-03	992	231	]	
2.000E-03	993	232	]	
1.500E-03	994	233	]	
1.200E-03	995	234	]	
1.000E-03	996	235	]	
7.500E-04	997	236	]	
5.000E-04	998	237	]	
1.000E-04	999	238	]	

#### 3.3.2 Library 81B

Because the energy boundaries chosen for 81A did not always coincide with the energy boundaries used in SCALE's 238-group libraries, it was decided to make minor adjustments to the 81A-group structure so that it would align with the 238-group neutron energy group definitions. This alignment allows for easier comparisons between the broad-group and fine-group libraries. The 81B broad-group library (Table 3.1) was generated from the SCALE 238-group V7-238 library using a weighting function based on an HTGR 238-group neutron flux solution. The HTGR model used to calculate the neutron flux solution weighting function is listed in Appendix B. The 81B energy boundaries were selected to minimize differences with the 81A library energy boundaries.

### 3.3.3 Library 81B2

The broad-group library 81B2 used the same neutron energy group structure that was used in the generation of library 81B, but the library was generated using SCALE/MALOCS by condensing from the 999-group fine-group library using an appropriate 999-group HTGR neutron flux solution as the weighting function. This library should better represent the HTGR solution as it is based on the much finer detail of the SCALE 999-group master library and the ultra fine neutron flux solution in 999 groups.

### 3.3.4 Library 81B3

Broad-group library 81B3 was generated directly from ENDF/B-VII nuclear data files using an HTGR weighting function (flux solution) calculated with the CENTRM module in SCALE. The SCALE input case used to calculate the CENTRM flux weighting function is listed in Appendix C. The same neutron energy boundary structure was used with library 81B3 as with libraries 81B and 81B2.

Section 2.4 discusses the methodology employed in generating broad-group libraries directly from ENDF/B-VII nuclear data files. The SCALE input file listed in Appendix C was used to calculate the 1800K HTGR weighting function based on the CENTRM pointwise flux. This weighting approach is different from the method used in the generation of the generic 999-group fine-group library from the ENDF/B-VII files. The 999-group library was generated using the same weighting spectrum as all previous multigroup SCALE libraries, consisting of

- 1. Maxwellian spectrum (peak at 300 K) from 10-5 to 0.125 eV,
- 2. a 1/E spectrum from 0.125 eV to 67.4 keV,
- 3. a fission spectrum (effective temperature at 1.273 MeV) from 67.4 keV to 10 MeV, and
- 4. a 1/E spectrum from 10 to 20 MeV.

The use of a weighting function that is based on the CENTRM pointwise flux from a representative HTGR model simulation is a new technique developed at ORNL during this work. The temperature (1800K) considered in the calculation of the pointwise weighting function was considered appropriate for the high-temperature operation of an HTGR. This corresponds to a representative temperature of 1527°C, or 2780°F.

The initial version of this library (81B3i) created from the ENDF/B-VII data was then processed and enhanced with new IR f-factors and lambda factors for <sup>238</sup>U. The IR factors can be used with the new BONAMI-IR module to produce results that are generally equivalent to results with CENTRM/PMC, thus removing the need to run CENTRM/PMC for each unit cell. Thus, the IR capability can result in significant speedups in computer runtime compared with the traditional resonance self-shielding methods in SCALE.

### 3.3.5 Library 81C

The final broad-group nuclear data library, 81C, is based on the testing and improvements to library 81B3. This library is the ultimate result and includes new f-factors for <sup>238</sup>U and other actinides (App. F) and lambda factors for all nuclides. The neutron energy group boundaries are the same as the broad-group library 81B3. Broad-group library 81C, in addition to having all the necessary IR treatment factors implemented, also uses the new nuclide identification naming convention that has been developed to remove the maximum mixture number limit of 2147 in SCALE.

## 4. COMPARISON OF RESULTS WITH THE SCALE BROAD-GROUP LIBRARIES

Tables 4.1–4.3 summarize simplified model results with SCALE using various fine- and broad-group nuclear data libraries. The final 81C library is intended for use in production runs with SCALE. This broad-group library can model HTGR scenarios adequately, with similar accuracy to fine-group library runs but with considerably less computational time for resonance self-shielding of the cross sections. In the results presented in this section, BONAMI-IR and the 81C library ran 35 to 100 times faster than CENTRM/PMC with the same library.

Table 4.1 shows the results for a series of KENO MG cases for a homogenous HTGR pin cell model that is representative of a prismatic NGNP design. These results are compared with the 999 group library eigenvalue solution. The results obtained with the various 81-group libraries compare quite favorably with respect to the 238-group KENO result. The cases in Table 4.1 all use CENTRM cross-section processing with white boundary conditions at a temperature of 300K.

Libraries	k <sub>eff</sub>	Δk relative to 999-group result (pcm)
81A	$1.25766 \pm 0.00039$	$-300 \pm 81$
81B	$1.25746 \pm 0.00040$	$-320 \pm 83$
81C	$1.25586 \pm 0.00040$	$-480 \pm 82$
238	1.25769 ±0.00041	$-376 \pm 88$
999	$1.26066 \pm 0.00042$	N/A

Table 4.1. k <sub>eff</sub> comparisons for MG KENO homogeneous cell HTGR	model
---	-------

Table 4.2 shows results of a very simple XSDRN 1-D homogeneous HTGR core model at 300K and 1200K. Results using BONAMI-IR and the 81C Library are compared with cases using CENTRM with the 81C, 238-group, and 999-group libraries. Note that the CENTRM cases use a triangular pitch lattice cell that produces homogenized number densities for the 1-D XSDRN model. This simple model is not as precise as the benchmark cases that follow.

Table 4.2.	k <sub>eff</sub> comparisons for	homogeneous 1-D radial model
------------	----------------------------------	------------------------------

k <sub>eff</sub>	T(K)	CENTRM	Δk <sub>eff</sub> (pcm) <sup>a</sup>	BONAMI-IR	$\Delta k_{eff} (pcm)^{a}$
81C	300	1.25214	-378	1.24397	-1195
238	300	1.25434	-158	N/A	N/A
999	300	1.25592	_	N/A	N/A
81C	1200	1.11115	-364	1.10665	-814
238	1200	1.11279	-200	N/A	N/A
999	1200	1.11479	_	N/A	N/A

<sup>a</sup> Difference from CENTRM case with 999 groups at same temperature.

The High Temperature Engineering Test Reactor (HTTR) [12,13], which is the first HTGR in Japan, is a prismatic fuel graphite-moderated and helium-cooled reactor with a thermal output of 30 MW and a maximum outlet gas temperature of 950 °C and has the capability to demonstrate nuclear process heat utilization using an intermediate heat exchanger. The construction of the HTTR was decided by Japanese Atomic Energy Commission (JAEC) in 1987 and started in March 1991 by the Japan Atomic Energy Research Institute (JAERI) to establish and upgrade the technology basis for an HTGR. The HTTR was intended to serve as a potential tool for new and innovative basic research on high temperature technologies.

Calculations were performed in this work with two of the HTTR benchmark cases (case 1 and case 2) from the SCALE HTGR validation report [14]. The case 2 input file is listed in Appendix D, and both a cross-sectional and a vertical view of this HTTR model are shown in Appendix E. The calculated  $k_{eff}$  results, and the relative  $\Delta k$  values with respect to the CE KENO results are tabulated in Table 4.3 and 4.4. The results obtained with the 81C library and BONAMI-IR show good agreement with both the 238-group library and the CE results.

Library	Cross-section processor	k <sub>eff</sub>	Δk <sub>eff</sub> (pcm) relative to CE
81C	BONAMI-IR	$1.21629 \pm 0.00024$	$-305 \pm 49$
81C	CENTRM	$1.21661 \pm 0.00022$	-273 ±47
238	CENTRM	$1.21887 \pm 0.00025$	$-47 \pm 50$
999	CENTRM	$1.21807 \pm 0.00023$	$-127 \pm 48$
CE	N/A	$1.21934 \pm 0.00025$	-

Table 4.3. k<sub>eff</sub> results for HTTR benchmark case 1

 Table 4.4.
 k<sub>eff</sub> results for HTTR benchmark case 2

Library	Cross-section processor	k <sub>eff</sub>	Δk <sub>eff</sub> (pcm) relative to CE
81C	BONAMI-IR	$1.20799 \pm 0.00027$	$-374 \pm 52$
81C	CENTRM	$1.20659 \pm 0.00029$	$-514 \pm 54$
238	CENTRM	$1.20930 \pm 0.00023$	$-243 \pm 48$
CE	N/A	$1.21173 \pm 0.00025$	_

The performance of the 81C library for analyses of pebble bed reactor (PBR) configurations was assessed using two test cases: (1) a pebble unit cell with fuel representative of the HTR-10 reactor at full power and (2) the first critical core of HTR-10. The models that were used for testing are described in detail elsewhere [14]. The model for the pebble unit cell is a 1-D SCALE/XSDRN model. The model for the first critical core of HTR-10 is a full 3-D SCALE/KENO-VI model that has been developed using benchmark specifications included in the IRPhE Handbook [15]. The double heterogeneity of fuel is modeled in SCALE using the DOUBLEHET option for multigroup cross-section processing.

The results obtained with SCALE for the pebble unit cell at operating temperature (1200K for fuel and 900K for coolant) are presented in Table 4.5, as obtained using the 81C HTGR library and the standard 238-group ENDF/B-VII transport library in SCALE. The 81C library was used with both CENTRM and the new BONAMI-IR for cross section self-shielding. Also shown in Table 4.5 is the result obtained with MCNP5 continuous energy ENDF/B-VII data for the same configuration. The MCNP5 model explicitly

represents the fuel particles inside the fuel pebbles using a lattice representation that ensures the fuel particles do not intersect the interface of the graphite matrix with the pebble shell [14]. The result obtained with the 81-group library and BONAMI-IR is within 146 pcm of the SCALE result for the 238-group library and within 271 pcm of the MCNP result.

Table 4.5	5. k <sub>eff</sub> results for HTR-10 pebble unit cell (1200K fuel, 900K coolant)	

Code	Library	<b>Cross-section processor</b>	k <sub>eff</sub>	$\Delta k_{eff} (pcm)^d$	$\Delta k_{eff} (pcm)^{e}$
			1.60822		
MCNP	CE <sup>a</sup> ENDF/B-VII	NA <sup>b</sup>	$(\sigma=0.00021)^{c}$	_	-125
SCALE	238-group ENDF/B-VII	CENTRM	1.60936	125	_
	81C	CENTRM	1.60783	-28	-153
	81C	BONAMI-IR	1.61082	-271	146

 $^{a}CE = continuous energy.$ 

<sup>b</sup> NA = not applicable.

<sup>c</sup> Standard deviation from the Monte Carlo transport calculation.

<sup>d</sup> Difference in  $k_{eff}$  is calculated using the MCNP result as reference; 1 pcm=10<sup>-5</sup>.

<sup>e</sup> Difference in k<sub>eff</sub> is calculated using the SCALE 238-group ENDF/B-VII with CENTRM result as reference.

To assess the effect of the temperature on library performance, the same pebble unit cell was calculated with 300K temperature in both fuel and coolant. The corresponding results are presented in Table 4.6. If the SCALE result for the 238-group library is used as the reference for comparison, the result obtained with the 81-group library is within 148 pcm when using CENTRM and within 338 pcm when using BONAMI-IR.

Table 4 6.	k <sub>eff</sub> results for	HTR-10	pebble ı	anit (300K)
	men reserves ror		pe~~	

Code	Library	Cross-section Processor	k <sub>eff</sub>	Δk <sub>eff</sub> (pcm) <sup>d</sup>	Δk <sub>eff</sub> (pcm) <sup>e</sup>
			1.69040		
MCNP	CE <sup>a</sup> ENDF/B-VII	$NA^b$	$(\sigma = 0.00014)^{c}$	_	110
SCALE	238-group ENDF/B-VII	CENTRM	1.68930	-110	-
	81C	CENTRM	1.68782	-258	-148
	81C	BONAMI-IR	1.68592	-448	-338

 $^{a}$  CE = continuous energy.

<sup>b</sup> NA = not applicable.

<sup>c</sup> Standard deviation from the Monte Carlo transport calculation.

<sup>d</sup> Difference in  $k_{eff}$  is calculated using the MCNP result as reference; 1 pcm=10<sup>-5</sup>.

 $^{e}$  Difference in  $k_{\rm eff}$  is calculated using the SCALE 238-group ENDF/B-VII with CENTRM result as reference.

The results obtained for the HTR-10 first core (full core 3-D model) are shown in Table 4.7. There is an excellent agreement between MCNP and SCALE when using the 238-group ENDF/B-VII library. The result obtained with the 81-group library and BONAMI-IR is within 357 pcm of the 238-group library result with CENTRM. This difference is consistent with the difference seen in Table 4.6 for the pebble unit cell at the same temperature (300 K).

Code	Library	<b>Cross-section processor</b>	k <sub>eff</sub>	$\Delta k_{eff} (pcm)^{d}$	Δk <sub>eff</sub> (pcm) <sup>c</sup>
			1.01473		
MCNP	CE <sup>a</sup> ENDF/B-VII	$NA^b$	( $\sigma$ =0.00021) <sup>c</sup>	_	$54 \pm 85$
SCALE	238-group ENDF/B-VII	CENTRM	1.01419	$-54 \pm 85$	_
	81C	BONAMI-IR	(σ=0.00082) 1.01062 (σ=0.00087)	-411 ± 89	$-357 \pm 120$

Table 4.7.  $k_{eff}$  results for HTR-10 full core

 $^{a}$  CE = continuous energy.

<sup>b</sup> NA = not applicable.

<sup>c</sup> Standard deviation from the Monte Carlo transport calculation.

<sup>d</sup> Difference in  $k_{eff}$  is calculated using the MCNP result as reference; 1 pcm=10<sup>-5</sup>.

<sup>e</sup> Difference in k<sub>eff</sub> is calculated using the SCALE 238-group ENDF/B-VII with CENTRM result as reference.

The calculated results with BONAMI-IR and the 81C library for the HTTR and HTR-10 reactor benchmarks demonstrate the capability to produce accurate results for actual operating HTGRs, both with prismatic and pebble bed fuels. These results show good agreement with CE and 238-group calculations. Although further verification and validation of BONAMI-IR and the 81C library are desirable, these results presented here provide confidence that this library can be useful for HTGR analyses.

# 5. SUMMARY AND RECOMMENDATIONS

The final 81-group library allows for the modeling of HTGR cases with SCALE with sufficient accuracy and faster CPU times than the V7-238 library. Further processing to include intermediate resonance features provides an additional improvement by reducing computational times for resonance self-shielding (up to 100 times faster) without loss of accuracy.

We observed that

- 1. HTGR broad-group libraries need more groups than LWR broad-group libraries.
- 2. In HTGRs, the average neutron flux distribution in the vicinity of fuel is more important for neutronics and self-shielding considerations than the flux within the fuel.
- 3. Fine-group libraries with many groups (such as the new 999-group library) properly show details of the increase in flux at the lower end of resonances, due to the self-shielding of the resonance and the reduction in cross section at the lower energy.
- 4. The use of flux values from the average flux distribution of an HTGR model is an appropriate weighting function for use in the generation of broad-group libraries.

The effectiveness and correctness of a broad-group nuclear data library is quite sensitive to the neutron energy boundary structure and to the weighting function (usually a fine-group neutron flux solution) that is used in generating the library from ENDF/B files or through condensation from a fine-group master library.

Based on the results presented in this report, the choice of the broad-group energy boundaries for 81C library allows SCALE to model HTGR cases with reasonable accuracy and significantly faster CPU times than fine-group or CE calculations. The new 81C library includes new lambda factors for all nuclides and f-factors for <sup>238</sup>U and other actinides. It also contains high-temperature data consistent with HTGR operation and modeling. The 81C library requires the BONAMI-IR module in SCALE to fully utilize data in the library. When the IR data are processed with BONAMI-IR, accurate results can be obtained with significantly reduced computational runtimes.

### 6. REFERENCES

- SCALE: A Comprehensive Modeling and Simulation Suite for Nuclear Safety Analysis and Design, ORNL/TM-2005/39, Version 6.1, Oak Ridge National Laboratory, Oak Ridge, Tennessee, June 2011. Available from Radiation Safety Information Computational Center at Oak Ridge National Laboratory as CCC-785.
- S. M. Bowman, "SCALE 6: Comprehensive Nuclear Safety Analysis Code System," *Nucl. Technol.* 174(2), 126-148 (May 2011).
- N. M. Greene, J. L. Lucius, L. M. Petrie, W. E. Ford, III, J. E. White, and R. Q. Wright, *AMPX—A* Modular Code System to Generate Multigroup Neutron-Gamma Cross Sections from ENDF/B, ORNL/TM-3706 (AMPX-1), Union Carbide Corporation (Nuclear Division), Oak Ridge National Laboratory, 1976.
- 4. M. E. Dunn, N. M. Greene, "AMPX-2000: A Cross-Section Processing System for Generating Nuclear Data for Criticality Safety Applications," *Trans. Am. Nucl. Soc.* **86**, 118 (2002).
- 5. *MCNP—A General Monte Carlo N-Particle Transport Code, Version 5*, LA-CP-03-0245, Los Alamos National Laboratory, April 2003.
- 6. D. Wiarda et al, "AMPX Cross-Section Processing Status", Presentations at the 2009 and the 2010 Cross Section Evaluation Working Group (CSEWG) and U.S. Nuclear Data Program (USNDP) Annual Meetings, National Nuclear Data Center, Brookhaven National Laboratory.
- M.L. Williams, Kang-Seog Kim, and D. F. Hollenbach, *Generation of Multigroup Cross Sections for* the Very High Temperature Reactor, Final Report – Department of Energy Generation IV Nuclear Energy Systems Initiative Program, VHTR Advanced Modeling and Simulation Project, Oak Ridge National Laboratory, September 25, 2009.
- 8. Kang-Seog Kim, M. L. Williams, D. F. Hollenbach, "RIML: A Program to Generate Intermediate Resonance Parameters, Self-Shielded Cross Sections, Subgroup Levels and Weights, and Associated AMPX Master Library," Oak Ridge National Laboratory, October 2, 2009
- "The Numerical Nuclear Reactor for High Fidelity Integrated Simulation of Neutronic, Thermal-Hydraulic and Thermo-Mechanical Phenomena," Final Report of US/ROK International Nuclear Energy Research Initiative Project Number 2002-010-K, Argonne National Laboratory, Korea Atomic Energy Research Institute, Purdue University, and Seoul National University, March 2005.
- 10. R. Goldstein and E. R. Cohen, "Theory of Resonance Absorption of Neutrons," *Nucl. Sci. Eng.* **13**, 132 (1962).
- 11. National Nuclear Data Center (NNDC) at Brookhaven National Laboratory (BNL), website <a href="http://www.nndc.bnl.gov">http://www.nndc.bnl.gov</a>
- 12. IAEA, Evaluation of High Temperature Gas Cooled Reactor Performance: Benchmark Analysis Related to Initial Testing of the HTTR and HTR-10, IAEA-TECDOC-1382, International Atomic Energy Agency, Vienna, November 2003.

- International Handbook of Evaluated Reactor Physics Benchmark Experiments, NEA-1765, IRPHE2009-HANDBOOK; HTTR-GCR-RESR-001, CRIT-SUB-REAC-COEF-KIN-RRATE (new), "Evaluation of the Start-Up Core Physics Tests at Japan's High Temperature Engineering Test Reactor (Fully-Loaded Core)," March 21, 2009.
- 14. G. Ilas, D. Ilas, R.P. Kelly, and E.E. Sunny, *Validation of SCALE for High Temperature Gas-Cooled Reactor Analysis*, ORNL/TM-2011/161 (2011).
- 15. W. K. Terry, L. M. Montierth, S. S. Kim, J. J. Cogliati, and A. M. Ougouag, "Evaluation of the Initial Critical Configuration of the HTR-10 Pebble-Bed Reactor," *International Handbook of Evaluated Reactor Physics Benchmark Experiments (IRPhE) Handbook*, Nuclear Energy Agency (March 2009).

APPENDIX A

# DESCRIPTION OF INTERMEDIATE RESONANCE METHOD IN SCALE

#### A.1 INTERMEDIATE RESONANCE APPROXIMATION

The intermediate resonance (IR) approximation was proposed in the 1960s as an extension to the narrow resonance (NR) and wide resonance (WR) approximations, which are used in solving the slowing-down equation to obtain an analytical flux expression for computing multigroup (MG) cross sections. The NR approximation is used to represent elastic scattering sources of nuclides for which the neutron energy loss is large compared to the practical width of resonances for the absorber materials of interest. This approximation tends to be more accurate for light nuclides (e.g., moderators) and for higher energy ranges. Conversely, the WR approximation is used to represent elastic scattering sources of nuclides for which the neutron energy loss is small compared to the practical widths. This approximation tends to be more accurate for heavy nuclides (e.g., the limit of infinite mass is usually assumed) and for lower energy ranges. Since most resonance absorption in LEU thermal reactors occurs in <sup>238</sup>U, this material is usually used as the basis to determine if a nuclide is a NR or a WR scatterer.

Many materials cannot be treated accurately by either the NR or WR methods. The IR method provides a more generalized approach in which the scattering source is represented by a linear combination of NR and WR expressions; i.e., for scatterers with slowing-down properties intermediate between NR and WR scatterers. This is done by introducing an IR parameter usually called lambda factors, for which NR scatters have  $\lambda=1$ , WR scatters have  $\lambda=0$ , and fractional  $\lambda$ 's are for intermediate scatterers. Codes have been developed by ORNL to determine group-dependent lambda values for all materials, using the procedure described in Section A.2. Lambda values are included in the HTR 81-group library.

Applying the IR approximation and neglecting resonance overlap effects in the slowing-down equation, the following analytical expression is obtained for the flux spectrum near a resonance of nuclide "r":

$$\Phi_{\rm IR}^{\rm (r)}({\rm E};\sigma_0^{\rm (r)}) = \left(\frac{\sigma_{\rm p}^{\rm (r)} + \sigma_0^{\rm (r)}}{\sigma_{\rm t}^{\rm (r)}({\rm E}) + \sigma_0^{\rm (r)}}\right) \frac{1}{{\rm E}}$$

where  $\sigma_t^{(r)}(E)$ ,  $\sigma_p^{(r)}$ ,  $\sigma_0^{(r)}$  are the total, potential, and background cross sections for resonance material "r".

The background cross section in Eq. 1 depends on the lambda factors and is equal to

$$\sigma_0^{(r)} = \frac{1}{N^{(r)}} \sum_{j \neq r} \lambda^{(j)} \Sigma_p^{(j)}$$

Equation 2 is appropriate for a homogeneous medium, but a similar expression also can be used for heterogeneous lattices by including an additional constant called the escape cross section. Eq. 1 shows that the IR method allows the flux energy spectrum to be parameterized in terms of the single variable  $\sigma_0^{(r)}$ , which indicates the degree of resonance self-shielding. The value of  $\sigma_0^{(r)}$  can vary by multigroup, but it is not a function of energy within a group.

Energy-dependent spectra for weighting MG cross sections of an arbitrary resonance material "r" are obtained by solving the slowing-down equation with the pointwise code CENTRM for a homogeneous mixture composed of "r" plus hydrogen. The hydrogen concentration is varied to produce the desired background cross sections in a predetermined set that spans the expected range of self-shielding for the resonance material, so that a set of MG data are computed at varying degrees of self-shielding. These are

converted into group-dependent self-shielding factors parameterized versus  $\sigma_0^{(r)}$ , which are stored on the AMPX master library.

During a reactor physics calculation with TRITON, for example, the background for the system of interest is computed using eq. 2 with problem-specific materials and concentrations, and the corresponding shielding factor is found by interpolating from the set of background cross sections on the library. This is done by the SCALE code BONAMI, which has been modified to use the IR expression for the background cross section. The self-shielded cross section for the particular system is equal to the product of the interpolated shielding factor and the unshielded (i.e., infinitely dilute) cross section, which is also stored in the master library. The BONAMI IR procedure for computing self-shielded cross sections is very fast since only data interpolation is required.

### A.2 COMPUTATION OF HYDROGEN-EQUIVALENT LAMBDA FACTORS

An important component of the IR method is to have reasonable values for the IR lambda values. ORNL computes these values using the "hydrogen equivalence" approach based on <sup>238</sup>U resonances. In this wellestablished method, it is assumed that hydrogen is a true NR material ( $\lambda$ =1) since a neutron can lose essentially all of its energy in single elastic collision. A table of self-shielded cross sections versus background cross sections is generated for mixtures of <sup>238</sup>U and hydrogen with varying concentrations, using CENTRM calculations as described in the previous section. To obtain lambdas for nuclides other than hydrogen, a portion of the hydrogen number density in the mixture is replaced by another nuclide "j". If a one-to-one exchange of hydrogen atoms with atoms of "j" is done (i.e., number of hydrogen atoms removed equals the number of *j* added), the shielded cross section for the mixture will be different than the corresponding mixture containing only hydrogen, since the slowing-down properties of *j* are different. However instead of one-to-one replacement, the number of *i* atoms is modified to obtain the same shielded cross section as obtained with hydrogen. This is called the hydrogen equivalent number density of *j*, and from this value the corresponding lambda value for nuclide *j* can be found. The procedure is repeated for each multigroup to obtain group-dependent lambdas. The lambda factors are not very sensitive to temperature and thus have been generated only for the nominal fuel temperature of 1500 K in the HTR 81-group library.

# **APPENDIX B**

# INPUT FILE FOR RADIAL CORE MODEL 999-GROUP (VHTR) MODEL

Presented here is an input file for the radial\_core\_model-999grps (VHTR) model.

```
=shell
cp ~xxx/SCALE6/HTR multigroup proj/older csas decks/v7 999 v7 999
end
=csas1x
                parm=centrm
homog (no double het) fuel unit cell for ngnp prismatic lattice
v7 999
read comp
۲
    This case does not collapse to 23-Groups
' homgenized channel
u-238 1 0 7.99688E-4 300.0 end
u-235 1 0 7.23460E-5 300.0 end
o 1 0 1.30805E-3 300.0 end
graphite 1 0 5.85220e-2 300.0 end
graphite 1 0 3.77085E-3 300.0 end
si 1 0 3.77085E-3 300.0 end
' graphite moderator
graphite 7 den=1.74 1.0 300.0 end
' helium coolant
he-3 8 0 3.71220e-11 300.0 end
        8 0 2.65156e-5 300.0 end
he-4
.
' carbon steel for PV
carbonsteel 91 end
' S.S. for structure
ss316 92 end
' graphite reflector
graphite 93 den=1.74 1.0 300.0 end
b-11 93 0 1.0e-8 300.0 end
          93 0 0.2e-8 300.0 end
b-10
.
end comp
read celldata
 lattice triangpitch pitch=1.8796 7 fuelr=0.6225 1
 gapr=0.6350 8 cellmix=40 end
 centrm data
   ixprt=1 ipbt=1
  reflected BC in CENTRM
   ibr=1 iup=20 demin=2.0E-5
  end centrm
end celldata
end
=shell
rm ft02f001
```

rm ft03f001 rm ft42f001 rm ft81f001 end =xsdrn Radial model of VHTR, with homo 999 grp XSs (no double het). ' this case collapses over 3 zones: inner refl, core, and outer refl ' ige izm im ibl ibr mx ms sn isct ievt iim icm iclc ith '1\$\$ 2 3 334 1 0 2 11 8 3 1 20 60 30 0 e 1\$\$ 2 3 334 1 0 2 11 8 3 1 20 600 500 0 e 500 0 e • iprt id1 ipbt isx isen idm2 nbands ifsn **'**2\$\$ -2 -1 e -1 2\$\$ -2 e ' ifg iqm ipm ifn itmx idat1 ipn idfm iaz iai ifct '3\$\$ 1 0 0 1 0 0 3 0 4 1 1 e 3\$\$ 0 0 0 1 0 0 3 0 4 1 1 e . icon igmf itp ipp 0 999 0 0 • 4\$\$ 0 0 ρ • eps ptc xnf ev evm bf dy '5\*\* 1.0e-4 1.0e-5 1.0 a7 813.0 e 5\*\* 1.0e-4 1.0e-6 1.0 a7 813.0 e Т . . << MIXING TABLE >> mixtures: mix-1=homo fuel block ; mix-2=graphite reflector 13\$\$ 10r1 2 . nuclide iDs for cell-homogenized fuel XS ; reflector 14\$\$ 1092238 1092235 1008016 1006312 1014028 1014029 1014030 7006312 8002003 8002004 93006312 ' homo fuel atom densities ; and reflector 15\*\* 3.18E-04 2.88E-05 1.093E-02 2.48E-02 1.38E-03 7.01E-05 4.65E-05 5.12E-02 5.99E-13 4.28E-07 8.73211E-02 Т . ' fission density guess 34## f1.0 Т ' radial intervals 35\*\* 146i0.0 32i147.62 32i180.31 27i213.01 92i241.32 334.40 ' zone numbers by interval -inner refl- -- 3 fuel rings -- -- outer refl --36\$\$ 144r1 1 1 1 2 2 2 88r2 2 2 2 333 90r3 ' mixture by zone 39\$\$ 2 1 2 ' transport method by group, for iclc outers

```
46$$ 148r0 f1
' activity materials
49$$ 1092238 1092235 1092235 93006312
' activity mts
50$$ -102 -18 1452 -2
' was: collapsed group structure. set to 23 groups
      51$$ 11r1 6r2 17r3 10r4 5r5 8r6 17r7 69r8 22r9 14r10 5r11 6r12
      4r13 8r14 2r15 2r16 2r17 2r18 3r19 1r20 2r21 5r22 17r23
51$$ 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
'48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70
71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93
'94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112
'113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129
'130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146
'147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163
'164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180
'181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197
'198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214
215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231
232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248
249 250 251 252 253 254 255 256 257 258 259 260 261
Т
end
'=shell
'rm ft04f001
'mv ft03f001 ft04f001
'end
=xsdrn
Radial model of VHTR, with full 999 grp XSs (no double het).
' uses 999-grp XSs collapsed over 3 zones (innr refl, core, outr refl)
   ige izm im ibl ibr mx ms sn isct ievt iim icm iclc ith
                           12 8
1$$ 2 3 334 1
                  0
                       3
                                  3 1 20
                                                 300 200
                                                          0 e
    iprt idl ipbt isx isen idm2 nbands ifsn
2$$
    -2
          0
               0
                    0
                       0
                              0
                                    -3
                                          0
                                                е
.
    ifg iqm ipm ifn itmx idat1 ipn idfm iaz iai ifct
                                    3
                                          0
                                              4
3$$
    0
         0
              0
                   1
                        0
                              0
                                                   1
                                                        1
                                                             e
۲.
            ptc
                  xnf
                        ev evm bf
     eps
                                       dv
5**
    1.0e-4 1.0e-6 1.0
                                    a7 813.0 e
Т
.
           << MIXING TABLE
                                       >>
   mixtures: mix-1=homo fuel block ; mix-2=graphite reflector
13$$ 10r1 2 3
.
   nuclide iDs for cell-homogenized fuel XS ; reflector
14$$ 21092238 21092235 21008016 21006312 21014028 21014029
     21014030 27006312 28002003 28002004 193006312 393006312
```

```
' homo fuel atom densities ; and reflector
15** 3.18E-04 2.88E-05 1.093E-02 2.48E-02 1.38E-03 7.01E-05
    4.65E-05 5.12E-02 5.99E-13 4.28E-07 8.73211E-02 8.73211E-02
Т
•
' fission density guess
34## f1.0
Т
' radial intervals
35** 146i0.0 32i147.62 32i180.31 27i213.01 92i241.32 334.40
' zone numbers by interval
  -inner refl- -- 3 fuel rings -- -- outer refl --
.
1

      36$$
      144r1
      1
      1
      2
      2
      88r2
      2
      2
      3
      3
      90r3

.
' mixture by zone
39$$ 2 1 3
' transport method by group, for iclc outers
46$$ 8r0 f1
' activity materials
49$$ 21092238 21092235 21092235 193006312
' activity mts
50$$ -102 -18 1452 -2
.
Т
end
```

# **APPENDIX C**

# INPUT FOR GENERATING CENTRM POINTWISE FLUX WEIGHTING FUNCTIONS

Presented here is an input file for generating a temperature-dependent CENTRM pointwise flux weighting function (this example for 1800 K).

```
=csas1x
                parm=centrm
homo (NO double-het) fuel unit cell for ngp prismatic lattice
V7-238
read comp
' homgenized channel
u-238 1 0 7.99688E-4 1800.0 end
u-235
       1 0 7.23460E-5 1800.0 end
  1 0 1.30805E-3 1800.0 end
0
graphite 1 0 5.85220e-2 1800.0 end
' c 1 0 3.77085E-3 1800.0 end
graphite 1 0 3.77085E-3 1800.0 end
si 1 0 3.77085E-3 1800.0 end
.
' graphite moderator
graphite 7 den=1.74 1.0 300.0 end
' helium coolant
he-3 8 0 3.71220e-11 300.0 end
he-4 8 0 2.65156e-5 300.0 end
end comp
read celldata
lattice triangpitch pitch=1.5 7 fuelr=0.6225 1
   gapr=0.6350 8 end
centrm data ixprt=1 ipbt=1 nprt=1 iprt=-1 id1=2
' reflected BC in CENTRM
isn=10
n2d=0
ibr=3
iup=20
demin=2.0E-5
end centrm
moredata szf=0.5 end
end celldata
end
```

### **APPENDIX D**

INPUT FOR TEST2R3\_MG: SAMPLE JAPANESE HTTR BENCHMARK CASE

Presented here is input for the Test2r3 Mg: sample Japanese HTTR benchmark case

```
=shell
cp /home/xxx/newlib htgr/81B3/tst8 IR Master ft34f001
ln -sf /home/xxx/SCALE6 100204/Linux x86 64/bin/csas6 ./csas6
ln -sf /home/xxx/SCALE6 100204/Linux x86 64/bin/bonami ./bonami
end
=ajax
0$$ 88 e
1$$ 1 t
2$$ 34 0 t
end
=csas26 parm=bonami
Volkan's test# 1: 5 rings of 6.3% enriched fuel blocks + 1 reflector ring
ft88f001
* _____
' --- References:
' [1] John D. Bess, Nozomu Fujimoto: Evaluation of the Start-up Core Physics Tests
     at Japan's High Temperature Engineering Test Reactor (Fully-Loaded Core),
     Revision 0, March, 2009
1 _____
' --- Materials -----
read comp
' Material References:
' ------
            CFP fuel atom densities from Table 3.1, pag. 195 of [1]
' m=7
' m=13
           Buffer atom densities from Table 3.2, pag. 196 of [1]
' m=14
           IPyC atom densities from Table 3.2, pag. 196 of [1]
          SiC atom densities from Table 3.2, pag. 196 of [1]
OPyC atom densities from Table 3.2, pag. 196 of [1]
' m=15
' m=16
' m=17
          Overcoat atom densities from Table 3.2, pag. 196 of [1]
Compact atom densities from Table 3.3, pag. 196 of [1]
' m=18
' m=19
           Sleeve atom densities from Table 3.4, pag. 196 of [1]
          IG-110 atom densities from Table 3.6, pag. 197 of [1]
' m=20
           by multiplying with 1.005
         Helium coolant from 3.1.3.10, page 199 of [1]
Disks atom densities in BP pins from Table 3.5, pag. 197 of [1]
BP atom densities (2.5%) from Table 3.5, pag. 197 of [1]
' m=21
' m=22
' m=24
' m=25
           PGX Graphite from Table 3.9, pag. 199 of [1]
' _____
' --- Fuel Kernel, 6.3% enrichment:
 U-234 7 0 1.1293E-05 300.00 end
               7 0 1.4783E-03 300.00 end
 U-235
 U-238
               7 0 2.1699E-02 300.00 end
 0-16
               7 0 4.6343E-02 300.00 end
               7 0 1.7276E-07
 B-10
                                  300.00 end
' --- Buffer:
 C-graphite 13 0 5.5153E-02
                                   300.00 end
 B-10
               13 0 1.8290E-08
                                  300.00 end
' --- IPyC:
 C-graphite 14 0 9.2758E-02
B-10 14 0 3.0761E-08
                                   300.00 end
                                   300.00 end
' --- SiC:
 C-graphite
             15 0 4.8061E-02
                                   300.00 end
             15 0 4.8061E-02
 Si
                                   300.00 end
              15 0 5.3208E-08
 в-10
                                   300.00 end
' --- OPyC:
 C-graphite 16 0 9.2758E-02
B-10 16 0 3.0761E-08
                                   300.00 end
                                 300.00 end
' --- Graphite overcoat:
 C-graphite 17 0 8.5237E-02
                                   300.00 end
```

```
в-10
             17 0 2.8267E-08 300.00 end
' --- Graphite compact:
 C-graphite 18 0 8.5237E-02
                                300.00 end
 B-10
              18 0 1.5452E-08 300.00 end
' --- Graphite sleeve:
 C-graphite 19 0 8.8747E-02
                                300.00 end
              19 0 7.2596E-09 300.00 end
 в-10
' --- IG-110 Graphite:
 C-graphite 20 0 8.8243E-02
B-10 20 0 7.8036E-09
                                 300.00 end
                                300.00 end
' --- Helium coolant:
 He
      21 0 2.4616E-05
                               300.00 end
' --- Graphite disks:
 C-graphite 22 0 8.8747E-02
B-10 22 0 7.2596E-09
                                300.00 end
                                300.00 end
' --- Burnable poison (2.5wt%):
 C-graphite 24 0 8.7995E-02
                               300.00 end
 B-10

        24
        0
        4.9882E-04
        300.00
        end

        24
        0
        2.0078E-03
        300.00
        end

 B-11
B-11
' --- PGX Graphite:
C-graphite 25 0 8.6134E-02 300.00 end
B-10 25 0 3.6372E-08 300.00 end
It (inport and out)
' --- Homogenized graphite compact (inner and outer helium embeded):
' Obtained by volumetric homogenization of materials 18 and 21
             28 0 4.6313E-06 300.00 end
28 0 6.8834E-02 300.00 end
 He
 C-graphite
             28 0 4.7270E-09 300.00 end
 в-10
end comp
' --- Cell data -----
read celldata
doublehet fuelmix=10 end
  gfd=0.06 7
            13
 coatr=0.036
              14
 coatr=0.039
 coatr=0.0415
               15
 coatr=0.046
               16
matrix=28
numpar=12987 end grain
rod triangpitch right bdy=white left bdy=reflected
pitch=5.15 20 fuelr=1.3 fuelh=3.9 gapd=3.4 19 cladd=4.1 21 end
moredata iropt=1 end
end celldata
۱ _____
' --- Parameters -----
read parm
     gen=110
     npg=100000
     nsk=10
      tba=100
     htm=no
      flx=yes
      fdn=yes
end parm
' --- Geometry -----
read geom
' Dimensions for block and pin details based on Figure 1.52 page 68 of [1]
' Counting of pins starts at the lower left corner, going horizontally and
' then vertically
```

```
D-4
```

```
' Dimensions for grain cells based on Figure 3.1 page 176 of [1]
' Numbering scheme for cells that make up fuel block units:
  zlb1 fuel grain
  zlb2 BP pin
  zlb3 fuel pin
  zlb4
       central hole
        empty pin
  zlb5
  zlb6
        graphite
  zlb
        block
' Block numbering (Fig. 3.15, page 190 of [1]):
' Each block is numbered according to the scheme 100*z+10*1+b, where:
  z=1,...,8
                  zone number
                     **Fuel: z=1,2 for zones 1 and 2, respectively
                            z=3,5 alternatively as one goes counterclockwise
                            for zone 3, z=4 for zone 4
                     **Replaceable Reflectors in fuel columns follow the same
                       pattern as fuel blocks, but with different 1: 1=1,2,8,9
                     **CR:
                           z=6 for "C" (b=1) and "R1" (b=2,...,7)
                            z=7 for "R2" and "R3" (b=1,...,9, going
                            counterclockwise)
                     **Instrumentation Blocks have z=8 (b=1,2,3)
                  layer number from top to bottom
   1=1,...,9
                  (fuel blocks in layers 3 to 7 from top)
   b=1,...,bmax(z) block number (starting from pozitive x, counterclockwise)
                     bmax(1) = ... = bmax(5) = 6
                     bmax(6) = 7, bmax(7) = 9
                     bmax(8) = 3
' Replaceable Reflector (RR) blocks that are not in fuel columns are assigned
' block# 900
' Graphite blocks to make up the Permanent Reflector are assigned block# 100
'======= Graphite Block ============
unit 10
             1 18.
                        29.
 hexprism
                               -29.
           25
 media
                 1
                         1
           1
 boundary
'========= Void Block =============
unit 20
             1 18.
                         29.
                               -29.
 hexprism
            0
 media
                 1
                         1
            1
 boundary
'======== Central handling hole ==============
unit 1114
             1 2.5
                        29.
                                1.5
                                        20.
 cone
 cylinder
             2 1.5
                        20.
                               14.
              3 2.25
                        14.
 cylinder
                                4.
              4 2.505 29.
5 2.575 29.
                               -29.
 cylinder
                               -29.
 hexprism
 media
           21
                  1
                         1
 media
           21
                  1
                          2
 media
            21
                          3
                  1
           20
 media
                  1
                          4
                                -1
                                       -2
                                               -3
                          5
           20
                                -4
 media
                  1
           5
 boundary
unit 1116
           1 2.575 29.
 hexprism
                               -29.
           20
                 1
 media
                        1
 boundary 1
'========== Empty BP pin location =================
unit 1315
```

```
cylinder10.7525.2-24.8cylinder20.7529.-29.hexprism32.57529.-29.
 media 21 1 1
 media
         20
                       2
               1
                             -1
 media
         20
                      3
                1
                             -2
 boundary 3
hit 1412

cylinder 1 0.7 5.2 -4.8

cylinder 2 0.7 25.2 -24.8

cylinder 3 0.75 25.2 -24.8

cylinder 4 0.75 29. -29.

hexprism 5 2.575 29. -29.

media 22 1 1

media 24 1 2 -1

media 21 1 3 -2


1 3 -2

1 4 -3
unit 1412
 media
media
         20 1
         20
               1 5
                            -4
 boundary 5
unit 2413
 cylinder21.327.3cylinder41.728.85cylinder52.0529.hexprism62.57529.
                     27.3 -27.3
                    28.85 -28.85
                            -29.
                            -29.
 media 10
media 19
                1 2
1 4
               1
                            -2
               1
1
                      5
 media
         21
                            -4
 media 20
                     6
                            -5
 boundary 6
unit 110
 rhexprism 1 17. 29.
                           -29.
 array 241 1 place 5 5 1 0.0
                                  0.0 0.0
 boundary 1
unit 11
           1 18.
                      29.
 hexprism
                            -29.
 hole 110 rotate a1=30
media 20 1
boundary 1
                       1
'========== Global Geometry ===============
global unit 1
rhexprism 1 176.669182 29. -29.
 array 1 1 place 7 7 1 0.0 0.0
                                            0.0
 boundary
            1
end geom
' --- Boundary conditions -----
read boun
surface(1) = vacuum
surface(2) = vacuum
surface(3) = vacuum
surface(4) = vacuum
surface(5) = vacuum
surface(6)=vacuum
surface(7) = reflect
surface(8) = reflect
end boun
* _____
read array
 ara=1 nux=13 nuy=13 nuz=1 typ=hexagonal
```

```
fill
 20 20 20 20 20 20 10 10 10 10 10 10 20
   20 20 20 20 20 10 10 10 10 10 10 10 20
     20 20 20 20 10 10 11 11 11 11 10 10 20
      20 20 20 10 10 11 11 11 11 11 10 10 20
       20 20 10 10 11 11 11 11 11 11 10 10 20
         20 10 10 11 11 11 11 11 11 11 10 10 20
          20 10 10 11 11 11 11 11 11 10 10 20 20
           20 10 10 11 11 11 11 11 10 10 20 20 20
             20 10 10 11 11 11 11 10 10 20 20 20 20
              20 10 10 10 10 10 10 10 20 20 20 20 20
               20 10 10 10 10 10 10 20 20 20 20 20 20
                end fill
' --- Fuel block arrays ------
 ara=241 nux=9 nuy=9 nuz=1 typ=hexagonal
 fill
   1116 1116 1116 1116 1116 1116 1116 1116 1116
     1116 1116 1116 1116 2413 2413 2413 1315 1116
      1116 1116 1116 2413 2413 2413 2413 2413 1116
       1116 1116 2413 2413 2413 2413 2413 2413 1116
         1116 1412 2413 2413 1114 2413 2413 2413 1116
          1116 2413 2413 2413 2413 2413 2413 1116 1116
            1116 2413 2413 2413 2413 2413 1116 1116 1116
             1116 2413 2413 2413 1412 1116 1116 1116 1116
              1116 1116 1116 1116 1116 1116 1116 1116 1116
 end fill
end array
' _____
' --- Energy splitting -----
read energy
2e7 1.01e6 0.625 1e-5
end energy
۱ _____
' --- Plot cros-section ------
read plot
ttl='z=25 cm'
 TYP=XY
 XUL=-205.0 YUL=205.0 ZUL=25.
 XLR=205.0 YLR=-205.0 ZLR=25.
 NAX=640 end
ttl='Vertical View of the HTTR Core'
 TYP=XZ
 XUL=-205. YUL=0. ZUL=30.
 XLR=205. YLR=0. ZLR=-30.
 UAX=1.0 WDN=-1.0 NAX=640 end
end plot
end data
end
       _____
' ___
' --- End input deck -----
```

# **APPENDIX E**

## SCHEMATIC DIAGRAMS OF THE HTTR BENCHMARK CASE

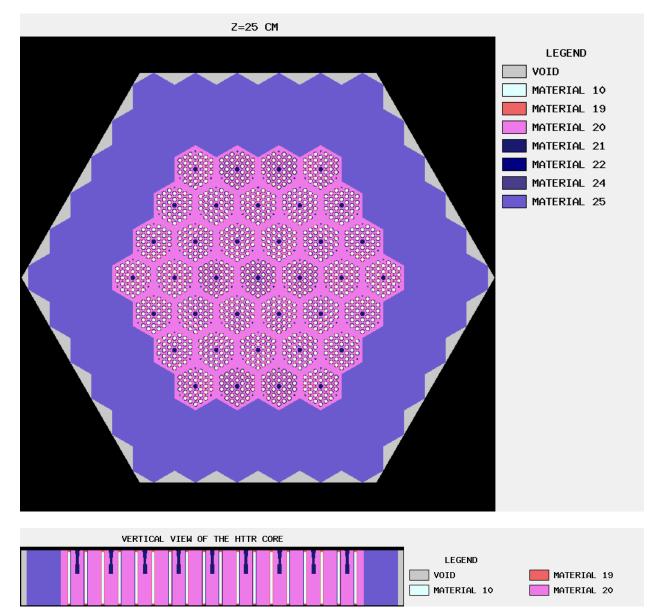

Presented here is a schematic diagram of the HTTR benchmark case (Test2r3\_Mg).

**APPENDIX F** 

**IR F-FACTOR** 

#### Nuclides for which IR f-factors are applied

Am-241	Np-235	U-232
Am-242	Np-236	U-233
Am-242m	Np-237	U-234
Am-243	Np-238	U-235
Am-244	Np-239	U-236
Am-244m	Pa-231	U-237
Bk-249	Pa-232	U-238
Bk-250	Pa-233	U-239
Cf-249	Pu-236	U-240
Cf-250	Pu-237	U-241
Cf-251	Pu-238	
Cf-252	Pu-239	
Cf-253	Pu-240	
Cf-254	Pu-241	
Cm-241	Pu-242	
Cm-242	Pu-243	
Cm-243	Pu-244	
Cm-244	Pu-246	
Cm-245	Ra-223	
Cm-246	Ra-226	
Cm-247	Th-227	
Cm-248	Th-228	
Cm-249	Th-229	
Cm-250	Th-230	
Es-254	Th-232	
Es-255	Th-233	
Fm-255	Th-234	

NRC FORM 335 (12-2010) NRCMD 3.7	1. REPORT NUMBER (Assigned by NRC, Add Vol., Supp., Rev., and Addendum Numbers, if any.)			
BIBLIOGRAPHIC DATA SHEET				
(See instructions on the reverse)	NUREG/CR-7106			
2. TITLE AND SUBTITLE	3. DATE REPO	RT PUBLISHED		
Generation of a Broad-Group HTGR Library for Use with SCALE	MONTH	YEAR		
	June	2012		
	4. FIN OR GRANT NUMBER N6841			
5. AUTHOR(S)	6. TYPE OF REPORT			
R. J. Ellis, D. J. Lee, D. Wiarda, M. L. Wiliams and U. Mertyurek Techr		iical Report		
	7. PERIOD COVERED			
8. PERFORMING ORGANIZATION - NAME AND ADDRESS (If NRC, provide Division, Office or Region, U.S. Nuclear Regulatory Commission, and mailing address; if contractor, provide name and mailing address.)				
Oak Ridge National Laboratory Managed by UT-Batelle, LLC Oak Ridge, TN 37831-6170				
<ol> <li>SPONSORING ORGANIZATION - NAME AND ADDRESS (If NRC, type "Same as above"; if contractor, provide NRC Division, Office or and mailing address.)</li> </ol>	Region, U.S. Nuclear Regu	ulatory Commission,		
Division of Systems Analysis				
Office of Nuclear Regulatory Research				
US Nuclear Regualtory Commission				
Washington, DC, 20555-0001				
10. SUPPLEMENTARY NOTES n/a				
11. ABSTRACT (200 words or less)				
With current and ongoing interest in high temperature gas reactors (HTGRs), the U. S. Nuclear Regulatory Commission (NRC) anticipates the need for nuclear data libraries appropriate for use in applications for modeling, assessing, and analyzing HTGR reactor physics and operating behavior. The objective of this work was to develop a broad-group library suitable for production analysis with SCALE for HTGR applications. Several interim libraries were generated from SCALE fine-group 238-group and 999-group libraries, and the final broad-group library was created from Evaluated Nuclear Data File/B Version and other codes. Furthermore, intermediate resonance (IR) methods were applied to the HTGR broad-group library, and lambda factors and f-factors were incorporated into the library's nuclear data files. A new version of the SCALE BONAMI module, named BONAMI-IR, was developed to process the IR data in the new library and, thus, eliminate the need for the CENTRM/PMC modules for resonance self-shielding. This report documents the development of the HTGR broad-group nuclear data library and the results of test and benchmark calculations using the new library with SCALE. The 81-group library is shown to model HTGR cases with similar accuracy to the SCALE 238-group library but with significantly faster computational times due to the reduced number of energy groups and the use of BONAMI-IR instead of BONAMI/CENTRM/PMC for resonance self-shielding calculations.				
12. KEY WORDS/DESCRIPTORS (List words or phrases that will assist researchers in locating the report.)	13. AVAILABI	LITY STATEMENT		
HTGR, SCALE		UNIIMITED		
	(This Page)			
		nclassified		
	(This Report, UI	nclassified		
	15. NUMBER OF PAGES			
	16. PRICE			
NDC ECRM 225 (42 2040)				





UNITED STATES NUCLEAR REGULATORY COMMISSION WASHINGTON, DC 20555-0001

OFFICIAL BUSINESS

NUREG/CR-7106

Generation of a Broad-Group HTGR Library for Use with SCALE

June 2012