



Tennessee Valley Authority, Post Office Box 2000, Soddy-Daisy, Tennessee 37379

April 25, 2000

U.S. Nuclear Regulatory Commission  
ATTN: Document Control Desk  
Washington, D.C. 20555

Gentlemen:

In the Matter of ) Docket Nos. 50-327  
Tennessee Valley Authority ) 50-328

**SEQUOYAH NUCLEAR PLANT (SQN) - UNITS 1 AND 2 - EMERGENCY PLAN  
IMPLEMENTING PROCEDURE (EPIP) REVISION**

In accordance with the requirements of 10 CFR 50, Appendix E,  
Section V, enclosed is a copy of SQN EPIP-6, Revision 28,  
"Activation and Operation of the Technical Support Center."

If you have any questions concerning this matter, please  
telephone me at (423) 843-7170 or J. D. Smith at  
(423) 843-6672.

Sincerely,

Pedro Salas  
Licensing and Industry Affairs Manager

Enclosure  
cc: See page 2

10/15

U.S. Nuclear Regulatory Commission  
Page 2  
April 25, 2000

cc: Mr. R. W. Hernan, Project Manager (Enclosure)  
U.S. Nuclear Regulatory Commission  
One White Flint, North  
11555 Rockville Pike  
Rockville, Maryland 20852-2739

NRC Resident Inspector (Enclosure will be provided by  
Sequoyah Nuclear Plant Document Control Unit)  
2600 Igou Ferry Road  
Soddy-Daisy, Tennessee 37384-3624

Regional Administrator (Enclosure)  
U.S. Nuclear Regulatory Commission  
Region II  
Atlanta Federal Center  
61 Forsyth St., SW, Suite 23T85  
Atlanta, Georgia 30303-3415

TENNESSEE VALLEY AUTHORITY  
SEQUOYAH NUCLEAR PLANT  
EMERGENCY PLAN IMPLEMENTING PROCEDURE

EPIP-6

ACTIVATION AND OPERATION OF THE  
TECHNICAL SUPPORT CENTER

Revision 28

QUALITY RELATED

PREPARED/PROOFREAD BY: J. Randy Ford DATE: 04/13/2000

RESPONSIBLE ORGANIZATION: Emergency Preparedness

APPROVED BY: John Casey Date: 04/13/2000

EFFECTIVE DATE: 04/13/2000

Level of Use: Reference

REVISION DESCRIPTION: Intent Revision. This revision incorporates DCN D20348A which installed orifices in the Unit 1 ECCS injection lines, eliminating the throttle valve erosion concern. Revised RVLIS terminology to match the plant in App O and removed a CST Level from the Post Accident and Area Radiation Monitors section of App O. Added further directions for identification and tracking of ventilation breaches to App N based on feedback from TSC training. Revised the relief for the SED from the Site Vice President to the TSC Operations Manager for TVAN standardization. Added the ability for the SED to make PARs using EPIP-5. Removed the TSC Ops Mgr checklist item for communication since this function is now handled by the TSC Operations Communicator (included changes to Operations Specialist checklist). Enhanced the SED turnover App U. Remove the SED notification upon arrival from the checklists as agreed by SEDs. Deleted reference to Appendix R in section 3.2.9. Updated CECC Contact for RadCon Manager in Appendix G. Reformatted and revised fonts, consolidated pages based on changes in fonts.

## TABLE OF CONTENTS

Section	Title	Page
	Table of Contents .....	2
<b>1.0</b>	<b>PURPOSE</b> .....	4
<b>2.0</b>	<b>REFERENCES</b> .....	4
<b>3.0</b>	<b>INSTRUCTIONS</b> .....	4
3.1	Declaration of the Event.....	4
3.2	Activation of TSC.....	4
3.2.1	Shift Manager.....	4
3.2.2	Call List.....	5
3.2.3	Response.....	5
3.2.4	TSC Operation.....	5
3.2.5	Site Vice President.....	6
3.2.6	Site Emergency Director (SED).....	6
3.2.7	TSC Operations Manager.....	6
3.2.8	Technical Assessment Manager (TAM).....	7
3.2.9	Technical Assessment Team (TAT).....	7
3.2.10	Operations Advisor, TAT.....	7
3.2.11	Site Security Manager.....	7
3.2.12	Radiological Control Manager.....	7
3.2.13	TSC Chemistry Manager.....	7
3.2.14	NRC Coordinator.....	8
3.2.15	Operations Specialist.....	8
3.2.16	EP Planning Manager.....	8
3.2.17	TSC Clerical/Logkeeper Staff.....	8
3.2.18	OSC Communicator.....	8
3.2.19	TSC Operations Communicator.....	9
3.3	Termination and Deactivation.....	9
<b>4.0</b>	<b>RECORDS</b> .....	9
4.1	QA Records.....	9
4.2	Non-QA Records.....	9
 <b>APPENDICES</b>		
Appendix A	Site Vice President Checklist.....	10
Appendix B	Site Emergency Director Checklist.....	11
Appendix C	TSC Operations Manager Checklist.....	13
Appendix D	Technical Assessment Manager Checklist.....	14
Appendix E	Operations Advisor, TAT Checklist.....	15
Appendix F	Site Security Manager Checklist.....	16
Appendix G	TSC RADCON Manager Checklist.....	17
Appendix H	TSC Chemistry Manager Checklist.....	18
Appendix I	NRC Coordinator Checklist.....	19
Appendix J	Operations Specialist Checklist.....	20
Appendix K	EP Planning Manager Checklist.....	21

**TABLE OF CONTENTS**  
(Continued)

		<b>Page</b>
Appendix L	TSC Clerical/Logkeeper Staff Checklist.....	22
Appendix M	OSC Communicator Checklist.....	23
Appendix N	Technical Assessment Team Checklist.....	24
Appendix O	Plant Parameter Data Sheets.....	26
Appendix P	Predictive Release Data Sheet.....	31
Appendix Q	TSC Accident Assessment Sheet.....	32
Appendix R	Protective Action Recommendation Guidance..	33
Appendix S	Containment Sump Operation and Level Guidance.....	34
Appendix T	ERCW Concerns for Technical Assessment Team...	35
Appendix U	SED Turnover Data Sheet.....	37
Appendix V	Control Building Battery Room Exhaust Fan Failure.....	39
Appendix W	Contingencies for Control and Processing... Large Volumes of Secondary Side Contaminated Water.....	40
Appendix X	Large Break LOCA Concern CCP/SIP run-out due To Throttle Valve Erosion .....	41
Appendix Y	Technical Support Center Telephone Listing and Organization .....	42
Appendix Z	Reference Materials and Equipment List.....	44
Appendix AA	TSC Operations Communicator Checklist.....	45
 <b>SOURCE NOTES.....</b>		 <b>46</b>

<b>SNQ</b>	<b>ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER</b>	<b>EPIP-6 Rev. 28 Page 4 of 46</b>
------------	---	--

## **1.0 PURPOSE**

The purpose of this procedure is to describe activation of the Technical Support Center (TSC), describe the TSC organization, and provide for TSC operation once it has been staffed. The TSC is activated during an Alert, Site Area Emergency, and General Emergency.

## **2.0 REFERENCES**

### **2.1 Interface Documents**

- A. EPIP-15, "Emergency Exposure Guidelines"
- B. EPIP-16, "Termination and Recovery"
- C. 0-SO-67-3, "ERCW Strainers and Traveling Screens"
- D. EPIP-7 "Activation and Operation of the Operations Support Center"
- E. EPIP-14 "Radiological Control Response"

### **2.2 Developmental Documents**

- A. Memorandum from J. B. Hosmer to R. J. Johnson dated 1/15/88, Implementing PRDCS and Operation Training (RIMS-B25880115028)
- B. EPIP-7, "Activation and Operation of the Operations Support Center (OSC)"

## **3.0 INSTRUCTIONS**

### **3.1 Declaration of the Event**

The Shift Manager (SM) upon detection of an emergency condition becomes the Site Emergency Director (SED), classifies the emergency, and declares the event. Upon arrival of the Plant Manager or alternate defined in the Duty Roster or Call List, the SM will be relieved of the SED duties. Appendix U may be used to ensure a complete turnover. The SED activates and operates the TSC (Appendix B) and oversees the operations of the Operations Support Center (OSC).

### **3.2 Activation of the TSC**

#### **3.2.1 Shift Manager (SM)**

The SM will activate the TSC and OSC by announcing the emergency condition by one or more of the following methods.

- A. Plant Public Address (PA) announcement.
- B. The SM or Operations Clerk will normally activate the Emergency Paging System (EPS) or, contact the persons designated on the call list. If the EPS cannot be activated from the site, contact the Operations Duty Specialist (ODS) on the ringdown line or 5-751-1700 and have the EPS activated from the CECC.
- C. The SM may activate the onsite emergency sirens at an "Alert" and shall activate the sirens at a "Site Area Emergency" or "General Emergency."

<b>SNQ</b>	<b>ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER</b>	<b>EPIP-6</b> <b>Rev. 28</b> Page 5 of 46
------------	---	---

### **3.2.2 Call List**

The Emergency Preparedness Planning Manager (EPPM) shall maintain a call list listing all TSC personnel by name, plant and home telephone numbers. The Call List will be updated at least quarterly by the EPPM or designee with input by the appropriate section/group supervisors. The list will be provided to the SM and placed in the TSC.

### **3.2.3 Response**

The following personnel should report to the TSC, or the assigned TSC support locations (see Appendix Y, TSC Layout), upon announcement of an "ALERT" or higher emergency classification or at the direction of the SED.

- A. Site Vice President
- B. Site Emergency Director
- C. TSC Operations Manager
- D. Technical Assessment Manager
- E. Operations Advisor, TAT
- F. Site Security Manager
- G. TSC Radiological Control Manager (RCM)
- H. TSC Chemistry Manager
- I. NRC Coordinator
- J. Operations Specialist (affected Unit Control Room)
- K. EP Planning Manager
- L. TSC Clerical/Logkeeper Staff
- M. OSC Communicator
- N. Technical Assessment Team
- O. TSC Operations Communicator
- P. Other Plant staff the SED determines to be necessary to support TSC functions will be called.

### **3.2.4 TSC Operations**

The TSC shall operate to ensure the following:

- A. Provide plant management and technical support to plant operations personnel during emergency conditions.
- B. Perform CECC functions for the Alert Emergency class, the Site Area Emergency class, and General Emergency class until the CECC is functional.
- C. Help the reactor operators determine the plant safety status.
- D. Relieve the reactor operators of peripheral duties and communications not directly related to reactor system manipulations.
- E. Prevent congestion in the control room.

<b>SQN</b>	<b>ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER</b>	<b>EPIP-6 Rev. 28 Page 6 of 46</b>
------------	---	--

- F. Provide assistance to the operators by technical personnel who have comprehensive plant data at their disposal.
- G. Provide a coordinated emergency response by both technical and management personnel.
- H. Provide reliable communications between onsite and offsite emergency response personnel.
- I. Provide a focal point for development of recommendations for offsite actions.
- J. Provide relevant plant data to the NRC for its analysis of abnormal plant operating conditions.

### **3.2.5 Site Vice President**

The Site Vice President serves as a corporate interface for the SED, relieving him from duties which could distract from the SED's primary purpose of plant operations and accident mitigating activities. The Site Vice President shall provide assistance in the areas of TVA Policy, site resources, direct interface with the CECC, onsite media, NRC, FEMA, or other federal organizations responding to the site. The Site Vice President may assist the SED as requested. Appendix A, Site Vice President Checklist, shall be used to ensure required actions are completed.

### **3.2.6 Site Emergency Director (SED)**

The SED directs activities of the onsite emergency organization; determines the emergency classification; initiates protective actions onsite; prior to the CECC being staffed, makes notification of escalated emergency classification to the State and recommendations for protective actions to State and local agencies in accordance with Appendix R, Protective Action Recommendation Guidance or EPIP-5; coordinates emergency actions with onsite NRC; and approves or authorizes emergency doses that will exceed occupational dose limits. May be relieved by the TSC Operations Manager as needed. Appendix B, Site Emergency Director Checklist, shall be used to ensure required actions are completed.

### **3.2.7 TSC Operations Manager**

The Operations Manager directs operational activities; informs SED of plant status and operational problems; performs damage assessment as necessary; and recommends solutions and mitigating action for operational problems. The TSC Operations Manager may relieve the SED when the SED must leave the TSC. Appendix C, Operations Manager Checklist, shall be used to ensure required actions are completed.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 7 of 46
-----	---	-----------------------------------

### 3.2.8 Technical Assessment Manager (TAM)

The TAM directs onsite effluent assessment; directs activities of Technical Assessment Team (TAT); provides information, evaluations, and projections to SED; coordinates assessment activities with the CECC plant assessment team; and establishes and maintains a status of significant plant problems. Appendix D, Technical Assessment Manager Checklist, shall be used to ensure required actions are completed.

### 3.2.9 Technical Assessment Team (TAT)

The TAT prepares and provides periodic current assessment on plant conditions and provides this information to the CECC plant assessment team on Appendix Q when requested; projects future plant status based on present plant conditions; and provides technical support to plant operations on mitigating actions. Appendix N, Technical Assessment Team Checklist, shall be used to ensure required actions are completed.

### 3.2.10 Operations Advisor, TAT

The Operations Advisor, TAT operates the ICS to obtain plant status and parameters; completes plant parameter data sheets, as needed, and provides information from the Control Room to the Technical Assessment Manager and Technical Assessment Team. Appendix E, Operations Advisor, TAT Checklist, shall be used to ensure required actions are completed.

### 3.2.11 Site Security Manager

The Site Security Manager directs activities of Site Security; controls access to site and control room; and reports on site accountability/evacuation. Appendix F, Site Security Checklist, shall be used to ensure required actions are completed.

### 3.2.12 Radiological Control Manager

The TSC RCM directs assessment of inplant and onsite radiological conditions; coordinates additional RADCON support with CECC; recommends protective actions for onsite personnel to the SED; after notifying the SED authorizes KI issue; coordinates assessment of radiological conditions offsite with CECC; and provides RADCON surveillance/support to MET station personnel. Appendix G, TSC RADCON Manager Checklist, shall be used to ensure required actions are completed.

### 3.2.13 TSC Chemistry Manager

The Chemistry Manager coordinates assessment of radioactive effluents with the CECC; directs post accident sampling system (PASS) activities; directs the initiation of onsite/off-site dose assessment if needed prior to the CECC being staffed; and determines impact of the incident on radwaste and various effluent treatment systems. Appendix H, Chemistry Manager Checklist, shall be used to ensure required actions are completed.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 8 of 46
-----	---	-----------------------------------

### 3.2.14 NRC Coordinator

The NRC Coordinator acts as primary liaison with onsite NRC personnel; updates NRC personnel on plant status; and obtains information from TSC personnel as requested by the NRC; may act as T.A.T. Member, if qualified. Appendix I, NRC Coordinator Checklist, shall be used to ensure required actions are completed.

### 3.2.15 Operations Specialist

The Operations Specialist serves in the control room as the communications interface with the TSC Operations Manager and OSC Operations Advisor; provides advice regarding Technical Specifications, system response, safety limits, etc.; and assists in development of recommended solutions to developing problems; informs the TSC Ops. Manager and OSC Ops. Advisor of Ops. personnel/teams dispatched by the SM. Appendix J, Operations Specialist Checklist, should be used to ensure required actions are completed.

### 3.2.16 EP Planning Manager

The EP Planning Manager advises the SED regarding the overall radiological emergency plan, use of implementing procedures, emergency equipment availability, and coordination with CECC; and confirms TSC is operating properly. He will keep the plant staff informed, by P/A system, of current plant conditions as directed by the SED. Appendix K, EP Planning Manager Checklist, shall be used to ensure required actions are completed.

### 3.2.17 TSC Clerical/Logkeeper Staff

The TSC clerks provide logistics support to the TSC. The designated TSC logkeeper will maintain a chronological log of the SED and TSC activities. The log should include entries such as decisions made by the SED, content of SED discussions, time of classification upgrades and PARs and the level of each, status of repair and damage control teams, briefing times and any other entry as directed by the SED. The logkeeper may prepare briefing notes for the SED. The notes should include activities since the last briefing and include team status, changes in classification and PARs, and current plant conditions. The TSC logkeeper should have some technical writing ability. Appendix L, TSC Clerical Staff Checklist, shall be used to ensure required actions are completed.

### 3.2.18 OSC Communicator

The OSC Communicator maintains communications between the OSC and TSC, maintains cognizance of dispatched teams and status, and assists the OSC and OSC Manager in establishing OSC work priorities. Appendix M

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 9 of 46
-----	---	-----------------------------------

### 3.2.19 TSC Operations Communicator

The TSC Operations Communicator monitors the Operations Specialist Party Line, provides information from the MCR to the TSC, and maintains a current log of major operational events for the Operations Manager's use. Appendix AA shall be used to ensure required actions are completed.

### 3.3 Termination and Deactivation

- A. The TSC will be deactivated when the indicated plant conditions are such that in accordance with EPIP-16 "Termination and Recovery" the emergency has been terminated, and the OSC has been deactivated.
- B. All records generated during the operation of the TSC and OSC have been reviewed and forwarded to the Emergency Preparedness Planning Manager.
- C. All equipment and usable supplies have been returned to their storage locations.

## 4.0 RECORDS

### 4.1 QA Records

The following appendices and checklists necessary to demonstrate key actions during an emergency are considered QA records. These records shall be forwarded to the EP Planning Manager who shall submit QA records and any other records deemed necessary to corporate Emergency Preparedness for maintenance.

- A. TSC Checklists
- B. Plant Parameter Data Sheets
- C. Predictive Release Data Sheets
- D. TSC Accident Assessment Sheets
- E. TSC Log Book

### 4.2 Non-QA Records

The appendices and checklists in this instruction necessary to demonstrate key actions during NRC evaluated exercises will be retained by the SQN EP Manager for at least two years.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 10 of 46
-----	---	------------------------------------

APPENDIX A  
Page 1 of 1

SITE VICE PRESIDENT

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |   |
|-------|---|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |
| _____ | 2. Establish log of communications/events.  |
| _____ | 3. Establish contact with the Media Relations Specialist.   |
| _____ | 4. Check the status of emergency actions already in effect such as accountability or site evacuation. |

OPERATIONAL RESPONSIBILITIES

- \* Provides TVA policy direction to the Site Emergency Director.
- \* Directs the site resources to support the SED in the accident mitigation activities.
- \* Provides direct interface on overall site response activities with NRC, FEMA, Federal organizations, the CECC Director, and onsite media.
- \* At your discretion, may provide interface at the appropriate offsite location on the overall site response activities with State and Local agencies, NRC region/corporate, and the Joint Information Center.
- \* Provides support to other emergency operation centers as necessary. As applicable, designates an alternate to provide direction and/or support for the overall site response and support to the SED.
- \* Will assure that following all changes in emergency classification that the State has been notified in accordance with established procedures. Will appoint an alternate to complete this function if absent from the TSC.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 11 of 46
-----	---	------------------------------------

APPENDIX B  
Page 1 of 2

SITE EMERGENCY DIRECTOR

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |  |
|-------|--|
| _____ | 1. Obtain turnover briefing from SM/SED in accordance with Appendix U.   |
| _____ | 2. Fill out the Organizational/Staffing Chart.   |
| _____ | 3. Establish log of communications/events.   |
| _____ | 4. Establish contact with the CECC Director.   |
| _____ | 5. If the emergency classification is escalated, and the CECC has not assumed responsibility for communications with the State, ensure the State is notified within 15 minutes by implementing EPIP-3, EPIP-4 or EPIP-5, as appropriate. |
| _____ | 6. Check the status of emergency actions already in effect such as accountability or site evacuation.  |
| _____ | 7. Review checklist with key positions (Operations, Technical Assessment Manager, RADCON, OSC Communicator, etc.).   |
| _____ | 8. Ensure minimum staffing is present for TSC operability. The following individuals must be present: SED, Radcon manager, reactor engineer, mechanical engineer, and electrical engineer.   |
| _____ | 9. Assume role of SED from SM/SED and notify the CECC and OSC that the TSC is operational and announce on plant PA system.   |
| _____ | 10. Clearly announce the time of activation of the TSC and OSC to the TSC and OSC staffs.  |

OPERATIONAL RESPONSIBILITIES  
(Listed on next page)

DEACTIVATION RESPONSIBILITIES

- \* Declare the event to be terminated in accordance with EPIP-16 "Termination and Recovery."
- \* Activate recovery personnel.
- \* Declare the OSC is deactivated.
- \* Declare the TSC deactivated.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 12 of 46
-----	---	------------------------------------

APPENDIX B  
Page 2 of 2

SITE EMERGENCY DIRECTOR

OPERATIONAL RESPONSIBILITIES (Continued)

- \* Periodically briefs the TSC/OSC staff on the current situation.
- \* Periodically direct key TSC positions to provide status summary to TSC staff.
- \* Periodically updates the plant staff on plant status and emergency conditions.
- \* Periodically reviews operation of the OSC with the OSC Manager.
- \* Directs activities of onsite emergency organizations.
- \* Consults with the CECC Director on important decisions.
- \* Initiates onsite protective actions.
- \* When necessary, establish a RADCON checkpoint for site evacuation.
- \* Coordinates emergency actions with onsite NRC.
- \* Initiates long-term 24 Hour/day operation.
- \* Approves or authorizes, in accordance with EPIP-15, emergency doses that may exceed occupational dose limits. This responsibility cannot be delegated.
- \* Prior to the CECC being staffed, in accordance with Appendix R or EPIP-5 makes recommendations for protective actions to State and Local agencies through the Operations Duty Specialist within about five minutes of the determination. This responsibility cannot be delegated except to the CECC Director.
- \* Determines the emergency classification and periodically reevaluates the classification. Changes to the classification will be reported to the CECC Director within about five minutes and the NRC. The classification of the event cannot be delegated.
- \* Evaluates conditions and determines if additional emergency procedures should be implemented.
  - a. Environmental Monitoring, CECC EPIP-9
  - b. Medical Emergency, SQN EPIP-10
  - c. Security Threat, Physical Security Plan
  - d. Accountability/Evacuation, SQN EPIP-8
  - e. RadCon Response, SQN EPIP-14
- \* Assumes responsibility for Severe Accident Management when directed by the MCR and the TSC is functional and the SAMG evaluators are monitoring the Diagnostic Flow Chart. The TSC must have Three evaluators monitoring SAMGs to assume the accident responsibility.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 13 of 46
-----	---	------------------------------------

APPENDIX C  
Page 1 of 1

TSC OPERATIONS MANAGER

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |   |
|-------|---|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |
| _____ | 2. Establish log of communications/events.  |
| _____ | 3. Log on to ICS  |
| _____ | 4. Check the status of emergency actions already in effect such as Accountability or Site Evacuation.                         |
| _____ | 5. Verify notification of the NRC has been accomplished.  |
| _____ | 6. Designates an operationally competent person to establish and maintain communications with the NRC via the FTS 2000 PHONE. |

OPERATIONAL RESPONSIBILITIES

- \* Directs operational activities.
- \* Informs the SED of plant status and operational problems.
- \* Recommends solutions and mitigating action for operational problems.
- \* Periodically reviews the emergency status with the control room. Reviews trended parameters, time history information, and status boards with the control room staff.
- \* Assures the control room is aware of the TSC accident assessment.
- \* Discuss with the control room the OSC activities such as repair and response priorities and, status of damage control and repair teams.
- \* During long term accident operating conditions, evaluate routine activities which would be performed under normal plant operating conditions, e.g., AUCO rounds, equipment inspections, surveillance instructions, compensatory measures, or other similar activities. Determine if any of these actions should be performed on a normal or reduced frequency.
- \* Assume SED responsibilities if the SED must leave the TSC

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 14 of 46
-----	---	------------------------------------

APPENDIX D  
Page 1 of 1

TECHNICAL ASSESSMENT MANAGER

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |  |   |
|--|---|
|  | 1. Fill out the Organizational/Staffing Chart.  |
|  | 2. Establish log of communications/events.  |
|  | 3. Check the status of emergency actions already in effect such as Accountability or Site Evacuation. |

OPERATIONAL RESPONSIBILITIES

- \* Directs onsite effluent assessment.
- \* Directs activities of the Technical Assessment Team.
- \* Projects future plant status based on present plant conditions.
- \* Keeps assessment team informed of plant status.
- \* Provides information, evaluations, and projections to the SED.
- \* Coordinates assessment activities with the CECC Plant Assessment team.
- \* Establishes and maintains a status of significant plant problems.
- \* Assures information on EPIP-6, Appendix P, is sent to the CECC to be used in the predictive release rate model.
- \* If the need for post accident sampling is anticipated, alert TSC Chemistry Manager so that they can prepare RWP and support.
- \* Assures Post Accident sampling in accordance with 1,(2)-TI-CEM-043-066.0 is initiated as required.
- \* Provides for trending of significant parameters.
- \* Designates personnel to maintain Plant Status and Trending Boards.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 15 of 46
-----	---	------------------------------------

APPENDIX E  
Page 1 of 1

OPERATIONS ADVISOR, TAT

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |   |
|-------|---|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |
| _____ | 2. Log on to ICS  |
| _____ | 3. Establish contact with the Control Room. (Dial PAX 101)  |
| _____ | 4. Check the status of emergency actions already in effect such as Accountability or Site Evacuation. |

OPERATIONAL RESPONSIBILITIES

- \* Operates ICS to obtain plant status and parameters.
- \* Provides information from the Control Room to the Technical Assessment Manager and Technical Assessment Team.
- \* Completes portions of plant parameters data sheets (Appendix O and Appendix P) as needed.
- \* Plots/trends as designated by TAM.
- \* Obtains supplemental data as needed by the TSC, OSC, or CECC.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 16 of 46
-----	---	------------------------------------

APPENDIX F  
Page 1 of 1

SITE SECURITY MANAGER

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |   |
|-------|---|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |
| _____ | 2. Establish log of communications/events.  |
| _____ | 3. Establish contact with the CAS and the SAS.  |
| _____ | 4. Check the status of emergency actions already in effect such as Accountability or Site Evacuation. |

OPERATIONAL RESPONSIBILITIES

- \* Directs activities of Site Security personnel.
- \* Controls access to Site and control room.
- \* Reports on site accountability/evacuation as defined in EIPs.
- \* Assures an officer is dispatched to the STC, Visitor Center, Livewell, and Design Services Complex during accountability / evacuation.
- \* Advises incoming emergency response personnel at the gate house of any radiological hazards in route to the TSC or OSC.
- \* Assists in establishing search teams, as required.
- \* Provides status updates to Site Security personnel.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 17 of 46
-----	---	------------------------------------

APPENDIX G

TSC RADCON Manager

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |   |
|-------|---|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |
| _____ | 2. Establish log of communications/events.  |
| _____ | 3. Establish contact with the OSC RADCON Manager, the plant monitoring van (if dispatched), and the CECC Radiological Assessment Manager. |
| _____ | 4. Log on to ICS  |
| _____ | 5. Check the status of emergency actions already in effect such as Accountability or Site Evacuation.                                     |

OPERATIONAL RESPONSIBILITIES

- \* Remains cognizant of assessments of inplant and onsite radiological conditions from the OSC RADCON Manager.
- \* Keeps the CECC Radiological Assessment Coordinator informed of site radiological conditions.
- \* Coordinates supplemental RADCON support with the CECC Radiological Assessment Coordinator
- \* Makes recommendations for protective actions for onsite personnel to the SED.
- \* Authorizes issue of KI to onsite personnel after informing SED.
- \* Coordinates assessment of radiological conditions offsite with CECC Radiological Assessment Coordinator.
- \* Maintains status maps of offsite radiological conditions and inplant radiation status board.
- \* Provides RADCON surveillance through the OSC to the SQN Training Center and MET station personnel, if required by environmental releases.
- \* Assures the RADCON Laboratory Supervisor has designated a qualified/knowledgeable person to provide inplant radiological data to the NRC HP Network (HPN) upon request.
- \* Provides periodic status reports to the SED on radiological conditions.

SQN	<b>ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER</b>	<b>EPIP-6 Rev. 28 Page 18 of 46</b>
-----	---	---

APPENDIX H  
Page 1 of 1

TSC CHEMISTRY MANAGER

INT/TIME

- |       |   |
|-------|---|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |
| _____ | 2. Establish log of communications/events.  |
| _____ | 3. Establish contact with the Chemistry Supervisor in the lab and the CECC Radiological Assessment Coordinator. |
| _____ | 4. Log on to ICS  |
| _____ | 5. Check the status of emergency actions already in effect such as Accountability or Site Evacuation.           |

OPERATIONAL RESPONSIBILITIES

- \* Directs the Chem. Lab Supervisor to implement the applicable portions of EPIP-14 to initiate onsite/off-site dose assessment if needed prior to the CECC being staffed.
- \* Coordinates the assessment of radioactive effluents with the CECC Radiological Assessment Coordinator.
- \* Remains cognizant of Chemistry lab Post Accident Sampling Activities.
- \* Determines the impact of the incident on radwaste and various effluent treatment systems.
- \* Performs release rate calculations and dose projections in accordance with EPIP-14 when required.
- \* Completes portions of plant parameter data sheets (Appendix O and P) as needed.
- \* Provides all plant chemistry data to the Technical Assessment Team.
- \* Completes Predictive Release Data sheet (Appendix P) and transmits it to the CECC PAT.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 19 of 46
-----	---	------------------------------------

APPENDIX I  
Page 1 of 1

NRC COORDINATOR

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |  |
|-------|--|
| _____ | 1. Fill out the Organizational/Staffing Chart.   |
| _____ | 2. Establish log of communications/events.   |
| _____ | 3. Check the status of emergency actions already in effect<br>such as Accountability or Site Evacuation. |

OPERATIONAL RESPONSIBILITIES

- \* Acts as primary liaison with onsite NRC personnel.
- \* Updates NRC personnel on plant status.
- \* Provides information requests from NRC to TSC personnel.
- \* May act as a member of the Technical Assessment Team, if qualified.

<b>SQN</b>	<b>ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER</b>	<b>EPIP-6 Rev. 28 Page 20 of 46</b>
------------	---	---

APPENDIX J  
Page 1 of 1

OPERATIONS SPECIALIST

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |  |
|-------|--|
| _____ | 1. Fill out the Organizational/Staffing Chart.   |
| _____ | 2. Report to the Control Room.   |
| _____ | 3. Establish log of communications/events.   |
| _____ | 4. Establish contact with the TSC Operations Communicator and OSC Operations Advisor. (Dial PAX 101).                    |
| _____ | 5. Check the status of emergency actions already in effect such as Accountability or Site Evacuation.                    |
| _____ | 6. Locate all Ops. Personnel/teams currently or previously tasked and ensure each is tracked on the OSC Ops. Team board. |

OPERATIONAL RESPONSIBILITIES

- \* Serves as the control room - TSC and OSC communications link.
- \* Provides operational knowledge for status evaluation of plant systems.
- \* Provides advice regarding Technical Specifications, system response, safety limits, etc.
- \* Assists in development of recommended solutions to developing problems.
- \* May use ICS to trend parameters.
- \* Assures the control room staff is aware of the TSC accident assessments and OSC activities
- \* Ensures the OSC Ops. Advisor and TSC Ops. Communicator are informed of the status of all Ops. personnel/teams dispatched by the SM.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 21 of 46
-----	---	------------------------------------

APPENDIX K  
Page 1 of 1

EP PLANNING MANAGER

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |   |  |
|-------|---|--|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |  |
| _____ | 2. Establish log of communications/events.  |  |
| _____ | 3. Check the status of emergency actions already in effect such as Accountability or Site Evacuation. |  |
| _____ | 4. Verifies checklists are distributed and are being completed.                                       |  |
| _____ | 5. Verifies all essential positions are filled.   |  |
| _____ | 6. Verifies all activation activities are proceeding normally.  |  |

OPERATIONAL RESPONSIBILITIES

- \* Advises the SED regarding overall REP, use of EPIPs, emergency equipment availability, and coordination with the CECC.
- \* Confirms TSC and OSC are operating properly.
- \* Provides assistance to the SED as requested.
- \* Makes P/A announcements to update plant personnel of emergency status.
- \* Tracks entry into EAL's and PAR's.

DEACTIVATION RESPONSIBILITIES

- \* Collect all logs and information from all TSC and OSC staff.
- \* Return the TSC and OSC to "stand by" condition.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 22 of 46
-----	---	------------------------------------

APPENDIX L  
Page 1 of 1

TSC CLERICAL/LOGKEEPER STAFF

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |  |  |
|--|--|
|  | 1. Fill out the Organizational/Staffing Chart. |
|  | 2. Establish a log of activities.              |
|  | 3. Distribute manuals and equipment.           |

OPERATIONAL RESPONSIBILITIES

- \* Assists in setup and activation of the TSC.
- \* Maintains accountability of TSC personnel.
- \* Answers telephones.
- \* Distributes plant parameter data sheets.
- \* Uses TSC call list to obtain staff for unfilled positions or replacement staff for shift turnover.
- \* Operates facsimile machines.
- \* Operates the TSC information clock.
- \* Logkeeper maintains a chronological log of the SED and TSC activities to include classification changes, PARs, changes in plant conditions, briefings, team status, content of discussions, and decisions made by the SED.
- \* Logkeeper assists the SED in preparing briefing notes.

DEACTIVATION OF THE TECHNICAL SUPPORT CENTER

- \* Transfers all logs, notes, and other materials to the EP Planning Manager for documentation and storage.
- \* Deactivates the TSC by returning all equipment, reference materials and supplies to the TSC storage cabinets.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 23 of 46
-----	---	------------------------------------

APPENDIX M  
Page 1 of 1

OSC COMMUNICATOR

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |   |
|-------|---|
| _____ | 1. Fill out the Organizational/Staffing Chart.  |
| _____ | 2. Establish log of communications/events.  |
| _____ | 3. Establish contact with the Assistant OSC Manager.  |
| _____ | 4. Check the status of emergency actions already in effect such as Accountability or Site Evacuation. |
| _____ | 5. Check status of deployed emergency response teams.   |

OPERATIONAL RESPONSIBILITIES

- \* Maintains cognizance of deployed OSC teams purpose and status.
- \* Assists the SED and the OSC Manager in determining the relative priorities of activities.
- \* Maintains the TSC Team Tracking Board and periodically faxes a copy to the OSC.

<b>SQN</b>	<b>ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER</b>	<b>EPIP-6 Rev. 28 Page 24 of 46</b>
------------	---	---

APPENDIX N  
Page 1 of 2

TECHNICAL ASSESSMENT TEAM

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- |       |  |
|-------|--|
| _____ | 1. Fill out the Organizational/Staffing Chart.   |
| _____ | 2. Establish log of communications/events.   |
| _____ | 3. Establish contact with the Technical Assessment Manager.  |
| _____ | 4. Establish contact with the CECC Plant Assessment Team<br>(751-1629)                                   |
| _____ | 5. Check the status of emergency actions already in effect<br>such as Accountability or Site Evacuation. |

OPERATIONAL RESPONSIBILITIES

- \* Prepares and provides current assessment on plant conditions and provides this information to the CECC Plant Assessment Team.
- \* Project future status based on present plant conditions.
- \* Provide technical support to plant operations on mitigating actions.
- \* Monitor containment sump level per Appendix S.
- \* Provides direction for environmental qualification operating concerns for containment cooling following a non-LOCA event inside containment (i.e., loss of secondary side coolant) per Appendix T.
- \* Determines the condition of the reactor and nuclear fuel.
- \* Prepares TSC accident assessment sheet Appendix Q and transmits to the CECC when requested.
- \* Performs trending of key plant parameters as requested.
- \* Provides Technical Assessment to TAM on Appendix Q when requested.
- \* Team leader may designate a TSC log keeper.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 25 of 46
-----	---	------------------------------------

APPENDIX N  
Page 2 of 2

- \* Verifies that all ABSCE doors are closed (call Fire Ops at 7447 or OSC Fire Ops Advisor at 6430).
- \* Identifies and tracks the status of current ABSCE breaches (call Fire Ops at 7447 or OSC Fire Ops Advisor at 6430).
- \* Verifies that all Control Room Emergency Ventilation Pressure Boundary (CREVS) doors are closed (call Fire Ops at 7447 or OSC Fire Ops Advisor at 6430).
- \* Identifies and tracks the status of current CREVS breaches (call Fire Ops at 7447 or OSC Fire Ops Advisor at 6430).
- \* If all control building battery room exhaust fans are off, then refer to Appendix V.
- \* Monitor the temperature of the 6.9kv shutdown board rooms in accordance with Appendix V.
- \* Refer to Appendix W, for contingency plan for control and processing of large volumes of contaminated water in the plant secondary side.
- \* Refer to Appendix X, for guidance for large break LOCA concerns - CCP/SIP run-out due to throttle valve erosion (applicable to Unit 2 only ... DCN D20348A installed orifices making this issue not applicable to unit 1).
- \* Interface with Nuclear Engineering onsite and in the CECC (751-1634) for specific technical assistance and support as needed.
- \* In the event of a high energy line break (HELB) in the Auxiliary Building, evaluate the need to restore the environmental condition of the Auxiliary Building back to a normal condition within 6-24 hours. If environmental conditions are adverse, make recommendations to the Technical Assessment Manager to mitigate the condition.

APPENDIX O  
Page 1 of 5

PLANT PARAMETER DATA SHEETS

DATE: \_\_\_\_\_  
TIME: \_\_\_\_\_  
UNIT: \_\_\_\_\_

GENERAL INFORMATION

1. CST LEVEL: (LI-2-230A) \_\_\_\_\_ FT (LI-2-233A) \_\_\_\_\_ FT
2. SG HEAT SINK: CONDENSER \_\_\_\_\_ ATMOSPHERE \_\_\_\_\_
3. AFW PUMPS RUNNING: MD-A \_\_\_\_\_ MD-B \_\_\_\_\_ TD \_\_\_\_\_
4. SG LEVELS: NR: (1) \_\_\_\_\_ (2) \_\_\_\_\_ (3) \_\_\_\_\_ (4) \_\_\_\_\_ %  
(LI-3-39) (LI-3-52) (LI-3-94) (LI-3-107)  
WR: (1) \_\_\_\_\_ (2) \_\_\_\_\_ (3) \_\_\_\_\_ (4) \_\_\_\_\_ %  
(LR-3-43) (LR-3-98)
5. SG PRESSURES: (1) \_\_\_\_\_ (2) \_\_\_\_\_ (3) \_\_\_\_\_ (4) \_\_\_\_\_ PSIG  
(PI-1-2A) (PI-1-9A) (PI-1-20A) (PI-1-27A)
6. RVLIS: (LOWER RANGE) (WIDE RANGE) (PLENUM)  
(LI-68-367) \_\_\_\_\_ (LI-68-368) \_\_\_\_\_ (LI-68-369) \_\_\_\_\_ %  
(LI-68-370) \_\_\_\_\_ (LI-68-371) \_\_\_\_\_ (LI-68-372) \_\_\_\_\_ %
7. PZR LEVEL: (LI-68-335) \_\_\_\_\_ (LI-68-320) \_\_\_\_\_ %
8. PZR PRESSURE: (PI-68-342A) \_\_\_\_\_ (PI-68-340A) \_\_\_\_\_ PSIG
9. RCS PRESSURE: WR: (LOOP 1 HOT LEG) (PI-68-69) \_\_\_\_\_ PSIG
10. RCS HL TEMP: WR: (1) \_\_\_\_\_ (2) \_\_\_\_\_ (3) \_\_\_\_\_ (4) \_\_\_\_\_ °F  
(TR-68-1) (TR-68-24) (TR-68-43) (TR-68-65)
11. RCS CL TEMP: WR: (1) \_\_\_\_\_ (2) \_\_\_\_\_ (3) \_\_\_\_\_ (4) \_\_\_\_\_ °F  
(TR-68-1) (TR-68-24) (TR-68-43) (TR-68-65)
12. RCS FLOW: RUNNING RCPs \_\_\_\_\_ NATURAL CIRCULATION \_\_\_\_\_
13. ECCS STATUS: STANDBY \_\_\_\_\_ INJECT \_\_\_\_\_ RECIRC \_\_\_\_\_ SPRAY \_\_\_\_\_
14. RWST LEVEL: (LI-63-50) \_\_\_\_\_ (LI-63-51) \_\_\_\_\_ %
15. CONTAINMENT SUMP LEVEL: WR: (LI-63-176) \_\_\_\_\_ %
16. CHARGING SI FLOW RATE: (FI-62-93) \_\_\_\_\_ (FI-63-170) \_\_\_\_\_ GPM
17. CONTAINMENT PRESSURE: NR: (PI-30-44) \_\_\_\_\_ (PI-30-45) \_\_\_\_\_ PSIG

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 27 of 46
-----	---	------------------------------------

APPENDIX O  
Page 2 of 5

PLANT PARAMETER DATA SHEETS

DATE: \_\_\_\_\_  
TIME: \_\_\_\_\_  
UNIT: \_\_\_\_\_

GENERAL INFORMATION (Continued)

18. INCORE THERMOCOUPLES:    QUAD 1 - (1 of #41,28,24,56,55,29,6) \_\_\_\_\_ °F  
(Exo-Sensor)                    QUAD 2 - (1 of #44,22,58,21,16,63,64) \_\_\_\_\_ °F  
                                      QUAD 3 - (1 of #54,12,8,40,4,3,7)        \_\_\_\_\_ °F  
                                      QUAD 4 - (1 of #60,9,45,6,46,42,36)    \_\_\_\_\_ °F

19. NIS SOURCE RANGE:       (N31) \_\_\_\_\_ (N32) \_\_\_\_\_ CPS

DATA BY: \_\_\_\_\_



SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 29 of 46
-----	---	------------------------------------

APPENDIX O  
Page 4 of 5

PLANT PARAMETER DATA SHEETS

DATE: \_\_\_\_\_  
TIME: \_\_\_\_\_  
UNIT: \_\_\_\_\_

POST ACCIDENT AND AREA RADIATION MONITORS

1. UPPER CONTAINMENT: (TOP OF #2 & #3 SG) RM-90-271: \_\_\_\_\_ R/HR  
(TOP OF #1 & #4 SG) RM-90-272: \_\_\_\_\_ R/HR
2. LOWER CONTAINMENT: (BETWEEN #2 & #3 SG) RM-90-273: \_\_\_\_\_ R/HR  
(BETWEEN #1 & #4 SG) RM-90-274: \_\_\_\_\_ R/HR
3. SHIELD BLDG VENT (LR/RM-90-260) U1 \_\_\_\_\_ U2 \_\_\_\_\_ MR/HR  
(HR/RM-90-261) U1 \_\_\_\_\_ U2 \_\_\_\_\_ MR/HR  
(FLOW/FE-90-400) U1 \_\_\_\_\_ U2 \_\_\_\_\_ CFM
4. RCDT PUMP DISCH: (RM-90-277) \_\_\_\_\_ (RM-90-278) \_\_\_\_\_ MR/HR
5. RX FLOOR/EQ SUMP  
DISCHARGE HEADER: (RM-90-275) \_\_\_\_\_ (RM-90-276) \_\_\_\_\_ MR/HR
6. RHR PUMP A-A: (LR/RM-90-290) \_\_\_\_\_ (HR/RM-90-291) \_\_\_\_\_ MR/HR  
ROOMS: B-B: (LR/RM-90-292) \_\_\_\_\_ (HR/RM-90-293) \_\_\_\_\_ MR/HR
7. COND VAC EXHAUST: (LR/RM-90-255) \_\_\_\_\_ (HR/RM-90-256) \_\_\_\_\_ MR/HR
8. AREA MONITORS: (RM-90-59) \_\_\_\_\_ MR/HR  
(RM-90-60) \_\_\_\_\_ MR/HR
9. ERCW DISCH A: (RM-90-133A) \_\_\_\_\_ (RM-90-140A) \_\_\_\_\_ CPM  
HEADERS: B: (RM-90-134A) \_\_\_\_\_ (RM-90-141A) \_\_\_\_\_ CPM
10. MN STM LINES: (RM-90-421) \_\_\_\_\_ (RM-90-422) \_\_\_\_\_  $\mu$ Ci/cc  
(RM-90-423) \_\_\_\_\_ (RM-90-424) \_\_\_\_\_  $\mu$ Ci/cc

DATA BY: \_\_\_\_\_

APPENDIX O  
Page 5 of 5

PLANT PARAMETER DATA SHEETS

DATE: \_\_\_\_\_  
 TIME: \_\_\_\_\_  
 UNIT: \_\_\_\_\_

RADIOLOGICAL RELEASE DATA

1. RELEASE POINT: \_\_\_\_\_
2. RELEASE RATES:    DECREASING    STABLE    INCREASING    UNKNOWN

AIRBORNE		LIQUID RELEASE					
GROSS RELEASES $\mu$ Ci/SEC	ISO-TOPE	CONCENTRATION VALUE	UNITS	FLOW RATE VALUE	UNITS	TOTAL RELEASE VALUE	RELEASE UNITS
NOBLE GAS _____	_____	_____	_____	_____	_____	_____	_____
IODINES _____	_____	_____	_____	_____	_____	_____	_____
PARTICULATE _____	_____	_____	_____	_____	_____	_____	_____
ISOTOPE	RELEASE RATE						
_____	_____						
_____	_____						
_____	_____						
_____	_____						
_____	_____						
_____	_____						
_____	_____						

3. RELEASE BEGAN \_\_\_\_\_ EXPECTED TO END \_\_\_\_\_ EST/EDT. DURATION \_\_\_\_\_ HR  
 RELEASE POTENTIAL: \_\_\_\_\_ Ci, IN VOLUME OF \_\_\_\_\_ (CU FT OR GAL)

4. METEOROLOGICAL CONDITIONS: (IF REQUESTED DUE TO MET DATA LINK INOPERABLE)

DATE	TIME	WINDSPEED (METER/S)	FROM (DEGREES)	ELEVATION (METERS)	TEMPERATURE DIFFERENTIAL
____/____/____	____:____	_____	_____	_____	_____
____/____/____	____:____	_____	_____	_____	_____
____/____/____	____:____	_____	_____	_____	_____
____/____/____	____:____	_____	_____	_____	_____

5. REMARKS/COMMENTS:
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

DATA BY: \_\_\_\_\_

**APPENDIX P  
Page 1 of 1**

PREDICTIVE RELEASE DATA SHEET

TO: CECC PAT                      DATE: \_\_\_\_\_ TIME: \_\_\_\_\_ UNIT: \_\_\_\_\_  
DATA NEEDED FOR CECC TO PERFORM PREDICTIVE RELEASE METHODOLOGY

1. PRIMARY COOLANT CONCENTRATION

ISOTOPE	IN GAS $\mu\text{Ci/cc}$	IN LIQ $\mu\text{Ci/ml}$	SAMPLE DATA
I-131	_____	_____	DATE: _____ TIME _____
I-132	_____	_____	LOCATION: _____
I-133	_____	_____	TEMPERATURE: _____ DEG F
I-134	_____	_____	PRESSURE _____ PSIA
I-135	_____	_____	GAS VOLUME: _____ CC
CS-137	_____	_____	WATER MASS: _____ GRAMS
CS-138	_____	_____	WATER LEVEL: _____
KR-85m	_____	_____	
KR-85	_____	_____	
KR-87	_____	_____	
KR-88	_____	_____	
XE-133	_____	_____	
XE-135	_____	_____	

2. CONCENTRATION OF HYDROGEN IN CONTAINMENT ATMOSPHERE

H CONC (MOLE %): \_\_\_\_\_ DATE: \_\_\_\_\_  
 CNTMT TEMP: \_\_\_\_\_ DEGREES F                      TIME: \_\_\_\_\_  
 CNTMT PRESS \_\_\_\_\_ PSIG                              LOCATION: \_\_\_\_\_

3. OPERATING POWER HISTORY (IF ICS DATA LINK INOPERABLE)

DATE/TIME OF SHUTDOWN: \_\_\_\_\_

START PERIOD	END PERIOD	AVG POWER IN Mwt	START PERIOD	END PERIOD	AVG POWER IN Mwt
_____	_____	_____	_____	_____	_____

4. EXO-SENSOR CORE EXIT THERMOCOUPLE READINGS (IF ICS DATA LINK INOPERABLE)

THERMOCOUPLE NUMBER	DATE	TIME	READING (°F)	NOTES:
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____

5. Rx WATER LEVEL HISTORY (IF ICS DATA LINK INOP) \* See TI-28, Appendix B, Page 5

TIME	RVLIS %	RCS COOLANT ELEVATION (FT)	RCS GALS.* BY VOL.	RCS VOL. BY CUFT.
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____

<b>SNQ</b>	<b>ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER</b>	<b>EPIP-6 Rev. 28 Page 32 of 46</b>
------------	---	---

**APPENDIX Q**

To: Technical Assessment Manager (cc: CECC PAT & NRC Coordinator)  
From: SNQ Technical Assessment Team

1. HEAT REMOVAL CAPABILITY (FR-H and FR-C; S/G Level, RCP Flow, ECCS Flow, Subcooling RCS):
  
2. FUEL INTEGRITY: (Rad Monitors, Core Exit T/Cs, RCS Chemistry, RVLIS, H2 Concentration):
  
3. RADIOACTIVITY IN CONTAINMENT: (Rad Monitors, Rad Surveys, Fuel Integrity):
  
4. CONTAINMENT INTEGRITY: (FR-Z; CNTMT Pressure, CNTMT Breaches, Releases Outside CNTMT):
  
5. SUBCRITICALITY: (FR-S; Rods all inserted, NIS SR + IR Decreasing):
  
6. RCS INVENTORY: (FR-1; PZR Level, RVLIS, RCS Subcooling, Core Exit T/Cs):
  
7. OVERALL ASSESSMENT:
  
8. RECOMMENDATIONS:

TAT Leader: \_\_\_\_\_ Time: \_\_\_\_\_ Date: \_\_\_\_\_


APPENDIX R  
Page 1 of 1  
**PROTECTIVE ACTION RECOMMENDATION LOGIC DIAGRAM**

**SEQUOYAH NUCLEAR PLANT**

NOTES	
①	If conditions are not known Then Answer NO.
②	CONTINUE ASSESSMENT. Modify protective actions based on available plant and field monitoring information. Locate and evacuate additional localized hotspots.

TABLE 1 RADIOACTIVITY RELEASE DOSE	
TYPE	LIMIT
Measured	3.9E-6 microCi/cc of Iodine 131
	1 REM/hr External Dose
Projected	1 REM TEDE
	5 REM Thyroid CDE

TABLE 2 SEVERE CORE DAMAGE	
INDICATIONS	
1.	Containment Radiation Monitor Reading on RM-90-271 or 272 is $\geq 28$ REM/hr.
	or
2.	Containment Radiation Monitor Reading on RM-90-273 or 274 is $\geq 29$ REM/hr.
	or
3.	Reactor coolant Activity of $\geq 300$ microCi/gm Dose Equivalent I-131.
	or
	Inadequate core cooling as indicated by "red" or "orange" path from core cooling status tree.

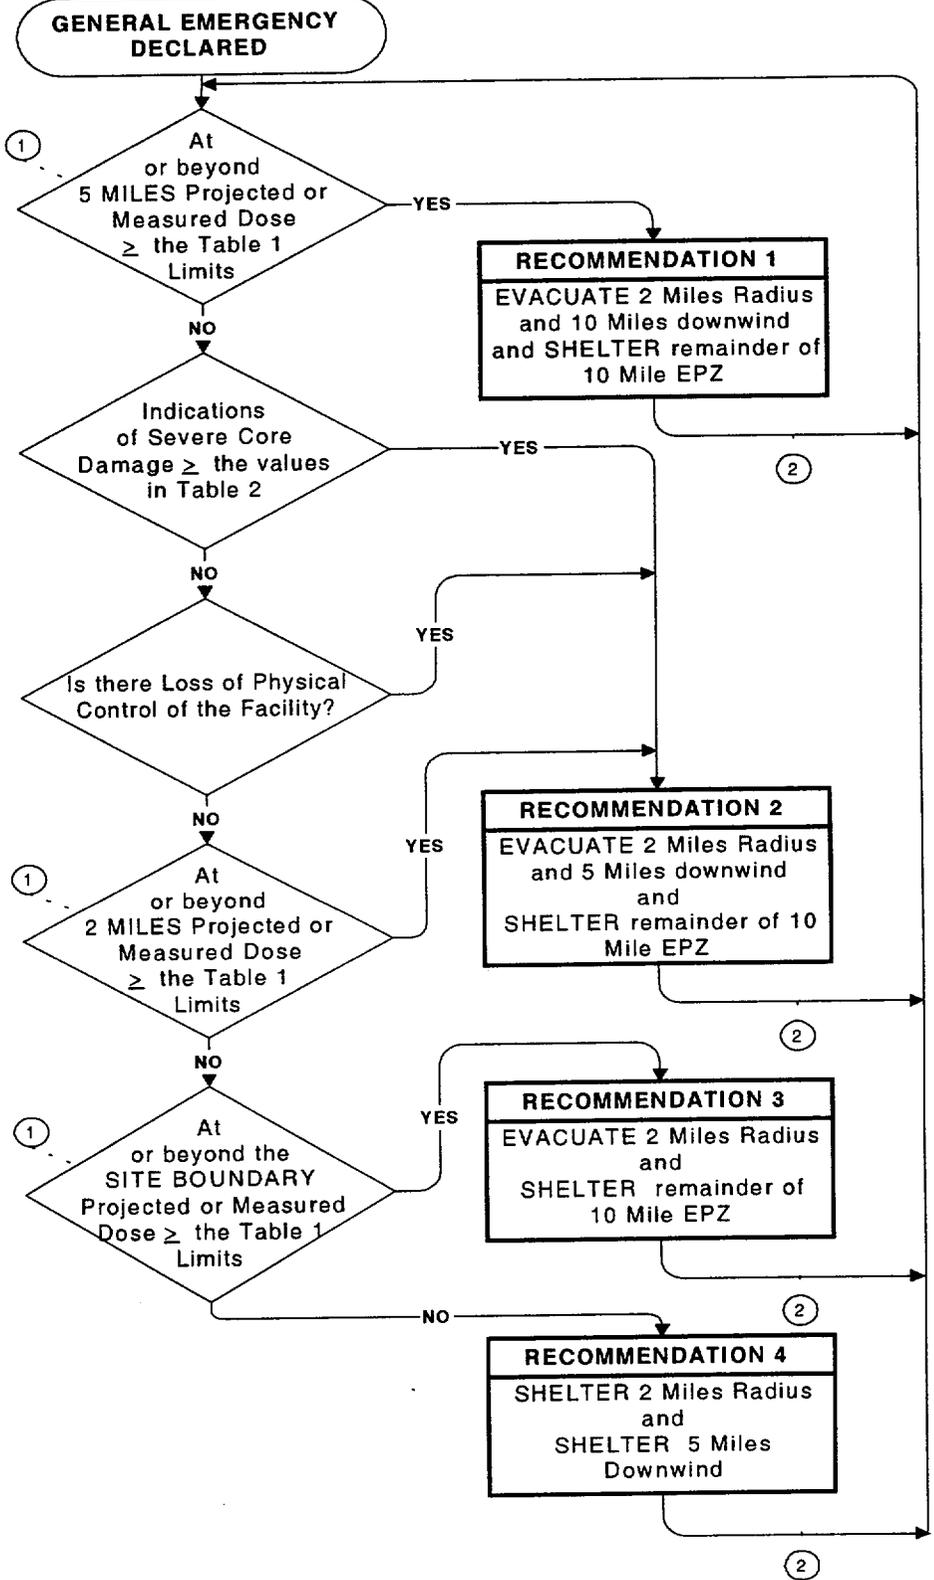

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 34 of 46
-----	---	------------------------------------

## APPENDIX S

### CONTAINMENT SUMP OPERATION AND LEVEL GUIDANCE

1. The 11 percent containment level set point for switch over was specified to prevent an inappropriate automatic switch over to the containment sump for steam line breaks in the yard that could damage the RWST. Switch over, as required for a LOCA, is based on change in RWST level (i.e., volume of water injected). Based upon RWST Technical Specification limits and switch over setpoints, the actual sump level will be at least 63.5 percent (el. 693) at the time of switch over.
2. During the injection phase following a LOCA, the only function of the containment sump level instrumentation is to provide a permissive input for the switch over.
3. Until the inflow into the containment sump and the leakage out of it through the crane wall reaches equilibrium, the actual transient sump level could approach 90 percent. When instrumentation errors are considered, the sump level indication could go high off scale for a short period of time.
4. Actual equilibrium level in the containment sump is expected to be 63.5 percent (i.e., crane wall penetrations are sealed up to 63.5 percent, and more than enough water will be injected to reach this level; surplus water will flow into the area outside the crane wall). However, due to instrument inaccuracies, the indicated level could vary between 50 percent and 78 percent.
5. After the sump has reached equilibrium and temperature effects on instrumentation have stabilized, the indicated sump level should remain constant. Because the sump volume is large and will tend to mask small leaks, any significant trend showing an increase or decrease in level, however slow, should be investigated.
6. The containment sump is subject to vortexing, which could damage the pumps if the sump is operated at too low level. As long as the indicated level stays above 37 percent, the sump will operate as designed with full ECCS flow.
7. The limiting set point for sump operation at full flow (37 percent level) is based upon vortex prevention requirements.
8. If recirculation from the sump is required with a low sump level (less than 37 percent) following a large break LOCA, then the operator should be aware that vortex-free sump operation is no longer assured. If operation under these conditions is required, the probability of effective ECCS operation will improve if flow from the sump is reduced. Also, other system indicators (e.g., pump amps, pressure, and flow) should be monitored for signs of vortexing.
9. For near normal conditions (i.e., containment spray is no longer required and total flow from the sump is less than 11,000 gal/min, the instrument inaccuracies are less than +/- 8 percent and a minimum indicated level of 18 percent will ensure vortex free sump operation.
- 10 Utilize the "External Leakage Rates" notebook, in the affected unit Control Room, to anticipate areas of potentially high dose rates when sump recirculation is initiated.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 35 of 46
-----	---	------------------------------------

APPENDIX T  
Page 1 of 2

ERCW CONCERNS FOR TECHNICAL ASSESSMENT TEAM


1. Provide direction for environmental qualification operating concerns for containment cooling following a non-LOCA event (e.g. loss of secondary coolant) inside containment. Items which should be addressed are listed below:
  - a. Cooldown the RCS to less than 350°F within 12 hours and continue as conditions allow.
  - b. In case of failure of the normal RHR suction valve FCV-74-1 to open, continue cooldown using the steam generators.

**CAUTION: Prior to initiating ERCW flow to the LCC coils, the potential for water hammer must be considered. Parameters to consider are containment temperature which can cause boiling in the coils, available system pressure to prevent boiling, and maintenance of system inventory after initiating ERCW flow.**

- c. Within one to four hours after event initiation, place at least two lower containment coolers in service. Ensure ERCW is aligned before placing coolers in service. This action will require entry into the annulus to manually open the ERCW valve if one train of power is lost. Preferably, all lower containment coolers should be placed in service.
  - (1) If A-train power is lost, A-train valves FCV-67-104, FCV-67-112, FCV-67-83 and FCV-67-91, located in the annulus (approx. el. 690) will have to be manually operated in order to place the B-train ERCW header to the B-train lower compartment coolers in service. See Appendix T, page 2, for the specific location of these valves.
  - (2) If B-train power is lost, B-train valves FCV-67-88, and FCV-67-96, FCV-67-99 and FCV-67-107, located in the annulus (approx. el. 690) will have to be manually operated in order to place the A-train ERCW header to the A-train lower compartment coolers in service. See Appendix T, page 2, for the specific location of these valves.
  - (3) The Temperature Control Valves (TCV's) for each Lower Compartment Cooler must be opened to obtain ERCW flow. The TCV's are operated from the Auxiliary Control Room for Units 1 & 2 via transfer switches or can also be failed open from panel M-9.
- d. Evaluate containment heat loads. If a reactor coolant pump is running, then at least three lower containment coolers should be in service.
- e. Evaluate ERCW flow to the lower containment coolers and, if required, consider reducing flow to other equipment such as the containment spray heat exchangers.
- f. In case of failure of both the CVCS letdown and excess letdown flow paths, then evaluate use of the reactor vessel head vent system or pressurizer PORV.

APPENDIX T  
Page 2 of 2

2. Monitor ERCW screens and strainers. Within 3 hours after an operating [C.2] basis earthquake (1/2 SSE), a loss of downstream dam, a stage I flood, a tornado warning or within 12 hours following a LOCA, then perform the following actions
  - a. Isolate chlorination to ERCW.
  - b. Inspect ERCW traveling screens and place screens into continuous backwash.
  - c. Inspect ERCW strainers differential pressure and place into continuous backwash.
  
3. For events other than those listed in previous step, then maintain the normal monitoring and cleaning frequency of the ERCW screens and strainers per 0-SO-67-3.

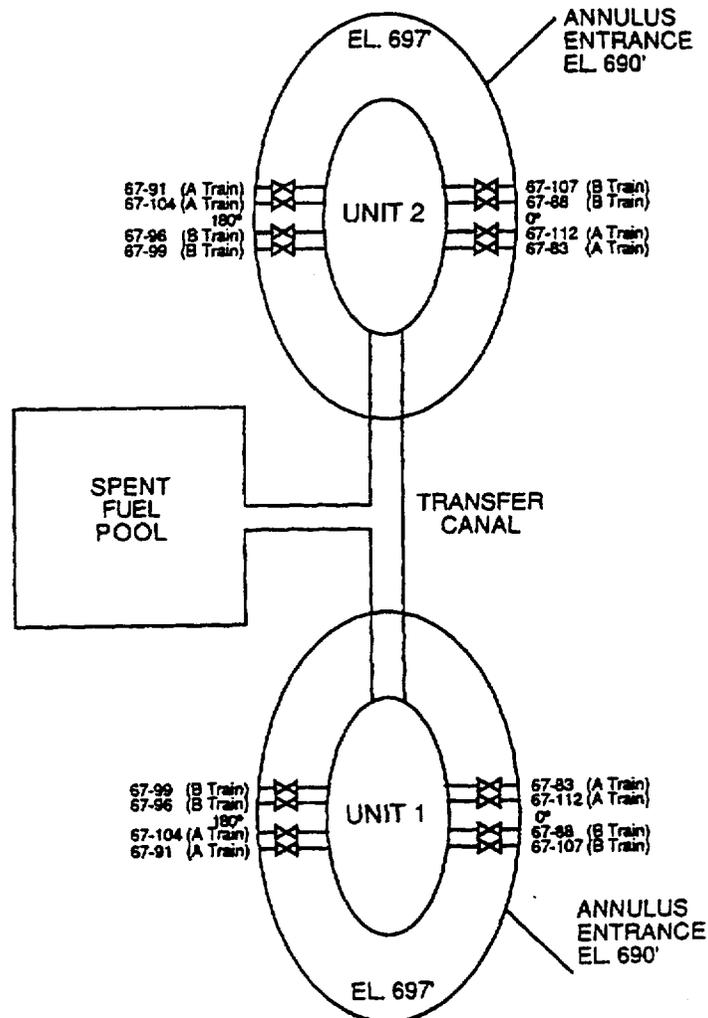

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 37 of 46
-----	---	------------------------------------

APPENDIX U  
Page 1 of 2

SED TURNOVER DATASHEET

1. Current Emergency Classification:    UE   ALERT   SAE   GE  
EAL(s) \_\_\_\_\_  
Time Declared \_\_\_\_\_      Time ODS Notified \_\_\_\_\_  
State Notified \_\_\_\_\_      Time NRC Notified \_\_\_\_\_
  
2. Event Description:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
  
3. Equipment Problems:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_
  
4. Rad Release:    Yes    No  
Onsite Dose Assessment Initiated:    Yes    No  
 Filtered       Unfiltered  
 Monitored     Unmonitored  
 Controlled     Uncontrolled  
Projected Duration \_\_\_\_\_ (Hours/Minutes)  
Wind Speed \_\_\_\_\_ mi/hr   Wind Direction From \_\_\_\_\_ Degrees  
Projected TEDE \_\_\_\_\_ mrem @ \_\_\_\_\_ miles  
Projected Thyroid CDE \_\_\_\_\_ mrem @ \_\_\_\_\_ miles
  
5. Protective Action Recommendations to Offsite Officials (General Emergency Only)  
None   1   2   3   4

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 38 of 46
-----	---	------------------------------------

APPENDIX U  
Page 2 of 2

6. Onsite Protective Actions Taken:

---

---

---

---

---

---

---

---

7. Field Monitoring Vans Activated:  Yes  No

8. Emergency Facilities Activated:  TSC  OSC  CECC

9. Personnel/Actions Dispatched by the SM:

---

---

---

---

---

---

---

---

10. Ensure minimum staffing of the TSC has completed (see App B #8)

11. Review this turnover Appendix with SM for any changes.

---

---

---

---

---

---

---

---

12. SED Responsibility Transferred:

From \_\_\_\_\_ To \_\_\_\_\_  
SED SED

Time \_\_\_\_\_ Date \_\_\_\_\_

13. Return to App B #9

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 39 of 46
-----	---	------------------------------------

APPENDIX V  
Page 1 of 1

**CONTROL BUILDING BATTERY ROOM EXHAUST FAN FAILURE AND  
6.9KV SHUTDOWN BOARD ROOMS TEMPERATURE MONITOR**

With all control building battery room exhaust fans off there is a potential for Hydrogen buildup in the battery rooms. Calculations (EEB 800723 901 and EEB 800723 902) show that it will take approximately 11 days to reach potentially explosive limits of hydrogen in the room. The TSC staff shall monitor the time frame that the battery room exhaust fans are off. The TSC staff shall determine how and when the fans are to be returned to service prior to the explosive limits being reached.

Monitor the temperature of the 6900V shutdown board rooms within the first hour and then every 24 hours in accordance with 0-PI-OPS-000-606.0 to ensure that the temperature remains below 80°F. If the temperature of a Board Room exceeds 80°F, actions must be taken (as determined by the TSC) to reduce the temperature below 80°F and the temperature of the affected Board Room(s) must be monitored at an increased frequency as determined by the TSC.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 40 of 46
-----	---	------------------------------------

APPENDIX W  
Page 1 of 1

**CONTINGENCIES FOR CONTROL AND PROCESSING LARGE VOLUMES OF  
SECONDARY SIDE CONTAMINATED WATER**

The method of processing large amounts of contaminated water in the secondary side of the plant due to a steam generator tube rupture will be determined by the Chemistry Lab, based on condensate samples for activity.

The preferred method is to process the water through the condensate D.I. Waste Regeneration System to the High Crud Tanks (HCT). The water can then be released to the release header using 0-SI-CEM-077-400.1 or 0-SI-CEM-077-400.2. Reference flow diagrams 1,2-47W838-1 and 4.

If the contamination levels of the condensate are almost within limits for release, consideration should be given to using one of the condensate D.I. beds to reduce the activity level to a point that release using method one is possible. This will depend on the age and condition of the resins. Contact the WWPG manager or Technical Support Engineer for guidance.

If the contamination levels are high enough to prevent release, consider processing the water through a Demineralizer System similar to the Rad Waste D.I. being supplied by Chem Nuclear, under agreement contract #93N7B-79294A-000.

Two methods of D.I. operation are discussed here. The first being the best method.

**METHOD 1 (PREFERRED)**

Process the water through the condensate D.I. Waste Regeneration System. This will provide a flow path from the condensate system through a vendor supplied demineralizer system back to the unit hotwell through an open manway (vacuum will have to be broken). This will allow recirculation of water from the condensate system of up to 200 gpm back to the hotwell until the activity levels are at a point that the water can be released to the HCT's, or after Chem Lab analysis indicates that it can be saved as condensate.

**METHOD 2 (ALTERNATE)**

Process water through a vendor supplied D.I. System to the HCT's and then release the HCT's to the release header, using 0-SI-CEM-077-400.1 or 0-SI-CEM-077-400.2, as clean D.I. water. As this water is being removed additional make-up water will be required to maintain inventory in the unit hotwell.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 41 of 46
-----	---	------------------------------------

APPENDIX X  
Page 1 of 1

Unit 2 Only

**LARGE BREAK LOCA CONCERN**  
**CCP/SIP RUN OUT DUE TO THROTTLE VALVE EROSION**

There is a design related ECCS deficiency associated with the Centrifugal Charging Pump and Safety Injection Pump throttle/balancing valves during a Large Break LOCA when on sump recirculation. Valve erosion leads to excessive pump run out.

In as little as two days after a LBLOCA,:

- Evaluate the condition of the CCP's and SIP's by closely monitoring their discharge flows SIP @ 675 gpm; CCP @ 555 gpm.
- Consider shutdown of any or all CCP's & SIP's that exceed the run out flow limits.


The CCP's and SIP's will be operating on cold leg recirculation and SIP's will be operating on hot leg recirculation at this time. Throttle/balancing valve erosion, due to the system's high operating pressures, will begin to seriously impact the pump's run out limits. Exceeding the allowable run out flows will quickly lead to pump damage and failure. Shutdown of the CCP's & SIP's at this point in time is acceptable since the accident should have been turned around and both the core and containment parameters should be within the mitigation capabilities of one RHR pump.

APPENDIX Y  
Page 1 of 2

TSC TELEPHONE NUMBERS

TSC Position	Phone #
Site Emergency Director	6480
Podium	6489
Operations Manager/TSC Operations Communicator	6481/6458
TSC Logkeeper	6462
Technical Assessment Manager	6479
TSC/OSC Communicator	6478
Site Vice President	6490
EP Manager	6460
TAT Boardwriter - Spectralink	6459
Chemistry Manager	6477
Radcon Manager	6472
Asst. Radcon Manager	6463
Spare	6455
Spare	6465
Technical Assessment Team Leader	6466
TAT Members	6475
	6476
	6464
Operations Advisor, TAT	6467
Spectralink	6488
Westinghouse	6468
TSC Clerks	6474
TSC Facsimile Machine - Incoming	6461
TSC Facsimile Machine - Outgoing	6473
Nuclear Security Manager	6469
NRC Coordinator	6469
NRC Conference Room	6457
	6471
	6456
	6483
Spare Spectralink	6470
Spare Spectralink	6440

APPENDIX Y  
Page 2 of 2

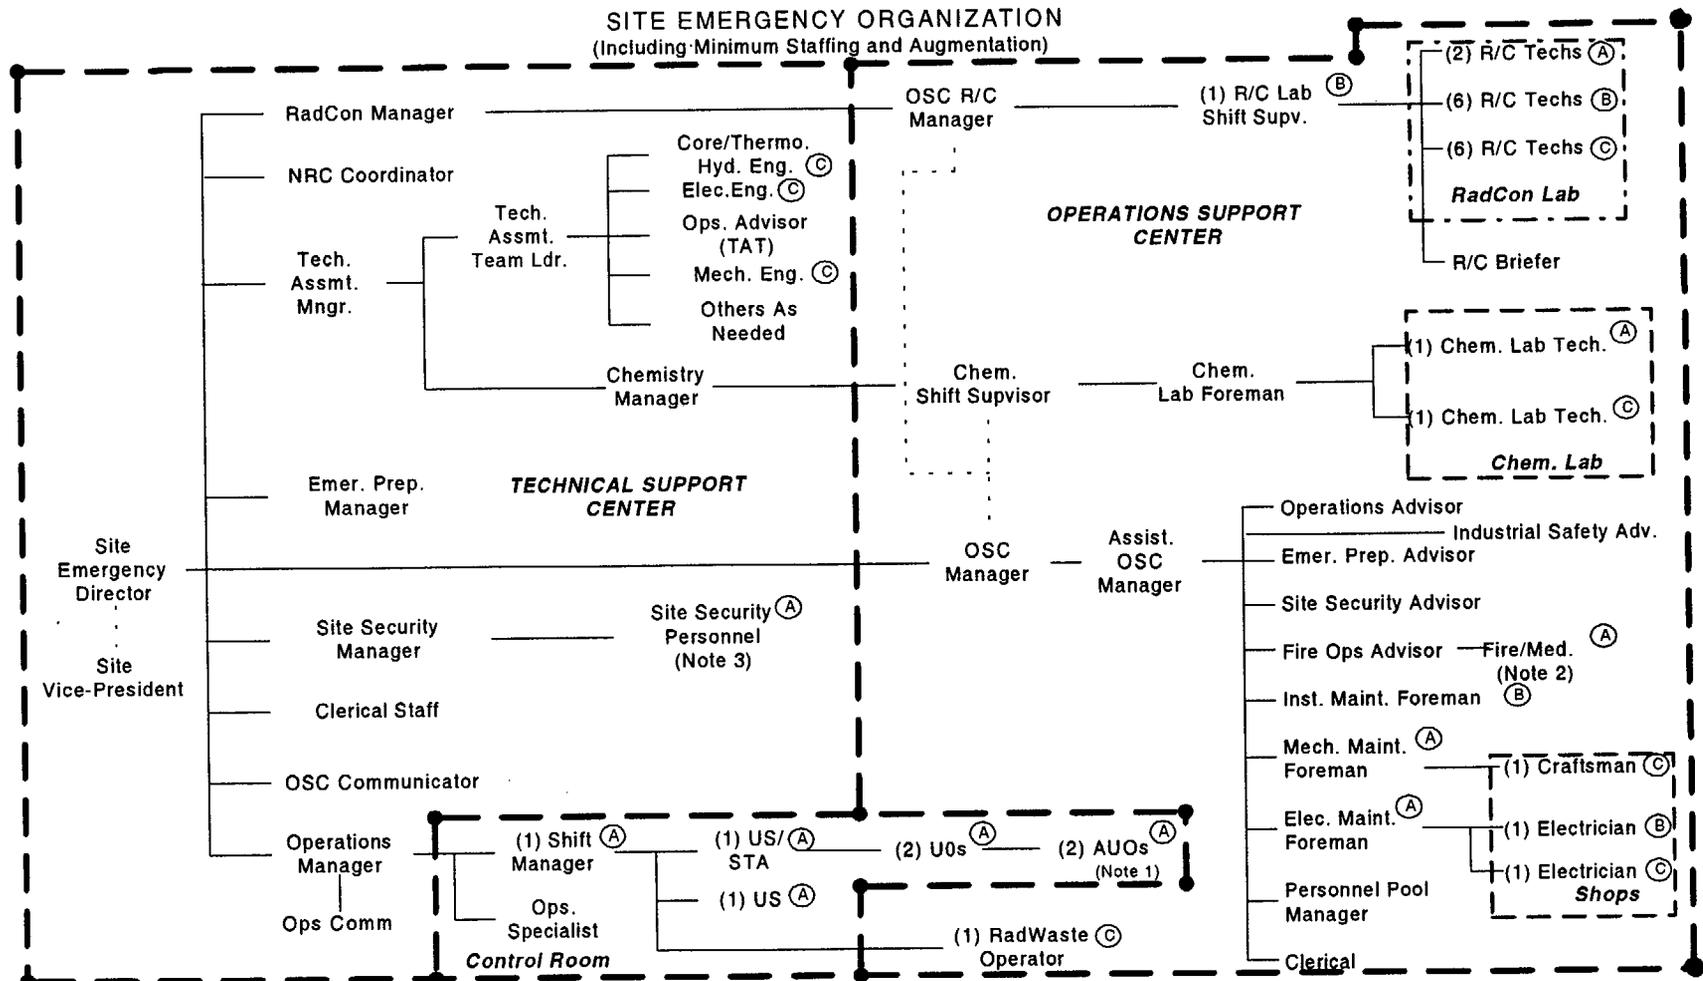

(A) On Shift.  
(B) Will arrive within approximately 30 minutes of declaration of Alert or higher classification.  
(C) Will arrive within approximately 60 minutes of declaration of Alert or higher classification.  
Note 1: For each unaffected unit in operation maintain at least one US, one UO, and one AOU except units sharing a control room may share a US if all fan controllers are red.  
Note 2: On shift fire brigade per technical specifications.  
Note 3: On shift security personnel per security plan.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 44 of 46
-----	---	------------------------------------

APPENDIX Z  
Page 1 of 1

The following reference materials are provided in the TSC:

1. Sequoyah Nuclear Plant FSAR.
2. Sequoyah Nuclear Plant Technical Specifications (Unit 1).
3. Sequoyah Nuclear Plant Technical Specifications (Unit 2).
4. Surveillance Instructions (Selected).<sup>1</sup>
5. Technical Instructions (Selected).<sup>1</sup>
6. Radiological Control Instructions.
7. Site Health and Safety Manual.
8. System Operating Instructions.
9. General Operating Instructions.
10. REP and SQN and CECC Emergency Plan Implementing Procedures
11. Plant Functional Drawings.
12. Abnormal Operating Instructions.
13. Emergency Operating Instructions.
14. Westinghouse Emergency Response Guidelines<sup>2</sup>.

- 1 Selection to be made by Technical Support Manager.
- 2 Obtain copy from 24-Hour.

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 45 of 46
-----	---	------------------------------------

APPENDIX AA

TSC OPERATIONS COMMUNICATOR  
Page 1 of 1

INITIAL ACTIVATION OF THE TECHNICAL SUPPORT CENTER

INT/TIME

- \_\_\_\_\_ 1. Fill out the Organization/Staffing Chart.
- \_\_\_\_\_ 2. Obtain headset and dial X 101.
- \_\_\_\_\_ 3. Provide the completed checklist to the TSC log keeper.

OPERATIONAL RESPONSIBILITIES

- Monitors the Operations Specialist Party Line
- Provides information from the MCR to TSC personnel
- Monitors plant status boards
- Obtains supplemental data as needed by the TSC, OSC, or CECC
- Makes inquiries to the Operations Specialist to obtain specific information as necessary
- Maintains a current log of major operational events for the Operations Manager's use

SQN	ACTIVATION AND OPERATION OF THE TECHNICAL SUPPORT CENTER	EPIP-6 Rev. 28 Page 46 of 46
-----	---	------------------------------------

**SOURCE NOTES**

**REQUIREMENTS**

**STATEMENT**

**IMPLEMENTING  
SOURCE DOCUMENT  
STATEMENT**

To address emergency classification by the Site Emergency Director (SED) in the TSC.

NRC Exercise Weakness  
50/327, 328/86-64-08

C.1

Operation of ERCW screens/strainers to be consistent with DNE USQD (RIMS-B25871008558).

NRC-IE-87-52-02  
Weakness No. 1  
NCO-870324038

C.2

NP Radiological Emergency  
Plan (NP-REP)

NUREG-0696