

LEGAL DESCRIPTION OF SITE BOUNDARY

That portion of Sections 35 & 36, T.28N., R.37E.W.M., and Sections 1 and 2, T.27N., R.37E.W.M. in Stevens County Washington, described as follows:

Commencing at the Section Corner common to Sections 25, 26, 35, and 36, T.28N., R.37E.W.M.; thence S1°44'20"E along the line common to Sections, 35 and 36, a distance of 1835.20 feet to the Point of Beginning; thence N88°51'21"E a distance of 1318.59 feet to Boundary Monument #1; thence S1°48'48"E a distance of 3459.35 feet to a found Brass Cap monument which bears N87°33'35"E a distance of 1323.11 feet from the Section corner common to sections 35 and 36, T.28N., R.37E.W.M., and sections 1 and 2, T.27N., R.37E.W.M.; thence continuing S1°48'48"E a distance of 2198.00 feet to Boundary Monument #2; thence N73°24'16"W a distance of 4135.52 feet to Boundary Monument #3; thence N13°59'38"E a distance of 800.74 feet to Boundary Monument #3A; thence N35°55'55"W a distance of 729.62 feet to Boundary Monument #4; thence N36°17'29"E a distance of 3809.31 feet to Boundary Monument #5; thence N88°51'21"E a distance of 445.82 feet to a point on the line common to sections 35 and 36 and the Point of Beginning.

Contains 382.38 acres;

AUDITORS CERTIFICATE

Filed for record this 29th day of September 1999 at _____ M. in Book _____ of Surveys on page 183 at the request of Western Nuclear.


EQUIPMENT & PROCEDURE

A Nikon DTM-1 Total Station, and a Field Traverse were used for this Survey.

BASIS OF BEARING


Bearings for this survey are based on the east line of the west half of the west half of Section 36, T.28N., R.37E.W.M. as represented on page 34 & 35 of Book 2 of Surveys, Official records of Stevens County, WA.

LEGEND

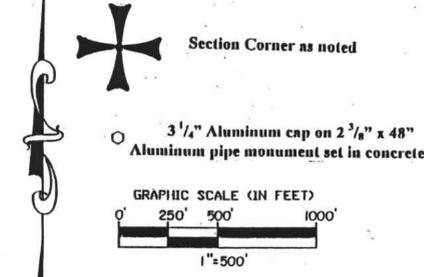

SURVEYORS CERTIFICATE

This map correctly represents a survey made by me or under my direction and is in conformance with the requirements of the Survey Recording Act at the request of Western Nuclear, Inc.

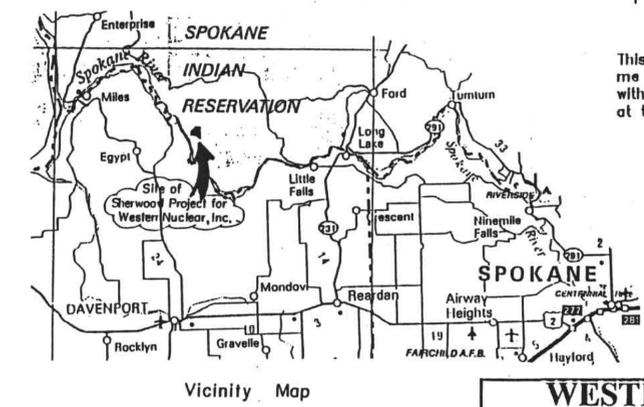

WESTERN NUCLEAR, INC.
SHERWOOD PROJECT
 PROPERTY SURVEY IN A PORTION OF SECTIONS 35 & 36, T.28N., R.37E.W.M. & SECTIONS 1 & 2, T.27 N., R.37E.W.M., STEVENS COUNTY, WASHINGTON

Founded 1948
Simpson Engineers, Inc.
 CIVIL ENGINEERS & LAND SURVEYORS
 N. 909 ARGONNE ROAD, SPOKANE WA., 99212-2789
 PHONE (509) 926-1322 FAX (509) 926-1323

DRAWN BY	T.J.P.	DATE	9-1-99	PROJECT NO.	13621	DRAWING NO.	1 OF 1
CHECKED BY	C.E.S.	DATE	9/1/99				

D-2