



April 11, 2001

Frederick C. Combs, Deputy Director  
Office of State and Tribal Programs  
United States Nuclear Regulatory Commission  
Washington, D.C. 20555-0001

Dear Mr. Combs:

This letter is to inform the Nuclear Regulatory Commission that there will be a Public Rulemaking Hearing on the proposed revision to Nebraska Administrative Code (NAC) Regulations for the Control of Radiation in Title 180 on May 3, 2001.

The proposed changes will –

- Reissue Title 180, Chapter 1, Sections 001-019 as Title 180, Chapters 1-19.
- Change the name of Title 180 from "Nebraska Regulations for Control of Radiation-Ionizing" to "Control of Radiation".
- Renumber and reformat all chapters in order to comply with the Health and Human Services System uniform procedures for regulations.
- Include technical and editorial changes made for better clarity such as: The phrase "the effective date of these regulations" was removed and the actual effective date of the regulation was inserted throughout. 180 NAC 15-013 (formerly 180 NAC 1-015.13) was rewritten to improve clarity but no substantive changes were made.
- Renumber and reformat attached forms.
- Reserve all of 180 NAC 3-012 due to the material being transferred to other Chapters in previous updates.
- Change 180 NAC 4-015.02 item 3 (formerly 180 NAC 1-004.16.B3), by inserting the word "within" after "decommissioning plan" in the first line and after the word "Agency" in the third line. This word has been inserted in order to be compatible with the U.S. Nuclear Regulatory Commission's regulations.
- Reserve 180 NAC 15-007 as the requirements are in 180 NAC 7.
- Change 180 NAC 17 Appendix 17-A (formerly 180 NAC 1-017 Appendix 017-A), (C. Severity III – Significant Violations, item 3 from "immediately" to "within 30 days".

Please find enclosed a copy of the Notice of Public Rulemaking Hearing sent to Licensee and Registrants along with a portion of the Notice of Public Rulemaking pertaining to Title 180 that appeared in the newspapers.

Enclosed are diskettes with the Draft of Title 180. The draft is also located at <http://www.nol.org/home/SOS/Rules/hearings.htm>

If you have any questions, please feel free to contact me at (402)471-0560.

Sincerely,

Trudy K. Hill  
Radiological Health Specialist  
Radioactive Materials Program

Enclosures

01 APR 20 PM 4: 11

DSP

STP-006 Template  
RIDS Dist: SPO8



**MEMORANDUM**

TO: Licensees and Registrants

FROM: Sue Semerena, Administrator  
Consumer Health Services  
HHS Regulation and Licensure

DATE: April 6, 2001

SUBJECT: Notice of Public Rulemaking Hearing

On May 3, 2001, at 9 AM (CST) in the Nebraska State Office Building, Sixth Floor Conference Room Z, 301 Centennial Mall South, Lincoln, Nebraska, there will be a Public Rulemaking Hearing on the proposed revision to Nebraska Administrative Code (NAC) regulations for the Control of Radiation in Title 180.

Enclosed for your information is a copy of the Notice of Public Rulemaking (portion pertaining to Title 180 only) that appeared in the *Omaha World Herald* and *Lincoln Journal Star* newspapers on April 2, 2001.

Draft regulations will be available 3 weeks prior to the hearing on the Internet at <http://www.nol.org/home/SOS/Rules/hearings.htm>.

If you wish to request a copy of the proposed revisions, please contact Trudy Hill.

Phone: (402)471-0560 Fax (402)471-0169

E-mail: [trudy.hill@hhss.state.ne.us](mailto:trudy.hill@hhss.state.ne.us)

Mail: HHS Regulation and Licensure  
Consumer Health Services  
P.O. Box 95007  
Lincoln, NE 68509-5007

Include the following information:

Name of Licensee, Registrant or Interested Party  
Address  
License or Registration Number (if applicable)

If you have any questions or concerns regarding this memorandum, please contact me at (402)471-0927. Alternate formats for persons with disabilities are available by calling the Department's TTD/TTY telephone number, (402)471-9570 or the Nebraska Relay System 800-833-7352 TDD.

Enclosure

**HEALTH AND HUMAN SERVICES SYSTEM  
NOTICE OF PUBLIC HEARINGS  
May 3, 2001  
State Office Building, Sixth Floor Conf. Room Z  
301 Centennial Mall South, Lincoln, NE**

All interested persons are invited to attend and comment at the hearings or to submit comments in writing. Written comments must be postmarked or received by 5:00 p.m. CT on May 5, 2001 and should be addressed to the Department of HHS Regulation and Licensure, Regulatory Analysis and Integration Division, Connie McGreer, P.O. Box 95007, Lincoln, NE 68509, fax 402/471-0555.

Draft copies of the regulations and the estimated schedule for rulemaking are available at the Department of HHS Regulation and Licensure, Regulatory Analysis and Integration Division, State Office Building, Third Floor, 301 Centennial Mall South, P.O. Box 95007, Lincoln, NE 68509, phone 402/471-9022; and at the office of the Secretary of State, Regulations Division, Room 343, State Capitol, Lincoln, NE 68509, phone 402/471-2385. The draft fiscal impact statement for these regulations is available at HHS Regulation and Licensure as above. Draft regulations will be available 3 weeks prior to the hearing on the Internet at <http://www.nol.org/home/SOS/Rules/hearings.htm>.

If auxiliary aids or reasonable accommodations are needed to participate in a hearing, please call Connie McGreer at 402/471-9022 or for persons with hearing impairments, please call the Director of Regulation and Licensure at 402/471-9570 (voice and TDD) or the Nebraska Relay System at 800/833-7352 TDD by no later than 10 days prior to the hearing date. This notice is given in compliance with Neb. Rev. Stat. section 84-907.

**Public Hearing at 9:00 a.m. CT**

The Department of Health and Human Services Regulation and Licensure is holding this hearing to accept comments on proposed changes to Nebraska Administrative Code (NAC) regulations for the Control of Radiation in Title 180. The proposed changes will –

- Reissue Title 180, Chapter 1, Sections 001-019 as Title 180, Chapters 1-19.
- Change the name of Title 180 from “Nebraska Regulations for Control of Radiation-Ionizing” to “Control of Radiation”.
- Renumber and reformat all chapters in order to comply with the Health and Human Services System uniform procedures for regulations.
- Include technical and editorial changes made for better clarity such as: The phrase “the effective date of these regulations” was removed and the actual effective date of the regulation was inserted throughout. 180 NAC 15-013 (formerly 180 NAC 1-015.13) was rewritten to improve clarity but no substantive changes were made.
- Renumber and reformat attached forms.
- Reserve all of 180 NAC 3-012 due to the material being transferred to other Chapters in previous updates.
- Change 180 NAC 4-015.02 item 3 (formerly 180 NAC 1-004.16.B3), by inserting the word “within” after “decommissioning plan” in the first line and after the word “Agency” in the third line. This word has been inserted in order to be compatible with the U.S. Nuclear Regulatory Commission’s regulations.
- Reserve 180 NAC 15-007 as the requirements are in 180 NAC 7.
- Change 180 NAC 17 Appendix 17-A (formerly 180 NAC 1-017 Appendix 017-A), (C. Severity III – Significant Violations, item 3 from “immediately” to “within 30 days”.

Authority for these regulations is found in Neb. Rev. Stat. sections 71-3501 to 71-3519.

**NOTE: This is only a portion of the Notice of Public Rulemaking that appeared in the *Omaha World Herald* and *Lincoln Journal Star* newspapers on April 2, 2001. This portion of the Notice is for the proposed revisions to Nebraska Administrative Code (NAC) regulations for the Control of Radiation in Title 180.**

TITLE 180 CONTROL OF RADIATION

CHAPTER 4 STANDARDS FOR PROTECTION AGAINST RADIATION

4-001	Scope and Authority	1
4-002	Definitions	1
4-003	Implementation	4

RADIATION PROTECTION PROGRAMS

4-004	Radiation Protection Programs	4
-------	-------------------------------	---

OCCUPATIONAL DOSE LIMITS

4-005	Occupational Dose Limits for Adults	4
4-006	Compliance with Requirements for Summation of External and Internal Doses	5
4-007	Determination of External Dose From Airborne Radioactive Material	6
4-008	Determination of Internal Exposure	6
4-009	Determination of Prior Occupational Dose	8
4-010	Planned Special Exposures	9
4-011	Occupational Dose Limits for Minoris	10
4-012	Dose To An Embryo/Fetus	10

RADIATION DOSE LIMITS FOR INDIVIDUAL MEMBERS OF THE PUBLIC

4-013	Dose Limits for Individual Members of the Public	11
4-014	Compliance with Dose Limits for Individual Members of the Public	12

RADIOLOGICAL CRITERIA FOR LICENSE TERMINATION

4-015	General Provisions and Scope	12
4-016	Radiological Criteria for Unrestricted Use	13
4-017	Criteria for License Termination Under Restricted Conditions	13
4-018	Alternate Criteria for License Termination	15
4-019	Public Notification and Public Participation	16
4-020	Minimization of Contamination	16

SURVEYS AND MONITORING

4-021	General	16
4-022	Conditions Requiring Individual Monitoring of External and Internal Occupational Dose	17
4-023	Control of Access to High Radiation Areas	18
4-024	Control of Access to Very High Radiation Areas	19
4-025	Control of Access to Very High Radiation Areas--Irradiators	19

RESPIRATORY PROTECTION AND CONTROLS TO RESTRICT INTERNAL  
EXPOSURE IN RESTRICTED AREAS

4-026	Use of Process or Other Engineering Controls	21
4-027	Use of Other Controls	21
4-028	Use of Individual Respiratory Protection Equipment	21

STORAGE AND CONTROL OF LICENSED OR REGISTERED  
SOURCES OF RADIATION

4-029	Security of Stored Sources of Radiation	23
4-030	Control of Sources of Radiation Not in Storage	23

PRECAUTIONARY PROCEDURES

4-031	Caution Signs	24
4-032	Posting Requirements	25
4-033	Exceptions to Posting Requirements	25
4-034	Labeling Containers and Radiation Machines	26
4-035	Exemptions to Labeling Requirements	26
4-036	Procedures for Receiving and Opening Packages	27

WASTE DISPOSAL

4-037	General Requirements	28
4-038	Method for Obtaining Approval of Proposed Disposal Procedures	28
4-039	Disposal by Release into Sanitary Swerage	28
4-040	Treatment or Disposal by Inceneration	29
4-041	Disposal of Specific Wastes	29
4-042	Transfer for Disposal and Manifests	30
4-043	Compliance with Environmental and Health Protection Regulations	31

RECORDS

4-044	General Provisions	31
4-045	Records of Radiation Protection Programs	31
4-046	Records of Surveys	32
4-047	Records of Tests for Leakage or Contamination of Sealed Sources	32
4-048	Records of Prior Occupational Dose	32
4-049	Records of Planned Special Exposures	32
4-050	Records of Individual Monitoring Results	33
4-051	Records of Dose to Individual Members of the Public	34
4-052	Records of Waste Disposal	34
4-053	Records of Testing Entry Control Devices for Very High Radiation Areas	34
4-054	Forms of Records	34

REPORTS

4-055 Reports of Stolen, Lost, or Missing Licensed or Registered Sources of Radiation . .	35
4-056 Notification of Incidents . . . . .	35
4-057 Reports of Exposures, Radiation Levels and Concentrations of Radioactive Material Exceeding the Constraints or Limits . . . . .	36
4-058 Reports of Planned Special Exposures . . . . .	38
4-059 Reserved . . . . .	38
4-060 Reports of Individual Monitoring . . . . .	38
4-061 Notifications and Reports to Individuals . . . . .	39
4-062 Reports of Leaking or Contaminated Sealed Souces . . . . .	39

ADDITIONAL REQUIREMENTS

4-063 Vacating Premeises . . . . .	39
------------------------------------	----

APPENDIXES

Appendix 4-A Protection Factors for Respirators . . . . .	40
Appendix 4-B Annual Limits on Intake (ALI) and Derived Air Concentrations (DAC) of Radionuclides for Occupational Exposure, Effluent Concentrations; Concentrations for Release to Sanitary Sewerage Annual Limits on Intate (ALI and Derived ) Air Concentrations . . . . .	43
Appendix 4-C Quantities Material Requiring Labeling . . . . .	98
Appendix 4-D Requirements for Transfers fo Low-Level Radioactive Wate Intended for Disposal at Licensed Disposal Facilities and Manifests . . . . .	106
Appendix 4-E Classification and Characteristicstic of Low-Level Radioactive Waste . . . . .	114
Appendix 4-F Quantities for Use With Decommissioning . . . . .	119
Appendix 4-G Concentration and Activity Limits of Nuclides for Disposal in a City or County Landfill Disposal Facility . . . . .	124

FORMS

Form NRH-1 Cumulative Occupation Exposure History	
Form NRH 2 Occupational Exposure Record for a Monitoring Period	
NRC Form 540 & 540A Uniform Low-level Radioactive Waste Manifest - Shipping Paper	
NRC Form 541 & 541A Uniform Low-level Radioactive Waste Manifest – Container and Waste Description	
NRC Form 542 & 542A Uniform Low-level Radioactive Waste Manifest – Manifest Index and Regional Compact Tabulation	

Draft  
03/01/01

NEBRASKA OF HEALTH AND HUMAN SERVICES  
REGULATION AND LICENSURE

180 NAC 4

**THIS PAGE WAS INTENTIONALLY LEFT BLANK**

TITLE 180 CONTROL OF RADIATION

CHAPTER 4 STANDARDS FOR PROTECTION AGAINST RADIATION

4-001 SCOPE AND AUTHORITY

4-001.01 180 NAC 4 establishes standards for protection against ionizing radiation resulting from activities conducted pursuant to licenses or registrations issued by the Agency. The regulations are authorized by and implement the Nebraska Radiation Control Act, Neb. Stat. Rev. sections 71-3501 to 3519.

4-001.02 The requirements of 180 NAC 4 are designed to control the receipt, possession, use, transfer, and disposal of sources of radiation by any licensee or registrant so the total dose to an individual, including doses resulting from all sources of radiation other than background radiation, does not exceed the standards for protection against radiation prescribed in 180 NAC 4. However, nothing in 180 NAC 4 shall be construed as limiting actions that may be necessary to protect health and safety.

4-001.03 Except as specifically provided in other Chapters of Title 180, 180 NAC 4 applies to persons licensed or registered by the Agency to receive, possess, use, transfer, or dispose of sources of radiation. The limits in 180 NAC 4 do not apply to doses due to background radiation, to exposure of patients to radiation for the purpose of medical diagnosis or therapy, to exposure from individuals administered radioactive material and released in accordance with 180 NAC 7-030 or to voluntary participation in medical research programs.

4-002 DEFINITIONS

Annual limit on intake (ALI) means the derived limit for the amount of radioactive material taken into the body of an adult worker by inhalation or ingestion in a year. ALI is the smaller value of intake of a given radionuclide in a year by the reference man that would result in a committed effective dose equivalent of 0.05 Sv (5 rem) or a committed dose equivalent of 0.5 Sv (50 rem) to any individual organ or tissue. ALI values for intake by ingestion and by inhalation of selected radionuclides are given in Table I, Columns 1 and 2, of Appendix 180 NAC 4-B.

Class means a classification scheme for inhaled material according to its rate of clearance from the pulmonary region of the lung. Materials are classified as D, W, or Y, which applies to a range of clearance half-times: for Class D (Days) of less than 10 days, for Class W (Weeks) from 10 to 100 days, and for Class Y (Years) of greater than 100 days. For purposes of these regulations, "lung class" and "inhalation class" are equivalent terms.

Declared pregnant woman means a woman who has voluntarily informed her employer, in writing, of her pregnancy and the estimated date of conception.

Derived air concentration (DAC) means the concentration of a given radionuclide in air which, if breathed by the reference man for working year of 2,000 hours under conditions of light work, results in an intake of one ALI. For purposes of this definition, the condition of light work is an inhalation rate of 1.2 cubic meters of air per hour for 2,000 hours in a year. DAC values are given in Table I, Column 3, of Appendix 180 NAC 4-B.

Derived air concentration-hour (DAC-hour) means the product of the concentration of radioactive material in air, expressed as a fraction or multiple of the derived air concentration for each radionuclide, and the time of exposure to that radionuclide, in hours. A licensee or registrant may take 2,000 DAC-hours to represent one ALI, equivalent to a committed effective dose equivalent of 0.05 Sv (5 rem).

Dosimetry processor means an individual or an organization that processes and evaluates individual monitoring devices in order to determine the radiation dose delivered to the monitoring devices.

Dosimetry processor means an individual or an organization that processes and evaluates individual monitoring devices in order to determine the radiation dose delivered to the monitoring devices.

Inhalation class [See "Class"].

Lung class [See "Class"].

Nonstochastic effect means a health effect, the severity of which varies with the dose and for which a threshold is believed to exist. Radiation-induced cataract formation is an example of a nonstochastic effect. For purposes of these regulations, a "deterministic effect" is an equivalent term.

Planned special exposure means an infrequent exposure to radiation, separate from and in addition to the annual occupational dose limits.

Quarter means a period of time equal to one-fourth of the year observed by the licensee or registrant, approximately 13 consecutive weeks, providing that the beginning of the first quarter in a year coincides with the starting date of the year and that no day is omitted or duplicated in consecutive quarters.

Reference man means a hypothetical aggregation of human physical and physiological characteristics determined by international consensus. These characteristics may be used by researchers and public health workers to standardize results of experiments and to relate biological insult to a common base. A description of the Reference Man is contained in the International Commission on Radiological Protection Report, ICRP Publication 23, "Report of the Task Group on Reference Man." A copy of this report is available for inspection at the Department

of Health and Human Services Regulation and Licensure, 301 Centennial Mall South, Lincoln, Nebraska.

Respiratory protective equipment means an apparatus, such as a respirator, used to reduce an individual's intake of airborne radioactive materials.

Sanitary sewerage means a system of public sewers for carrying off waste water and refuse, but excluding sewage treatment facilities, septic tanks, and leach fields owned or operated by the licensee.

Stochastic effect means a health effect that occurs randomly and for which the probability of the effect occurring, rather than its severity, is assumed to be a linear function of dose without threshold. Hereditary effects and cancer incidence are examples of stochastic effects.

Very high radiation area means an area, accessible to individuals, in which radiation levels could result in an individual receiving an absorbed dose in excess of 5 Gy (500 rad) in 1 hour at 1 meter from a source of radiation or from any surface that the radiation penetrates.<sup>1</sup>

Weighting factor  $w_T$  for an organ or tissue (T) means the proportion of the risk of stochastic effects resulting from irradiation of that organ or tissue to the total risk of stochastic effects when the whole body is irradiated uniformly. For calculating the effective dose equivalent, the values of  $w_T$  are:

ORGAN DOSE WEIGHTING FACTORS	
<u>Organ or Tissue</u>	<u><math>w_T</math></u>
Gonads	0.25
Breast	0.15
Red Bone Marrow	0.12
Lung	0.12
Thyroid	0.03
Bone Surfaces	0.03
Remainder	0.30 <sup>a</sup>
Whole Body	1.00 <sup>b</sup>

<sup>a</sup> 0.30 results from 0.06 for each of 5 "remainder" organs, excluding the skin and the lens of the eye, that receive the highest doses.

<sup>b</sup> For the purpose of weighting the external whole body dose, for adding it to the internal dose, a single weighting factor,  $w_T = 1.0$ , has been specified. The use of other weighting factors for external exposure will be approved on a case-by-case basis until such time as specific guidance is issued.

---

<sup>1</sup> At very high doses received at high dose rates, units of absorbed dose, gray and rad, are appropriate, rather than units of dose equivalent, sievert and rem.

#### 4-003 IMPLEMENTATION

4-003.01 Any existing license condition that is more restrictive than 180 NAC 4 remains in force until there is an amendment or renewal of the license.

4-003.02 If a license condition exempts a licensee from a provision of 180 NAC 4 in effect on or before the effective date of these regulations, it also exempts the licensee from the corresponding provision of 180 NAC 4.

4-003.03 If a license condition cites provisions of 180 NAC 4 in effect prior to the effective date of these regulations, which do not correspond to any provisions of 180 NAC 4, the license condition remains in force until there is an amendment or renewal of the license that modifies or removes this condition.

### RADIATION PROTECTION PROGRAMS

#### 4-004 RADIATION PROTECTION PROGRAMS

4-004.01 Each licensee or registrant shall develop, document, and implement a radiation protection program sufficient to ensure compliance with the provisions of 180 NAC 4. See 180 NAC 4-045 for recordkeeping requirements relating to these programs.

4-004.02 The licensee or registrant shall use, to the extent practicable, procedures and engineering controls based upon sound radiation protection principles to achieve occupational doses and public doses that are as low as is reasonably achievable (ALARA).

4-004.03 The licensee or registrant shall, at intervals not to exceed 12 months, review the radiation protection program content and implementation.

4-004.04 To implement the ALARA requirements of 180 NAC 4-004.02 and notwithstanding the requirements in 180 NAC 4-013, a constraint on air emissions of radioactive material to the environment, excluding Radon-222 and its daughters shall be established by licensees, such that the individual member of the public likely to receive the highest dose will not be expected to receive a total effective dose equivalent in excess of 10 mrem (0.1 mSv) per year from these emissions. If a licensee subject to this requirement exceeds this dose constraint, the licensee shall report the exceedance as provided in 180 NAC 4-057 and promptly take appropriate corrective action to ensure against a recurrence.

### OCCUPATIONAL DOSE LIMITS

#### 4-005 OCCUPATIONAL DOSE LIMITS FOR ADULTS

4-005.01 The licensee or registrant shall control the occupational dose to individual adults, except for planned special exposures pursuant to 180 NAC 4-010, to the following dose limits:

1. An annual limit, which is the more limiting of:
  - a. The total effective dose equivalent being equal to 0.05 Sv (5 rem); or

- b. The sum of the deep dose equivalent and the committed dose equivalent to any individual organ or tissue other than the lens of the eye being equal to 0.5 Sv (50 rem).
2. The annual limits to the lens of the eye, to the skin, and to the extremities which are:
    - a. An eye dose equivalent of 0.15 Sv (15 rem), and
    - b. A shallow dose equivalent of 0.5 Sv (50 rem) to the skin or to any extremity.

4-005.02 Doses received in excess of the annual limits, including doses received during accidents, emergencies, and planned special exposures, must be subtracted from the limits for planned special exposures that the individual may receive during the current year and during the individual's lifetime. See 4-010.05, item 1 and 2.

4-005.03 The assigned deep dose equivalent and shallow dose equivalent shall be for the portion of the body receiving the highest exposure.

4-005.04 The deep dose equivalent, eye dose equivalent and shallow dose equivalent may be assessed from surveys or other radiation measurements for the purpose of demonstrating compliance with the occupational dose limits, if the individual monitoring device was not in the region of highest potential exposure, or the results of individual monitoring are unavailable.

4-005.05 Derived air concentration (DAC) and annual limit on intake (ALI) values are presented in Table I of Appendix 180 NAC 4-B and may be used to determine the individual's dose and to demonstrate compliance with the occupational dose limits. See 180 NAC 4-050.

4-005.06 Notwithstanding the annual dose limits, the licensee shall limit the soluble uranium intake by an individual to 10 milligrams in a week in consideration of chemical toxicity. See footnote 3 of Appendix 180 NAC 4-B.

4-005.07 The licensee or registrant shall reduce the dose that an individual may be allowed to receive in the current year by the amount of occupational dose received while employed by any other person. See 180 NAC 4-009.05.

#### 4-006 COMPLIANCE WITH REQUIREMENTS FOR SUMMATION OF EXTERNAL AND INTERNAL DOSES

4-006.01 If the licensee is required to monitor pursuant to both 180 NAC 4-022.01 and 4-022.02, the licensee shall demonstrate compliance with the dose limits by summing external and internal doses. If the licensee or registrant is required to monitor only pursuant to 180 NAC 4-022.01 or only pursuant to 180 NAC 4-022.02 then summation is not required to demonstrate compliance with the dose limits. The licensee may demonstrate compliance with the requirements for summation of external and internal doses pursuant to 180 NAC 4-006.02 through 4-006.04. The dose equivalents for the lens of the eye, the skin, and the extremities are not included in the summation, but are subject to separate limits.

4-006.02 Intake by Inhalation. If the only intake of radionuclides is by inhalation, the total effective dose equivalent limit is not exceeded if the sum of the deep dose equivalent divided by the total effective dose equivalent limit, and one of the following, does not exceed unity:

1. The sum of the fractions of the inhalation ALI for each radionuclide, or
2. The total number of derived air concentration-hours (DAC-hours) for all radionuclides divided by 2,000, or
3. The sum of the calculated committed effective dose equivalents to all significantly irradiated organs or tissues (T) calculated from bioassay data using appropriate biological models and expressed as a fraction of the annual limit. For purposes of this requirement, an organ or tissue is deemed to be significantly irradiated if, for that organ or tissue, the product of the weighting factors,  $w_T$ , and the committed dose equivalent,  $H_{T,50}$ , per unit intake is greater than 10 percent of the maximum weighted value of  $H_{50}$ , (i.e.,  $w_T H_{T,50}$ ), per unit intake for any organ or tissue.

4-006.03 Intake by Oral Ingestion. If the occupationally exposed individual also receives an intake of radionuclides by oral ingestion greater than 10 percent of the applicable oral ALI, the licensee or registrant shall account for this intake and include it in demonstrating compliance with the limits.

4-006.04 Intake through Wounds or Absorption through Skin. The licensee or registrant shall evaluate and, to the extent practical, account for intakes through wounds or skin absorption. The intake through intact skin has been included in the calculation of DAC for hydrogen-3 and does not need to be evaluated or accounted for pursuant to 180 NAC 4-006.04.

#### 4-007 DETERMINATION OF EXTERNAL DOSE FROM AIRBORNE RADIOACTIVE MATERIAL

4-007.01 Licensees shall, when determining the dose from airborne radioactive material, include the contribution to the deep dose equivalent, eye dose equivalent, and shallow dose equivalent from external exposure to the radioactive cloud. See Appendix 180 NAC 4-B, footnotes 1 and 2.

4-007.02 Airborne radioactivity measurements and DAC values shall not be used as the primary means to assess the deep dose equivalent when the airborne radioactive material includes radionuclides other than noble gases or if the cloud of airborne radioactive material is not relatively uniform. The determination of the deep dose equivalent to an individual shall be based upon measurements using instruments or individual monitoring devices.

#### 4-008 DETERMINATION OF INTERNAL EXPOSURE

4-008.01 For purposes of assessing dose used to determine compliance with occupational dose equivalent limits, the licensee shall, when required under 180 NAC 4-022 take suitable and timely measurements of:

1. Concentrations of radioactive materials in air in work areas; or

2. Quantities of radionuclides in the body; or
3. Quantities of radionuclides excreted from the body; or
4. Combinations of these measurements.

4-008.02 Unless respiratory protective equipment is used, as provided in 180 NAC 4-028 or the assessment of intake is based on bioassays, the licensee shall assume that an individual inhales radioactive material at the airborne concentration in which the individual is present.

4-008.03 When specific information on the physical and biochemical properties of the radionuclides taken into the body or the behavior of the material in an individual is known, the licensee may:

1. Use that information to calculate the committed effective dose equivalent, and, if used, the licensee shall document that information in the individual's record; and
2. Upon prior approval of the Agency, adjust the DAC or ALI values to reflect the actual physical and chemical characteristics of airborne radioactive material, for example, aerosol size distribution or density; and
3. Separately assess the contribution of fractional intakes of Class D, W, or Y compounds of a given radionuclide to the committed effective dose equivalent. See Appendix 180 NAC 4-B.

4-008.04 If the licensee chooses to assess intakes of Class Y material using the measurements given in 180 NAC 4-008.01, item 2 or 3, the licensee may delay the recording and reporting of the assessments for periods up to 7 months, unless otherwise required by 180 NAC 4-056 or 4-057. This delay permits the licensee to make additional measurements basic to the assessments.

4-008.05 If the identity and concentration of each radionuclide in a mixture are known, the fraction of the DAC applicable to the mixture for use in calculating DAC-hours shall be either:

1. The sum of the ratios of the concentration to the appropriate DAC value, (e.g., D, W, or Y) from Appendix 180 NAC 4-B for each radionuclide in the mixture; or
2. The ratio of the total concentration for all radionuclides in the mixture to the most restrictive DAC value for any radionuclide in the mixture.

4-008.06 If the identity of each radionuclide in a mixture is known, but the concentration of one or more of the radionuclides in the mixture is not known, the DAC for the mixture shall be the most restrictive DAC of any radionuclide in the mixture.

4-008.07 When a mixture of radionuclides in air exists, a licensee may disregard certain radionuclides in the mixture if:

1. The licensee uses the total activity of the mixture in demonstrating compliance with the dose limits in 180 NAC 4-005 and in complying with the monitoring requirements in 180 NAC 4-022, and

2. The concentration of any radionuclide disregarded is less than 10 percent of its DAC, and
3. The sum of these percentages for all of the radionuclides disregarded in the mixture does not exceed 30 percent.

4-008.08 When determining the committed effective dose equivalent, the following information may be considered:

1. In order to calculate the committed effective dose equivalent, the licensee may assume that the inhalation of one ALI, or an exposure of 2,000 DAC-hours, results in a committed effective dose equivalent of 0.05 Sv (5 rem) for radionuclides that have their ALIs or DACs based on the committed effective dose equivalent.
2. For an ALI (and the associated DAC) determined by the nonstochastic organ dose limit of 0.5 Sv (50 rem), the intake of radionuclides that would result in a committed effective dose equivalent of 0.05 Sv (5 rem), (the stochastic ALI) is listed in parentheses in Table I of Appendix 180 NAC 4-B. The licensee may, as a simplifying assumption, use the stochastic ALI to determine committed effective dose equivalent. However, if the licensee uses the stochastic ALI, the licensee shall also demonstrate that the limit in 180 NAC 4-005.01, item 1.b. is met.

#### 4-009 DETERMINATION OF PRIOR OCCUPATIONAL DOSE

4-009.01 For each individual who may enter the licensee's or registrant's restricted area and is likely to receive, in a year, an occupational dose requiring monitoring pursuant to 180 NAC 4-022, the licensee or registrant shall:

1. Determine the occupational radiation dose received during the current year; and
2. Attempt to obtain the records of cumulative occupational radiation dose.

4-009.02 Prior to permitting an individual to participate in a planned special exposure, the licensee or registrant shall determine:

1. The internal and external doses from all previous planned special exposures; and
2. All doses in excess of the limits (including doses received during accidents and emergencies) received during the lifetime of the individual.

4-009.03 In complying with the requirements of 180 NAC 4-009.01, a licensee or registrant may:

1. Accept, as a record of the occupational dose that the individual received during the current year, a written signed statement from the individual, or from the individual's most recent employer for work involving radiation exposure, that discloses the nature and the amount of any occupational dose that the individual received during the current year; and
2. Accept, as the record of cumulative radiation dose, an up-to-date Agency Form NRH-1, or equivalent, signed by the individual and countersigned by an

appropriate official of the most recent employer for work involving radiation exposure, or the individual's current employer, if the individual is not employed by the licensee or registrant; and

3. Obtain reports of the individual's dose equivalent from the most recent employer for work involving radiation exposure, or the individual's current employer, if the individual is not employed by the licensee or registrant, by telephone, telegram, electronic media, or letter. The licensee or registrant shall request a written verification of the dose data if the authenticity of the transmitted report cannot be established.

4-009.04 The licensee or registrant shall record the exposure history, as required by 180 NAC 4-009.01, on Agency Form NRH-1, or other clear and legible record, including all of the information required on that form.

1. The form or record shall show each period in which the individual received occupational exposure to radiation or radioactive material and shall be signed by the individual who received the exposure. For each period for which the licensee or registrant obtains reports, the licensee or registrant shall use the dose shown in the report in preparing Agency Form NRH-1 or equivalent. For any period in which the licensee or registrant does not obtain a report, the licensee or registrant shall place a notation on Agency Form NRH-1 indicating the periods of time for which data are not available.
2. Licensees or registrants are not required to partition historical dose between external dose equivalent(s) and internal committed dose equivalent(s). Further, occupational exposure histories obtained and recorded on Agency Form NRH-1 before the effective date of these regulations, might not have included effective dose equivalent, but may be used in the absence of specific information on the intake of radionuclides by the individual.

4-009.05 If the licensee or registrant is unable to obtain a complete record of an individual's current and previously accumulated occupational dose, the licensee or registrant shall assume:

1. In establishing administrative controls under 180 NAC 4-005.07 for the current year, that the allowable dose limit for the individual is reduced by 12.5 mSv (1.25 rem) for each quarter for which records were unavailable and the individual was engaged in activities that could have resulted in occupational radiation exposure; and
2. That the individual is not available for planned special exposures.

4-009.06 The licensee or registrant shall retain the records on Agency Form NRH-1 or equivalent until the Agency terminates each pertinent license or registration requiring this record. The licensee or registrant shall retain records used in preparing Agency Form NRH-1 or equivalent for 3 years after the record is made. This includes records required under the standards for protection against radiation in effect prior to May 30, 1994.

4-010 PLANNED SPECIAL EXPOSURES A licensee or registrant may authorize an adult worker to receive doses in addition to and accounted for separately from the doses received under the limits specified in 180 NAC 4-005 provided that each of the following conditions is satisfied:

1. The licensee or registrant authorizes a planned special exposure only in an exceptional situation when alternatives that might avoid the higher exposure are unavailable or impractical.
2. The licensee or registrant, and employer if the employer is not the licensee or registrant, specifically authorizes the planned special exposure, in writing, before the exposure occurs.
3. Before a planned special exposure, the licensee or registrant ensures that each individual involved is:
  - a. Informed of the purpose of the planned operation; and
  - b. Informed of the estimated doses and associated potential risks and specific radiation levels or other conditions that might be involved in performing the task; and
  - c. Instructed in the measures to be taken to keep the dose ALARA considering other risks that may be present.
4. Prior to permitting an individual to participate in a planned special exposure, the licensee or registrant ascertains prior doses as required by 180 NAC 4-009.02 during the lifetime of the individual for each individual involved.
5. Subject to 180 NAC 4-005.02, the licensee or registrant shall not authorize a planned special exposure that would cause an individual to receive a dose from all planned special exposures and all doses in excess of the limits to exceed:
  - a. The numerical values of any of the dose limits in 180 NAC 4-005.01 in any year; and
  - b. Five times the annual dose limits in 180 NAC 4-005.01 during the individual's lifetime.
6. The licensee or registrant maintains records of the conduct of a planned special exposure in accordance with 180 NAC 4-049 and submits a written report in accordance with 180 NAC 4-058.
7. The licensee or registrant records the best estimate of the dose resulting from the planned special exposure in the individual's record and informs the individual, in writing, of the dose within 30 days from the date of the planned special exposure. The dose from planned special exposures shall not be considered in controlling future occupational dose of the individual pursuant to 180 NAC 4-005.01 but shall be included in evaluations required by 180 NAC 4-010.04 and 4-010.05.

4-011 OCCUPATIONAL DOSE LIMITS FOR MINORS The annual occupational dose limits for minors are 10 percent of the annual occupational dose limits specified for adult workers in 180 NAC 4-005.

4-012 DOSE TO AN EMBRYO/FETUS

4-012.01 The licensee or registrant shall ensure that the dose to an embryo/fetus during the entire pregnancy, due to occupational exposure of a declared pregnant woman, does not exceed 5 mSv (0.5 rem). See 180 NAC 4-050 for record keeping requirements.

4-012.02 The licensee or registrant shall make efforts to avoid substantial variation above a uniform monthly exposure rate to a declared pregnant woman so as to satisfy the limit in 180 NAC 4-012.01.<sup>2</sup>

4-012.03 The dose to an embryo/fetus shall be taken as the sum of:

1. The deep dose equivalent to the declared pregnant woman; and
2. The dose to the embryo/fetus from radionuclides in the embryo/fetus and radionuclides in the declared pregnant woman.

4-012.04 If by the time the woman declares pregnancy to the licensee or registrant, the dose to the embryo/fetus has exceeded 4.5 mSv (0.45 rem), the licensee or registrant shall be deemed to be in compliance with 180 NAC 4-012.01 if the additional dose to the embryo/fetus does not exceed 0.50 mSv (0.05 rem) during the remainder of the pregnancy.

## RADIATION DOSE LIMITS FOR INDIVIDUAL MEMBERS OF THE PUBLIC

### 4-013 DOSE LIMITS FOR INDIVIDUAL MEMBERS OF THE PUBLIC

4-013.01 Each licensee or registrant shall conduct operations so that:

1. The total effective dose equivalent to individual members of the public from the licensed or registered operation does not exceed 1 mSv (0.1 rem) in a year, exclusive of the dose contributions from background radiation, from any medical administration the individual has received, from exposure to individuals administered radioactive material and released in accordance with 180 NAC 7-030, from voluntary participation in medical research programs, and from the licensee's or registrant's disposal of radioactive material into sanitary sewerage in accordance with 180 NAC 4-039, and
2. The dose in any unrestricted area from external sources, exclusive of the dose contributions from patients administered radioactive material and released in accordance with 180 NAC 7-030, does not exceed 0.02 mSv (0.002 rem) in any one hour.

4-013.02 If the licensee or registrant permits members of the public to have access to restricted areas, the limits for members of the public continue to apply to those individuals.

4-013.03 A licensee, registrant, or an applicant for a license or registration may apply for prior Agency authorization to operate up to an annual dose limit for an individual member of the public of 5 mSv (0.5 rem). This application shall include the following information:

1. Demonstration of the need for and the expected duration of operations in excess of the limit in 180 NAC 4-013.01; and

---

<sup>2</sup> The National Council on Radiation Protection and Measurements recommended in NCRP Report No. 91 "Recommendations on Limits for Exposure to Ionizing Radiation" (June 1, 1987) that no more than 0.5 mSv (0.05 rem) to the embryo/fetus be received in any one month.

2. The licensee's or registrant's program to assess and control dose within the 5 mSv (0.5 rem) annual limit; and
3. The procedures to be followed to maintain the dose ALARA.

4-013.04 In addition to the requirements of 180 NAC 4, a licensee or registrant subject to the provisions of the U.S. Environmental Protection Agency's generally applicable environmental radiation standards in 40 CFR 190 shall comply with those standards.

4-013.05 The Agency may impose additional restrictions on radiation levels in unrestricted areas and on the total quantity of radionuclides that a licensee or registrant may release in effluents in order to restrict the collective dose.

#### 4-014 COMPLIANCE WITH DOSE LIMITS FOR INDIVIDUAL MEMBERS OF THE PUBLIC: :

4-014.01 The licensee or registrant shall make or cause to be made surveys of radiation levels in unrestricted areas and radioactive materials in effluents released to unrestricted areas to demonstrate compliance with the dose limits for individual members of the public in 180 NAC 4-013.

4-014.02 A licensee or registrant shall show compliance with the annual dose limit in 180 NAC 4-013 by:

1. Demonstrating by measurement or calculation that the total effective dose equivalent to the individual likely to receive the highest dose from the licensed or registered operation does not exceed the annual dose limit; or
2. Demonstrating that:
  - a. The annual average concentrations of radioactive material released in gaseous and liquid effluents at the boundary of the unrestricted area do not exceed the values specified in Table II of Appendix 180 NAC 4-B; and
  - b. If an individual were continuously present in an unrestricted area, the dose from external sources would not exceed 0.02 mSv (0.002 rem) in an hour and 0.5 mSv (0.05 rem) in a year.

4-014.03 Upon approval from the Agency, the licensee or registrant may adjust the effluent concentration values in Appendix 180 NAC 4-B, Table II, for members of the public, to take into account the actual physical and chemical characteristics of the effluents, such as, aerosol size distribution, solubility, density, radioactive decay equilibrium, and chemical form.

#### RADIOLOGICAL CRITERIA FOR LICENSE TERMINATION

#### 4-015 GENERAL PROVISIONS AND SCOPE

4-015.01 The criteria in 180 NAC 4 apply to the decommissioning of facilities licensed under 180 NAC 3 and 12, as well as other facilities subject to the Agency's jurisdiction under the Act for low-level waste disposal facilities (180 NAC 12), the criteria apply only to ancillary surface facilities that support radioactive waste disposal activities. The criteria do not apply to uranium and thorium recovery facilities or to uranium solution extraction facilities.

4-015.02 The criteria in 180 NAC 4 do not apply to sites which:

1. Have been decommissioned prior to the effective date of the rule in accordance criteria identified in the Site Decommissioning Management Plan Action Plan of April 16, 1992 (57 FR 13389);
2. Have previously submitted and received Agency approval on a license termination plan or decommissioning plan that is compatible with the Site Decommissioning Management Plan Action Plan criteria; or
3. Submit a sufficient License Termination Plan or decommissioning plan within 1 year after the effective date of these regulations and such License Termination Plan or decommissioning plan is approved by the Agency within 2 years after the effective date of these regulations and in accordance with the criteria identified in the Site Decommissioning Management Plan, except that if an Environmental Impact Statement is required in the submittal, there will be a provision for day-for-day extension.

4-015.03 After a site has been decommissioned and the license terminated in accordance with the criteria in 180 NAC 4, the Agency will require additional cleanup only if, based on new information, it determines that the criteria of 180 NAC 4 were not met and residual radioactivity remaining at the site could result in significant threat to public health and safety.

4- When calculating TEDE to the average member of the critical group the license shall determine the peak annual TEDE dose expected within the first 1000 years after decommissioning.

4-016 RADIOLOGICAL CRITERIA FOR UNRESTRICTED USE: A site will be considered acceptable for unrestricted use if the residual radioactivity that is distinguishable from background radiation results in a TEDE to an average member of the critical group that does not exceed 25 mrem (0.25 mSv) per year, including that from groundwater sources of drinking water, and the residual radioactivity has been reduced to levels that are as low as reasonably achievable (ALARA). Determination of the levels which are ALARA must take into account consideration of any detriments, such as deaths from transportation accidents, expected to potentially result from decontamination and waste disposal.

4-017 CRITERIA FOR LICENSE TERMINATION UNDER RESTRICTED CONDITIONS

4-017.01 A site will be considered acceptable for license termination under restricted conditions if:

1. The licensee can demonstrate that further reductions in residual radioactivity necessary to comply with the provisions of 180 NAC 4-016 would result in net public or environmental harm or were not being made because the residual levels associated with restricted conditions are ALARA. Determination of the levels which are ALARA must take into account consideration of any detriments, such as traffic accidents, expected to potentially result from decontamination and waste disposal;
2. The licensee has made provisions for legally enforceable institutional controls that provide reasonable assurance that the TEDE from residual radioactivity

- distinguishable from background to the average member of the critical group will not exceed 25 mrem (0.25 mSv) per year;
3. The licensee has provided sufficient financial assurance to enable an independent third party, including a governmental custodian of a site, to assume and carry out responsibilities for any necessary control and maintenance of the site. Acceptable financial assurance mechanisms are;
    - a. Funds placed into an account segregated from the licensee's assets and outside the licensee's administrative control as described in 180 NAC 3-018.06, item 1;
    - b. Surety method, insurance, or other guarantee method as described in 180 NAC 3-018.06, item 2;
    - c. A statement of intent in the case of Federal, State or local Government licensees, as described in 180 NAC 3-018.06, item 4; or
    - d. When a governmental entity is assuming custody and ownership of a site, an arrangement that is deemed acceptable by such governmental entity.
  4. The licensee has submitted a decommissioning plan or License Termination Plan to the Agency indicating the licensee's intent to decommission in accordance with 180 NAC 3-018.01, and specifying that the licensee intends to decommission by restricting use of the site. The licensee shall document in the License Termination Plan or decommissioning plan how the advice of individuals and institutions in the community who may be affected by the decommissioning has been sought and incorporated, as appropriate, following analysis of that advice.
    - a. Licensees proposing to decommission by restricting use of the site shall seek advice from such affected parties regarding the following matters concerning the proposed decommissioning;
      - (1) Whether provisions for institutional controls proposed by the licensee;
        - (a) Will provide reasonable assurance that the TEDE from residual radioactivity distinguishable from background to the average member of the critical group will not exceed 25 mrem (0.25 mSv) TEDE per year;
        - (b) Will be enforceable; and
        - (c) Will not impose undue burdens on the local community or other affected parties.
      - (2) Whether the licensee has provided sufficient financial assurance to enable an independent third party, including a governmental custodian of a site, to assume and carry out responsibilities for any necessary control and maintenance of the site.
    - b. In seeking advice on the issues identified in 180 NAC 4-017.01, item 4.a., the licensee shall provide for:

- (1) Participation by representatives of a broad cross section of community interests who may be affected by the decommissioning;
  - (2) An opportunity for a comprehensive, collective discussion on the issues by the participants represented; and
  - (3) A publicly available summary of the results of all such discussions, including a description of the individual viewpoints of the participants on the issues and the extent of agreement and disagreement among the participants on the issues; and
5. Residual radioactivity at the site has been reduced so that if the institutional controls were no longer in effect, there is reasonable assurance that the TEDE from residual radioactivity distinguishable from background to the average member of the critical group is as low as reasonably achievable and would not exceed either:
- a. 100 mrem (1 mSv) per year; or (1 mSv) per year; or
  - b. 500 mrem (5 mSv) per year provided the licensee;
    - (1) Demonstrates that further reductions in residual radioactivity necessary to comply with the 100 mrem/y (1 mSv/y) value of 180 NAC 4-017.01, item 5.a. are not technically achievable, would be prohibitively expensive, or would result in net public or environmental harm;
    - (2) Makes provisions for durable institutional controls;
    - (3) Provides sufficient financial assurance to enable a responsible government entity or independent third party, including a governmental custodian of a site both to carry out periodic rechecks of the site, no less frequently than every 5 years to assure that the institutional controls necessary to meet the criteria of 180 NAC 4-017.01, item 2 and to assume and carry out responsibilities for any necessary control and, maintenance of those controls. Acceptable financial assurance mechanisms are those in 180 NAC 4-017.01, item 3.

#### 4-018 ALTERNATE CRITERIA FOR LICENSE TERMINATION

4-018.01 The Agency may terminate a license using alternate criteria greater than the dose criterion of 180 NAC 4-016, 4-017.01, item 2 and 4-017.01, item 4.a.(1)(a), if the licensee:

1. Provides assurance that public health and safety would continue to be protected, and that it is unlikely that the dose from all man-made sources combined, other than medical, would be more than the 1 mSv/y (100 mrem/y) limit of 180 NAC 4-013.01, item 1, by submitting an analysis of possible sources of exposure;
2. Has employed to the extent practical restrictions on site use according to the provisions of 180 NAC 4-017 in minimizing exposures at the site; and
3. Reduces doses to ALARA levels, taking into consideration any detriments such as traffic accidents expected to potentially result from decontamination and waste disposal.

4. Has submitted a decommissioning plan or License Termination Plan to the Agency indicating the licensee's intent to decommission in accordance with 180 NAC 3-019.04 and specifying that the licensee proposes to decommission by use of alternate criteria. The licensee shall document in the decommissioning plan or License Termination Plan how the advice of individuals and institutions in the community who may be affected by the decommissioning has been sought and addressed, as appropriate, following analysis of that advice. In seeking such advice, the licensee shall provide for:
  - a. Participation by representatives of a broad cross section of community interests who may be affected by the decommissioning;
  - b. An opportunity for a comprehensive, collective discussion on the issues by the participants represented; and
  - c. A publicly available summary of the results of all such discussions, including a description of the individual viewpoints of the participants on the issues and the extent of agreement and disagreement among the participants on the issues.

4-018.02 The use of alternate criteria to terminate a license requires the approval of the Agency after consideration of the Agency staff's recommendations that will address any comments provided by the Environmental Protection Agency and any public comments submitted pursuant to 180 NAC 4-019.

#### 4-019 PUBLIC NOTIFICATION AND PUBLIC PARTICIPATION

4-019.01 Upon the receipt of the License Termination Plan or decommissioning plan from the licensee, or a proposal by the licensee for release of a site pursuant to 180 NAC 4-017 and 4-018, or whenever the Agency deems such notice to be in the public interest, the Agency shall:

1. Notify and solicit comments from:
  - a. Local and State governments in the vicinity of the site and any Indian Nation or other indigenous people that have treaty or statutory rights that could be affected by the decommissioning; and
  - b. The Environmental Protection Agency for cases where the licensee proposes to release a site pursuant to 180 NAC 4-018.

4-019.02 Publish a notice in a forum, such as local newspapers, letters to the State or local organizations, or other appropriate forum, that is readily accessible to individuals in the vicinity of the site, and solicit comments from affected parties.

4-020 MINIMIZATION OF CONTAMINATION: Applicants for licenses, other than renewals, shall describe in the application how the facility design and the procedures for operation will minimize, to the extent practicable, contamination of the facility and the environment, facilitate eventual decommissioning, and minimize, to the extent practicable, the generation of radioactive waste.

#### SURVEYS AND MONITORING

4-021 GENERAL

4-021.01 Each licensee or registrant shall make, or cause to be made, surveys that:

1. Are necessary for the licensee or registrant to comply with 180 NAC 4; and
2. Are necessary under the circumstances to evaluate:
  - a. Radiation levels; and
  - b. Concentrations or quantities of radioactive material; and
  - c. The potential radiological hazards that could be present.

4-021.02 The licensee or registrant shall ensure that instruments and equipment used for quantitative radiation measurements (e.g., dose rate and effluent monitoring) are calibrated at intervals not to exceed 12 months for the radiation measured, except when a more frequent interval is specified in another applicable chapter or a license condition.

4-021.03 All personnel dosimeters (except for direct and indirect reading pocket ionization chambers and those dosimeters used to measure the dose to any extremity) that require processing to determine the radiation dose and that are used by licensees and registrants to comply with 180 NAC 4-005, with other applicable provisions of these regulations, or with conditions specified in a license or registration shall be processed and evaluated by a dosimetry processor:

1. Holding current personnel dosimetry accreditation from the National Voluntary Laboratory Accreditation Program (NVLAP) of the National Institute of Standards and Technology; and
2. Approved in this accreditation process for the type of radiation or radiations included in the NVLAP program that most closely approximates the type of radiation or radiations for which the individual wearing the dosimeter is monitored.

4-021.04 The licensee or registrant shall ensure that adequate precautions are taken to prevent a deceptive exposure of an individual monitoring device.

4-022 CONDITIONS REQUIRING INDIVIDUAL MONITORING OF EXTERNAL AND INTERNAL OCCUPATIONAL DOSE Each licensee or registrant shall monitor exposures from sources of radiation at levels sufficient to demonstrate compliance with the occupational dose limits of 180 NAC 4. As a minimum:

4-022.01 Each licensee or registrant shall monitor occupational exposure to radiation and shall supply and require the use of individual monitoring devices by:

1. Adults likely to receive, in 1 year from sources external to the body, a dose in excess of 10 percent of the limits in 180 NAC 4-005.01; and
2. Minors and declared pregnant women likely to receive, in 1 year from sources external to the body, a dose in excess of 10 percent of any of the applicable limits in 180 NAC 4-011 or 4-012; and
3. Individuals entering a high or very high radiation area.

4-022.02 Each licensee or registrant shall monitor, to determine compliance with 180 NAC 4-008, the occupational intake of radioactive material by and assess the committed effective dose equivalent to:

1. Adults likely to receive, in 1 year, an intake in excess of 10 percent of the applicable ALI in Table I, Columns 1 and 2, of Appendix 180 NAC 4-B; and
2. Minors and declared pregnant women likely to receive, in 1 year, a committed effective dose equivalent in excess of 0.5 mSv (0.05 rem).

## CONTROL OF EXPOSURE FROM EXTERNAL SOURCES IN RESTRICTED AREAS

### 4-023 CONTROL OF ACCESS TO HIGH RADIATION AREAS

4-023.01 The licensee or registrant shall ensure that each entrance or access point to a high radiation area has one or more of the following features:

1. A control device that, upon entry into the area, causes the level of radiation to be reduced below that level at which an individual might receive a deep dose equivalent of 1 mSv (0.1 rem) in 1 hour at 30 centimeters from the source of radiation from any surface that the radiation penetrates; or
2. A control device that energizes a conspicuous visible or audible alarm signal so that the individual entering the high radiation area and the supervisor of the activity are made aware of the entry; or
3. Entryways that are locked, except during periods when access to the areas is required, with positive control over each individual entry.

4-023.02 In place of the controls required by 180 NAC 4-023.01 for a high radiation area, the licensee or registrant may substitute continuous direct or electronic surveillance that is capable of preventing unauthorized entry.

4-023.03 The licensee or registrant may apply to the Agency for approval of alternative methods for controlling access to high radiation areas.

4-023.04 The licensee or registrant shall establish the controls required by 180 NAC 4-023.01 and 4-023.03 in a way that does not prevent individuals from leaving a high radiation area.

4-023.05 The licensee or registrant is not required to control each entrance or access point to a room or other area that is a high radiation area solely because of the presence of radioactive materials prepared for transport and packaged and labeled in accordance with the regulations of the U.S. Department of Transportation provided that:

1. The packages do not remain in the area longer than 3 days; and
2. The dose rate at 1 meter from the external surface of any package does not exceed 0.1 mSv (0.01 rem) per hour.

4-023.06 The licensee is not required to control entrance or access to rooms or other areas in hospitals solely because of the presence of patients containing radioactive material, provided that there are personnel in attendance who are taking the necessary precautions to prevent the exposure of individuals to radiation or radioactive material in

excess of the established limits in 180 NAC 4 and to operate within the ALARA provisions of the licensee's or registrant's radiation protection program.

4-023.07 The registrant is not required to control entrance or access to rooms or other areas containing sources of radiation capable of producing a high radiation area as described in 180 NAC 4-023 if the registrant has met all the specific requirements for access and control specified in other applicable 180 NAC Chapters, such as, 180 NAC 5 for industrial radiography, 180 NAC 6 for x-rays in the healing arts, and 180 NAC 9 for particle accelerators.

#### 4-024 CONTROL OF ACCESS TO VERY HIGH RADIATION AREAS

4-024.01 In addition to the requirements in 180 NAC 4-023, the licensee or registrant shall institute measures to ensure that an individual is not able to gain unauthorized or inadvertent access to areas in which radiation levels could be encountered at 5 Gy (500 rad) or more in 1 hour at 1 meter from a source of radiation or any surface through which the radiation penetrates. This requirement does not apply to rooms or areas in which diagnostic x-ray systems are the only source of radiation, or to non-self-shielded irradiators.

4-024.02 The registrant is not required to control entrance or access to rooms or other areas containing sources of radiation capable of producing a very high radiation area as described in 180 NAC 4-024.01 if the registrant has met all the specific requirements for access and control specified in other applicable 180 NAC Chapters, such as, 180 NAC 5 for industrial radiography, 180 NAC 6 for x-rays in the healing arts, and 180 NAC 9 for particle accelerators.

#### 4-025 CONTROL OF ACCESS TO VERY HIGH RADIATION AREAS--IRRADIATORS

4-025.01 180 NAC 4-025 applies to registrants with sources of radiation in non-self-shielded irradiators. 180 NAC 4-025 does not apply to sources of radiation that are used in teletherapy, in industrial radiography, or in completely self-shielded irradiators in which the source of radiation is both stored and operated within the same shielding radiation barrier and, in the designed configuration of the irradiator, is always physically inaccessible to any individual and cannot create high levels of radiation in an area that is accessible to any individual.

4-025.02 Each area in which there may exist radiation levels in excess of 5 Gy (500 rad) in 1 hour at 1 meter from a source of radiation that is used to irradiate materials shall meet the following requirements:

1. Each entrance or access point must be equipped with entry control devices which:
  - a. Function automatically to prevent any individual from inadvertently entering a very high radiation area; and
  - b. Permit deliberate entry into the area only after a control device is actuated that causes the radiation level within the area, from the source of radiation, to be reduced below that at which it would be possible for an

- individual to receive a deep dose equivalent in excess of 1 mSv (0.1 rem) in 1 hour; and
- c. Prevent operation of the source of radiation if it would produce radiation levels in the area that could result in a deep dose equivalent to an individual in excess of 1 mSv (0.1 rem) in 1 hour.
2. Additional control devices shall be provided so that, upon failure of the entry control devices to function as required by 180 NAC 4-025.02, item 1:
    - a. The radiation level within the area, from the source of radiation, is reduced below that at which it would be possible for an individual to receive a deep dose equivalent in excess of 1 mSv (0.1 rem) in 1 hour; and
    - b. Conspicuous visible and audible alarm signals are generated to make an individual attempting to enter the area aware of the hazard and at least one other authorized individual, who is physically present, familiar with the activity, and prepared to render or summon assistance, aware of the failure of the entry control devices.
  3. The registrant shall provide control devices so that, upon failure or removal of physical radiation barriers:
    - a. The radiation level from the source of radiation is reduced below that at which it would be possible for an individual to receive a deep dose equivalent in excess of 1 mSv (0.1 rem) in 1 hour; and
    - b. Conspicuous visible and audible alarm signals are generated to make potentially affected individuals aware of the hazard and the registrant or at least one other individual, who is familiar with the activity and prepared to render or summon assistance, aware of the failure or removal of the physical barrier.
  4. Physical radiation barriers that comprise permanent structural components, such as walls, that have no credible probability of failure or removal in ordinary circumstances need not meet the requirements of 180 NAC 4-025.02, item 3.
  5. Each area shall be equipped with devices that will automatically generate conspicuous visible and audible alarm signals to alert personnel in the area before the source of radiation can be put into operation and in time for any individual in the area to operate a clearly identified control device, which must be installed in the area and which can prevent the source of radiation from being put into operation.
  6. Each area shall be controlled by use of such administrative procedures and such devices as are necessary to ensure that the area is cleared of personnel prior to each use of the source of radiation.
  7. Each area shall be checked by a radiation measurement to ensure that, prior to the first individual's entry into the area after any use of the source of radiation, the radiation level from the source of radiation in the area is below that at which it would be possible for an individual to receive a deep dose equivalent in excess of 1 mSv (0.1 rem) in 1 hour.
  8. The entry control devices required in 180 NAC 4-025.02, item 1 shall have been tested for proper functioning. See 180 NAC 4-053 for record keeping requirements.

- a. Testing shall be conducted prior to initial operation with the source of radiation on any day, unless operations were continued uninterrupted from the previous day; and
  - b. Testing shall be conducted prior to resumption of operation of the source of radiation after any unintentional interruption; and
  - c. The registrant shall submit and adhere to a schedule for periodic tests of the entry control and warning systems.
9. The registrant shall not conduct operations, other than those necessary to place the source of radiation in safe condition or to effect repairs on controls, unless control devices are functioning properly.
10. Entry and exit portals that are used in transporting materials to and from the irradiation area, and that are not intended for use by individuals, shall be controlled by such devices and administrative procedures as are necessary to physically protect and warn against inadvertent entry by any individual through these portals.

4-025.03 Registrants or applicants for registrations for sources of radiation within the purview of 180 NAC 4-025.02 which will be used in a variety of positions or in locations, such as open fields or forests, that make it impracticable to comply with certain requirements of 180 NAC 4-025.02, such as those for the automatic control of radiation levels, may apply to the Agency for approval of alternative safety measures. Alternative safety measures shall provide personnel protection at least equivalent to those specified in 180 NAC 4-025.02. At least one of the alternative measures shall include an entry-preventing interlock control based on a measurement of the radiation that ensures the absence of high radiation levels before an individual can gain access to the area where such sources of radiation are used.

4-025.04 The entry control devices required by 180 NAC 4-025.02 and 4-025.03 shall be established in such a way that no individual will be prevented from leaving the area.

#### RESPIRATORY PROTECTION AND CONTROLS TO RESTRICT INTERNAL EXPOSURE IN RESTRICTED AREAS

4-026 USE OF PROCESS OR OTHER ENGINEERING CONTROLS: The licensee or registrant shall use, to the extent practical, process or other engineering controls (for example, containment or ventilation) to control the concentrations of radioactive material in air.

4-027 USE OF OTHER CONTROLS: When it is not practical to apply process or other engineering controls to control the concentrations of radioactive material in air to values below those that define an airborne radioactivity area, the licensee or registrant shall, consistent with maintaining the total effective dose equivalent ALARA, increase monitoring and limit intakes by one or more of the following means:

1. Control of access; or
2. Limitation of exposure times; or
3. Use of respiratory protection equipment; or
4. Other controls.

4-028 USE OF INDIVIDUAL RESPIRATORY PROTECTION EQUIPMENT

4-028.01 If the licensee uses respiratory protection equipment to limit intakes pursuant to 180 NAC 4-027:

1. Except as provided in 180 NAC 4-028.01, item 2, the licensee shall use only respiratory protection equipment that is tested and certified or had certification extended by the National Institute for Occupational Safety and Health and the Mine Safety and Health Administration.
2. If the licensee wishes to use equipment that has not been tested or certified by the National Institute for Occupational Safety and Health and the Mine Safety and Health Administration, has not had certification extended by the National Institute for Occupational Safety and Health and the Mine Safety and Health Administration, or for which there is no schedule for testing or certification, the licensee or registrant shall submit an application for authorized use of that equipment, including a demonstration by testing, or a demonstration on the basis of reliable test information, that the material and performance characteristics of the equipment are capable of providing the proposed degree of protection under anticipated conditions of use.
3. The licensee shall implement and maintain a respiratory protection program that includes:
  - a. Air sampling sufficient to identify the potential hazard, permit proper equipment selection, and estimate exposures; and
  - b. Surveys and bioassays, as appropriate, to evaluate actual intakes; and
  - c. Testing of respirators for operability immediately prior to each use; and
  - d. Written procedures regarding selection, fitting, issuance, maintenance, and testing of respirators, including testing for operability immediately prior to each use; supervision and training of personnel; monitoring, including air sampling and bioassays; and record keeping; and
  - e. Determination by a physician prior to initial fitting of respirators, and either every 12 months thereafter or periodically at a frequency determined by a physician, that the individual user is medically fit to use the respiratory protection equipment.
4. The licensee shall issue a written policy statement on respirator usage covering:
  - a. The use of process or other engineering controls, instead of respirators; and
  - b. The routine, nonroutine, and emergency use of respirators; and
  - c. The length of periods of respirator use and relief from respirator use.
5. The licensee shall advise each respirator user that the user may leave the area at any time for relief from respirator use in the event of equipment malfunction, physical or psychological distress, procedural or communication failure, significant deterioration of operating conditions, or any other conditions that might require such relief.
6. The licensee shall use respiratory protection equipment within the equipment manufacturer's expressed limitations for type and mode of use and shall provide

proper visual, communication, and other special capabilities (such as adequate skin protection) when needed.

4-028.02 When estimating exposure of individuals to airborne radioactive materials, the licensee may make allowance for respiratory protection equipment used to limit intakes pursuant to 180 NAC 4-027, provided that the following conditions, in addition to those in 180 NAC 4-028.01, are satisfied:

1. The licensee selects respiratory protection equipment that provides a protection factor, specified in Appendix 180 NAC 4-A, greater than the multiple by which peak concentrations of airborne radioactive materials in the working area are expected to exceed the values specified in Appendix 180 NAC 4-B, Table I, Column 3. However, if the selection of respiratory protection equipment with a protection factor greater than the peak concentration is inconsistent with the goal specified in 180 NAC 4-027 of keeping the total effective dose equivalent ALARA, the licensee may select respiratory protection equipment with a lower protection factor provided that such a selection would result in a total effective dose equivalent that is ALARA. The concentration of radioactive material in the air that is inhaled when respirators are worn may be initially estimated by dividing the average concentration in air, during each period of uninterrupted use, by the protection factor. If the exposure is later found to be greater than initially estimated, the corrected value shall be used; if the exposure is later found to be less than initially estimated, the corrected value may be used.
2. The licensee shall obtain authorization from the Agency before assigning respiratory protection factors in excess of those specified in Appendix 180 NAC 4-A. The Agency may authorize a licensee to use higher protection factors on receipt of an application that:
  - a. Describes the situation for which a need exists for higher protection factors, and
  - b. Demonstrates that the respiratory protection equipment provides these higher protection factors under the proposed conditions of use.

4-028.03 In an emergency, the licensee shall use as emergency equipment only respiratory protection equipment that has been specifically certified or had certification extended for emergency use by the National Institute for Occupational Safety and Health and the Mine Safety and Health Administration.

4-028.04 The licensee shall notify the Agency in writing at least 30 days before the date that respiratory protection equipment is first used pursuant to either 180 NAC 4-028.01 or 4-028.02.

#### STORAGE AND CONTROL OF LICENSED OR REGISTERED SOURCES OF RADIATION

4-029 SECURITY OF STORED SOURCES OF RADIATION: The licensee or registrant shall secure from unauthorized removal or access licensed or registered sources of radiation that are stored in unrestricted areas.

4-030 CONTROL OF SOURCES OF RADIATION NOT IN STORAGE

4-030.01 The licensee or registrant shall control and maintain constant surveillance of licensed or registered radioactive material that is in an unrestricted area and that is not in storage.

4-030.02 The registrant shall maintain control of registered radiation machines that are in an unrestricted area and that are not in storage.


PRECAUTIONARY PROCEDURES

4-031 CAUTION SIGNS

4-031.01 Standard Radiation Symbol: Unless otherwise authorized by the Agency, the symbol prescribed by 180 NAC 4-031 shall use the colors magenta, or purple, or black on yellow background. The symbol prescribed is the three-bladed design as follows:

RADIATION SYMBOL

1. Cross-hatched area is to be magenta, or purple, or black, and
2. The background is to be yellow.

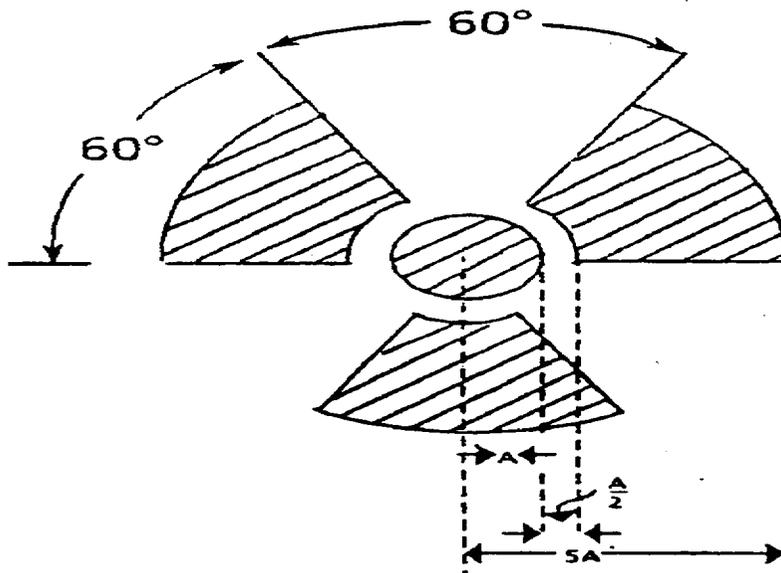

4-031.02 Exception to Color Requirements for Standard Radiation Symbol: Notwithstanding the requirements of 180 NAC 4-031.01, licensees or registrants are authorized to label sources, source holders, or device components containing sources of radiation that are subjected to high temperatures, with conspicuously etched or stamped radiation caution symbols and without a color requirement.

4-031.03 Additional Information on Signs and Labels: In addition to the contents of signs and labels prescribed in 180 NAC 4, the licensee or registrant shall provide, on or near the

required signs and labels, additional information, as appropriate, to make individuals aware of potential radiation exposures and to minimize the exposures.

#### 4-032 POSTING REQUIREMENTS

4-032.01 Posting of Radiation Areas: The licensee or registrant shall post each radiation area with a conspicuous sign or signs bearing the radiation symbol and the words "CAUTION, RADIATION AREA."

4-032.02 Posting of High Radiation Areas: The licensee or registrant shall post each high radiation area with a conspicuous sign or signs bearing the radiation symbol and the words "CAUTION, HIGH RADIATION AREA" or "DANGER, HIGH RADIATION AREA."

4-032.03 Posting of Very High Radiation Areas: The licensee or registrant shall post each very high radiation area with a conspicuous sign or signs bearing the radiation symbol and words "GRAVE DANGER, VERY HIGH RADIATION AREA."

4-032.04 Posting of Airborne Radioactivity Areas: The licensee or registrant shall post each airborne radioactivity area with a conspicuous sign or signs bearing the radiation symbol and the words "CAUTION, AIRBORNE RADIOACTIVITY AREA" or "DANGER, AIRBORNE RADIOACTIVITY AREA."

4-032.05 Posting of Areas or Rooms in which Licensed or Registered Material is Used or Stored: The licensee or registrant shall post each area or room in which there is used or stored an amount of licensed or registered material exceeding 10 times the quantity of such material specified in Appendix 180 NAC 4-C with a conspicuous sign or signs bearing the radiation symbol and the words "CAUTION, RADIOACTIVE MATERIAL(S)" or "DANGER, RADIOACTIVE MATERIAL(S)."

#### 4-033 EXCEPTIONS TO POSTING REQUIREMENT:

4-033.01 A licensee or registrant is not required to post caution signs in areas or rooms containing sources of radiation for periods of less than 8 hours, if each of the following conditions is met:

1. The sources of radiation are constantly attended during these periods by an individual who takes the precautions necessary to prevent the exposure of individuals to sources of radiation in excess of the limits established in 180 NAC 4; and
2. The area or room is subject to the licensee's or registrant's control.

4-033.02 Rooms or other areas in hospitals that are occupied by patients are not required to be posted with caution signs pursuant to 180 NAC 4-032 provided that the patient could be released from licensee control pursuant to 180 NAC 7-030.

4-033.03 A room or area is not required to be posted with a caution sign because of the presence of a sealed source provided the radiation level at 30 centimeters from the surface of the sealed source container or housing does not exceed 0.05 mSv (0.005 rem) per hour.

4-033.04 A room or area is not required to be posted with a caution sign because of the presence of radiation machines used solely for diagnosis in the healing arts.

4-034 LABELING CONTAINERS AND RADIATION MACHINES

4-034.01 The licensee or registrant shall ensure that each container of licensed or registered material bears a durable, clearly visible label bearing the radiation symbol and the words "CAUTION, RADIOACTIVE MATERIAL" or "DANGER, RADIOACTIVE MATERIAL." The label shall also provide information (such as the radionuclides present, an estimate of the quantity of radioactivity, the date for which the activity is estimated, radiation levels, kinds of materials, and mass enrichment) to permit individuals handling or using the containers, or working in the vicinity of the containers, to take precautions to avoid or minimize exposures.

4-034.02 Each licensee or registrant shall, prior to removal or disposal of empty uncontaminated containers to unrestricted areas, remove or deface the radioactive material label or otherwise clearly indicate that the container no longer contains radioactive materials.

4-034.03 Each registrant shall ensure that each radiation machine is labeled in a conspicuous manner which cautions individuals that radiation is produced when it is energized.

4-035 EXEMPTIONS TO LABELING REQUIREMENTS: A licensee or registrant is not required to label:

4-035.01 Containers holding licensed or registered material in quantities less than the quantities listed in Appendix 180 NAC 4-C; or

4-035.02 Containers holding licensed or registered material in concentrations less than those specified in Table III of Appendix 180 NAC 4-B; or

4-035.03 Containers attended by an individual who takes the precautions necessary to prevent the exposure of individuals in excess of the limits established by 180 NAC 4; or

4-035.04 Containers when they are in transport and packaged and labeled in accordance with the regulations of the U.S. Department of Transportation<sup>3</sup>; or

4-035.05 Containers that are accessible only to individuals authorized to handle or use them, or to work in the vicinity of the containers, if the contents are identified to these individuals by a readily available written record. Examples of containers of this type are containers in locations such as water-filled canals, storage vaults, or hot cells. The record shall be retained as long as the containers are in use for the purpose indicated on the record; or

---

<sup>3</sup> Labeling of packages containing radioactive materials is required by the U.S. Department of Transportation if the amount and type of radioactive material exceeds the limits for an excepted quantity or article as defined and limited by U.S. Department of Transportation regulations 49 CFR 173.403(m) and (w) and 173.421-424.

4-035.06 Installed manufacturing or process equipment, such as piping and tanks.

4-036 PROCEDURES FOR RECEIVING AND OPENING PACKAGES

4-036.01 Each licensee who expects to receive a package containing quantities of radioactive material in excess of a Type A quantity, as defined in 180 NAC 13-002 and Appendix A of 180 NAC 13, shall make arrangements to receive:

1. The package when the carrier offers it for delivery; or
2. Notification of the arrival of the package at the carrier's terminal and to take possession of the package expeditiously.

4-036.02 Each licensee shall:

1. Monitor the external surfaces of a labeled<sup>4</sup> package for radioactive contamination unless the package contains only radioactive material in the form of a gas or in special form as defined in 180 NAC 1-002; and
2. Monitor the external surfaces of a labeled<sup>4</sup> package for radiation levels unless the package contains quantities of radioactive material that are less than or equal to the Type A quantity, as defined in 180 NAC 13-002vc and Appendix A to 180 NAC 13; and
3. Monitor all packages known to contain radioactive material for radioactive contamination and radiation levels if there is evidence of degradation of package integrity, such as packages that are crushed, wet, or damaged.

4-036.03 The licensee shall perform the monitoring required by 180 NAC 4-036.02 as soon as practical after receipt of the package, but not later than 3 hours after the package is received at the licensee's or registrant's facility if it is received during the licensee's or registrant's normal working hours, or not later than 3 hours from the beginning of the next working day if it is received after working hours.

4-036.04 The licensee shall immediately notify the final delivery carrier and, by telephone and telegram, mailgram, or facsimile, the Agency when:

1. Removable radioactive surface contamination exceeds the limits of 180 NAC 13-015.08; or
2. External radiation levels exceed the limits of 180 NAC 13-015.09 and 13-015.10

4-036.05 Each licensee shall:

1. Establish, maintain, and retain written procedures for safely opening packages in which radioactive material is received; and
2. Ensure that the procedures are followed and that due consideration is given to special instructions for the type of package being opened.

---

<sup>4</sup> Labeled with a Radioactive White I, Yellow II, or Yellow III label as specified in U.S. Department of Transportation regulations, 49 CFR 172.403 and 172.436-440.

4-036.06 Licensees transferring special form sources in vehicles owned or operated by the licensee to and from a work site are exempt from the contamination monitoring requirements of 180 NAC 4-036.02, but are not exempt from the monitoring requirement in 180 NAC 4-036.02 for measuring radiation levels that ensures that the source is still properly lodged in its shield.

## WASTE DISPOSAL

### 4-037 GENERAL REQUIREMENTS

4-037.01 A licensee shall dispose of licensed material only:

1. By transfer to an authorized recipient as provided in 180 NAC 4-042 or in 180 NAC 3, 12 or 19, or to the U.S. Department of Energy; or
2. By decay in storage; or
3. By release in effluents within the limits in 180 NAC 4-13; or
4. As authorized pursuant to 180 NAC 4-038 through 4-041.

4-037.02 A person shall be specifically licensed to receive waste containing licensed material from other persons for:

1. Treatment prior to disposal; or
2. Treatment or disposal by incineration; or
3. Decay in storage; or
4. Management at a facility licensed pursuant to 180 NAC 12; or
5. Storage until transferred to a storage or disposal facility authorized to receive the waste.

### 4-038 METHOD FOR OBTAINING APPROVAL OF PROPOSED DISPOSAL PROCEDURES:

A licensee or applicant for a license may apply to the Agency for approval of proposed procedures, not otherwise authorized in these regulations, to dispose of licensed material generated in the licensee's operations. Each application shall include:

1. A description of the waste containing licensed or registered material to be disposed of, including the physical and chemical properties that have an impact on risk evaluation, and the proposed manner and conditions of waste disposal; and
2. An analysis and evaluation of pertinent information on the nature of the environment; and
3. The nature and location of other potentially affected facilities; and
4. Analyses and procedures to ensure that doses are maintained ALARA and within the dose limits in 180 NAC 4.

### 4-039 DISPOSAL BY RELEASE INTO SANITARY SEWERAGE

4-039.01 A licensee may discharge licensed material into sanitary sewerage if each of the following conditions is satisfied:

1. The material is readily soluble, or is readily dispersible biological material, in water; and
2. The quantity of licensed radioactive material that the licensee releases into the sewer in 1 month divided by the average monthly volume of water released into the sewer by the licensee does not exceed the concentration listed in Table III of Appendix 180 NAC 4-B; and
3. If more than one radionuclide is released, the following conditions must also be satisfied:
  - a. The licensee shall determine the fraction of the limit in Table III of Appendix 180 NAC 4-B represented by discharges into sanitary sewerage by dividing the actual monthly average concentration of each radionuclide released by the licensee or registrant into the sewer by the concentration of that radionuclide listed in Table III of Appendix 180 NAC 4-B; and
  - b. The sum of the fractions for each radionuclide required by 180 NAC 4-039.01, item 3.a. does not exceed unity; and
4. The total quantity of licensed radioactive material that the licensee releases into the sanitary sewerage system in a year does not exceed 185 GBq (5 Ci) of hydrogen-3, 37 GBq (1 Ci) of carbon-14, and 37 GBq (1 Ci) of all other radioactive materials combined.

4-039.02 Excreta from individuals undergoing medical diagnosis or therapy with radioactive material are not subject to the limitations contained in 180 NAC 4-039.01.

4-040 TREATMENT OR DISPOSAL BY INCENERATION: A licensee may treat or dispose of licensed material by incineration only in the amounts and forms specified in 180 NAC 4-041 or as specifically approved by the Agency pursuant to 180 NAC 4-038.

#### 4-041 DISPOSAL OF SPECIFIC WASTES

4-041.01 A licensee may dispose of the following licensed material as if it were not radioactive:

1. 1.85 kBq (0.05  $\mu$ Ci), or less, of Hydrogen-3, Carbon-14 or Iodine-125 per gram of medium used for liquid scintillation counting; and
2. 1.85 kBq (0.05  $\mu$ Ci), or less, of Hydrogen-3, or Carbon-14 or Iodine-125 per gram of animal tissue, averaged over the weight of the entire animal.

4-041.02 A licensee shall not dispose of tissue pursuant to 180 NAC 4-041.01, item 2 in a manner that would permit its use either as food for humans or as animal feed.

4-041.03 The licensee shall maintain records in accordance within 180 NAC 4-052.

4-041.04 Any licensee may, upon Agency approval of procedures required in 180 NAC 4-041.06, dispose of radioactive material included in Appendix 180 NAC 4-G, provided that it does not exceed the concentration and total curie limits contained therein. Any radioactive material included in Appendix 180 NAC 4-G may be disposed of at a city or county landfill facility authorized to receive the radioactive material.

4-041.05 Each licensee who disposes of radioactive material described in 180 NAC 4-041.01 or 4-041.04 shall:

1. Make surveys adequate to assure that the limits of 180 NAC 4-041.01 or 4-041.04 are not exceeded; and
2. Remove or otherwise obliterate all labels, tags, or other markings which would indicate that the material or its contents is radioactive.

4-041.06 Prior to the initiation of disposals authorized by 180 NAC 4-041.04, a licensee shall submit procedures to the Agency for:

1. The physical delivery of the material to the disposal site, the physical placing of the material in the disposal location and that the material is properly covered;
2. Surveys to be performed for compliance with 180 NAC 4-041.05, item 1;
3. Maintaining secure packaging during transportation to the site;
4. Maintaining records of disposals made under 180 NAC 4-041.04; and
5. Written authorization by the landfill operator agreeing to such disposal.

4-041.07 Nothing in 180 NAC 4, however, relieves the licensee of maintaining records showing the receipt, transfer, and disposal of such radioactive material as specified pursuant to 180 NAC 1-004.

4-041.08 Nothing in 180 NAC 4 relieves the licensee from complying with other applicable federal, state or local regulations governing any other toxic or hazardous property of these materials.

4-041.09 Radioactive material disposed of under 180 NAC 4 is not subject to the requirements of 180 NAC 13.

#### 4-042 TRANSFER FOR DISPOSAL AND MANIFESTS

4-042.01 The requirements of 180 NAC 4 and Appendix 180 NAC 4-D are designed to:

1. Control transfers of low-level radioactive waste by any waste generator, waste collector, or waste processor license, as defined in 180 NAC 4, who ships low-level waste either directly, or indirectly through a waste collector or waste processor, to a licensed low-level waste disposal facility.
2. Establish a manifest tracking system; and
3. Supplement existing requirements concerning transfers and recordkeeping for those waste.

4-042.02 All affected licensees must use Appendix 180 NAC 4-D and comply with 180 NAC 4-042.02, item 2.

1. Each shipment of radioactive waste intended for disposal at a licensed low-level radioactive waste disposal facility must be accompanied by a shipment manifest as specified in Section I of Appendix 180 NAC 4-D.
2. Any licensee shipping radioactive waste intended for ultimate disposal at a licensed land disposal facility must document the information required on the Agency's Uniform Low-Level Radioactive Waste Manifest and transfer this

recorded manifest information to the intended consignee in accordance with Appendix 180 NAC 4-D.

4-042.03 Each shipment manifest must include a certification by waste generator as specified in Section II of Appendix 180 NAC 4-D.

4-042.04 Each person involved in the transfer for disposal and disposal of waste, including the waste generator, waste collector, waste processor, and disposal facility operator, shall comply with the requirements specified in Section III of Appendix 180 NAC 4-D.

4-043 COMPLIANCE WITH ENVIRONMENTAL AND HEALTH PROTECTION REGULATIONS: Nothing in 180 NAC 4-037 through 4-042 relieves the licensee from complying with other applicable Federal, State, and local regulations governing any other toxic or hazardous properties of materials that may be disposed of pursuant to 180 NAC 4-037 through 4-042.

## RECORDS

### 4-044 GENERAL PROVISIONS

4-044.01 Each licensee or registrant shall use the SI units becquerel, gray, sievert and coulomb per kilogram, or the special units curie, rad, rem, and roentgen, including multiples and subdivisions, and shall clearly indicate the units of all quantities on records required by 180 NAC 4.

4-044.02 Notwithstanding the requirements of 180 NAC 4-044.01, when recording information on shipment manifests, as required in 180 NAC 4-042.02, item 1, information must be recorded in the International System of Units (SI) or in SI and units as specified in 180 NAC 4-044.01.

4-044.03 The licensee or registrant shall make a clear distinction among the quantities entered on the records required by 180 NAC 4, such as, total effective dose equivalent, total organ dose equivalent, shallow dose equivalent, eye dose equivalent, deep dose equivalent, or committed effective dose equivalent.

### 4-045 RECORDS OF RADIATION PROTECTION PROGRAMS

4-045.01 Each licensee or registrant shall maintain records of the radiation protection program, including:

1. The provisions of the program; and
2. Audits and other reviews of program content and implementation.

4-045.02 The licensee or registrant shall retain the records required by 180 NAC 4-045.01, item 1 until the Agency terminates each pertinent license or registration requiring the record. The licensee or registrant shall retain the records required by 180 NAC 4-045.01, item 2 for 3 years after the record is made.

### 4-046 RECORDS OF SURVEYS

4-046.01 Each licensee or registrant shall maintain records showing the results of surveys and calibrations required by 180 NAC 4-021 and 4-036.02. The licensee or registrant shall retain these records for 3 years after the record is made.

4-046.02 The licensee or registrant shall retain each of the following records until the Agency terminates each pertinent license or registration requiring the record:

1. Records of the results of surveys to determine the dose from external sources of radiation used, in the absence of or in combination with individual monitoring data, in the assessment of individual dose equivalents. This includes those records of results of surveys to determine the dose from external sources and used, in the absence of or in combination with individual monitoring data, in the assessment of individual dose equivalents required under the standards for protection against radiation in effect prior to May 30, 1994; and
2. Records of the results of measurements and calculations used to determine individual intakes of radioactive material and used in the assessment of internal dose. This includes those records of the results of measurements and calculations used to determine individual intakes of radioactive material and used in the assessment of internal dose required under the standards for protection against radiation in effect prior to May 30, 1994.
3. Records showing the results of air sampling, surveys, and bioassays required pursuant to 180 NAC 4-028.01, item 3.a. This includes those records showing the results of air sampling, surveys and bioassays required under the standards for protection against radiation in effect prior to May 30, 1994; and
4. Records of the results of measurements and calculations used to evaluate the release of radioactive effluents to the environment. This includes those records of the results of measurements and calculations used to evaluate the release of radioactive effluents to the environment required under the standards for protection against radiation in effect prior to May 30, 1994.

4-047 RECORDS OF TESTS FOR LEAKAGE OR CONTAMINATION OF SEALED SOURCES:

Records of tests for leakage or contamination of sealed sources required by 180 NAC 1-011 shall be kept in units of becquerel or microcuries and maintained for inspection by the Agency for 5 years after the records are made.

4-048 RECORDS OF PRIOR OCCUPATIONAL DOSE: For each individual who is likely to receive in a year, an occupational dose requiring monitoring pursuant to 180 NAC 4-022 the licensee or registrant shall: Retain the records of prior occupational dose and exposure history as specified in 180 NAC 4-009 on Agency Form NRH-1 or equivalent until the Agency terminates each pertinent license or registration requiring this record. The licensee or registrant shall retain records used in preparing Agency Form NRH-1 for 3 years after the record is made.

4-049 RECORDS OF PLANNED SPECIAL EXPOSURES

4-049.01 For each use of the provisions of 180 NAC 4-010 for planned special exposures, the licensee or registrant shall maintain records that describe:

1. The exceptional circumstances requiring the use of a planned special exposure; and

2. The name of the management official who authorized the planned special exposure and a copy of the signed authorization; and
3. What actions were necessary; and
4. Why the actions were necessary; and
5. What precautions were taken to assure that doses were maintained ALARA; and
6. What individual and collective doses were expected to result; and
7. The doses actually received in the planned special exposure.

4-049.02 The licensee or registrant shall retain the records until the Agency terminates each pertinent license or registration requiring these records.

#### 4-050 RECORDS OF INDIVIDUAL MONITORING RESULTS

4-050.1 Recordkeeping Requirement. Each licensee or registrant shall maintain records of doses received by all individuals for whom monitoring was required pursuant to 180 NAC 4-022 and records of doses received during planned special exposures, accidents, and emergency conditions. Assessments of dose equivalent and records made using units in effect before the effective date ~~October 30, 1996~~ of 180 NAC 4 need not be changed. These records shall include, when applicable:

1. The deep dose equivalent to the whole body, eye dose equivalent, shallow dose equivalent to the skin, and shallow dose equivalent to the extremities; and
2. The estimated intake of radionuclides, see 180 NAC 4-006; and
3. The committed effective dose equivalent assigned to the intake of radionuclides; and
4. The specific information used to calculate the committed effective dose equivalent pursuant to 180 NAC 4-008.03; and
5. The total effective dose equivalent when required by 180 NAC 4-006; and
6. The total of the deep dose equivalent and the committed dose to the organ receiving the highest total dose.

4-050.02 Recordkeeping Frequency. The licensee or registrant shall make entries of the records specified in 180 NAC 4-050.01 at intervals not to exceed 1 year.

4-050.03 Recordkeeping Format. The licensee or registrant shall maintain the records specified in 180 NAC 4-050.01 on Agency Form NRH-2, in accordance with the instructions for Agency Form NRH-2, or in clear and legible records containing all the information required by Agency Form NRH-2.

4-050.04 The licensee or registrant shall maintain the records of dose to an embryo/fetus with the records of dose to the declared pregnant woman. The declaration of pregnancy, including the estimated date of conception, shall also be kept on file, but may be maintained separately from the dose records.

4-050.05 The licensee or registrant shall retain each required form or record until the Agency terminates each pertinent license or registration requiring the record.

#### 51- RECORDS OF DOSE TO INDIVIDUAL MEMBERS OF THE PUBLIC

4-051.01 Each licensee or registrant shall maintain records sufficient to demonstrate compliance with the dose limit for individual members of the public. See 180 NAC 4-013.

4-051.02 The licensee or registrant shall retain the records required by 180 NAC 4-051 until the Agency terminates each pertinent license or registration requiring the record.

#### 4-052 RECORDS OF WASTE DISPOSAL

4-052.01 Each licensee shall maintain records of the disposal of licensed materials made pursuant to 180 NAC 4-038 through 4-041 and 180 NAC 12, and disposal by burial in soil, including burials authorized before August 22, 1982.<sup>4</sup>

4-052.02 The licensee shall retain the records required by 180 NAC 4-052.01 until the Agency terminates each pertinent license requiring the record. Requirements for disposition of these records, prior to license termination, are located in 180 NAC 3-030 for activities licensed under 180 NAC 4. This includes records required under the standards for protection against radiation in effect prior to May 30, 1994.

#### 4-053 RECORDS OF TESTING ENTRY CONTROL DEVICES FOR VERY HIGH RADIATION AREAS

1- Each licensee or registrant shall maintain records of tests made pursuant to 180 NAC 4-025.02, item 8 on entry control devices for very high radiation areas. These records must include the date, time, and results of each such test of function.

4-053.02 The licensee or registrant shall retain the records required by 180 NAC 4-053.01 for 3 years after the record is made.

4-054 FORM OF RECORDS: Each record required by 180 NAC 4 shall be legible throughout the specified retention period. The record shall be the original or a reproduced copy or a microform, provided that the copy or microform is authenticated by authorized personnel and that the microform is capable of producing a clear copy throughout the required retention period. The record may also be stored in electronic media with the capability for producing legible, accurate, and complete records during the required retention period. Records, such as letters, drawings, and specifications, shall include all pertinent information, such as stamps, initials, and signatures. The licensee or registrant shall maintain adequate safeguards against tampering with and loss of records.

### REPORTS

#### 4-055 REPORTS OF STOLEN, LOST, OR MISSING LICENSED OR REGISTERED SOURCES OF RADIATION

4-055.01 Telephone Reports. Each licensee or registrant shall report to the Agency by telephone as follows:

---

<sup>4</sup> <sup>4</sup>A previous 180 NAC 1-004.23, (January 1974) permitted burial of small quantities of licensed material in soil before August 22, 1982, without specific Agency authorization.

1. Immediately after its occurrence becomes known to the licensee or registrant, stolen, lost, or missing licensed radioactive material in an aggregate quantity equal to or greater than 1,000 times the quantity specified in Appendix 180 NAC 4-C under such circumstances that it appears to the licensee that an exposure could result to individuals in unrestricted areas; or
2. Within 30 days after its occurrence becomes known to the licensee or registrant, lost, stolen, or missing licensed radioactive material in an aggregate quantity greater than 10 times the quantity specified in Appendix 180 NAC 4-C that is still missing.
3. Immediately after its occurrence becomes known to the registrant, a stolen, lost, or missing radiation machine.

4-055.02 Written Reports. Each licensee or registrant required to make a report pursuant to 180 NAC 4-055.01 shall, within 30 days after making the telephone report, make a written report to the Agency setting forth the following information:

1. A description of the licensed or registered source of radiation involved, including, for radioactive material, the kind, quantity, and chemical and physical form; and, for radiation machines, the manufacturer, model and serial number, type and maximum energy of radiation emitted;
2. A description of the circumstances under which the loss or theft occurred; and
3. A statement of disposition, or probable disposition, of the licensed or registered source of radiation involved; and
4. Exposures of individuals to radiation, circumstances under which the exposures occurred, and the possible total effective dose equivalent to persons in unrestricted areas; and
5. Actions that have been taken, or will be taken, to recover the source of radiation; and
6. Procedures or measures that have been, or will be, adopted to ensure against a recurrence of the loss or theft of licensed or registered sources of radiation.

4-055.03 Subsequent to filing the written report, the licensee or registrant shall also report additional substantive information on the loss or theft within 30 days after the licensee or registrant learns of such information.

4-055.04 The licensee or registrant shall prepare any report filed with the Agency pursuant to 180 NAC 4-055 so that names of individuals who may have received exposure to radiation are stated in a separate and detachable portion of the report.

#### 4-056 NOTIFICATION OF INCIDENTS

4-056.01 Immediate Notification: Notwithstanding other requirements for notification, each licensee or registrant shall immediately report each event involving a source of radiation possessed by the licensee or registrant that may have caused or threatens to cause any of the following conditions:

1. An individual to receive:
  - a. A total effective dose equivalent of 0.25 Sv (25 rem) or more; or

- b. eye dose equivalent of 0.75 Sv (75 rem) or more; or
  - c. a shallow dose equivalent to the skin or extremities of 2.5 Gy (250 rad) or more; or
2. The release of radioactive material, inside or outside of a restricted area, so that, had an individual been present for 24 hours, the individual could have received an intake five times the occupational ALI. This provision does not apply to locations where personnel are not normally stationed during routine operations, such as hot-cells or process enclosures.

4-056.02 Twenty-Four Hour Notification: Each licensee or registrant shall, within 24 hours of discovery of the event, report to the Agency each event involving loss of control of a licensed or registered source of radiation possessed by the licensee or registrant that may have caused, or threatens to cause, any of the following conditions:

1. An individual to receive, in a period of 24 hours:
  - a. A total effective dose equivalent exceeding 0.05 Sv (5 rem); or
  - b. An eye dose equivalent exceeding 0.15 Sv (15 rem); or
  - c. A shallow dose equivalent to the skin or extremities exceeding 0.5 Sv (50 rem); or
2. The release of radioactive material, inside or outside of a restricted area, so that, had an individual been present for 24 hours, the individual could have received an intake in excess of one occupational ALI. This provision does not apply to locations where personnel are not normally stationed during routine operations, such as hot-cells or process enclosures).

4-056.03 The licensee or registrant shall prepare each report filed with the Agency pursuant to 180 NAC 4-056 so that names of individuals who have received exposure to sources of radiation are stated in a separate and detachable portion of the report.

4-056.04 Licensees or registrants shall make the reports required by 180 NAC 4-056.01 and 4-056.02 by initial contact by telephone to the Agency and shall confirm the initial contact by telegram, mailgram, or electronic media to the Agency.

4-056.05 The provisions of 180 NAC 4-056 do not apply to doses that result from planned special exposures, provided such doses are within the limits for planned special exposures and are reported pursuant to 180 NAC 4-058.

#### 4-057 REPORTS OF EXPOSURES, RADIATION LEVELS, AND CONCENTRATIONS OF RADIOACTIVE MATERIAL EXCEEDING THE CONSTRAINTS OR LIMITS

4-057.01 Reportable Events: In addition to the notification required by 180 NAC 4-056, each licensee or registrant shall submit a written report within 30 days after learning of any of the following occurrences:

1. Any incident for which notification is required by 180 NAC 4-056; or
2. Doses in excess of any of the following:

- a. The occupational dose limits for adults in 180 NAC 4-005; or
  - b. The occupational dose limits for a minor in 180 NAC 4-011; or
  - c. The limits for an embryo/fetus of a declared pregnant woman in 180 NAC 4-012; or
  - d. The limits for an individual member of the public in 180 NAC 4-013; or
  - e. Any applicable limit in the license; or
  - f. The ALARA constraints for air emissions established under 180 NAC 4-004.04; or
3. Levels of radiation or concentrations of radioactive material in:
- a. A restricted area in excess of applicable limits in the license; or
  - b. An unrestricted area in excess of 10 times the applicable limit set forth in 180 NAC 4 or in the license, whether or not involving exposure of any individual in excess of the limits in 180 NAC 4-013; or
4. For licensees subject to the provisions of U.S. Environmental Protection Agency's generally applicable environmental radiation standards in 40 CFR 190, incorporated herein by reference and available for viewing at the Department of Health and Human Services Regulation and Licensure, 301 Centennial Mall South, 3rd floor, Lincoln, Nebraska 68509-5007, levels of radiation or releases of radioactive material in excess of those standards, or of license conditions related to those standards.

#### 4-057.02 Contents of Reports

1. Each report required by 180 NAC 4-057 shall describe the extent of exposure of individuals to radiation and radioactive material, including, as appropriate:
  - a. Estimates of each individual's dose; and
  - b. The levels of radiation and concentrations of radioactive material involved; and
  - c. The cause of the elevated exposures, dose rates, or concentrations; and
  - d. Corrective steps taken or planned to ensure against a recurrence, including the schedule for achieving conformance with applicable limits, ALARA constraints, generally applicable environmental standards and associated license conditions.
2. Each report filed pursuant to 180 NAC 4-057.01 shall include for each individual exposed: the name, Social Security account number, and date of birth. With respect to the limit for the embryo fetus in 180 NAC 4-012, the identifiers should be those of the declared pregnant woman. The report shall be prepared so that this information is stated in a separate and detachable portion of the report.

4-057.03 All licensees or registrants who make reports pursuant to 180 NAC 4-057.01 shall submit the report in writing to the Agency.

4-058 REPORTS OF PLANNED SPECIAL EXPOSURES: The licensee or registrant shall submit a written report to the Agency within 30 days following any planned special exposure conducted in accordance with 180 NAC 4-010, informing the Agency that a planned special

exposure was conducted and indicating the date the planned special exposure occurred and the information required by 180 NAC 4-049.

4-059 [Reserved]

4-060 REPORTS OF INDIVIDUAL MONITORING

4-060.01 180 NAC 4 applies to each person licensed by the Agency to:

1. Possess or use sources of radiation for purposes of industrial radiography pursuant to 180 NAC 3 or 180 NAC 5; or
2. Receive radioactive waste from other persons for disposal pursuant to 180 NAC 12; or
3. Possess or use at any time, for processing or manufacturing for distribution pursuant to 180 NAC 3 or 180 NAC 7, radioactive material in quantities exceeding any one of the following quantities:

<u>Radionuclide</u>	<b>Activity<sup>a</sup></b>	
	<u>Ci</u>	<u>GBq</u>
Cesium-137	1	37
Cobalt-60	1	37
Gold-198	100	3,700
Iodine-131	1	37
Iridium-192	10	370
Krypton-85	1,000	37,000
Promethium	10	370
Technetium-99m	1,000	37,000

<sup>a</sup>The Agency may require as a license condition, or by rule, regulation, or order pursuant to 180 NAC 1-007, reports from licensees who are licensed to use radionuclides not on this list, in quantities sufficient to cause comparable radiation levels.

4-060.02 Each licensee in a category listed in 180 NAC 4-60.01 shall submit an annual report of the results of individual monitoring carried out by the licensee for each individual for whom monitoring was required by 180 NAC 4-022 during that year. The licensee may include additional data for individuals for whom monitoring was provided but not required. The licensee shall use Agency Form NRH-2 or electronic media containing all the information required by Agency Form NRH-2.

4-060.03 The licensee shall file the report required by 180 NAC 4-060.02, covering the preceding year, on or before April 30 of each year. The licensee or registrant shall submit the report to the Agency.

4-061 NOTIFICATIONS AND REPORTS TO INDIVIDUALS

4-061.01 Requirements for notification and reports to individuals of exposure to radiation or radioactive material are specified in 180 NAC 10-04.

4-061.02 When a licensee or registrant is required, pursuant to the provisions of 180 NAC 4-057, 4-058, and 4-060, to report to the Agency any exposure of identified occupationally exposed individual, or an identified member of the public, to radiation or radioactive material, the licensee shall also provide a copy of the report submitted to the Agency to the individual. This report must be transmitted at a time no later than the transmittal to the Agency.

4-062 REPORTS OF LEAKING OR CONTAMINATED SEALED SOURCES: The licensee shall file a report within 5 days with the Agency if the test for leakage or contamination required pursuant to 180 NAC 1-011 indicates a sealed source is leaking or contaminated. The report shall include the equipment involved, the test results and the corrective action taken.

#### ADDITIONAL REQUIREMENTS

4-063 VACATING PREMISES: Each specific licensee shall, no less than 30 days before vacating or relinquishing possession or control of premises which may have been contaminated with radioactive material as a result of his activities, notify the Agency in writing of intent to vacate. When deemed necessary by the Agency, the licensee shall decontaminate the premises in such a manner as the Agency may specify.

APPENDIX 4-A

PROTECTION FACTORS FOR RESPIRATORS<sup>1</sup>

Description <sup>2</sup>	Modes <sup>3</sup>	Protection Factors <sup>4</sup>		Tested and Certified Equipment
		Particulates Only	Particulates, gases, & vapors <sup>5</sup>	
<b>I. AIR-PURIFYING RESPIRATORS:<sup>6</sup></b>				
Facepiece, half-mask <sup>7</sup>	NP	10	-----	30 CFR 11,
Facepiece, full	NP	50	-----	Subpart K.
Facepiece, half-mask full or hood	PP	1000	-----	
<b>II. ATMOSPHERE-SUPPLYING RESPIRATORS</b>				
<b>1. Air-line Respirator:</b>				
Facepiece, half-mask	CF	-----	1000	30 CFR 11,
Facepiece, half-mask	D	-----	5	Subpart J.
Facepiece, full	CF	-----	2000	
Facepiece, full	D	-----	5	
Facepiece, full	PD	-----	2000	
Hood	CF	-----	<sup>8</sup>	
Suit	CF	-----	<sup>9</sup>	<sup>10</sup>
<b>2. Self-contained breathing apparatus (SCBA):</b>				
Facepiece, full	D	-----	50	30 CFR 11,
Facepiece, full	PD	-----	10,000 <sup>11</sup>	Subpart H.
Facepiece, full	RD	-----	50	
Facepiece, full	RP	-----	5,000 <sup>12</sup>	
<b>III. COMBINATION RESPIRATORS</b>				
Any combination of air-purifying and atmosphere-supplying respirators		Protection Factor for type and mode of operation as listed above		30 CFR 11, Sec. 11.63(b).

See next page for footnotes.

FOOTNOTES

1. For use in the selection of respiratory protective equipment to be used only where the contaminants have been identified and the concentrations, or possible concentrations, are known.

2. Only for shaven faces and where nothing interferes with the seal of tight-fitting facepieces against the skin. Hoods and suits are excepted.
3. The mode symbols are defined as follows:
  - CF = continuous flow
  - D = demand
  - NP = negative pressure, that is, negative phase during inhalation
  - PD = pressure demand, that is, always positive pressure
  - PP = positive pressure
  - RD = demand, recirculating (closed circuit)
  - RP = pressure demand, recirculating (closed circuit)
4.
  - a. The protection factor is a measure of the degree of protection afforded by a respirator, defined as the ratio of the concentration of airborne radioactive material outside the respiratory protective equipment to that inside the equipment, usually inside the facepiece, under conditions of use. It is applied to the ambient airborne concentration to estimate the concentrations inhaled by the wearer according to the following formula:
  - b. The protection factors apply:
    - (i) Only for individuals trained in using respirators and wearing properly fitted respirators that are used and maintained under supervision in a well-planned respiratory protective program.
    - (ii) For air-purifying respirators only when high efficiency particulate filters, above 99.97% removal efficiency by thermally generated 0.3  $\mu\text{m}$  dioctyl phthalate (DOP) test or equivalent, are used in atmospheres not deficient in oxygen and not containing radioactive gas or vapor respiratory hazards.
    - (iii) No adjustment is to be made for the use of sorbents against radioactive material in the form of gases or vapors.
    - (iv) For atmosphere-supplying respirators only when supplied with adequate respirable air. Respirable air shall be provided of the quality and quantity required in accordance with the National Institute for Occupational Safety and Health and the Mine Safety and Health Administration certification as described in 30 CFR 11. Oxygen and air shall not be used in the same apparatus.
5. Excluding radioactive contaminants that present an absorption or submersion hazard. For tritium oxide, approximately one-third of the intake occurs by absorption through the skin so that an overall protection factor of less than 2 is appropriate when atmosphere-supplying respirators are used to protect against tritium oxide. If the protection factor for respiratory protective equipment is 5, the effective protection factor for tritium is about 1.4; with protection factors of 10, the effective factor for tritium oxide is about 1.7; and with protection factors of 100 or more, the effective factor for tritium oxide is about 1.9. Air-purifying respirators are not suitable for protection against tritium oxide. See also footnote 9 concerning supplied-air suits.
6. Canisters and cartridges shall not be used beyond service-life limitations.
7. Under-chin type only. This type of respirator is not satisfactory for use where it might be possible (e.g., if an accident or emergency were to occur) for the ambient airborne concentrations to reach instantaneous values greater than 10 times the pertinent values in Table I, Column 3 of Appendix 180 NAC4-B. This type of respirator is not suitable for protection against plutonium or other high-toxicity materials. The mask is to be tested for fit prior to use, each time it is donned.
- 8.

- a. Equipment shall be operated in a manner that ensures that proper air flow-rates are maintained. A protection factor of no more than 1000 may be utilized for tested-and-certified supplied-air hoods when a minimum air flow of 6 cubic feet per minute (0.17 m<sup>3</sup>/min) is maintained and calibrated air-line pressure gauges or flow measuring devices are used. A protection factor of up to 2000 may be used for tested and certified hoods only when the air flow is maintained at the manufacturer's recommended maximum rate for the equipment, this rate is greater than 6 cubic feet per minute (0.17m<sup>3</sup>/min) and calibrated air line pressure gauges or flow measuring devices are used.
  - b. The design of the supplied-air hood or helmet, with a minimum flow of 6 cubic feet per minute (0.17 m<sup>3</sup>/min) of air, may determine its overall efficiency and the protection it provides. For example, some hoods aspirate contaminated air into the breathing zone when the wearer works with hands-over-head. This aspiration may be overcome if a short cape-like extension to the hood is worn under a coat or overalls. Other limitations specified by the approval agency shall be considered before using a hood in certain types of atmospheres. See footnote 9.
9. Appropriate protection factors shall be determined, taking into account the design of the suit and its permeability to the contaminant under conditions of use. There shall be a standby rescue person equipped with a respirator or other apparatus appropriate for the potential hazards and communications equipment whenever supplied-air suits are used.
  10. No approval schedules are currently available for this equipment. Equipment is to be evaluated by testing or on the basis of reliable test information.
  11. This type of respirator may provide greater protection and be used as an emergency device in unknown concentrations for protection against inhalation hazards. External radiation hazards and other limitations to permitted exposure, such as skin absorption, must be taken into account in such circumstances.
  12. Quantitative fit testing shall be performed on each individual, and no more than 0.02% leakage is allowed with this type of apparatus. Perceptible outward leakage of gas from this or any positive pressure self-contained breathing apparatus is unacceptable because service life will be reduced substantially. Special training in the use of this type of apparatus shall be provided to the wearer.

Note 1: Protection factors for respirators approved by the U.S. Bureau of Mines and the National Institute for Occupational Safety and Health, according to applicable approvals for respirators for type and mode of use to protect against airborne radionuclides, may be used to the extent that they do not exceed the protection factors listed in this table. The protection factors listed in this table may not be appropriate to circumstances where chemical or other respiratory hazards exist in addition to radioactive hazards. The selection and use of respirators for such circumstances should take into account applicable approvals of the U.S. Bureau of Mines and the National Institute for Occupational Safety and Health.

Note 2: Radioactive contaminants, for which the concentration values in Table I, Column 3 of Appendix 180 NAC 4-B are based on internal dose due to inhalation, may present external exposure hazards at higher concentrations. Under these circumstances, limitations on occupancy may have to be governed by external dose limits.

APPENDIX 4-B

ANNUAL LIMITS ON INTAKE (ALI) AND DERIVED AIR CONCENTRATIONS  
(DAC) OF RADIONUCLIDES FOR OCCUPATIONAL EXPOSURE; EFFLUENT CONCENTRATIONS;  
CONCENTRATIONS FOR RELEASE TO SANITARY SEWERAGE

Introduction

For each radionuclide, Table I indicates the chemical form which is to be used for selecting the appropriate ALI or DAC value. The ALIs and DACs for inhalation are given for an aerosol with an activity median aerodynamic diameter (AMAD) of 1  $\mu\text{m}$ , micron, and for three classes (D,W,Y) of radioactive material, which refer to their retention (approximately days, weeks or years) in the pulmonary region of the lung. This classification applies to a range of clearance half-times for D if less than 10 days, for W from 10 to 100 days, and for Y greater than 100 days. The class (D,W, or Y) given in the column headed "Class" applies only to the inhalation ALIs and DACs given in Table I, columns 2 and 3. Table II provides concentration limits for airborne and liquid effluents released to the general environment. Table III provides concentration limits for discharges to sanitary sewerage.

Note: The values in Tables I, II, and III are presented in the computer "E" notation. In this notation a value of 6E-02 represents a value of  $6 \times 10^{-2}$  or 0.06, 6E+2 represents  $6 \times 10^2$  or 600, and 6E+0 represents  $6 \times 10^0$  or 6.

Table I "Occupational Values"

Note that the columns in Table I of this appendix captioned "Oral Ingestion ALI," "Inhalation ALI," and "DAC," are applicable to occupational exposure to radioactive material.

The ALIs in this appendix are the annual intakes of given radionuclide by "Reference Man" which would result in either (1) a committed effective dose equivalent of 0.05 Sv (5 rem), stochastic ALI, or (2) a committed dose equivalent of 0.5 Sv (50 rem) to an organ or tissue, non-stochastic ALI. The stochastic ALIs were derived to result in a risk, due to irradiation of organs and tissues, comparable to the risk associated with deep dose equivalent to the whole body of 0.05 Sv (5 rem). The derivation includes multiplying the committed dose equivalent to an organ or tissue by a weighting factor,  $w_T$ . This weighting factor is the proportion of the risk of stochastic effects resulting from irradiation of the organ or tissue, T, to the total risk of stochastic effects when the whole body is irradiated uniformly. The values of  $w_T$  are listed under the definition of weighting factor in 180 NAC 4-02. The non-stochastic ALIs were derived to avoid non-stochastic effects, such as prompt damage to tissue or reduction in organ function.

A value of  $w_T = 0.06$  is applicable to each of the five organs or tissues in the "remainder" category receiving the highest dose equivalents, and the dose equivalents of all other remaining tissues may be disregarded. The following portions of the GI tract -- stomach, small intestine, upper large intestine, and lower large intestine -- are to be treated as four separate organs.

Note that the dose equivalents for an extremity, skin, and lens of the eye are not considered in computing the committed effective dose equivalent, but are subject to limits that must be met separately.

When an ALI is defined by the stochastic dose limit, this value alone is given. When an ALI is determined by the non-stochastic dose limit to an organ, the organ or tissue to which the limit applies is shown, and the ALI for the stochastic limit is shown in parentheses. Abbreviated organ or tissue designations are used:

LLI wall = lower large intestine wall;

St. wall = stomach wall;

Blad wall = bladder wall; and

Bone surf = bone surface.

APPENDIX 4-B

The use of the ALIs listed first, the more limiting of the stochastic and non-stochastic ALIs, will ensure that non-stochastic effects are avoided and that the risk of stochastic effects is limited to an acceptably low value. If, in a particular situation involving a radionuclide for which the nonstochastic ALI is limiting, use of that non-stochastic ALI is considered unduly conservative, the licensee may use the stochastic ALI to determine the committed effective dose equivalent. However, the licensee shall also ensure that the 0.5 Sv (50 rem) dose equivalent limit for any organ or tissue is not exceeded by the sum of the external deep dose equivalent plus the internal committed dose equivalent to that organ, not the effective dose. For the case where there is no external dose contribution, this would be demonstrated if the sum of the fractions of the nonstochastic ALIs ( $ALI_{ns}$ ) that contribute to the committed dose equivalent to the organ receiving the highest dose does not exceed unity, that is,  $\sum (\text{intake (in } \mu\text{Ci)}) / ALI_{ns} \leq 1.0$ . If there is an external deep dose equivalent contribution of  $H_d$ , then this sum must be less than  $1 - (H_d/50)$ , instead of  $\leq 1.0$ .

The derived air concentration (DAC) values are derived limits intended to control chronic occupational exposures. The relationship between the DAC and the ALI is given by:

$$\text{DAC} = \text{ALI}(\text{in } \mu\text{Ci}) / (2000 \text{ hours per working year} \times 60 \text{ minutes/hour} \times 2 \times 10^4 \text{ ml per minute}) = [\text{ALI} / 2.4 \times 10^9] \mu\text{Ci/ml},$$

where  $2 \times 10^4$  ml is the volume of air breathed per minute at work by Reference Man under working conditions of light work.

The DAC values relate to one of two modes of exposure: either external submersion or the internal committed dose equivalents resulting from inhalation of radioactive materials. DACs based upon submersion are for immersion in a semi-infinite cloud of uniform concentration and apply to each radionuclide separately.

The ALI and DAC values include contributions to exposure by the single radionuclide named and any in-growth of daughter radionuclides produced in the body by decay of the parent. However, intakes that include both the parent and daughter radionuclides should be treated by the general method appropriate for mixtures.

The values of ALI and DAC do not apply directly when the individual both ingests and inhales a radionuclide, when the individual is exposed to a mixture of radionuclides by either inhalation or ingestion or both, or when the individual is exposed to both internal and external irradiation. See 180 NAC 4-06. When an individual is exposed to radioactive materials which fall under several of the translocation classifications of the same radionuclide, such as, Class D, Class W, or Class Y, the exposure may be evaluated as if it were a mixture of different radionuclides.

It should be noted that the classification of a compound as Class D, W, or Y is based on the chemical form of the compound and does not take into account the radiological half-life of different radionuclides. For this reason, values are given for Class D, W, and Y compounds, even for very short-lived radionuclides.

Table II "Effluent Concentrations"

The columns in Table II of this appendix captioned "Effluents," "Air" and "Water" are applicable to the assessment and control of dose to the public, particularly in the implementation of the provisions of 180 NAC 4-014. The concentration values given in Columns 1 and 2 of Table II are equivalent to the radionuclide concentrations which, if inhaled or ingested continuously over the course of a year, would produce a total effective dose equivalent of 0.5 mSv (0.05 rem).

APPENDIX 4-B

Consideration of non-stochastic limits has not been included in deriving the air and water effluent concentration limits because non-stochastic effects are presumed not to occur at or below the dose levels established for individual members of the public. For radionuclides, where the non-stochastic limit was governing in deriving the occupational DAC, the stochastic ALI was used in deriving the corresponding airborne effluent limit in Table II. For this reason, the DAC and airborne effluent limits are not always proportional as was the case in Appendix 1 180 NAC 4 (Nebraska Regulations for Control of Radiation-Ionizing) which went into effect on November 25, 1990.

The air concentration values listed in Table II, Column 1 were derived by one of two methods. For those radionuclides for which the stochastic limit is governing, the occupational stochastic inhalation ALI was divided by  $2.4 \times 10^9$  ml, relating the inhalation ALI to the DAC, as explained above, and then divided by a factor of 300. The factor of 300 includes the following components: a factor of 50 to relate the 0.05 Sv (5 rem) annual occupational dose limit to the 1 mSv (0.1 rem) limit for members of the public, a factor of 3 to adjust for the difference in exposure time and the inhalation rate for a worker and that for members of the public; and a factor of 2 to adjust the occupational values, derived for adults, so that they are applicable to other age groups.

For those radionuclides for which submersion (external dose) is limiting, the occupational DAC in Table I, Column 3 was divided by 219. The factor of 219 is composed of a factor of 50, as described above, and a factor of 4.38 relating occupational exposure for 2,000 hours per year to full-time exposure (8,760 hours per year). Note that an additional factor of 2 for age considerations is not warranted in the submersion case.

The water concentrations were derived by taking the most restrictive occupational stochastic oral ingestion ALI and dividing by  $7.3 \times 10^7$ . The factor of  $7.3 \times 10^7$  (ml) includes the following components: the factors of 50 and 2 described above and a factor of  $7.3 \times 10^5$  (ml) which is the annual water intake of Reference Man.

Note 2 at the end of this appendix provides groupings of radionuclides which are applicable to unknown mixtures of radionuclides. These groupings, including occupational inhalation ALIs and DACs, air and water effluent concentrations and releases to sewer, require demonstrating that the most limiting radionuclides in successive classes are absent. The limit for the unknown mixture is defined when the presence of one of the listed radionuclides cannot be definitely excluded as being present either from knowledge of the radionuclide composition of the source or from actual measurements.

Table III "Releases to Sewers"

The monthly average concentrations for release to sanitary sewerage are applicable to the provisions in 004.40. The concentration values were derived by taking the most restrictive occupational stochastic oral ingestion ALI and dividing by  $7.3 \times 10^6$  (ml). The factor of  $7.3 \times 10^6$  (ml) is composed of a factor of  $7.3 \times 10^5$  (ml), the annual water intake by Reference Man, and a factor of 10, such that the concentrations, if the sewage released by the licensee were the only source of water ingested by a Reference Man during a year, would result in a committed effective dose equivalent of 0.5 mSv (0.5 rem).

APPENDIX 4-B

LIST OF ELEMENTS

<u>Name</u>	<u>Atomic Symbol</u>	<u>Atomic Number</u>	<u>Name</u>	<u>Atomic Symbol</u>	<u>Atomic Number</u>
Actinium	Ac	89	Mercury	Hg	80
Aluminum	Al	13	Molybdenum	Mo	42
Americium	Am	95	Neodymium	Nd	60
Antimony	Sb	51	Neptunium	Np	93
Argon	Ar	18	Nickel	Ni	28
Arsenic	As	33	Niobium	Nb	41
Astatine	At	85	Osmium	Os	76
Barium	Ba	56	Palladium	Pd	46
Berkelium	Bk	97	Phosphorus	P	15
Beryllium	Be	4	Platinum	Pt	78
Bismuth	Bi	83	Plutonium	Pu	94
Bromine	Br	35	Polonium	Po	84
Cadmium	Cd	48	Potassium	K	19
Calcium	Ca	20	Praseodymium	Pr	59
Californium	Cf	98	Promethium	Pm	61
Carbon	C	6	Protactinium	Pa	91
Cerium	Ce	58	Radium	Ra	88
Cesium	Cs	55	Radon	Rn	86
Chlorine	Cl	17	Rhenium	Re	75
Chromium	Cr	24	Rhodium	Rh	45
Cobalt	Co	27	Rubidium	Rb	37
Copper	Cu	29	Ruthenium	Ru	44
Curium	Cm	96	Samarium	Sm	62
Dysprosium	Dy	66	Scandium	Sc	21
Einsteinium	Es	99	Selenium	Se	34
Erbium	Er	68	Silicon	Si	14
Europium	Eu	63	Silver	Ag	47
Fermium	Fm	100	Sodium	Na	11
Fluorine	F	9	Strontium	Sr	38
Francium	Fr	87	Sulfur	S	16
Gadolinium	Gd	64	Tantalum	Ta	73
Gallium	Ga	31	Technetium	Tc	43
Germanium	Ge	32	Tellurium	Te	52
Gold	Au	79	Terbium	Tb	65
Hafnium	Hf	72	Thallium	Tl	81
Holmium	Ho	67	Thorium	Th	90
Hydrogen	H	1	Thulium	Tm	69
Indium	In	49	Tin	Sn	50
Iodine	I	53	Titanium	Ti	22
Iridium	Ir	77	Tungsten	W	74
Iron	Fe	26	Uranium	U	92
Krypton	Kr	36	Vanadium	V	23
Lanthanum	La	57	Xenon	Xe	54
Lead	Pb	82	Ytterbium	Yb	70
Lutetium	Lu	71	Yttrium	Y	39
Magnesium	Mg	12	Zinc	Zn	30
Manganese	Mn	25	Zirconium	Zr	40
Mendelevium	Md	101			

Draft  
03/01/01

NEBRASKA HEALTH AND HUMAN SERVICES  
REGULATION AND LICENSURE

180 NAC 4

APPENDIX 4-B

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Radionuclide No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI (μCi)

ALI (μCi)

DAC (μCi/ml)

Air (μCi/ml)

Water (μCi/ml)

Concentration

1	Hydrogen-3	Water, DAC includes skin absorption	8E+4	8E+4	2E-5	1E-7	1E-3	1E-2
		Gas (HT or T <sub>2</sub> ) Submersion <sup>1</sup> : Use above values as HT and T <sub>2</sub> oxidize in air and in the body to HTO.						
4	Beryllium-7	W, all compounds except those given for Y	4E+4	2E+4	9E-6	3E-8	6E-4	6E-3
		Y, oxides, halides, and nitrates	-	2E+4	8E-6	3E-8	-	-
4	Beryllium-10	W, see <sup>7</sup> Be	1E+3	2E+2	6E-8	2E-10	-	-
		LLI wall (1E+3)	-	-	-	-	2E-5	2E-4
		Y, see <sup>7</sup> Be	-	1E+1	6E-9	2E-11	-	-
6	Carbon-11 <sup>2</sup>	Monoxide	-	1E+6	5E-4	2E-6	-	-
		Dioxide	-	6E+5	3E-4	9E-7	-	-
		Compounds	4E+5	4E+5	2E-4	6E-7	6E-3	6E-2
6	Carbon-14	Monoxide	-	2E+6	7E-4	2E-6	-	-
		Dioxide	-	2E+5	9E-5	3E-7	-	-
		Compounds	2E+3	2E+3	1E-6	3E-9	3E-5	3E-4
9	Fluorine-18 <sup>2</sup>	D, fluorides of H, Li, Na, K, Rb, Cs, and Fr	5E+4	7E+4	3E-5	1E-7	-	-
		St wall (5E+4)	-	-	-	-	7E-4	7E-3
		W, fluorides of Be, Mg, Ca, Sr, Ba, Ra, Al, Ga, In, Tl, As, Sb, Bi, Fe, Ru, Os, Co, Ni, Pd, Pt, Cu, Ag, Au, Zn, Cd, Hg, Sc, Y, Ti, Zr, V, Nb, Ta, Mn, Tc, and Re	-	9E+4	4E-5	1E-7	-	-
		Y, lanthanum fluoride	-	8E+4	3E-5	1E-7	-	-
11	Sodium-22	D, all compounds	4E+2	6E+2	3E-7	9E-10	6E-6	6E-5
11	Sodium-24	D, all compounds	4E+3	5E+3	2E-6	7E-9	5E-5	5E-4
12	Magnesium-28	D, all compounds except those given for W	7E+2	2E+3	7E-7	2E-9	9E-6	9E-5
		W, oxides, hydroxides, carbides, halides, and nitrates	-	1E+3	5E-7	2E-9	-	-
13	Aluminum-26	D, all compounds except those given for W	4E+2	6E+1	3E-8	9E-11	6E-6	6E-5

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI (μCi)	Col. 2 Inhalation ALI (μCi)	Col. 3 DAC (μCi/ml)	Col. 1 Air (μCi/ml)	Col. 2 Water (μCi/ml)	
		W, oxides, hydroxides, carbides, halides, and nitrates	-	9E+1	4E-8	1E-10	-	-
14	Silicon-31	D, all compounds except those given for W and Y	9E+3	3E+4	1E-5	4E-8	1E-4	1E-3
		W, oxides, hydroxides, carbides, and nitrates	-	3E+4	1E-5	5E-8	-	-
		Y, aluminosilicate glass	-	3E+4	1E-5	4E-8	-	-
14	Silicon-32	D, see <sup>31</sup> Si	2E+3 LLI wall (3E+3)	2E+2	1E-7	3E-10	-	-
		W, see <sup>31</sup> Si	-	1E+2	5E-8	2E-10	-	-
		Y, see <sup>31</sup> Si	-	5E+0	2E-9	7E-12	-	-
15	Phosphorus-32	D, all compounds except phosphates given for W	6E+2	9E+2	4E-7	1E-9	9E-6	9E-5
		W, phosphates of Zn <sup>2+</sup> , S <sup>3+</sup> , Mg <sup>2+</sup> , Fe <sup>3+</sup> , Bi <sup>3+</sup> , and lanthanides	-	4E+2	2E-7	5E-10	-	-
15	Phosphorus-33	D, see <sup>32</sup> P	6E+3	8E+3	4E-6	1E-8	8E-5	8E-4
		W, see <sup>32</sup> P	-	3E+3	1E-6	4E-9	-	-
16	Sulfur-35	Vapor	-	1E+4	6E-6	2E-8	-	-
		D, sulfides and sulfates except those given for W	1E+4 LLI wall (8E+3)	2E+4	7E-6	2E-8	-	-
		W, elemental sulfur, sulfides of Sr, Ba, Ge, Sn, Pb, As, Sb, Bi, Cu, Ag, Au, Zn, Cd, Hg, W, and Mo. Sulfates of Ca, Sr, Ba, Ra, As, Sb, and Bi	6E+3	-	-	-	1E-4	1E-3
			-	2E+3	9E-7	3E-9	-	-
17	Chlorine-36	D, chlorides of H, Li, Na, K, Rb, Cs, and Fr	2E+3	2E+3	1E-6	3E-9	2E-5	2E-4
		W, chlorides of lanthanides, Be, Mg, Ca, Sr, Ba, Ra, Al, Ga, In, Tl, Ge, Sn, Pb, As, Sb, Bi, Fe, Ru, Os, Co, Rh, Ir, Ni, Pd, Pt, Cu, Ag, Au, Zn, Cd, Hg, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Cr, Mo, W, Mn, Tc, and Re	-	2E+2	1E-7	3E-10	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III release to Sewers			Table I Occupational Values			Table II Effluent Concentrations		
Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Oral	Inhalation		Air	Water	
			Ingestion ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	
17	Chlorine-38 <sup>2</sup>	D, see <sup>36</sup> Cl	2E+4 St wall (3E+4)	4E+4	2E-5	6E-8	-	-
		W, see <sup>36</sup> Cl	-	5E+4	2E-5	6E-8	3E-4	3E-3
17	Chlorine-39 <sup>2</sup>	D, see <sup>36</sup> Cl	2E+4 St wall (4E+4)	5E+4	2E-5	7E-8	-	-
		W, see <sup>36</sup> Cl	-	6E+4	2E-5	8E-8	5E-4	5E-3
18	Argon-37	Submersion <sup>1</sup>	-	-	1E+0	6E-3	-	-
18	Argon-39	Submersion <sup>1</sup>	-	-	2E-4	8E-7	-	-
18	Argon-41	Submersion <sup>1</sup>	-	-	3E-6	1E-8	-	-
19	Potassium-40	D, all compounds	3E+2	4E+2	2E-7	6E-10	4E-6	4E-5
19	Potassium-42	D, all compounds	5E+3	5E+3	2E-6	7E-9	6E-5	6E-4
19	Potassium-43	D, all compounds	6E+3	9E+3	4E-6	1E-8	9E-5	9E-4
19	Potassium-44 <sup>2</sup>	D, all compounds	2E+4 St wall (4E+4)	7E+4	3E-5	9E-8	-	-
			-	-	-	-	5E-4	5E-3
19	Potassium-45 <sup>2</sup>	D, all compounds	3E+4 St wall (5E+4)	1E+5	5E-5	2E-7	-	-
			-	-	-	-	7E-4	7E-3
20	Calcium-41	W, all compounds	3E+3 Bone surf (4E+3)	4E+3 Bone surf (4E+3)	2E-6	-	-	-
			-	-	-	5E-9	6E-5	6E-4
20	Calcium-45	W, all compounds	2E+3	8E+2	4E-7	1E-9	2E-5	2E-4
20	Calcium-47	W, all compounds	8E+2	9E+2	4E-7	1E-9	1E-5	1E-4
21	Scandium-43	Y, all compounds	7E+3	2E+4	9E-6	3E-8	1E-4	1E-3
21	Scandium-44m	Y, all compounds	5E+2	7E+2	3E-7	1E-9	7E-6	7E-5
21	Scandium-44	Y, all compounds	4E+3	1E+4	5E-6	2E-8	5E-5	5E-4
21	Scandium-46	Y, all compounds	9E+2	2E+2	1E-7	3E-10	1E-5	1E-4
21	Scandium-47	Y, all compounds	2E+3 LLI wall (3E+3)	3E+3	1E-6	4E-9	-	-
			-	-	-	-	4E-5	4E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III		Table I				Table II		
release to		Occupational Values				Effluent		
Sewers						Concentrations		
Monthly		Col. 1	Col. 2	Col. 3	Col. 1	Col. 2		
Average		Ingestion	Inhalation		Air	Water	Concentration	
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
	(μCi/m)							
21	Scandium-48	Y, all compounds	8E+2	1E+3	6E-7	2E-9	1E-5	1E-4
21	Scandium-49 <sup>2</sup>	Y, all compounds	2E+4	5E+4	2E-5	8E-8	3E-4	3E-3
22	Titanium-44	D, all compounds except those given for W and Y W, oxides, hydroxides, carbides, halides, and nitrates Y, SrTiO	3E+2	1E+1	5E-9	2E-11	4E-6	4E-5
			-	3E+1	1E-8	4E-11	-	-
			-	6E+0	2E-9	8E-12	-	-
22	Titanium-45	D, see <sup>44</sup> Ti W, see <sup>44</sup> Ti Y, see <sup>44</sup> Ti	9E+3	3E+4	1E-5	3E-8	1E-4	1E-3
			-	4E+4	1E-5	5E-8	-	-
			-	3E+4	1E-5	4E-8	-	-
23	Vanadium-47 <sup>2</sup>	D, all compounds except those given for W	3E+4	8E+4	3E-5	1E-7	-	-
			St wall (3E+4)	-	-	-	4E-4	4E-3
		W, oxides, hydroxides, carbides, and halides	-	1E+5	4E-5	1E-7	-	-
23	Vanadium-48	D, see <sup>47</sup> V W, see <sup>47</sup> V	6E+2	1E+3	5E-7	2E-9	9E-6	9E-5
			-	6E+2	3E-7	9E-10	-	-
23	Vanadium-49	D, see <sup>47</sup> V W, see <sup>47</sup> V	7E+4	3E+4	1E-5	-	-	-
			LLI wall (9E+4)	Bone surf (3E+4)	-	5E-8	1E-3	1E-2
			-	2E+4	8E-6	2E-8	-	-
24	Chromium-48	D, all compounds except those given for W and Y W, halides and nitrates Y, oxides and hydroxides	6E+3	1E+4	5E-6	2E-8	8E-5	8E-4
			-	7E+3	3E-6	1E-8	-	-
			-	7E+3	3E-6	1E-8	-	-
24	Chromium-49 <sup>2</sup>	D, see <sup>48</sup> Cr W, see <sup>48</sup> Cr Y, see <sup>48</sup> Cr	3E+4	8E+4	4E-5	1E-7	4E-4	4E-3
			-	1E+5	4E-5	1E-7	-	-
			-	9E+4	4E-5	1E-7	-	-
24	Chromium-51	D, see <sup>48</sup> Cr W, see <sup>48</sup> Cr Y, see <sup>48</sup> Cr	4E+4	5E+4	2E-5	6E-8	5E-4	5E-3
			-	2E+4	1E-5	3E-8	-	-
			-	2E+4	8E-6	3E-8	-	-
25	Manganese-51 <sup>2</sup>	D, all compounds except those given for W W, oxides, hydroxides, halides, and nitrates	2E+4	5E+4	2E-5	7E-8	3E-4	3E-3
			-	6E+4	3E-5	8E-8	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci/m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci/ml}$ )	Col. 1 Air ( $\mu\text{Ci/ml}$ )	Col. 2 Water ( $\mu\text{Ci/ml}$ )	
25	Manganese-52m <sup>2</sup> D, see <sup>51</sup> Mn		3E+4 St wall (4E+4)	9E+4	4E-5	1E-7	-	-
		W, see <sup>51</sup> Mn	-	1E+5	4E-5	1E-7	5E-4	5E-3
25	Manganese-52	D, see <sup>51</sup> Mn	7E+2	1E+3	5E-7	2E-9	1E-5	1E-4
		W, see <sup>51</sup> Mn	-	9E+2	4E-7	1E-9	-	-
25	Manganese-53	D, see <sup>51</sup> Mn	5E+4	1E+4	5E-6	-	7E-4	7E-3
		W, see <sup>51</sup> Mn	-	Bone surf (2E+4) 1E+4	- 5E-6	3E-8 2E-8	-	-
25	Manganese-54	D, see <sup>51</sup> Mn	2E+3	9E+2	4E-7	1E-9	3E-5	3E-4
		W, see <sup>51</sup> Mn	-	8E+2	3E-7	1E-9	-	-
25	Manganese-56	D, see <sup>51</sup> Mn	5E+3	2E+4	6E-6	2E-8	7E-5	7E-4
		W, see <sup>51</sup> Mn	-	2E+4	9E-6	3E-8	-	-
26	Iron-52	D, all compounds except those given for W	9E+2	3E+3	1E-6	4E-9	1E-5	1E-4
		W, oxides, hydroxides, and halides	-	2E+3	1E-6	3E-9	-	-
26	Iron-55	D, see <sup>52</sup> Fe	9E+3	2E+3	8E-7	3E-9	1E-4	1E-3
		W, see <sup>52</sup> Fe	-	4E+3	2E-6	6E-9	-	-
26	Iron-59	D, see <sup>52</sup> Fe	8E+2	3E+2	1E-7	5E-10	1E-5	1E-4
		W, see <sup>52</sup> Fe	-	5E+2	2E-7	7E-10	-	-
26	Iron-60	D, see <sup>52</sup> Fe	3E+1	6E+0	3E-9	9E-12	4E-7	4E-6
		W, see <sup>52</sup> Fe	-	2E+1	8E-9	3E-11	-	-
27	Cobalt-55	W, all compounds except those given for Y	1E+3	3E+3	1E-6	4E-9	2E-5	2E-4
		Y, oxides, hydroxides, halides, and nitrates	-	3E+3	1E-6	4E-9	-	-
27	Cobalt-56	W, see <sup>55</sup> Co	5E+2	3E+2	1E-7	4E-10	6E-6	6E-5
		Y, see <sup>55</sup> Co	4E+2	2E+2	8E-8	3E-10	-	-
27	Cobalt-57	W, see <sup>55</sup> Co	8E+3	3E+3	1E-6	4E-9	6E-5	6E-4
		Y, see <sup>55</sup> Co	4E+3	7E+2	3E-7	9E-10	-	-
27	Cobalt-58m	W, see <sup>55</sup> Co	6E+4	9E+4	4E-5	1E-7	8E-4	8E-3
		Y, see <sup>55</sup> Co	-	6E+4	3E-5	9E-8	-	-
27	Cobalt-58	W, see <sup>55</sup> Co	2E+3	1E+3	5E-7	2E-9	2E-5	2E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI (μCi)	Col. 2 Inhalation ALI (μCi)	Col. 3 Inhalation DAC (μCi/ml)	Col. 1 Air (μCi/ml)	Col. 2 Water (μCi/ml)	
		Y, see <sup>55</sup> Co	1E+3	7E+2	3E-7	1E-9	-	-
27	Cobalt-60m <sup>2</sup>	W, see <sup>55</sup> Co	1E+6 St wall (1E+6)	4E+6	2E-3	6E-6	-	-
		Y, see <sup>55</sup> Co	-	3E+6	1E-3	4E-6	-	2E-1
27	Cobalt-60	W, see <sup>55</sup> Co	5E+2	2E+2	7E-8	2E-10	3E-6	3E-5
		Y, see <sup>55</sup> Co	2E+2	3E+1	1E-8	5E-11	-	-
27	Cobalt-61 <sup>2</sup>	W, see <sup>55</sup> Co	2E+4	6E+4	3E-5	9E-8	3E-4	3E-3
		Y, see <sup>55</sup> Co	2E+4	6E+4	2E-5	8E-8	-	-
27	Cobalt-62m <sup>2</sup>	W, see <sup>55</sup> Co	4E+4 St wall (5E+4)	2E+5	7E-5	2E-7	-	-
		Y, see <sup>55</sup> Co	-	2E+5	6E-5	2E-7	7E-4	7E-3
28	Nickel-56	D, all compounds except those given for W	1E+3	2E+3	8E-7	3E-9	2E-5	2E-4
		W, oxides, hydroxides, and carbides	-	1E+3	5E-7	2E-9	-	-
		Vapor	-	1E+3	5E-7	2E-9	-	-
28	Nickel-57	D, see <sup>56</sup> Ni	2E+3	5E+3	2E-6	7E-9	2E-5	2E-4
		W, see <sup>56</sup> Ni	-	3E+3	1E-6	4E-9	-	-
		Vapor	-	6E+3	3E-6	9E-9	-	-
28	Nickel-59	D, see <sup>56</sup> Ni	2E+4	4E+3	2E-6	5E-9	3E-4	3E-3
		W, see <sup>56</sup> Ni	-	7E+3	3E-6	1E-8	-	-
		Vapor	-	2E+3	8E-7	3E-9	-	-
28	Nickel-63	D, see <sup>56</sup> Ni	9E+3	2E+3	7E-7	2E-9	1E-4	1E-3
		W, see <sup>56</sup> Ni	-	3E+3	1E-6	4E-9	-	-
		Vapor	-	8E+2	3E-7	1E-9	-	-
28	Nickel-65	D, see <sup>56</sup> Ni	8E+3	2E+4	1E-5	3E-8	1E-4	1E-3
		W, see <sup>56</sup> Ni	-	3E+4	1E-5	4E-8	-	-
		Vapor	-	2E+4	7E-6	2E-8	-	-
28	Nickel-66	D, see <sup>56</sup> Ni	4E+2 LLI wall (5E+2)	2E+3	7E-7	2E-9	-	-
		W, see <sup>56</sup> Ni	-	6E+2	3E-7	9E-10	6E-6	6E-5
		Vapor	-	3E+3	1E-6	4E-9	-	-
29	Copper-60 <sup>2</sup>	D, all compounds except those given for W and Y	3E+4 St wall	9E+4	4E-5	1E-7	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III release to Sewers			Table I Occupational Values			Table II Effluent Concentrations		
Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Oral	Inhalation		Air	Water	
Monthly	Average		Ingestion	ALI	DAC	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	
			ALI	ALI				
			( $\mu\text{Ci}$ )	( $\mu\text{Ci}$ )	( $\mu\text{Ci}/\text{ml}$ )			
		W, sulfides, halides, and nitrates	(3E+4)	-	-	-	4E-4	4E-3
		Y, oxides and hydroxides	-	1E+5	5E-5	2E-7	-	-
			-	1E+5	4E-5	1E-7	-	-
29	Copper-61	D, see <sup>60</sup> Cu	1E+4	3E+4	1E-5	4E-8	2E-4	2E-3
		W, see <sup>60</sup> Cu	-	4E+4	2E-5	6E-8	-	-
		Y, see <sup>60</sup> Cu	-	4E+4	1E-5	5E-8	-	-
29	Copper-64	D, see <sup>60</sup> Cu	1E+4	3E+4	1E-5	4E-8	2E-4	2E-3
		W, see <sup>60</sup> Cu	-	2E+4	1E-5	3E-8	-	-
		Y, see <sup>60</sup> Cu	-	2E+4	9E-6	3E-8	-	-
29	Copper-67	D, see <sup>60</sup> Cu	5E+3	8E+3	3E-6	1E-8	6E-5	6E-4
		W, see <sup>60</sup> Cu	-	5E+3	2E-6	7E-9	-	-
		Y, see <sup>60</sup> Cu	-	5E+3	2E-6	6E-9	-	-
30	Zinc-62	Y, all compounds	1E+3	3E+3	1E-6	4E-9	2E-5	2E-4
30	Zinc-63 <sup>2</sup>	Y, all compounds	2E+4	7E+4	3E-5	9E-8	-	-
			St wall (3E+4)	-	-	-	3E-4	3E-3
30	Zinc-65	Y, all compounds	4E+2	3E+2	1E-7	4E-10	5E-6	5E-5
30	Zinc-69m	Y, all compounds	4E+3	7E+3	3E-6	1E-8	6E-5	6E-4
30	Zinc-69 <sup>2</sup>	Y, all compounds	6E+4	1E+5	6E-5	2E-7	8E-4	8E-3
30	Zinc-71m	Y, all compounds	6E+3	2E+4	7E-6	2E-8	8E-5	8E-4
30	Zinc-72	Y, all compounds	1E+3	1E+3	5E-7	2E-9	1E-5	1E-4
31	Gallium-65 <sup>2</sup>	D, all compounds except those given for W	5E+4	2E+5	7E-5	2E-7	-	-
			St wall (6E+4)	-	-	-	9E-4	9E-3
		W, oxides, hydroxides, carbides, halides, and nitrates	-	2E+5	8E-5	3E-7	-	-
31	Gallium-66	D, see <sup>65</sup> Ga	1E+3	4E+3	1E-6	5E-9	1E-5	1E-4
		W, see <sup>65</sup> Ga	-	3E+3	1E-6	4E-9	-	-
31	Gallium-67	D, see <sup>65</sup> Ga	7E+3	1E+4	6E-6	2E-8	1E-4	1E-3
		W, see <sup>65</sup> Ga	-	1E+4	4E-6	1E-8	-	-
31	Gallium-68 <sup>2</sup>	D, see <sup>65</sup> Ga	2E+4	4E+4	2E-5	6E-8	2E-4	2E-3
		W, see <sup>65</sup> Ga	-	5E+4	2E-5	7E-8	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Average Radionuclide Class ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Ingestion	Inhalation		Air	Water	
		ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )		
31	Gallium-70 <sup>2</sup>	D, see <sup>65</sup> Ga	5E+4 St wall (7E+4)	2E+5	7E-5	2E-7	-	-
		W, see <sup>65</sup> Ga	-	2E+5	8E-5	3E-7	-	1E-3 1E-2
31	Gallium-72	D, see <sup>65</sup> Ga	1E+3	4E+3	1E-6	5E-9	2E-5	2E-4
		W, see <sup>65</sup> Ga	-	3E+3	1E-6	4E-9	-	-
31	Gallium-73	D, see <sup>65</sup> Ga	5E+3	2E+4	6E-6	2E-8	7E-5	7E-4
		W, see <sup>65</sup> Ga	-	2E+4	6E-6	2E-8	-	-
32	Germanium-66	D, all compounds except those given for W	2E+4	3E+4	1E-5	4E-8	3E-4	3E-3
		W, oxides, sulfides, and halides	-	2E+4	8E-6	3E-8	-	-
32	Germanium-67 <sup>2</sup>	D, see <sup>66</sup> Ge	3E+4 St wall (4E+4)	9E+4	4E-5	1E-7	-	-
		W, see <sup>66</sup> Ge	-	1E+5	4E-5	1E-7	6E-4	6E-3
32	Germanium-68	D, see <sup>66</sup> Ge	5E+3	4E+3	2E-6	5E-9	6E-5	6E-4
		W, see <sup>66</sup> Ge	-	1E+2	4E-8	1E-10	-	-
32	Germanium-69	D, see <sup>66</sup> Ge	1E+4	2E+4	6E-6	2E-8	2E-4	2E-3
		W, see <sup>66</sup> Ge	-	8E+3	3E-6	1E-8	-	-
32	Germanium-71	D, see <sup>66</sup> Ge	5E+5	4E+5	2E-4	6E-7	7E-3	7E-2
		W, see <sup>66</sup> Ge	-	4E+4	2E-5	6E-8	-	-
32	Germanium-75 <sup>2</sup>	D, see <sup>66</sup> Ge	4E+4 St wall (7E+4)	8E+4	3E-5	1E-7	-	-
		W, see <sup>66</sup> Ge	-	8E+4	4E-5	1E-7	9E-4	9E-3
32	Germanium-77	D, see <sup>66</sup> Ge	9E+3	1E+4	4E-6	1E-8	1E-4	1E-3
		W, see <sup>66</sup> Ge	-	6E+3	2E-6	8E-9	-	-
32	Germanium-78 <sup>2</sup>	D, see <sup>66</sup> Ge	2E+4 St wall (2E+4)	2E+4	9E-6	3E-8	-	-
		W, see <sup>66</sup> Ge	-	2E+4	9E-6	3E-8	3E-4	3E-3
33	Arsenic-69 <sup>2</sup>	W, all compounds	3E+4 St wall (4E+4)	1E+5	5E-5	2E-7	-	-
						6E-4	6E-3	

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Radionuclide

( $\mu\text{Ci}/\text{m}$ )

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI  
( $\mu\text{Ci}$ )

ALI  
( $\mu\text{Ci}$ )

DAC  
( $\mu\text{Ci}/\text{ml}$ )

Air  
( $\mu\text{Ci}/\text{ml}$ )

Water  
( $\mu\text{Ci}/\text{ml}$ )

Concentration

Atomic No.	Radionuclide	Class	ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
33	Arsenic-70 <sup>2</sup>	W, all compounds	1E+4	5E+4	2E-5	7E-8	2E-4	2E-3
33	Arsenic-71	W, all compounds	4E+3	5E+3	2E-6	6E-9	5E-5	5E-4
33	Arsenic-72	W, all compounds	9E+2	1E+3	6E-7	2E-9	1E-5	1E-4
33	Arsenic-73	W, all compounds	8E+3	2E+3	7E-7	2E-9	1E-4	1E-3
33	Arsenic-74	W, all compounds	1E+3	8E+2	3E-7	1E-9	2E-5	2E-4
33	Arsenic-76	W, all compounds	1E+3	1E+3	6E-7	2E-9	1E-5	1E-4
33	Arsenic-77	W, all compounds	4E+3 LLI wall (5E+3)	-	-	7E-9	- 6E-5	- 6E-4
33	Arsenic-78 <sup>2</sup>	W, all compounds	8E+3	2E+4	9E-6	3E-8	1E-4	1E-3
34	Selenium-70 <sup>2</sup>	D, all compounds except those given for W W, oxides, hydroxides, carbides, and elemental Se	2E+4 1E+4	4E+4 4E+4	2E-5 2E-5	5E-8 6E-8	1E-4 -	1E-3 -
34	Selenium-73m <sup>2</sup>	D, see <sup>70</sup> Se W, see <sup>70</sup> Se	6E+4 3E+4	2E+5 1E+5	6E-5 6E-5	2E-7 2E-7	4E-4 -	4E-3 -
34	Selenium-73	D, see <sup>70</sup> Se W, see <sup>70</sup> Se	3E+3 -	1E+4 2E+4	5E-6 7E-6	2E-8 2E-8	4E-5 -	4E-4 -
34	Selenium-75	D, see <sup>70</sup> Se W, see <sup>70</sup> Se	5E+2 -	7E+2 6E+2	3E-7 3E-7	1E-9 8E-10	7E-6 -	7E-5 -
34	Selenium-79	D, see <sup>70</sup> Se W, see <sup>70</sup> Se	6E+2 -	8E+2 6E+2	3E-7 2E-7	1E-9 8E-10	8E-6 -	8E-5 -
34	Selenium-81m <sup>2</sup>	D, see <sup>70</sup> Se W, see <sup>70</sup> Se	4E+4 2E+4	7E+4 7E+4	3E-5 3E-5	9E-8 1E-7	3E-4 -	3E-3 -
34	Selenium-81 <sup>2</sup>	D, see <sup>70</sup> Se W, see <sup>70</sup> Se	6E+4 St wall (8E+4) -	2E+5 -	9E-5 -	3E-7 -	- 1E-3	- 1E-2
34	Selenium-83 <sup>2</sup>	D, see <sup>70</sup> Se W, see <sup>70</sup> Se	4E+4 3E+4	1E+5 1E+5	5E-5 5E-5	2E-7 2E-7	4E-4 -	4E-3 -
35	Bromine-74m <sup>2</sup>	D, bromides of H, Li, Na, K, Rb, Cs, and Fr	1E+4	4E+4	2E-5	5E-8	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide No. ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion	Col. 2 ALI ( $\mu\text{Ci}$ ) Inhalation	Col. 3 DAC ( $\mu\text{Ci}/\text{ml}$ ) Inhalation	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
			St wall ( $2\text{E}+4$ )	-	-	-	$3\text{E}-4$	$3\text{E}-3$
		W, bromides of lanthanides, Be, Mg, Ca, Sr, Ba, Ra, Al, Ga, In, Tl, Ge, Sn, Pb, As, Sb, Bi, Fe, Ru, Os, Co, Rh, Ir, Ni, Pd, Pt, Cu, Ag, Au, Zn, Cd, Hg, Sc, Y, Ti, Zr, Hf, V, Nb, Ta, Mn, Tc, and Re	-	$4\text{E}+4$	$2\text{E}-5$	$6\text{E}-8$	-	-
35	Bromine-74 <sup>2</sup>	D, see <sup>74m</sup> Br	$2\text{E}+4$	$7\text{E}+4$	$3\text{E}-5$	$1\text{E}-7$	-	-
		W, see <sup>74m</sup> Br	St wall ( $4\text{E}+4$ )	-	-	-	$5\text{E}-4$	$5\text{E}-3$
			-	$8\text{E}+4$	$4\text{E}-5$	$1\text{E}-7$	-	-
35	Bromine-75 <sup>2</sup>	D, see <sup>74m</sup> Br	$3\text{E}+4$	$5\text{E}+4$	$2\text{E}-5$	$7\text{E}-8$	-	-
		W, see <sup>74m</sup> Br	St wall ( $4\text{E}+4$ )	-	-	-	$5\text{E}-4$	$5\text{E}-3$
			-	$5\text{E}+4$	$2\text{E}-5$	$7\text{E}-8$	-	-
35	Bromine-76	D, see <sup>74m</sup> Br	$4\text{E}+3$	$5\text{E}+3$	$2\text{E}-6$	$7\text{E}-9$	$5\text{E}-5$	$5\text{E}-4$
		W, see <sup>74m</sup> Br	-	$4\text{E}+3$	$2\text{E}-6$	$6\text{E}-9$	-	-
35	Bromine-77	D, see <sup>74m</sup> Br	$2\text{E}+4$	$2\text{E}+4$	$1\text{E}-5$	$3\text{E}-8$	$2\text{E}-4$	$2\text{E}-3$
		W, see <sup>74m</sup> Br	-	$2\text{E}+4$	$8\text{E}-6$	$3\text{E}-8$	-	-
35	Bromine-80m	D, see <sup>74m</sup> Br	$2\text{E}+4$	$2\text{E}+4$	$7\text{E}-6$	$2\text{E}-8$	$3\text{E}-4$	$3\text{E}-3$
		W, see <sup>74m</sup> Br	-	$1\text{E}+4$	$6\text{E}-6$	$2\text{E}-8$	-	-
35	Bromine-80 <sup>2</sup>	D, see <sup>74m</sup> Br	$5\text{E}+4$	$2\text{E}+5$	$8\text{E}-5$	$3\text{E}-7$	-	-
		W, see <sup>74m</sup> Br	St wall ( $9\text{E}+4$ )	-	-	-	$1\text{E}-3$	$1\text{E}-2$
			-	$2\text{E}+5$	$9\text{E}-5$	$3\text{E}-7$	-	-
35	Bromine-82	D, see <sup>74m</sup> Br	$3\text{E}+3$	$4\text{E}+3$	$2\text{E}-6$	$6\text{E}-9$	$4\text{E}-5$	$4\text{E}-4$
		W, see <sup>74m</sup> Br	-	$4\text{E}+3$	$2\text{E}-6$	$5\text{E}-9$	-	-
35	Bromine-83	D, see <sup>74m</sup> Br	$5\text{E}+4$	$6\text{E}+4$	$3\text{E}-5$	$9\text{E}-8$	-	-
		W, see <sup>74m</sup> Br	St wall ( $7\text{E}+4$ )	-	-	-	$9\text{E}-4$	$9\text{E}-3$
			-	$6\text{E}+4$	$3\text{E}-5$	$9\text{E}-8$	-	-
35	Bromine-84 <sup>2</sup>	D, see <sup>74m</sup> Br	$2\text{E}+4$	$6\text{E}+4$	$2\text{E}-5$	$8\text{E}-8$	-	-
		W, see <sup>74m</sup> Br	St wall ( $3\text{E}+4$ )	-	-	-	$4\text{E}-4$	$4\text{E}-3$
			-	$6\text{E}+4$	$3\text{E}-5$	$9\text{E}-8$	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
			Ingestion	Inhalation		Air	Water	
			ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	(μCi/ml)	(μCi/ml)	
36	Krypton-74 <sup>2</sup>	Submersion <sup>1</sup>	-	-	3E-6	1E-8	-	-
36	Krypton-76	Submersion <sup>1</sup>	-	-	9E-6	4E-8	-	-
36	Krypton-77 <sup>2</sup>	Submersion <sup>1</sup>	-	-	4E-6	2E-8	-	-
36	Krypton-79	Submersion <sup>1</sup>	-	-	2E-5	7E-8	-	-
36	Krypton-81	Submersion <sup>1</sup>	-	-	7E-4	3E-6	-	-
36	Krypton-83m <sup>2</sup>	Submersion <sup>1</sup>	-	-	1E-2	5E-5	-	-
36	Krypton-85m	Submersion <sup>1</sup>	-	-	2E-5	1E-7	-	-
36	Krypton-85	Submersion <sup>1</sup>	-	-	1E-4	7E-7	-	-
36	Krypton-87 <sup>2</sup>	Submersion <sup>1</sup>	-	-	5E-6	2E-8	-	-
36	Krypton-88	Submersion <sup>1</sup>	-	-	2E-6	9E-9	-	-
37	Rubidium-79 <sup>2</sup>	D, all compounds	4E+4 St wall (6E+4)	1E+5	5E-5	2E-7	-	-
				-	-	-	8E-4	8E-3
37	Rubidium-81m <sup>2</sup>	D, all compounds	2E+5 St wall (3E+5)	3E+5	1E-4	5E-7	-	-
				-	-	-	4E-3	4E-2
37	Rubidium-81	D, all compounds	4E+4	5E+4	2E-5	7E-8	5E-4	5E-3
37	Rubidium-82m	D, all compounds	1E+4	2E+4	7E-6	2E-8	2E-4	2E-3
37	Rubidium-83	D, all compounds	6E+2	1E+3	4E-7	1E-9	9E-6	9E-5
37	Rubidium-84	D, all compounds	5E+2	8E+2	3E-7	1E-9	7E-6	7E-5
37	Rubidium-86	D, all compounds	5E+2	8E+2	3E-7	1E-9	7E-6	7E-5
37	Rubidium-87	D, all compounds	1E+3	2E+3	6E-7	2E-9	1E-5	1E-4
37	Rubidium-88 <sup>2</sup>	D, all compounds	2E+4 St wall (3E+4)	6E+4	3E-5	9E-8	-	-
				-	-	-	4E-4	4E-3
37	Rubidium-89 <sup>2</sup>	D, all compounds	4E+4 St wall (6E+4)	1E+5	6E-5	2E-7	-	-
				-	-	-	9E-4	9E-3
38	Strontium-80 <sup>2</sup>	D, all soluble compounds						

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide Class ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
		except $\text{SrTiO}_3$ Y, all insoluble compounds and $\text{SrTiO}_3$	4E+3	1E+4	5E-6	2E-8	6E-5	6E-4
			-	1E+4	5E-6	2E-8	-	-
38	Strontium-81 <sup>2</sup>	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	3E+4 2E+4	8E+4 8E+4	3E-5 3E-5	1E-7 1E-7	3E-4 -	3E-3 -
38	Strontium-82	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	3E+2 LLI wall (2E+2) 2E+2	4E+2 - 9E+1	2E-7 - 4E-8	6E-10 - 1E-10	- 3E-6 -	- 3E-5 -
38	Strontium-83	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	3E+3 2E+3	7E+3 4E+3	3E-6 1E-6	1E-8 5E-9	3E-5 -	3E-4 -
38	Strontium-85m <sup>2</sup>	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	2E+5 -	6E+5 8E+5	3E-4 4E-4	9E-7 1E-6	3E-3 -	3E-2 -
38	Strontium-85	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	3E+3 -	3E+3 2E+3	1E-6 6E-7	4E-9 2E-9	4E-5 -	4E-4 -
38	Strontium-87m	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	5E+4 4E+4	1E+5 2E+5	5E-5 6E-5	2E-7 2E-7	6E-4 -	6E-3 -
38	Strontium-89	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	6E+2 LLI wall (6E+2) 5E+2	8E+2 - 1E+2	4E-7 - 6E-8	1E-9 - 2E-10	- 8E-6 -	- 8E-5 -
38	Strontium-90	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	3E+1 Bone surf (4E+1) -	2E+1 Bone surf (2E+1) 4E+0	8E-9 - 2E-9	- 3E-11 6E-12	- 5E-7 -	- 5E-6 -
38	Strontium-91	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	2E+3 -	6E+3 4E+3	2E-6 1E-6	8E-9 5E-9	2E-5 -	2E-4 -
38	Strontium-92	D, see $^{80}\text{Sr}$ Y, see $^{80}\text{Sr}$	3E+3 -	9E+3 7E+3	4E-6 3E-6	1E-8 9E-9	4E-5 -	4E-4 -
39	Yttrium-86m <sup>2</sup>	W, all compounds except those given for Y Y, oxides and hydroxides	2E+4 -	6E+4 5E+4	2E-5 2E-5	8E-8 8E-8	3E-4 -	3E-3 -
39	Yttrium-86	W, see $^{86\text{m}}\text{Y}$ Y, see $^{86\text{m}}\text{Y}$	1E+3 -	3E+3 3E+3	1E-6 1E-6	5E-9 5E-9	2E-5 -	2E-4 -
39	Yttrium-87	W, see $^{86\text{m}}\text{Y}$ Y, see $^{86\text{m}}\text{Y}$	2E+3 -	3E+3 3E+3	1E-6 1E-6	5E-9 5E-9	3E-5 -	3E-4 -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Radionuclide

( $\mu\text{Ci}/\text{m}$ )

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI  
( $\mu\text{Ci}$ )

ALI  
( $\mu\text{Ci}$ )

DAC  
( $\mu\text{Ci}/\text{ml}$ )

Air  
( $\mu\text{Ci}/\text{ml}$ )

Water  
( $\mu\text{Ci}/\text{ml}$ )

Concentration

39	Yttrium-88	W, see $^{86\text{m}}\text{Y}$ Y, see $^{86\text{m}}\text{Y}$	1E+3 -	3E+2 2E+2	1E-7 1E-7	3E-10 3E-10	1E-5 -	1E-4 -
39	Yttrium-90m	W, see $^{86\text{m}}\text{Y}$ Y, see $^{86\text{m}}\text{Y}$	8E+3 -	1E+4 1E+4	5E-6 5E-6	2E-8 2E-8	1E-4 -	1E-3 -
39	Yttrium-90	W, see $^{86\text{m}}\text{Y}$  Y, see $^{86\text{m}}\text{Y}$	4E+2 LLI wall (5E+2) -	7E+2 - 6E+2	3E-7 - 3E-7	9E-10 - 9E-10	- 7E-6 -	- 7E-5 -
39	Yttrium-91m <sup>2</sup>	W, see $^{86\text{m}}\text{Y}$ Y, see $^{86\text{m}}\text{Y}$	1E+5 -	2E+5 2E+5	1E-4 7E-5	3E-7 2E-7	2E-3 -	2E-2 -
39	Yttrium-91	W, see $^{86\text{m}}\text{Y}$  Y, see $^{86\text{m}}\text{Y}$	5E+2 LLI wall (6E+2) -	2E+2 - 1E+2	7E-8 - 5E-8	2E-10 - 2E-10	- 8E-6 -	- 8E-5 -
39	Yttrium-92	W, see $^{86\text{m}}\text{Y}$ Y, see $^{86\text{m}}\text{Y}$	3E+3 -	9E+3 8E+3	4E-6 3E-6	1E-8 1E-8	4E-5 -	4E-4 -
39	Yttrium-93	W, see $^{86\text{m}}\text{Y}$ Y, see $^{86\text{m}}\text{Y}$	1E+3 -	3E+3 2E+3	1E-6 1E-6	4E-9 3E-9	2E-5 -	2E-4 -
39	Yttrium-94 <sup>2</sup>	W, see $^{86\text{m}}\text{Y}$  Y, see $^{86\text{m}}\text{Y}$	2E+4 St wall (3E+4) -	8E+4 - 8E+4	3E-5 - 3E-5	1E-7 - 1E-7	- 4E-4 -	- 4E-3 -
39	Yttrium-95 <sup>2</sup>	W, see $^{86\text{m}}\text{Y}$  Y, see $^{86\text{m}}\text{Y}$	4E+4 St wall (5E+4) -	2E+5 - 1E+5	6E-5 - 6E-5	2E-7 - 2E-7	- 7E-4 -	- 7E-3 -
40	Zirconium-86	D, all compounds except those given for W and Y W, oxides, hydroxides, halides, and nitrates Y, carbide	1E+3 - -	4E+3 3E+3 2E+3	2E-6 1E-6 1E-6	6E-9 4E-9 3E-9	2E-5 - -	2E-4 - -
40	Zirconium-88	D, see $^{86}\text{Zr}$ W, see $^{86}\text{Zr}$ Y, see $^{86}\text{Zr}$	4E+3 - -	2E+2 5E+2 3E+2	9E-8 2E-7 1E-7	3E-10 7E-10 4E-10	5E-5 - -	5E-4 - -
40	Zirconium-89	D, see $^{86}\text{Zr}$ W, see $^{86}\text{Zr}$ Y, see $^{86}\text{Zr}$	2E+3 - -	4E+3 2E+3 2E+3	1E-6 1E-6 1E-6	5E-9 3E-9 3E-9	2E-5 - -	2E-4 - -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Radionuclide No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI (μCi)

ALI (μCi)

DAC (μCi/ml)

Air (μCi/ml)

Water (μCi/ml)

Concentration

40	Zirconium-93	D, see <sup>86</sup> Zr	1E+3 Bone surf (3E+3)	6E+0 Bone surf (2E+1)	3E-9 -	-	-	-
		W, see <sup>86</sup> Zr	-	2E+1 Bone surf (6E+1)	1E-8 -	2E-11 9E-11	4E-5 -	4E-4 -
		Y, see <sup>86</sup> Zr	-	6E+1 Bone surf (7E+1)	2E-8 -	- 9E-11	- -	- -
40	Zirconium-95	D, see <sup>86</sup> Zr	1E+3	1E+2 Bone surf (3E+2)	5E-8 -	-	2E-5	2E-4
		W, see <sup>86</sup> Zr	-	4E+2	2E-7	4E-10 5E-10	-	-
		Y, see <sup>86</sup> Zr	-	3E+2	1E-7	4E-10	-	-
40	Zirconium-97	D, see <sup>86</sup> Zr	6E+2	2E+3	8E-7	3E-9	9E-6	9E-5
		W, see <sup>86</sup> Zr	-	1E+3	6E-7	2E-9	-	-
		Y, see <sup>86</sup> Zr	-	1E+3	5E-7	2E-9	-	-
41	Niobium-88 <sup>2</sup>	W, all compounds except those given for Y	5E+4 St wall (7E+4)	2E+5 -	9E-5 -	3E-7 -	- 1E-3	- 1E-2
		Y, oxides and hydroxides	-	2E+5	9E-5	3E-7	-	-
41	Niobium-89 <sup>2</sup> (66 min)	W, see <sup>88</sup> Nb	1E+4	4E+4	2E-5	6E-8	1E-4	1E-3
		Y, see <sup>88</sup> Nb	-	4E+4	2E-5	5E-8	-	-
41	Niobium-89 (122 min)	W, see <sup>88</sup> Nb	5E+3	2E+4	8E-6	3E-8	7E-5	7E-4
		Y, see <sup>88</sup> Nb	-	2E+4	6E-6	2E-8	-	-
41	Niobium-90	W, see <sup>88</sup> Nb	1E+3	3E+3	1E-6	4E-9	1E-5	1E-4
		Y, see <sup>88</sup> Nb	-	2E+3	1E-6	3E-9	-	-
41	Niobium-93m	W, see <sup>88</sup> Nb	9E+3 LLI wall (1E+4)	2E+3 -	8E-7 -	3E-9 -	- 2E-4	- 2E-3
		Y, see <sup>88</sup> Nb	-	2E+2	7E-8	2E-10	-	-
41	Niobium-94	W, see <sup>88</sup> Nb	9E+2	2E+2	8E-8	3E-10	1E-5	1E-4
		Y, see <sup>88</sup> Nb	-	2E+1	6E-9	2E-11	-	-
41	Niobium-95m	W, see <sup>88</sup> Nb	2E+3 LLI wall (2E+3)	3E+3 -	1E-6 -	4E-9 -	- 3E-5	- 3E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
		Y, see $^{88}\text{Nb}$	-	2E+3	9E-7	3E-9	-	-
41	Niobium-95	W, see $^{88}\text{Nb}$ Y, see $^{88}\text{Nb}$	2E+3 -	1E+3 1E+3	5E-7 5E-7	2E-9 2E-9	3E-5 -	3E-4 -
41	Niobium-96	W, see $^{88}\text{Nb}$ Y, see $^{88}\text{Nb}$	1E+3 -	3E+3 2E+3	1E-6 1E-6	4E-9 3E-9	2E-5 -	2E-4 -
41	Niobium-97 <sup>2</sup>	W, see $^{88}\text{Nb}$ Y, see $^{88}\text{Nb}$	2E+4 -	8E+4 7E+4	3E-5 3E-5	1E-7 1E-7	3E-4 -	3E-3 -
41	Niobium-98 <sup>2</sup>	W, see $^{88}\text{Nb}$ Y, see $^{88}\text{Nb}$	1E+4 -	5E+4 5E+4	2E-5 2E-5	8E-8 7E-8	2E-4 -	2E-3 -
42	Molybdenum-90	D, all compounds except those given for Y Y, oxides, hydroxides, and $\text{MoS}_2$	4E+3 2E+3	7E+3 5E+3	3E-6 2E-6	1E-8 6E-9	3E-5 -	3E-4 -
42	Molybdenum-93m	D, see $^{90}\text{Mo}$ Y, see $^{90}\text{Mo}$	9E+3 4E+3	2E+4 1E+4	7E-6 6E-6	2E-8 2E-8	6E-5 -	6E-4 -
42	Molybdenum-93	D, see $^{90}\text{Mo}$ Y, see $^{90}\text{Mo}$	4E+3 2E+4	5E+3 2E+2	2E-6 8E-8	8E-9 2E-10	5E-5 -	5E-4 -
42	Molybdenum-99	D, see $^{90}\text{Mo}$ Y, see $^{90}\text{Mo}$	2E+3 LLI wall (1E+3) 1E+3	3E+3 - 1E+3	1E-6 - 6E-7	4E-9 - 2E-9	- 2E-5 -	- 2E-4 -
42	Molybdenum-101 <sup>2</sup>	D, see $^{90}\text{Mo}$ Y, see $^{90}\text{Mo}$	4E+4 St wall (5E+4) -	1E+5 - 1E+5	6E-5 - 6E-5	2E-7 - 2E-7	- 7E-4 -	- 7E-3 -
43	Technetium-93m <sup>2</sup>	D, all compounds except those given for W W, oxides, hydroxides, halides, and nitrates	7E+4 -	2E+5 3E+5	6E-5 1E-4	2E-7 4E-7	1E-3 -	1E-2 -
43	Technetium-93	D, see $^{93\text{m}}\text{Tc}$ W, see $^{93\text{m}}\text{Tc}$	3E+4 -	7E+4 1E+5	3E-5 4E-5	1E-7 1E-7	4E-4 -	4E-3 -
43	Technetium-94m <sup>2</sup>	D, see $^{93\text{m}}\text{Tc}$ W, see $^{93\text{m}}\text{Tc}$	2E+4 -	4E+4 6E+4	2E-5 2E-5	6E-8 8E-8	3E-4 -	3E-3 -
43	Technetium-94	D, see $^{93\text{m}}\text{Tc}$ W, see $^{93\text{m}}\text{Tc}$	9E+3 -	2E+4 2E+4	8E-6 1E-5	3E-8 3E-8	1E-4 -	1E-3 -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III release to Sewers			Table I Occupational Values			Table II Effluent Concentrations		
Monthly			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	
Atomic No.	Average Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Ingestion	Inhalation		Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
			ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )			
43	Technetium-95m	D, see $^{93\text{m}}\text{Tc}$	4E+3	5E+3	2E-6	8E-9	5E-5	5E-4
		W, see $^{93\text{m}}\text{Tc}$	-	2E+3	8E-7	3E-9	-	-
43	Technetium-95	D, see $^{93\text{m}}\text{Tc}$	1E+4	2E+4	9E-6	3E-8	1E-4	1E-3
		W, see $^{93\text{m}}\text{Tc}$	-	2E+4	8E-6	3E-8	-	-
43	Technetium-96m <sup>2</sup>	D, see $^{93\text{m}}\text{Tc}$	2E+5	3E+5	1E-4	4E-7	2E-3	2E-2
		W, see $^{93\text{m}}\text{Tc}$	-	2E+5	1E-4	3E-7	-	-
43	Technetium-96	D, see $^{93\text{m}}\text{Tc}$	2E+3	3E+3	1E-6	5E-9	3E-5	3E-4
		W, see $^{93\text{m}}\text{Tc}$	-	2E+3	9E-7	3E-9	-	-
43	Technetium-97m	D, see $^{93\text{m}}\text{Tc}$	5E+3	7E+3	3E-6	-	6E-5	6E-4
		W, see $^{93\text{m}}\text{Tc}$	-	St wall (7E+3) 1E+3	- 5E-7	1E-8 2E-9	- -	- -
43	Technetium-97	D, see $^{93\text{m}}\text{Tc}$	4E+4	5E+4	2E-5	7E-8	5E-4	5E-3
		W, see $^{93\text{m}}\text{Tc}$	-	6E+3	2E-6	8E-9	-	-
43	Technetium-98	D, see $^{93\text{m}}\text{Tc}$	1E+3	2E+3	7E-7	2E-9	1E-5	1E-4
		W, see $^{93\text{m}}\text{Tc}$	-	3E+2	1E-7	4E-10	-	-
43	Technetium-99m	D, see $^{93\text{m}}\text{Tc}$	8E+4	2E+5	6E-5	2E-7	1E-3	1E-2
		W, see $^{93\text{m}}\text{Tc}$	-	2E+5	1E-4	3E-7	-	-
43	Technetium-99	D, see $^{93\text{m}}\text{Tc}$	4E+3	5E+3	2E-6	-	6E-5	6E-4
		W, see $^{93\text{m}}\text{Tc}$	-	St wall (6E+3) 7E+2	- 3E-7	8E-9 9E-10	- -	- -
43	Technetium-101 <sup>2</sup>	D, see $^{93\text{m}}\text{Tc}$	9E+4	3E+5	1E-4	5E-7	-	-
		W, see $^{93\text{m}}\text{Tc}$	St wall (1E+5)	-	-	-	2E-3	2E-2
43	Technetium-104 <sup>2</sup>	D, see $^{93\text{m}}\text{Tc}$	2E+4	7E+4	3E-5	1E-7	-	-
		W, see $^{93\text{m}}\text{Tc}$	St wall (3E+4)	-	-	-	4E-4	4E-3
44	Ruthenium-94 <sup>2</sup>	D, all compounds except those given for W and Y	2E+4	4E+4	2E-5	6E-8	2E-4	2E-3
		W, halides	-	6E+4	3E-5	9E-8	-	-
		Y, oxides and hydroxides	-	6E+4	2E-5	8E-8	-	-
44	Ruthenium-97	D, see $^{94}\text{Ru}$	8E+3	2E+4	8E-6	3E-8	1E-4	1E-3
		W, see $^{94}\text{Ru}$	-	1E+4	5E-6	2E-8	-	-
		Y, see $^{94}\text{Ru}$	-	1E+4	5E-6	2E-8	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Radionuclide No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI (μCi)

ALI (μCi)

DAC (μCi/ml)

Air (μCi/ml)

Water (μCi/ml)

Concentration

44	Ruthenium-103	D, see <sup>94</sup> Ru W, see <sup>94</sup> Ru Y, see <sup>94</sup> Ru	2E+3 - -	2E+3 1E+3 6E+2	7E-7 4E-7 3E-7	2E-9 1E-9 9E-10	3E-5 - -	3E-4 - -
44	Ruthenium-105	D, see <sup>94</sup> Ru W, see <sup>94</sup> Ru Y, see <sup>94</sup> Ru	5E+3 - -	1E+4 1E+4 1E+4	6E-6 6E-6 5E-6	2E-8 2E-8 2E-8	7E-5 - -	7E-4 - -
44	Ruthenium-106	D, see <sup>94</sup> Ru  W, see <sup>94</sup> Ru Y, see <sup>94</sup> Ru	2E+2 LLI wall (2E+2) - -	9E+1 - 5E+1 1E+1	4E-8 - 2E-8 5E-9	1E-10 - 8E-11 2E-11	- 3E-6 - -	- 3E-5 - -
45	Rhodium-99m	D, all compounds except those given for W and Y W, halides Y, oxides and hydroxides	2E+4 - -	6E+4 8E+4 7E+4	2E-5 3E-5 3E-5	8E-8 1E-7 9E-8	2E-4 - -	2E-3 - -
45	Rhodium-99	D, see <sup>99m</sup> Rh W, see <sup>99m</sup> Rh Y, see <sup>99m</sup> Rh	2E+3 - -	3E+3 2E+3 2E+3	1E-6 9E-7 8E-7	4E-9 3E-9 3E-9	3E-5 - -	3E-4 - -
45	Rhodium-100	D, see <sup>99m</sup> Rh W, see <sup>99m</sup> Rh Y, see <sup>99m</sup> Rh	2E+3 - -	5E+3 4E+3 4E+3	2E-6 2E-6 2E-6	7E-9 6E-9 5E-9	2E-5 - -	2E-4 - -
45	Rhodium-101m	D, see <sup>99m</sup> Rh W, see <sup>99m</sup> Rh Y, see <sup>99m</sup> Rh	6E+3 - -	1E+4 8E+3 8E+3	5E-6 4E-6 3E-6	2E-8 1E-8 1E-8	8E-5 - -	8E-4 - -
45	Rhodium-101	D, see <sup>99m</sup> Rh W, see <sup>99m</sup> Rh Y, see <sup>99m</sup> Rh	2E+3 - -	5E+2 8E+2 2E+2	2E-7 3E-7 6E-8	7E-10 1E-9 2E-10	3E-5 - -	3E-4 - -
45	Rhodium-102m	D, see <sup>99m</sup> Rh  W, see <sup>99m</sup> Rh Y, see <sup>99m</sup> Rh	1E+3 LLI wall (1E+3) - -	5E+2 - 4E+2 1E+2	2E-7 - 2E-7 5E-8	7E-10 - 5E-10 2E-10	- 2E-5 - -	- 2E-4 - -
45	Rhodium-102	D, see <sup>99m</sup> Rh W, see <sup>99m</sup> Rh Y, see <sup>99m</sup> Rh	6E+2 - -	9E+1 2E+2 6E+1	4E-8 7E-8 2E-8	1E-10 2E-10 8E-11	8E-6 - -	8E-5 - -
45	Rhodium-103m <sup>2</sup>	D, see <sup>99m</sup> Rh W, see <sup>99m</sup> Rh Y, see <sup>99m</sup> Rh	4E+5 - -	1E+6 1E+6 1E+6	5E-4 5E-4 5E-4	2E-6 2E-6 2E-6	6E-3 - -	6E-2 - -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III			Table I			Table II		
release to			Occupational Values			Effluent		
Sewers						Concentrations		
Monthly			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Average			Ingestion	Inhalation				
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
	(μCi/m)							
45	Rhodium-105	D, see <sup>99m</sup> Rh	4E+3	1E+4	5E-6	2E-8	-	-
		LLI wall (4E+3)	-	-	-	-	5E-5	5E-4
		W, see <sup>99m</sup> Rh	-	6E+3	3E-6	9E-9	-	-
		Y, see <sup>99m</sup> Rh	-	6E+3	2E-6	8E-9	-	-
45	Rhodium-106m	D, see <sup>99m</sup> Rh	8E+3	3E+4	1E-5	4E-8	1E-4	1E-3
		W, see <sup>99m</sup> Rh	-	4E+4	2E-5	5E-8	-	-
		Y, see <sup>99m</sup> Rh	-	4E+4	1E-5	5E-8	-	-
45	Rhodium-107 <sup>2</sup>	D, see <sup>99m</sup> Rh	7E+4	2E+5	1E-4	3E-7	-	-
		St wall (9E+4)	-	-	-	-	1E-3	1E-2
		W, see <sup>99m</sup> Rh	-	3E+5	1E-4	4E-7	-	-
		Y, see <sup>99m</sup> Rh	-	3E+5	1E-4	3E-7	-	-
46	Palladium-100	D, all compounds except those given for W and Y	1E+3	1E+3	6E-7	2E-9	2E-5	2E-4
		W, nitrates	-	1E+3	5E-7	2E-9	-	-
		Y, oxides and hydroxides	-	1E+3	6E-7	2E-9	-	-
46	Palladium-101	D, see <sup>100</sup> Pd	1E+4	3E+4	1E-5	5E-8	2E-4	2E-3
		W, see <sup>100</sup> Pd	-	3E+4	1E-5	5E-8	-	-
		Y, see <sup>100</sup> Pd	-	3E+4	1E-5	4E-8	-	-
46	Palladium-103	D, see <sup>100</sup> Pd	6E+3	6E+3	3E-6	9E-9	-	-
		LLI wall (7E+3)	-	-	-	-	1E-4	1E-3
		W, see <sup>100</sup> Pd	-	4E+3	2E-6	6E-9	-	-
		Y, see <sup>100</sup> Pd	-	4E+3	1E-6	5E-9	-	-
46	Palladium-107	D, see <sup>100</sup> Pd	3E+4	2E+4	9E-6	-	-	-
		LLI wall Kidneys (4E+4) (2E+4)	-	-	-	3E-8	5E-4	5E-3
		W, see <sup>100</sup> Pd	-	7E+3	3E-6	1E-8	-	-
		Y, see <sup>100</sup> Pd	-	4E+2	2E-7	6E-10	-	-
46	Palladium-109	D, see <sup>100</sup> Pd	2E+3	6E+3	3E-6	9E-9	3E-5	3E-4
		W, see <sup>100</sup> Pd	-	5E+3	2E-6	8E-9	-	-
		Y, see <sup>100</sup> Pd	-	5E+3	2E-6	6E-9	-	-
47	Silver-102 <sup>2</sup>	D, all compounds except those given for W and Y	5E+4	2E+5	8E-5	2E-7	-	-
		St wall (6E+4)	-	-	-	-	9E-4	9E-3
		W, nitrates and sulfides	-	2E+5	9E-5	3E-7	-	-
		Y, oxides and hydroxides	-	2E+5	8E-5	3E-7	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III			Table I			Table II		
release to Sewers			Occupational Values			Effluent Concentrations		
Monthly			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Average			Ingestion	Inhalation				
Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
47	Silver-103 <sup>2</sup>	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	4E+4 - -	1E+5 1E+5 1E+5	4E-5 5E-5 5E-5	1E-7 2E-7 2E-7	5E-4 - -	5E-3 - -
47	Silver-104m <sup>2</sup>	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	3E+4 - -	9E+4 1E+5 1E+5	4E-5 5E-5 5E-5	1E-7 2E-7 2E-7	4E-4 - -	4E-3 - -
47	Silver-104 <sup>2</sup>	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	2E+4 - -	7E+4 1E+5 1E+5	3E-5 6E-5 6E-5	1E-7 2E-7 2E-7	3E-4 - -	3E-3 - -
47	Silver-105	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	3E+3 - -	1E+3 2E+3 2E+3	4E-7 7E-7 7E-7	1E-9 2E-9 2E-9	4E-5 - -	4E-4 - -
47	Silver-106m	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	8E+2 - -	7E+2 9E+2 9E+2	3E-7 4E-7 4E-7	1E-9 1E-9 1E-9	1E-5 - -	1E-4 - -
47	Silver-106 <sup>2</sup>	D, see <sup>102</sup> Ag	6E+4	2E+5	8E-5	3E-7	-	-
		St. wall (6E+4)	-	-	-	-	9E-4	9E-3
		W, see <sup>102</sup> Ag	-	2E+5	9E-5	3E-7	-	-
		Y, see <sup>102</sup> Ag	-	2E+5	8E-5	3E-7	-	-
47	Silver-108m	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	6E+2 - -	2E+2 3E+2 2E+1	8E-8 1E-7 1E-8	3E-10 4E-10 3E-11	9E-6 - -	9E-5 - -
47	Silver-110m	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	5E+2 - -	1E+2 2E+2 9E+1	5E-8 8E-8 4E-8	2E-10 3E-10 1E-10	6E-6 - -	6E-5 - -
47	Silver-111	D, see <sup>102</sup> Ag	9E+2	2E+3	6E-7	-	-	-
		LLI wall (1E+3)	-	Liver (2E+3)	-	2E-9	2E-5	2E-4
		W, see <sup>102</sup> Ag	-	9E+2	4E-7	1E-9	-	-
		Y, see <sup>102</sup> Ag	-	9E+2	4E-7	1E-9	-	-
47	Silver-112	D, see <sup>102</sup> Ag W, see <sup>102</sup> Ag Y, see <sup>102</sup> Ag	3E+3 - -	8E+3 1E+4 9E+3	3E-6 4E-6 4E-6	1E-8 1E-8 1E-8	4E-5 - -	4E-4 - -
47	Silver-115 <sup>2</sup>	D, see <sup>102</sup> Ag	3E+4	9E+4	4E-5	1E-7	-	-
		St wall (3E+4)	-	-	-	-	4E-4	4E-3

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III		Table 1			Table II			
release to Sewers		Occupational Values			Effluent Concentrations			
Monthly		Col. 1	Col. 2	Col. 3	Col. 1	Col. 2		
Average Radionuclide		Ingestion	Inhalation		Air	Water	Concentration	
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
	(μCi/m)							
		W, see <sup>102</sup> Ag	-	9E+4	4E-5	1E-7	-	-
		Y, see <sup>102</sup> Ag	-	8E+4	3E-5	1E-7	-	-
48	Cadmium-104 <sup>2</sup>	D, all compounds except those given for W and Y	2E+4	7E+4	3E-5	9E-8	3E-4	3E-3
		W, sulfides, halides, and nitrates	-	1E+5	5E-5	2E-7	-	-
		Y, oxides and hydroxides	-	1E+5	5E-5	2E-7	-	-
48	Cadmium-107	D, see <sup>104</sup> Cd	2E+4	5E+4	2E-5	8E-8	3E-4	3E-3
		W, see <sup>104</sup> Cd	-	6E+4	2E-5	8E-8	-	-
		Y, see <sup>104</sup> Cd	-	5E+4	2E-5	7E-8	-	-
48	Cadmium-109	D, see <sup>104</sup> Cd	3E+2	4E+1	1E-8	-	-	-
		Kidneys (4E+2)	-	5E+1	-	7E-11	6E-6	6E-5
		W, see <sup>104</sup> Cd	-	1E+2	5E-8	-	-	-
		Kidneys (1E+2)	-	-	-	2E-10	-	-
		Y, see <sup>104</sup> Cd	-	1E+2	5E-8	2E-10	-	-
48	Cadmium-113m	D, see <sup>104</sup> Cd	2E+1	2E+0	1E-9	-	-	-
		Kidneys (4E+1)	-	4E+0	-	5E-12	5E-7	5E-6
		W, see <sup>104</sup> Cd	-	8E+0	4E-9	-	-	-
		Kidneys (1E+1)	-	-	-	2E-11	-	-
		Y, see <sup>104</sup> Cd	-	1E+1	5E-9	2E-11	-	-
48	Cadmium-113	D, see <sup>104</sup> Cd	2E+1	2E+0	9E-10	-	-	-
		Kidneys (3E+1)	-	3E+0	-	5E-12	4E-7	4E-6
		W, see <sup>104</sup> Cd	-	8E+0	3E-9	-	-	-
		Kidneys (1E+1)	-	-	-	2E-11	-	-
		Y, see <sup>104</sup> Cd	-	1E+1	6E-9	2E-11	-	-
48	Cadmium-115m	D, see <sup>104</sup> Cd	3E+2	5E+1	2E-8	-	4E-6	4E-5
		Kidneys (8E+1)	-	-	-	1E-10	-	-
		W, see <sup>104</sup> Cd	-	1E+2	5E-8	2E-10	-	-
		Y, see <sup>104</sup> Cd	-	1E+2	6E-8	2E-10	-	-
48	Cadmium-115	D, see <sup>104</sup> Cd	9E+2	1E+3	6E-7	2E-9	-	-
		LLI wall (1E+3)	-	-	-	-	1E-5	1E-4
		W, see <sup>104</sup> Cd	-	1E+3	5E-7	2E-9	-	-
		Y, see <sup>104</sup> Cd	-	1E+3	6E-7	2E-9	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
48	Cadmium-117m	D, see $^{104}\text{Cd}$	5E+3	1E+4	5E-6	2E-8	6E-5	6E-4
		W, see $^{104}\text{Cd}$	-	2E+4	7E-6	2E-8	-	-
		Y, see $^{104}\text{Cd}$	-	1E+4	6E-6	2E-8	-	-
48	Cadmium-117	D, see $^{104}\text{Cd}$	5E+3	1E+4	5E-6	2E-8	6E-5	6E-4
		W, see $^{104}\text{Cd}$	-	2E+4	7E-6	2E-8	-	-
		Y, see $^{104}\text{Cd}$	-	1E+4	6E-6	2E-8	-	-
49	Indium-109	D, all compounds except those given for W	2E+4	4E+4	2E-5	6E-8	3E-4	3E-3
		W, oxides, hydroxides, halides, and nitrates	-	6E+4	3E-5	9E-8	-	-
49	Indium-110 <sup>2</sup> (69.1 min)	D, see $^{109}\text{In}$	2E+4	4E+4	2E-5	6E-8	2E-4	2E-3
		W, see $^{109}\text{In}$	-	6E+4	2E-5	8E-8	-	-
49	Indium-110 (4.9 h)	D, see $^{109}\text{In}$	5E+3	2E+4	7E-6	2E-8	7E-5	7E-4
		W, see $^{109}\text{In}$	-	2E+4	8E-6	3E-8	-	-
49	Indium-111	D, see $^{109}\text{In}$	4E+3	6E+3	3E-6	9E-9	6E-5	6E-4
		W, see $^{109}\text{In}$	-	6E+3	3E-6	9E-9	-	-
49	Indium-112 <sup>2</sup>	D, see $^{109}\text{In}$	2E+5	6E+5	3E-4	9E-7	2E-3	2E-2
		W, see $^{109}\text{In}$	-	7E+5	3E-4	1E-6	-	-
49	Indium-113m <sup>2</sup>	D, see $^{109}\text{In}$	5E+4	1E+5	6E-5	2E-7	7E-4	7E-3
		W, see $^{109}\text{In}$	-	2E+5	8E-5	3E-7	-	-
49	Indium-114m	D, see $^{109}\text{In}$	3E+2 LLI wall (4E+2)	6E+1	3E-8	9E-11	-	-
		W, see $^{109}\text{In}$	-	1E+2	4E-8	1E-10	5E-6	5E-5
49	Indium-115m	D, see $^{109}\text{In}$	1E+4	4E+4	2E-5	6E-8	2E-4	2E-3
		W, see $^{109}\text{In}$	-	5E+4	2E-5	7E-8	-	-
49	Indium-115	D, see $^{109}\text{In}$	4E+1	1E+0	6E-10	2E-12	5E-7	5E-6
		W, see $^{109}\text{In}$	-	5E+0	2E-9	8E-12	-	-
49	Indium-116m <sup>2</sup>	D, see $^{109}\text{In}$	2E+4	8E+4	3E-5	1E-7	3E-4	3E-3
		W, see $^{109}\text{In}$	-	1E+5	5E-5	2E-7	-	-
49	Indium-117m <sup>2</sup>	D, see $^{109}\text{In}$	1E+4	3E+4	1E-5	5E-8	2E-4	2E-3
		W, see $^{109}\text{In}$	-	4E+4	2E-5	6E-8	-	-
49	Indium-117 <sup>2</sup>	D, see $^{109}\text{In}$	6E+4	2E+5	7E-5	2E-7	8E-4	8E-3
		W, see $^{109}\text{In}$	-	2E+5	9E-5	3E-7	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III release to Sewers			Table I Occupational Values			Table II Effluent Concentrations		
Atomic No.	Average Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Oral Ingestion	Inhalation		Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	
			ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )			
49	Indium-119m <sup>2</sup>	D, see <sup>109</sup> In	4E+4 St wall (5E+4)	1E+5	5E-5	2E-7	-	-
		W, see <sup>109</sup> In	-	1E+5	6E-5	2E-7	7E-4	7E-3
50	Tin-110	D, all compounds except those given for W W, sulfides, oxides, hydroxides, halides, nitrates, and stannic phosphate	4E+3	1E+4	5E-6	2E-8	5E-5	5E-4
			-	1E+4	5E-6	2E-8	-	-
50	Tin-111 <sup>2</sup>	D, see <sup>110</sup> Sn	7E+4	2E+5	9E-5	3E-7	1E-3	1E-2
		W, see <sup>110</sup> Sn	-	3E+5	1E-4	4E-7	-	-
50	Tin-113	D, see <sup>110</sup> Sn	2E+3 LLI wall (2E+3)	1E+3	5E-7	2E-9	-	-
		W, see <sup>110</sup> Sn	-	5E+2	2E-7	8E-10	3E-5	3E-4
50	Tin-117m	D, see <sup>110</sup> Sn	2E+3 LLI wall (2E+3)	1E+3 Bone surf (2E+3)	5E-7	-	-	-
		W, see <sup>110</sup> Sn	-	1E+3	6E-7	3E-9 2E-9	3E-5	3E-4
50	Tin-119m	D, see <sup>110</sup> Sn	3E+3 LLI wall (4E+3)	2E+3	1E-6	3E-9	-	-
		W, see <sup>110</sup> Sn	-	1E+3	4E-7	1E-9	6E-5	6E-4
50	Tin-121m	D, see <sup>110</sup> Sn	3E+3 LLI wall (4E+3)	9E+2	4E-7	1E-9	-	-
		W, see <sup>110</sup> Sn	-	5E+2	2E-7	8E-10	5E-5	5E-4
50	Tin-121	D, see <sup>110</sup> Sn	6E+3 LLI wall (6E+3)	2E+4	6E-6	2E-8	-	-
		W, see <sup>110</sup> Sn	-	1E+4	5E-6	2E-8	8E-5	8E-4
50	Tin-123m <sup>2</sup>	D, see <sup>110</sup> Sn	5E+4	1E+5	5E-5	2E-7	7E-4	7E-3
		W, see <sup>110</sup> Sn	-	1E+5	6E-5	2E-7	-	-
50	Tin-123	D, see <sup>110</sup> Sn	5E+2 LLI wall (6E+2)	6E+2	3E-7	9E-10	-	-
		W, see <sup>110</sup> Sn	-	2E+2	7E-8	2E-10	9E-6	9E-5
50	Tin-125	D, see <sup>110</sup> Sn	4E+2	9E+2	4E-7	1E-9	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III		Table I			Table II			
release to		Occupational Values			Effluent			
Sewers					Concentrations			
Monthly		Col. 1	Col. 2	Col. 3	Col. 1	Col. 2		
Average Radionuclide		Ingestion	Inhalation		Air	Water	Concentration	
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
	(μCi/m)							
			LLI wall (5E+2)	-	-	-	6E-6	6E-5
		W, see <sup>110</sup> Sn	-	4E+2	1E-7	5E-10	-	-
50	Tin-126	D, see <sup>110</sup> Sn	3E+2	6E+1	2E-8	8E-11	4E-6	4E-5
		W, see <sup>110</sup> Sn	-	7E+1	3E-8	9E-11	-	-
50	Tin-127	D, see <sup>110</sup> Sn	7E+3	2E+4	8E-6	3E-8	9E-5	9E-4
		W, see <sup>110</sup> Sn	-	2E+4	8E-6	3E-8	-	-
50	Tin-128 <sup>2</sup>	D, see <sup>110</sup> Sn	9E+3	3E+4	1E-5	4E-8	1E-4	1E-3
		W, see <sup>110</sup> Sn	-	4E+4	1E-5	5E-8	-	-
51	Antimony-115 <sup>2</sup>	D, all compounds except those given for W	8E+4	2E+5	1E-4	3E-7	1E-3	1E-2
		W, oxides, hydroxides, halides, sulfides, sulfates, and nitrates	-	3E+5	1E-4	4E-7	-	-
51	Antimony-116m <sup>2</sup>	D, see <sup>115</sup> Sb	2E+4	7E+4	3E-5	1E-7	3E-4	3E-3
		W, see <sup>115</sup> Sb	-	1E+5	6E-5	2E-7	-	-
51	Antimony-116 <sup>2</sup>	D, see <sup>115</sup> Sb	7E+4	3E+5	1E-4	4E-7	-	-
		St wall (9E+4)	-	-	-	-	1E-3	1E-2
		W, see <sup>115</sup> Sb	-	3E+5	1E-4	5E-7	-	-
51	Antimony-117	D, see <sup>115</sup> Sb	7E+4	2E+5	9E-5	3E-7	9E-4	9E-3
		W, see <sup>115</sup> Sb	-	3E+5	1E-4	4E-7	-	-
51	Antimony-118m	D, see <sup>115</sup> Sb	6E+3	2E+4	8E-6	3E-8	7E-5	7E-4
		W, see <sup>115</sup> Sb	5E+3	2E+4	9E-6	3E-8	-	-
51	Antimony-119	D, see <sup>115</sup> Sb	2E+4	5E+4	2E-5	6E-8	2E-4	2E-3
		W, see <sup>115</sup> Sb	2E+4	3E+4	1E-5	4E-8	-	-
51	Antimony-120 <sup>2</sup> (16 min)	D, see <sup>115</sup> Sb	1E+5	4E+5	2E-4	6E-7	-	-
		St wall (2E+5)	-	-	-	-	2E-3	2E-2
		W, see <sup>115</sup> Sb	-	5E+5	2E-4	7E-7	-	-
51	Antimony-120 (5.76 d)	D, see <sup>115</sup> Sb	1E+3	2E+3	9E-7	3E-9	1E-5	1E-4
		W, see <sup>115</sup> Sb	9E+2	1E+3	5E-7	2E-9	-	-
51	Antimony-122	D, see <sup>115</sup> Sb	8E+2	2E+3	1E-6	3E-9	-	-
		LLI wall (8E+2)	-	-	-	-	1E-5	1E-4
		W, see <sup>115</sup> Sb	7E+2	1E+3	4E-7	2E-9	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III			Table I			Table II		
release to Sewers			Occupational Values			Effluent Concentrations		
Monthly			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Average			Ingestion	Inhalation				
Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
51	Antimony-124m <sup>2</sup>	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	3E+5 2E+5	8E+5 6E+5	4E-4 2E-4	1E-6 8E-7	3E-3 -	3E-2 -
51	Antimony-124	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	6E+2 5E+2	9E+2 2E+2	4E-7 1E-7	1E-9 3E-10	7E-6 -	7E-5 -
51	Antimony-125	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	2E+3 -	2E+3 5E+2	1E-6 2E-7	3E-9 7E-10	3E-5 -	3E-4 -
51	Antimony-126m <sup>2</sup>	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	5E+4 St wall (7E+4) -	2E+5 - 2E+5	8E-5 - 8E-5	3E-7 - 3E-7	- 9E-4 -	- 9E-3 -
51	Antimony-126	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	6E+2 5E+2	1E+3 5E+2	5E-7 2E-7	2E-9 7E-10	7E-6 -	7E-5 -
51	Antimony-127	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	8E+2 LLI wall (8E+2) 7E+2	2E+3 - 9E+2	9E-7 - 4E-7	3E-9 - 1E-9	- 1E-5 -	- 1E-4 -
51	Antimony-128 <sup>2</sup> (10.4 min)	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	8E+4 St wall (1E+5) -	4E+5 - 4E+5	2E-4 - 2E-4	5E-7 - 6E-7	- 1E-3 -	- 1E-2 -
51	Antimony-128 (9.01 h)	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	1E+3 -	4E+3 3E+3	2E-6 1E-6	6E-9 5E-9	2E-5 -	2E-4 -
51	Antimony-129	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	3E+3 -	9E+3 9E+3	4E-6 4E-6	1E-8 1E-8	4E-5 -	4E-4 -
51	Antimony-130 <sup>2</sup>	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	2E+4 -	6E+4 8E+4	3E-5 3E-5	9E-8 1E-7	3E-4 -	3E-3 -
51	Antimony-131 <sup>2</sup>	D, see <sup>115</sup> Sb W, see <sup>115</sup> Sb	1E+4 Thyroid (2E+4) -	2E+4 Thyroid (4E+4) 2E+4 Thyroid (4E+4) -	1E-5 - 1E-5 -	- 6E-8 6E-8	- 2E-4 -	- 2E-3 -
52	Tellurium-116	D, all compounds except those given for W W, oxides, hydroxides, and nitrates	8E+3 -	2E+4 3E+4	9E-6 1E-5	3E-8 4E-8	1E-4 -	1E-3 -
52	Tellurium-121m	D, see <sup>116</sup> Te	5E+2	2E+2	8E-8	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral Ingestion (μCi)	Col. 2 Inhalation (μCi)	Col. 3 Inhalation (μCi/ml)	Col. 1 Air (μCi/ml)	Col. 2 Water (μCi/ml)	Concentration
			Bone surf (7E+2)	Bone surf (4E+2)	-	5E-10	1E-5	1E-4
		W, see <sup>116</sup> Te	-	4E+2	2E-7	6E-10	-	-
52	Tellurium-121	D, see <sup>116</sup> Te	3E+3	4E+3	2E-6	6E-9	4E-5	4E-4
		W, see <sup>116</sup> Te	-	3E+3	1E-6	4E-9	-	-
52	Tellurium-123m	D, see <sup>116</sup> Te	6E+2	2E+2	9E-8	-	-	-
			Bone surf (1E+3)	Bone surf (5E+2)	-	8E-10	1E-5	1E-4
		W, see <sup>116</sup> Te	-	5E+2	2E-7	8E-10	-	-
52	Tellurium-123	D, see <sup>116</sup> Te	5E+2	2E+2	8E-8	-	-	-
			Bone surf (1E+3)	Bone surf (5E+2)	-	7E-10	2E-5	2E-4
		W, see <sup>116</sup> Te	-	4E+2	2E-7	-	-	-
			-	Bone surf (1E+3)	-	2E-9	-	-
52	Tellurium-125m	D, see <sup>116</sup> Te	1E+3	4E+2	2E-7	-	-	-
			Bone surf (1E+3)	Bone surf (1E+3)	-	1E-9	2E-5	2E-4
		W, see <sup>116</sup> Te	-	7E+2	3E-7	1E-9	-	-
52	Tellurium-127m	D, see <sup>116</sup> Te	6E+2	3E+2	1E-7	-	9E-6	9E-5
			-	Bone surf (4E+2)	-	6E-10	-	-
		W, see <sup>116</sup> Te	-	3E+2	1E-7	4E-10	-	-
52	Tellurium-127	D, see <sup>116</sup> Te	7E+3	2E+4	9E-6	3E-8	1E-4	1E-3
		W, see <sup>116</sup> Te	-	2E+4	7E-6	2E-8	-	-
52	Tellurium-129m	D, see <sup>116</sup> Te	5E+2	6E+2	3E-7	9E-10	7E-6	7E-5
		W, see <sup>116</sup> Te	-	2E+2	1E-7	3E-10	-	-
52	Tellurium-129 <sup>2</sup>	D, see <sup>116</sup> Te	3E+4	6E+4	3E-5	9E-8	4E-4	4E-3
		W, see <sup>116</sup> Te	-	7E+4	3E-5	1E-7	-	-
52	Tellurium-131m	D, see <sup>116</sup> Te	3E+2	4E+2	2E-7	-	-	-
			Thyroid (6E+2)	Thyroid (1E+3)	-	2E-9	8E-6	8E-5
		W, see <sup>116</sup> Te	-	4E+2	2E-7	-	-	-
			-	Thyroid (9E+2)	-	1E-9	-	-
52	Tellurium-131 <sup>2</sup>	D, see <sup>116</sup> Te	3E+3	5E+3	2E-6	-	-	-
			Thyroid (6E+3)	Thyroid (1E+4)	-	2E-8	8E-5	8E-4
		W, see <sup>116</sup> Te	-	5E+3	2E-6	-	-	-
			-	Thyroid	-	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci/m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci/ml}$ )	Col. 1 Air ( $\mu\text{Ci/ml}$ )	Col. 2 Water ( $\mu\text{Ci/ml}$ )	
	Monthly Average							
52	Tellurium-132	D, see $^{116}\text{Te}$ W, see $^{116}\text{Te}$	- 2E+2 Thyroid (7E+2) -	(1E+4) 2E+2 Thyroid (8E+2) 2E+2 Thyroid (6E+2)	- 9E-8 - 9E-8 -	2E-8 - 1E-9 -	- - 9E-6 -	- - 9E-5 -
52	Tellurium-133m <sup>2</sup>	D, see $^{116}\text{Te}$ W, see $^{116}\text{Te}$	3E+3 Thyroid (6E+3) -	5E+3 Thyroid (1E+4) 5E+3 Thyroid (1E+4)	2E-6 - 2E-6 -	- 2E-8 -	- 9E-5 -	- 9E-4 -
52	Tellurium-133 <sup>2</sup>	D, see $^{116}\text{Te}$ W, see $^{116}\text{Te}$	1E+4 Thyroid (3E+4) -	2E+4 Thyroid (6E+4) 2E+4 Thyroid	9E-6 - 9E-6 -	- 8E-8 -	- 4E-4 -	- 4E-3 -
52	Tellurium-134 <sup>2</sup>	D, see $^{116}\text{Te}$ W, see $^{116}\text{Te}$	2E+4 Thyroid (2E+4) -	(6E+4) 2E+4 Thyroid (5E+4) 2E+4 Thyroid (5E+4)	- 1E-5 - 1E-5 -	8E-8 - 7E-8 -	- 3E-4 -	- 3E-3 -
53	Iodine-120m <sup>2</sup>	D, all compounds	1E+4 Thyroid (1E+4)	2E+4 -	9E-6 -	3E-8 -	- 2E-4	- 2E-3
53	Iodine-120 <sup>2</sup>	D, all compounds	4E+3 Thyroid (8E+3)	9E+3 Thyroid (1E+4)	4E-6 -	- 2E-8	- 1E-4	- 1E-3
53	Iodine-121	D, all compounds	1E+4 Thyroid (3E+4)	2E+4 Thyroid (5E+4)	8E-6 -	- 7E-8	- 4E-4	- 4E-3
53	Iodine-123	D, all compounds	3E+3 Thyroid (1E+4)	6E+3 Thyroid (2E+4)	3E-6 -	- 2E-8	- 1E-4	- 1E-3
53	Iodine-124	D, all compounds	5E+1 Thyroid	8E+1 Thyroid	3E-8	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Radionuclide

( $\mu\text{Ci}/\text{m}$ )

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI  
( $\mu\text{Ci}$ )

ALI  
( $\mu\text{Ci}$ )

DAC  
( $\mu\text{Ci}/\text{ml}$ )

Air  
( $\mu\text{Ci}/\text{ml}$ )

Water  
( $\mu\text{Ci}/\text{ml}$ )

Concentration

Atomic No.	Radionuclide	Class	ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
			(2E+2)	(3E+2)	-	4E-10	2E-6	2E-5
53	Iodine-125	D, all compounds	4E+1 Thyroid (1E+2)	6E+1 Thyroid (2E+2)	3E-8	-	-	-
53	Iodine-126	D, all compounds	2E+1 Thyroid (7E+1)	4E+1 Thyroid (1E+2)	1E-8	-	-	-
53	Iodine-128 <sup>2</sup>	D, all compounds	4E+4 St wall (6E+4)	1E+5	5E-5	2E-7	-	-
53	Iodine-129	D, all compounds	5E+0 Thyroid (2E+1)	9E+0 Thyroid (3E+1)	4E-9	-	-	-
53	Iodine-130	D, all compounds	4E+2 Thyroid (1E+3)	7E+2 Thyroid (2E+3)	3E-7	-	-	-
53	Iodine-131	D, all compounds	3E+1 Thyroid (9E+1)	5E+1 Thyroid (2E+2)	2E-8	-	-	-
53	Iodine-132m <sup>2</sup>	D, all compounds	4E+3 Thyroid (1E+4)	8E+3 Thyroid (2E+4)	4E-6	-	-	-
53	Iodine-132	D, all compounds	4E+3 Thyroid (9E+3)	8E+3 Thyroid (1E+4)	3E-6	-	-	-
53	Iodine-133	D, all compounds	1E+2 Thyroid (5E+2)	3E+2 Thyroid (9E+2)	1E-7	-	-	-
53	Iodine-134 <sup>2</sup>	D, all compounds	2E+4	5E+4	2E-5	6E-8	-	-
53	Iodine-135	D, all compounds	8E+2 Thyroid (3E+3)	2E+3 Thyroid (4E+3)	7E-7	-	-	-
54	Xenon-120 <sup>2</sup>	Submersion <sup>1</sup>	-	-	1E-5	4E-8	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III		Table I			Table II			
release to		Occupational Values			Effluent			
Sewers					Concentrations			
Monthly		Col. 1	Col. 2	Col. 3	Col. 1	Col. 2		
Average		Ingestion	Inhalation		Air	Water	Concentration	
Atomic No.	Radionuclide	ALI	ALI	DAC	Air	Water		
	( $\mu\text{Ci}/\text{m}$ )	( $\mu\text{Ci}$ )	( $\mu\text{Ci}$ )	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )		
54	Xenon-121 <sup>2</sup>	Submersion <sup>1</sup>	-	-	2E-6	1E-8	-	
54	Xenon-122	Submersion <sup>1</sup>	-	-	7E-5	3E-7	-	
54	Xenon-123	Submersion <sup>1</sup>	-	-	6E-6	3E-8	-	
54	Xenon-125	Submersion <sup>1</sup>	-	-	2E-5	7E-8	-	
54	Xenon-127	Submersion <sup>1</sup>	-	-	1E-5	6E-8	-	
54	Xenon-129m	Submersion <sup>1</sup>	-	-	2E-4	9E-7	-	
54	Xenon-131m	Submersion <sup>1</sup>	-	-	4E-4	2E-6	-	
54	Xenon-133m	Submersion <sup>1</sup>	-	-	1E-4	6E-7	-	
54	Xenon-133	Submersion <sup>1</sup>	-	-	1E-4	5E-7	-	
54	Xenon-135m <sup>2</sup>	Submersion <sup>1</sup>	-	-	9E-6	4E-8	-	
54	Xenon-135	Submersion <sup>1</sup>	-	-	1E-5	7E-8	-	
54	Xenon-138 <sup>2</sup>	Submersion <sup>1</sup>	-	-	4E-6	2E-8	-	
55	Cesium-125 <sup>2</sup>	D, all compounds	5E+4 St wall (9E+4)	1E+5	6E-5	2E-7	-	
						1E-3	1E-2	
55	Cesium-127	D, all compounds	6E+4	9E+4	4E-5	1E-7	9E-4	
55	Cesium-129	D, all compounds	2E+4	3E+4	1E-5	5E-8	3E-4	
55	Cesium-130 <sup>2</sup>	D, all compounds	6E+4 St wall (1E+5)	2E+5	8E-5	3E-7	-	
						1E-3	1E-2	
55	Cesium-131	D, all compounds	2E+4	3E+4	1E-5	4E-8	3E-4	
55	Cesium-132	D, all compounds	3E+3	4E+3	2E-6	6E-9	4E-5	
55	Cesium-134m	D, all compounds	1E+5 St wall (1E+5)	1E+5	6E-5	2E-7	-	
						2E-3	2E-2	
55	Cesium-134	D, all compounds	7E+1	1E+2	4E-8	2E-10	9E-7	
55	Cesium-135m <sup>2</sup>	D, all compounds	1E+5	2E+5	8E-5	3E-7	1E-3	
55	Cesium-135	D, all compounds	7E+2	1E+3	5E-7	2E-9	1E-5	

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion (μCi)	Col. 2 ALI (μCi)	Col. 3 DAC (μCi/ml)	Col. 1 Air (μCi/ml)	Col. 2 Water (μCi/ml)	
55	Cesium-136	D, all compounds	4E+2	7E+2	3E-7	9E-10	6E-6	6E-5
55	Cesium-137	D, all compounds	1E+2	2E+2	6E-8	2E-10	1E-6	1E-5
55	Cesium-138 <sup>2</sup>	D, all compounds	2E+4 St wall (3E+4)	6E+4 -	2E-5 -	8E-8 -	- 4E-4	- 4E-3
56	Barium-126 <sup>2</sup>	D, all compounds	6E+3	2E+4	6E-6	2E-8	8E-5	8E-4
56	Barium-128	D, all compounds	5E+2	2E+3	7E-7	2E-9	7E-6	7E-5
56	Barium-131m <sup>2</sup>	D, all compounds	4E+5 St wall (5E+5)	1E+6 -	6E-4 -	2E-6 -	- 7E-3	- 7E-2
56	Barium-131	D, all compounds	3E+3	8E+3	3E-6	1E-8	4E-5	4E-4
56	Barium-133m	D, all compounds	2E+3 LLI wall (3E+3)	9E+3 -	4E-6 -	1E-8 -	- 4E-5	- 4E-4
56	Barium-133	D, all compounds	2E+3	7E+2	3E-7	9E-10	2E-5	2E-4
56	Barium-135m	D, all compounds	3E+3	1E+4	5E-6	2E-8	4E-5	4E-4
56	Barium-139 <sup>2</sup>	D, all compounds	1E+4	3E+4	1E-5	4E-8	2E-4	2E-3
56	Barium-140	D, all compounds	5E+2 LLI wall (6E+2)	1E+3 -	6E-7 -	2E-9 -	- 8E-6	- 8E-5
56	Barium-141 <sup>2</sup>	D, all compounds	2E+4	7E+4	3E-5	1E-7	3E-4	3E-3
56	Barium-142 <sup>2</sup>	D, all compounds	5E+4	1E+5	6E-5	2E-7	7E-4	7E-3
57	Lanthanum-131 <sup>2</sup>	D, all compounds except those given for W W, oxides and hydroxides	5E+4 -	1E+5 2E+5	5E-5 7E-5	2E-7 2E-7	6E-4 -	6E-3 -
57	Lanthanum-132	D, see <sup>131</sup> La W, see <sup>131</sup> La	3E+3 -	1E+4 1E+4	4E-6 5E-6	1E-8 2E-8	4E-5 -	4E-4 -
57	Lanthanum-135	D, see <sup>131</sup> La W, see <sup>131</sup> La	4E+4 -	1E+5 9E+4	4E-5 4E-5	1E-7 1E-7	5E-4 -	5E-3 -
57	Lanthanum-137	D, see <sup>131</sup> La	1E+4	6E+1 Liver	3E-8	-	2E-4	2E-3

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Radionuclide

( $\mu\text{Ci}/\text{m}$ )

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI  
( $\mu\text{Ci}$ )

ALI  
( $\mu\text{Ci}$ )

DAC  
( $\mu\text{Ci}/\text{ml}$ )

Air  
( $\mu\text{Ci}/\text{ml}$ )

Water  
( $\mu\text{Ci}/\text{ml}$ )

Concentration

		W, see $^{131}\text{La}$	-	(7E+1)	-	1E-10	-	-
			-	3E+2	1E-7	-	-	-
			-	Liver (3E+2)	-	4E-10	-	-
57	Lanthanum-138	D, see $^{131}\text{La}$	9E+2	4E+0	1E-9	5E-12	1E-5	1E-4
		W, see $^{131}\text{La}$	-	1E+1	6E-9	2E-11	-	-
57	Lanthanum-140	D, see $^{131}\text{La}$	6E+2	1E+3	6E-7	2E-9	9E-6	9E-5
		W, see $^{131}\text{La}$	-	1E+3	5E-7	2E-9	-	-
57	Lanthanum-141	D, see $^{131}\text{La}$	4E+3	9E+3	4E-6	1E-8	5E-5	5E-4
		W, see $^{131}\text{La}$	-	1E+4	5E-6	2E-8	-	-
57	Lanthanum-142 <sup>2</sup>	D, see $^{131}\text{La}$	8E+3	2E+4	9E-6	3E-8	1E-4	1E-3
		W, see $^{131}\text{La}$	-	3E+4	1E-5	5E-8	-	-
57	Lanthanum-143 <sup>2</sup>	D, see $^{131}\text{La}$	4E+4	1E+5	4E-5	1E-7	-	-
			St wall (4E+4)	-	-	-	5E-4	5E-3
		W, see $^{131}\text{La}$	-	9E+4	4E-5	1E-7	-	-
58	Cerium-134	W, all compounds except those given for Y	5E+2	7E+2	3E-7	1E-9	-	-
			LLI wall (6E+2)	-	-	-	8E-6	8E-5
		Y, oxides, hydroxides, and fluorides	-	7E+2	3E-7	9E-10	-	-
58	Cerium-135	W, see $^{134}\text{Ce}$	2E+3	4E+3	2E-6	5E-9	2E-5	2E-4
		Y, see $^{134}\text{Ce}$	-	4E+3	1E-6	5E-9	-	-
58	Cerium-137m	W, see $^{134}\text{Ce}$	2E+3	4E+3	2E-6	6E-9	-	-
			LLI wall (2E+3)	-	-	-	3E-5	3E-4
		Y, see $^{134}\text{Ce}$	-	4E+3	2E-6	5E-9	-	-
58	Cerium-137	W, see $^{134}\text{Ce}$	5E+4	1E+5	6E-5	2E-7	7E-4	7E-3
		Y, see $^{134}\text{Ce}$	-	1E+5	5E-5	2E-7	-	-
58	Cerium-139	W, see $^{134}\text{Ce}$	5E+3	8E+2	3E-7	1E-9	7E-5	7E-4
		Y, see $^{134}\text{Ce}$	-	7E+2	3E-7	9E-10	-	-
58	Cerium-141	W, see $^{134}\text{Ce}$	2E+3	7E+2	3E-7	1E-9	-	-
			LLI wall (2E+3)	-	-	-	3E-5	3E-4
		Y, see $^{134}\text{Ce}$	-	6E+2	2E-7	8E-10	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III			Table I			Table II		
release to			Occupational Values			Effluent		
Sewers						Concentrations		
Monthly			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Average			Ingestion	Inhalation				
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
	(μCi/m)							
58	Cerium-143	W, see <sup>134</sup> Ce	1E+3 LLI wall (1E+3)	2E+3	8E-7	3E-9	-	-
		Y, see <sup>134</sup> Ce	-	2E+3	7E-7	2E-9	2E-5	2E-4
58	Cerium-144	W, see <sup>134</sup> Ce	2E+2 LLI wall (3E+2)	3E+1	1E-8	4E-11	-	-
		Y, see <sup>134</sup> Ce	-	1E+1	6E-9	2E-11	3E-6	3E-5
59	Praseodymium-136 <sup>2</sup> W, all compounds except those given for Y		5E+4 St wall (7E+4)	2E+5	1E-4	3E-7	-	-
		Y, oxides, hydroxides, carbides, and fluorides	-	2E+5	9E-5	3E-7	1E-3	1E-2
59	Praseodymium-137 <sup>2</sup> W, see <sup>136</sup> Pr		4E+4	2E+5	6E-5	2E-7	5E-4	5E-3
		Y, see <sup>136</sup> Pr	-	1E+5	6E-5	2E-7	-	-
59	Praseodymium-138m W, see <sup>136</sup> Pr		1E+4	5E+4	2E-5	8E-8	1E-4	1E-3
		Y, see <sup>136</sup> Pr	-	4E+4	2E-5	6E-8	-	-
59	Praseodymium-139 W, see <sup>136</sup> Pr		4E+4	1E+5	5E-5	2E-7	6E-4	6E-3
		Y, see <sup>136</sup> Pr	-	1E+5	5E-5	2E-7	-	-
59	Praseodymium-142m <sup>2</sup> W, see <sup>136</sup> Pr		8E+4	2E+5	7E-5	2E-7	1E-3	1E-2
		Y, see <sup>136</sup> Pr	-	1E+5	6E-5	2E-7	-	-
59	Praseodymium-142 W, see <sup>136</sup> Pr		1E+3	2E+3	9E-7	3E-9	1E-5	1E-4
		Y, see <sup>136</sup> Pr	-	2E+3	8E-7	3E-9	-	-
59	Praseodymium-143 W, see <sup>136</sup> Pr		9E+2 LLI wall (1E+3)	8E+2	3E-7	1E-9	-	-
		Y, see <sup>136</sup> Pr	-	7E+2	3E-7	9E-10	2E-5	2E-4
59	Praseodymium-144 <sup>2</sup> W, see <sup>136</sup> Pr		3E+4 St wall (4E+4)	1E+5	5E-5	2E-7	-	-
		Y, see <sup>136</sup> Pr	-	1E+5	5E-5	2E-7	6E-4	6E-3
59	Praseodymium-145 W, see <sup>136</sup> Pr		3E+3	9E+3	4E-6	1E-8	4E-5	4E-4
		Y, see <sup>136</sup> Pr	-	8E+3	3E-6	1E-8	-	-
59	Praseodymium-147 <sup>2</sup> W, see <sup>136</sup> Pr		5E+4 St wall (8E+4)	2E+5	8E-5	3E-7	-	-
			-	-	-	-	1E-3	1E-2

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III			Table I			Table II		
release to			Occupational Values			Effluent		
Sewers						Concentrations		
Monthly			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Average			Ingestion	Inhalation				
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
	(μCi/m)							
		Y, see <sup>136</sup> Pr	-	2E+5	8E-5	3E-7	-	-
60	Neodymium-136 <sup>2</sup>	W, all compounds except those given for Y	1E+4	6E+4	2E-5	8E-8	2E-4	2E-3
		Y, oxides, hydroxides, carbides, and fluorides	-	5E+4	2E-5	8E-8	-	-
60	Neodymium-138	W, see <sup>136</sup> Nd	2E+3	6E+3	3E-6	9E-9	3E-5	3E-4
		Y, see <sup>136</sup> Nd	-	5E+3	2E-6	7E-9	-	-
60	Neodymium-139m	W, see <sup>136</sup> Nd	5E+3	2E+4	7E-6	2E-8	7E-5	7E-4
		Y, see <sup>136</sup> Nd	-	1E+4	6E-6	2E-8	-	-
60	Neodymium-139 <sup>2</sup>	W, see <sup>136</sup> Nd	9E+4	3E+5	1E-4	5E-7	1E-3	1E-2
		Y, see <sup>136</sup> Nd	-	3E+5	1E-4	4E-7	-	-
60	Neodymium-141	W, see <sup>136</sup> Nd	2E+5	7E+5	3E-4	1E-6	2E-3	2E-2
		Y, see <sup>136</sup> Nd	-	6E+5	3E-4	9E-7	-	-
60	Neodymium-147	W, see <sup>136</sup> Nd	1E+3	9E+2	4E-7	1E-9	-	-
		LLI wall (1E+3)	-	-	-	-	2E-5	2E-4
		Y, see <sup>136</sup> Nd	-	8E+2	4E-7	1E-9	-	-
60	Neodymium-149 <sup>2</sup>	W, see <sup>136</sup> Nd	1E+4	3E+4	1E-5	4E-8	1E-4	1E-3
		Y, see <sup>136</sup> Nd	-	2E+4	1E-5	3E-8	-	-
60	Neodymium-151 <sup>2</sup>	W, see <sup>136</sup> Nd	7E+4	2E+5	8E-5	3E-7	9E-4	9E-3
		Y, see <sup>136</sup> Nd	-	2E+5	8E-5	3E-7	-	-
61	Promethium-141 <sup>2</sup>	W, all compounds except those given for Y	5E+4	2E+5	8E-5	3E-7	-	-
		St wall (6E+4)	-	-	-	-	8E-4	8E-3
		Y, oxides, hydroxides, carbides, and fluorides	-	2E+5	7E-5	2E-7	-	-
61	Promethium-143	W, see <sup>141</sup> Pm	5E+3	6E+2	2E-7	8E-10	7E-5	7E-4
		Y, see <sup>141</sup> Pm	-	7E+2	3E-7	1E-9	-	-
61	Promethium-144	W, see <sup>141</sup> Pm	1E+3	1E+2	5E-8	2E-10	2E-5	2E-4
		Y, see <sup>141</sup> Pm	-	1E+2	5E-8	2E-10	-	-
61	Promethium-145	W, see <sup>141</sup> Pm	1E+4	2E+2	7E-8	-	1E-4	1E-3
		Bone surf (2E+2)	-	-	-	3E-10	-	-
		Y, see <sup>141</sup> Pm	-	2E+2	8E-8	3E-10	-	-
61	Promethium-146	W, see <sup>141</sup> Pm	2E+3	5E+1	2E-8	7E-11	2E-5	2E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide Class ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations			
			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	Concentration	
			Oral	Inhalation		Air	Water		
Monthly		Ingestion	ALI	DAC	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )			
		Y, see $^{141}\text{Pm}$	-	4E+1	2E-8	6E-11	-	-	
61	Promethium-147	W, see $^{141}\text{Pm}$	4E+3 LLI wall (5E+3)	1E+2 Bone surf (2E+2)	5E-8	-	3E-10	7E-5	7E-4
		Y, see $^{141}\text{Pm}$	-	1E+2	6E-8	2E-10	-	-	
61	Promethium-148m	W, see $^{141}\text{Pm}$	7E+2	3E+2	1E-7	4E-10	1E-5	1E-4	
		Y, see $^{141}\text{Pm}$	-	3E+2	1E-7	5E-10	-	-	
61	Promethium-148	W, see $^{141}\text{Pm}$	4E+2 LLI wall (5E+2)	5E+2	2E-7	8E-10	-	-	
		Y, see $^{141}\text{Pm}$	-	-	-	-	7E-6	7E-5	
61	Promethium-149	W, see $^{141}\text{Pm}$	1E+3 LLI wall (1E+3)	2E+3	8E-7	3E-9	-	-	
		Y, see $^{141}\text{Pm}$	-	-	-	-	2E-5	2E-4	
61	Promethium-150	W, see $^{141}\text{Pm}$	5E+3	2E+4	8E-6	3E-8	7E-5	7E-4	
		Y, see $^{141}\text{Pm}$	-	2E+4	7E-6	2E-8	-	-	
61	Promethium-151	W, see $^{141}\text{Pm}$	2E+3	4E+3	1E-6	5E-9	2E-5	2E-4	
		Y, see $^{141}\text{Pm}$	-	3E+3	1E-6	4E-9	-	-	
62	Samarium-141m <sup>2</sup>	W, all compounds	3E+4	1E+5	4E-5	1E-7	4E-4	4E-3	
62	Samarium-141 <sup>2</sup>	W, all compounds	5E+4 St wall (6E+4)	2E+5	8E-5	2E-7	-	-	
			-	-	-	-	8E-4	8E-3	
62	Samarium-142 <sup>2</sup>	W, all compounds	8E+3	3E+4	1E-5	4E-8	1E-4	1E-3	
62	Samarium-145	W, all compounds	6E+3	5E+2	2E-7	7E-10	8E-5	8E-4	
62	Samarium-146	W, all compounds	1E+1 Bone surf (3E+1)	4E-2 Bone surf (6E-2)	1E-11	-	-	-	
			-	-	-	9E-14	3E-7	3E-6	
62	Samarium-147	W, all compounds	2E+1 Bone surf (3E+1)	4E-2 Bone surf (7E-2)	2E-11	-	-	-	
			-	-	-	1E-13	4E-7	4E-6	
62	Samarium-151	W, all compounds	1E+4 LLI wall (1E+4)	1E+2 Bone surf (2E+2)	4E-8	-	-	-	
			-	-	-	2E-10	2E-4	2E-3	
62	Samarium-153	W, all compounds	2E+3	3E+3	1E-6	4E-9	-	-	

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
	Monthly Average							
			LLI wall ( $2\text{E}+3$ )	-	-	-	$3\text{E}-5$	$3\text{E}-4$
62	Samarium-155 <sup>2</sup>	W, all compounds	$6\text{E}+4$ St wall ( $8\text{E}+4$ )	$2\text{E}+5$	$9\text{E}-5$	$3\text{E}-7$	-	-
62	Samarium-156	W, all compounds	$5\text{E}+3$	$9\text{E}+3$	$4\text{E}-6$	$1\text{E}-8$	$7\text{E}-5$	$7\text{E}-4$
63	Europium-145	W, all compounds	$2\text{E}+3$	$2\text{E}+3$	$8\text{E}-7$	$3\text{E}-9$	$2\text{E}-5$	$2\text{E}-4$
63	Europium-146	W, all compounds	$1\text{E}+3$	$1\text{E}+3$	$5\text{E}-7$	$2\text{E}-9$	$1\text{E}-5$	$1\text{E}-4$
63	Europium-147	W, all compounds	$3\text{E}+3$	$2\text{E}+3$	$7\text{E}-7$	$2\text{E}-9$	$4\text{E}-5$	$4\text{E}-4$
63	Europium-148	W, all compounds	$1\text{E}+3$	$4\text{E}+2$	$1\text{E}-7$	$5\text{E}-10$	$1\text{E}-5$	$1\text{E}-4$
63	Europium-149	W, all compounds	$1\text{E}+4$	$3\text{E}+3$	$1\text{E}-6$	$4\text{E}-9$	$2\text{E}-4$	$2\text{E}-3$
63	Europium-150 (12.62 h)	W, all compounds	$3\text{E}+3$	$8\text{E}+3$	$4\text{E}-6$	$1\text{E}-8$	$4\text{E}-5$	$4\text{E}-4$
63	Europium-150 (34.2 y)	W, all compounds	$8\text{E}+2$	$2\text{E}+1$	$8\text{E}-9$	$3\text{E}-11$	$1\text{E}-5$	$1\text{E}-4$
63	Europium-152m	W, all compounds	$3\text{E}+3$	$6\text{E}+3$	$3\text{E}-6$	$9\text{E}-9$	$4\text{E}-5$	$4\text{E}-4$
63	Europium-152	W, all compounds	$8\text{E}+2$	$2\text{E}+1$	$1\text{E}-8$	$3\text{E}-11$	$1\text{E}-5$	$1\text{E}-4$
63	Europium-154	W, all compounds	$5\text{E}+2$	$2\text{E}+1$	$8\text{E}-9$	$3\text{E}-11$	$7\text{E}-6$	$7\text{E}-5$
63	Europium-155	W, all compounds	$4\text{E}+3$	$9\text{E}+1$	$4\text{E}-8$	-	$5\text{E}-5$	$5\text{E}-4$
			-	Bone surf ( $1\text{E}+2$ )	-	$2\text{E}-10$	-	-
63	Europium-156	W, all compounds	$6\text{E}+2$	$5\text{E}+2$	$2\text{E}-7$	$6\text{E}-10$	$8\text{E}-6$	$8\text{E}-5$
63	Europium-157	W, all compounds	$2\text{E}+3$	$5\text{E}+3$	$2\text{E}-6$	$7\text{E}-9$	$3\text{E}-5$	$3\text{E}-4$
63	Europium-158 <sup>2</sup>	W, all compounds	$2\text{E}+4$	$6\text{E}+4$	$2\text{E}-5$	$8\text{E}-8$	$3\text{E}-4$	$3\text{E}-3$
64	Gadolinium-145 <sup>2</sup> D, all compounds except those given for W		$5\text{E}+4$ St wall ( $5\text{E}+4$ )	$2\text{E}+5$	$6\text{E}-5$	$2\text{E}-7$	-	-
		W, oxides, hydroxides, and fluorides	-	$2\text{E}+5$	$7\text{E}-5$	$2\text{E}-7$	$6\text{E}-4$	$6\text{E}-3$

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Ingestion ALI ( $\mu\text{Ci}$ )	Inhalation ALI ( $\mu\text{Ci}$ )      DAC ( $\mu\text{Ci}/\text{ml}$ )		Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	
64	Gadolinium-146	D, see <sup>145</sup> Gd W, see <sup>145</sup> Gd	1E+3 -	1E+2 3E+2	5E-8 1E-7	2E-10 4E-10	2E-5 -	2E-4 -
64	Gadolinium-147	D, see <sup>145</sup> Gd W, see <sup>145</sup> Gd	2E+3 -	4E+3 4E+3	2E-6 1E-6	6E-9 5E-9	3E-5 -	3E-4 -
64	Gadolinium-148	D, see <sup>145</sup> Gd  W, see <sup>145</sup> Gd	1E+1 Bone surf (2E+1) - -	8E+3 Bone surf (2E-2) 3E-2 Bone surf (6E-2)	3E-12 - 1E-11 -	- 2E-14 - 8E-14	- 3E-7 - -	- 3E-6 - -
64	Gadolinium-149	D, see <sup>145</sup> Gd W, see <sup>145</sup> Gd	3E+3 -	2E+3 2E+3	9E-7 1E-6	3E-9 3E-9	4E-5 -	4E-4 -
64	Gadolinium-151	D, see <sup>145</sup> Gd  W, see <sup>145</sup> Gd	6E+3 - -	4E+2 Bone surf (6E+2) 1E+3	2E-7 - 5E-7	- 9E-10 2E-9	9E-5 - -	9E-4 - -
64	Gadolinium-152	D, see <sup>145</sup> Gd  W, see <sup>145</sup> Gd	2E+1 Bone surf (3E+1) - -	1E-2 Bone surf (2E-2) 4E-2 Bone surf (8E-2)	4E-12 - 2E-11 -	- 3E-14 - 1E-13	- 4E-7 - -	- 4E-6 - -
64	Gadolinium-153	D, see <sup>145</sup> Gd  W, see <sup>145</sup> Gd	5E+3 - -	1E+2 Bone surf (2E+2) 6E+2	6E-8 - 2E-7	- 3E-10 8E-10	6E-5 - -	6E-4 - -
64	Gadolinium-159	D, see <sup>145</sup> Gd W, see <sup>145</sup> Gd	3E+3 -	8E+3 6E+3	3E-6 2E-6	1E-8 8E-9	4E-5 -	4E-4 -
65	Terbium-147 <sup>2</sup>	W, all compounds	9E+3	3E+4	1E-5	5E-8	1E-4	1E-3
65	Terbium-149	W, all compounds	5E+3	7E+2	3E-7	1E-9	7E-5	7E-4
65	Terbium-150	W, all compounds	5E+3	2E+4	9E-6	3E-8	7E-5	7E-4
65	Terbium-151	W, all compounds	4E+3	9E+3	4E-6	1E-8	5E-5	5E-4
65	Terbium-153	W, all compounds	5E+3	7E+3	3E-6	1E-8	7E-5	7E-4
65	Terbium-154	W, all compounds	2E+3	4E+3	2E-6	6E-9	2E-5	2E-4
65	Terbium-155	W, all compounds	6E+3	8E+3	3E-6	1E-8	8E-5	8E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI (μCi)	Col. 2 ALI (μCi)	Col. 3 DAC (μCi/ml)	Col. 1 Air (μCi/ml)	Col. 2 Water (μCi/ml)	
65	Terbium-156m (5.0 h)	W, all compounds	2E+4	3E+4	1E-5	4E-8	2E-4	2E-3
65	Terbium-156m (24.4 h)	W, all compounds	7E+3	8E+3	3E-6	1E-8	1E-4	1E-3
65	Terbium-156	W, all compounds	1E+3	1E+3	6E-7	2E-9	1E-5	1E-4
65	Terbium-157	W, all compounds	5E+4 LLI wall (5E+4)	3E+2 Bone surf (6E+2)	1E-7	-	-	-
65	Terbium-158	W, all compounds	1E+3	2E+1	8E-9	3E-11	2E-5	2E-4
65	Terbium-160	W, all compounds	8E+2	2E+2	9E-8	3E-10	1E-5	1E-4
65	Terbium-161	W, all compounds	2E+3 LLI wall (2E+3)	2E+3	7E-7	2E-9	-	-
66	Dysprosium-155	W, all compounds	9E+3	3E+4	1E-5	4E-8	1E-4	1E-3
66	Dysprosium-157	W, all compounds	2E+4	6E+4	3E-5	9E-8	3E-4	3E-3
66	Dysprosium-159	W, all compounds	1E+4	2E+3	1E-6	3E-9	2E-4	2E-3
66	Dysprosium-165	W, all compounds	1E+4	5E+4	2E-5	6E-8	2E-4	2E-3
66	Dysprosium-166	W, all compounds	6E+2 LLI wall (8E+2)	7E+2	3E-7	1E-9	-	-
67	Holmium-155 <sup>2</sup>	W, all compounds	4E+4	2E+5	6E-5	2E-7	6E-4	6E-3
67	Holmium-157 <sup>2</sup>	W, all compounds	3E+5	1E+6	6E-4	2E-6	4E-3	4E-2
67	Holmium-159 <sup>2</sup>	W, all compounds	2E+5	1E+6	4E-4	1E-6	3E-3	3E-2
67	Holmium-161	W, all compounds	1E+5	4E+5	2E-4	6E-7	1E-3	1E-2
67	Holmium-162m <sup>2</sup>	W, all compounds	5E+4	3E+5	1E-4	4E-7	7E-4	7E-3
67	Holmium-162 <sup>2</sup>	W, all compounds	5E+5 St wall (8E+5)	2E+6	1E-3	3E-6	-	-
67	Holmium-164m <sup>2</sup>	W, all compounds	1E+5	3E+5	1E-4	4E-7	1E-3	1E-2

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Table 1 Occupational Values			Table II Effluent Concentrations		
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Ingestion ALI (μCi)	Inhalation ALI (μCi)      DAC (μCi/ml)		Air (μCi/ml)	Water (μCi/ml)	
67	Holmium-164 <sup>2</sup>	W, all compounds	2E+5 St wall (2E+5)	6E+5	3E-4	9E-7	-	-
67	Holmium-166m	W, all compounds	6E+2	7E+0	3E-9	9E-12	9E-6	9E-5
67	Holmium-166	W, all compounds	9E+2 LLI wall (9E+2)	2E+3	7E-7	2E-9	-	-
67	Holmium-167	W, all compounds	2E+4	6E+4	2E-5	8E-8	2E-4	2E-3
68	Erbium-161	W, all compounds	2E+4	6E+4	3E-5	9E-8	2E-4	2E-3
68	Erbium-165	W, all compounds	6E+4	2E+5	8E-5	3E-7	9E-4	9E-3
68	Erbium-169	W, all compounds	3E+3 LLI wall (4E+3)	3E+3	1E-6	4E-9	-	-
68	Erbium-171	W, all compounds	4E+3	1E+4	4E-6	1E-8	5E-5	5E-4
68	Erbium-172	W, all compounds	1E+3 LLI wall (1E+3)	1E+3	6E-7	2E-9	-	-
69	Thulium-162 <sup>2</sup>	W, all compounds	7E+4 St wall (7E+4)	3E+5	1E-4	4E-7	-	-
69	Thulium-166	W, all compounds	4E+3	1E+4	6E-6	2E-8	6E-5	6E-4
69	Thulium-167	W, all compounds	2E+3 LLI wall (2E+3)	2E+3	8E-7	3E-9	-	-
69	Thulium-170	W, all compounds	8E+2 LLI wall (1E+3)	2E+2	9E-8	3E-10	-	-
69	Thulium-171	W, all compounds	1E+4 LLI wall (1E+4)	3E+2 Bone surf (6E+2)	1E-7	-	-	-
69	Thulium-172	W, all compounds	7E+2 LLI wall (8E+2)	1E+3	5E-7	2E-9	-	-
69	Thulium-173	W, all compounds	4E+3	1E+4	5E-6	2E-8	6E-5	6E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Racionuclide  
No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI  
(μCi)

ALI  
(μCi)

DAC  
(μCi/ml)

Air  
(μCi/ml)

Water  
(μCi/ml)

Concentration

69	Thulium-175 <sup>2</sup>	W, all compounds	7E+4 St wall (9E+4)	3E+5	1E-4	4E-7	-	-
70	Ytterbium-162 <sup>2</sup>	W, all compounds except those given for Y Y, oxides, hydroxides, and fluorides	7E+4	3E+5	1E-4	4E-7	1E-3	1E-2
70	Ytterbium-166	W, see <sup>162</sup> Yb Y, see <sup>162</sup> Yb	1E+3	2E+3	8E-7	3E-9	2E-5	2E-4
70	Ytterbium-167 <sup>2</sup>	W, see <sup>162</sup> Yb Y, see <sup>162</sup> Yb	3E+5	8E+5	3E-4	1E-6	4E-3	4E-2
70	Ytterbium-169	W, see <sup>162</sup> Yb Y, see <sup>162</sup> Yb	2E+3	8E+2	4E-7	1E-9	2E-5	2E-4
70	Ytterbium-175	W, see <sup>162</sup> Yb Y, see <sup>162</sup> Yb	3E+3 LLI wall (3E+3)	4E+3	1E-6	5E-9	-	-
70	Ytterbium-177 <sup>2</sup>	W, see <sup>162</sup> Yb Y, see <sup>162</sup> Yb	2E+4	5E+4	2E-5	7E-8	2E-4	2E-3
70	Ytterbium-178 <sup>2</sup>	W, see <sup>162</sup> Yb Y, see <sup>162</sup> Yb	1E+4	4E+4	2E-5	6E-8	2E-4	2E-3
71	Lutetium-169	W, all compounds except those given for Y Y, oxides, hydroxides, and fluorides	3E+3	4E+3	2E-6	6E-9	3E-5	3E-4
71	Lutetium-170	W, see <sup>169</sup> Lu Y, see <sup>169</sup> Lu	1E+3	2E+3	9E-7	3E-9	2E-5	2E-4
71	Lutetium-171	W, see <sup>169</sup> Lu Y, see <sup>169</sup> Lu	2E+3	2E+3	8E-7	3E-9	3E-5	3E-4
71	Lutetium-172	W, see <sup>169</sup> Lu Y, see <sup>169</sup> Lu	1E+3	1E+3	5E-7	2E-9	1E-5	1E-4
71	Lutetium-173	W, see <sup>169</sup> Lu Y, see <sup>169</sup> Lu	5E+3	3E+2 Bone surf (5E+2)	1E-7	-	7E-5	7E-4
			-	3E+2	-	6E-10	-	-
			-	3E+2	1E-7	4E-10	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations			Concentration
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2		
			Ingestion ALI ( $\mu\text{Ci}$ )	Inhalation ALI ( $\mu\text{Ci}$ )      DAC ( $\mu\text{Ci}/\text{ml}$ )		Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )		
71	Lutetium-174m	W, see $^{169}\text{Lu}$	2E+3 LLI wall (3E+3)	2E+2 Bone surf (3E+2)	1E-7	-	-	-	4E-4
		Y, see $^{169}\text{Lu}$	-	2E+2	9E-8	5E-10 3E-10	4E-5	-	-
71	Lutetium-174	W, see $^{169}\text{Lu}$	5E+3	1E+2 Bone surf (2E+2)	5E-8	-	7E-5	7E-4	-
		Y, see $^{169}\text{Lu}$	-	2E+2	6E-8	3E-10 2E-10	-	-	-
71	Lutetium-176m	W, see $^{169}\text{Lu}$	8E+3	3E+4	1E-5	3E-8	1E-4	1E-3	-
		Y, see $^{169}\text{Lu}$	-	2E+4	9E-6	3E-8	-	-	-
71	Lutetium-176	W, see $^{169}\text{Lu}$	7E+2	5E+0 Bone surf (1E+1)	2E-9	-	1E-5	1E-4	-
		Y, see $^{169}\text{Lu}$	-	8E+0	3E-9	2E-11 1E-11	-	-	-
71	Lutetium-177m	W, see $^{169}\text{Lu}$	7E+2	1E+2 Bone surf (1E+2)	5E-8	-	1E-5	1E-4	-
		Y, see $^{169}\text{Lu}$	-	8E+1	3E-8	2E-10 1E-10	-	-	-
71	Lutetium-177	W, see $^{169}\text{Lu}$	2E+3 LLI wall (3E+3)	2E+3	9E-7	3E-9	-	-	-
		Y, see $^{169}\text{Lu}$	-	2E+3	9E-7	-	4E-5	4E-4	-
71	Lutetium-178m <sup>2</sup>	W, see $^{169}\text{Lu}$	5E+4 St. wall (6E+4)	2E+5	8E-5	3E-7	-	-	-
		Y, see $^{169}\text{Lu}$	-	2E+5	7E-5	-	8E-4	8E-3	-
71	Lutetium-178 <sup>2</sup>	W, see $^{169}\text{Lu}$	4E+4 St wall (4E+4)	1E+5	5E-5	2E-7	-	-	-
		Y, see $^{169}\text{Lu}$	-	1E+5	5E-5	-	6E-4	6E-3	-
71	Lutetium-179	W, see $^{169}\text{Lu}$	6E+3	2E+4	8E-6	3E-8	9E-5	9E-4	-
		Y, see $^{169}\text{Lu}$	-	2E+4	6E-6	3E-8	-	-	-
72	Hafnium-170	D, all compounds except those given for W W, oxides, hydroxides, carbides, and nitrates	3E+3	6E+3	2E-6	8E-9	4E-5	4E-4	-
			-	5E+3	2E-6	6E-9	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III			Table I			Table II		
release to			Occupational Values			Effluent		
Sewers						Concentrations		
Monthly			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Average			Ingestion	Inhalation				
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
	(μCi/m)							
72	Hafnium-172	D, see <sup>170</sup> Hf	1E+3	9E+0	4E-9	-	2E-5	2E-4
		W, see <sup>170</sup> Hf	-	Bone surf (2E+1)	-	3E-11	-	-
			-	4E+1	2E-8	-	-	-
			-	Bone surf (6E+1)	-	8E-11	-	-
72	Hafnium-173	D, see <sup>170</sup> Hf	5E+3	1E+4	5E-6	2E-8	7E-5	7E-4
		W, see <sup>170</sup> Hf	-	1E+4	5E-6	2E-8	-	-
72	Hafnium-175	D, see <sup>170</sup> Hf	3E+3	9E+2	4E-7	-	4E-5	4E-4
		W, see <sup>170</sup> Hf	-	Bone surf (1E+3)	-	1E-9	-	-
			-	1E+3	5E-7	2E-9	-	-
72	Hafnium-177m <sup>2</sup>	D, see <sup>170</sup> Hf	2E+4	6E+4	2E-5	8E-8	3E-4	3E-3
		W, see <sup>170</sup> Hf	-	9E+4	4E-5	1E-7	-	-
72	Hafnium-178m	D, see <sup>170</sup> Hf	3E+2	1E+0	5E-10	-	3E-6	3E-5
		W, see <sup>170</sup> Hf	-	Bone surf (2E+0)	-	3E-12	-	-
			-	5E+0	2E-9	-	-	-
			-	Bone surf (9E+0)	-	1E-11	-	-
72	Hafnium-179m	D, see <sup>170</sup> Hf	1E+3	3E+2	1E-7	-	1E-5	1E-4
		W, see <sup>170</sup> Hf	-	Bone surf (6E+2)	-	8E-10	-	-
			-	6E+2	3E-7	8E-10	-	-
72	Hafnium-180m	D, see <sup>170</sup> Hf	7E+3	2E+4	9E-6	3E-8	1E-4	1E-3
		W, see <sup>170</sup> Hf	-	3E+4	1E-5	4E-8	-	-
72	Hafnium-181	D, see <sup>170</sup> Hf	1E+3	2E+2	7E-8	-	2E-5	2E-4
		W, see <sup>170</sup> Hf	-	Bone surf (4E+2)	-	6E-10	-	-
			-	4E+2	2E-7	6E-10	-	-
72	Hafnium-182m <sup>2</sup>	D, see <sup>170</sup> Hf	4E+4	9E+4	4E-5	1E-7	5E-4	5E-3
		W, see <sup>170</sup> Hf	-	1E+5	6E-5	2E-7	-	-
72	Hafnium-182	D, see <sup>170</sup> Hf	2E+2	8E-1	3E-10	-	-	-
		W, see <sup>170</sup> Hf	Bone surf (4E+2)	Bone surf (2E+0)	-	2E-12	5E-6	5E-5
			-	3E+0	1E-9	-	-	-
			-	Bone surf (7E+0)	-	1E-11	-	-
72	Hafnium-183 <sup>2</sup>	D, see <sup>170</sup> Hf	2E+4	5E+4	2E-5	6E-8	3E-4	3E-3



Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Table 1 Occupational Values			Table II Effluent Concentrations		
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Ingestion ALI ( $\mu\text{Ci}$ )	Inhalation ALI ( $\mu\text{Ci}$ )      DAC ( $\mu\text{Ci}/\text{ml}$ )		Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	
		Y, see $^{172}\text{Ta}$	-	1E+3	4E-7	1E-9	-	-
73	Tantalum-184	W, see $^{172}\text{Ta}$ Y, see $^{172}\text{Ta}$	2E+3 -	5E+3 5E+3	2E-6 2E-6	8E-9 7E-9	3E-5 -	3E-4 -
73	Tantalum-185 <sup>2</sup>	W, see $^{172}\text{Ta}$ Y, see $^{172}\text{Ta}$	3E+4 -	7E+4 6E+4	3E-5 3E-5	1E-7 9E-8	4E-4 -	4E-3 -
73	Tantalum-186 <sup>2</sup>	W, see $^{172}\text{Ta}$	5E+4 St wall (7E+4)	2E+5 -	1E-4 -	3E-7 -	- 1E-3	- 1E-2
		Y, see $^{172}\text{Ta}$	-	2E+5	9E-5	3E-7	-	-
74	Tungsten-176	D, all compounds	1E+4	5E+4	2E-5	7E-8	1E-4	1E-3
74	Tungsten-177	D, all compounds	2E+4	9E+4	4E-5	1E-7	3E-4	3E-3
74	Tungsten-178	D, all compounds	5E+3	2E+4	8E-6	3E-8	7E-5	7E-4
74	Tungsten-179 <sup>2</sup>	D, all compounds	5E+5	2E+6	7E-4	2E-6	7E-3	7E-2
74	Tungsten-181	D, all compounds	2E+4	3E+4	1E-5	5E-8	2E-4	2E-3
74	Tungsten-185	D, all compounds	2E+3 LLI wall (3E+3)	7E+3 -	3E-6 -	9E-9 -	- 4E-5	- 4E-4
74	Tungsten-187	D, all compounds	2E+3	9E+3	4E-6	1E-8	3E-5	3E-4
74	Tungsten-188	D, all compounds	4E+2 LLI wall (5E+2)	1E+3 -	5E-7 -	2E-9 -	- 7E-6	- 7E-5
75	Rhenium-177 <sup>2</sup>	D, all compounds except those given for W	9E+4 St wall (1E+5)	3E+5 -	1E-4 -	4E-7 -	- 2E-3	- 2E-2
		W, oxides, hydroxides, and nitrates	-	4E+5	1E-4	5E-7	-	-
75	Rhenium-178 <sup>2</sup>	D, see $^{177}\text{Re}$	7E+4 St wall (1E+5)	3E+5 -	1E-4 -	4E-7 -	- 1E-3	- 1E-2
		W, see $^{177}\text{Re}$	-	3E+5	1E-4	4E-7	-	-
75	Rhenium-181	D, see $^{177}\text{Re}$ W, see $^{177}\text{Re}$	5E+3 -	9E+3 9E+3	4E-6 4E-6	1E-8 1E-8	7E-5 -	7E-4 -
75	Rhenium-182	D, see $^{177}\text{Re}$	7E+3	1E+4	5E-6	2E-8	9E-5	9E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Ingestion ALI ( $\mu\text{Ci}$ )	Inhalation ALI ( $\mu\text{Ci}$ )      DAC ( $\mu\text{Ci}/\text{ml}$ )		Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	
	(12.7 h)	W, see <sup>177</sup> Re	-	2E+4	6E-6	2E-8	-	-
75	Rhenium-182 (64.0 h)	D, see <sup>177</sup> Re W, see <sup>177</sup> Re	1E+3 -	2E+3 2E+3	1E-6 9E-7	3E-9 3E-9	2E-5 -	2E-4 -
75	Rhenium-184m	D, see <sup>177</sup> Re W, see <sup>177</sup> Re	2E+3 -	3E+3 4E+2	1E-6 2E-7	4E-9 6E-10	3E-5 -	3E-4 -
75	Rhenium-184	D, see <sup>177</sup> Re W, see <sup>177</sup> Re	2E+3 -	4E+3 1E+3	1E-6 6E-7	5E-9 2E-9	3E-5 -	3E-4 -
75	Rhenium-186m	D, see <sup>177</sup> Re	1E+3	2E+3	7E-7	-	-	-
		St wall (2E+3)	-	2E+2	6E-8	3E-9 2E-10	2E-5 -	2E-4 -
75	Rhenium-186	D, see <sup>177</sup> Re W, see <sup>177</sup> Re	2E+3 -	3E+3 2E+3	1E-6 7E-7	4E-9 2E-9	3E-5 -	3E-4 -
75	Rhenium-187	D, see <sup>177</sup> Re	6E+5	8E+5	4E-4	-	8E-3	8E-2
		W, see <sup>177</sup> Re	-	St wall (9E+5) 1E+5	- 4E-5	1E-6 1E-7	- -	- -
75	Rhenium-188m <sup>2</sup>	D, see <sup>177</sup> Re W, see <sup>177</sup> Re	8E+4 -	1E+5 1E+5	6E-5 6E-5	2E-7 2E-7	1E-3 -	1E-2 -
75	Rhenium-188	D, see <sup>177</sup> Re W, see <sup>177</sup> Re	2E+3 -	3E+3 3E+3	1E-6 1E-6	4E-9 4E-9	2E-5 -	2E-4 -
75	Rhenium-189	D, see <sup>177</sup> Re W, see <sup>177</sup> Re	3E+3 -	5E+3 4E+3	2E-6 2E-6	7E-9 6E-9	4E-5 -	4E-4 -
76	Osmium-180 <sup>2</sup>	D, all compounds except those given for W and Y	1E+5	4E+5	2E-4	5E-7	1E-3	1E-2
		W, halides and nitrates	-	5E+5	2E-4	7E-7	-	-
		Y, oxides and hydroxides	-	5E+5	2E-4	6E-7	-	-
76	Osmium-181 <sup>2</sup>	D, see <sup>180</sup> Os W, see <sup>180</sup> Os Y, see <sup>180</sup> Os	1E+4 - -	4E+4 5E+4 4E+4	2E-5 2E-5 2E-5	6E-8 6E-8 6E-8	2E-4 - -	2E-3 - -
76	Osmium-182	D, see <sup>180</sup> Os W, see <sup>180</sup> Os Y, see <sup>180</sup> Os	2E+3 - -	6E+3 4E+3 4E+3	2E-6 2E-6 2E-6	8E-9 6E-9 6E-9	3E-5 - -	3E-4 - -
76	Osmium-185	D, see <sup>180</sup> Os W, see <sup>180</sup> Os Y, see <sup>180</sup> Os	2E+3 - -	5E+2 8E+2 8E+2	2E-7 3E-7 3E-7	7E-10 1E-9 1E-9	3E-5 - -	3E-4 - -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
76	Osmium-189m	D, see $^{180}\text{Os}$ W, see $^{180}\text{Os}$ Y, see $^{180}\text{Os}$	8E+4 - -	2E+5 2E+5 2E+5	1E-4 9E-5 7E-5	3E-7 3E-7 2E-7	1E-3 - -	1E-2 - -
76	Osmium-191m	D, see $^{180}\text{Os}$ W, see $^{180}\text{Os}$ Y, see $^{180}\text{Os}$	1E+4 - -	3E+4 2E+4 2E+4	1E-5 8E-6 7E-6	4E-8 3E-8 2E-8	2E-4 - -	2E-3 - -
76	Osmium-191	D, see $^{180}\text{Os}$  W, see $^{180}\text{Os}$ Y, see $^{180}\text{Os}$	2E+3 LLI wall (3E+3) - -	2E+3 - 1E+3	9E-7 - 7E-7 6E-7	3E-9 - 2E-9 2E-9	- 3E-5 -	- 3E-4 -
76	Osmium-193	D, see $^{180}\text{Os}$  W, see $^{180}\text{Os}$ Y, see $^{180}\text{Os}$	2E+3 LLI wall (2E+3) - -	5E+3 - 3E+3 3E+3	2E-6 - 1E-6 1E-6	6E-9 - 4E-9 4E-9	- 2E-5 -	- 2E-4 -
76	Osmium-194	D, see $^{180}\text{Os}$  W, see $^{180}\text{Os}$ Y, see $^{180}\text{Os}$	4E+2 LLI wall (6E+2) - -	4E+1 - 6E+1 8E+0	2E-8 - 2E-8 3E-9	6E-11 - 8E-11 1E-11	- 8E-6 -	- 8E-5 -
77	Iridium-182 <sup>2</sup>	D, all compounds except those given for W and Y  W, halides, nitrates, and metallic iridium Y, oxides and hydroxides	4E+4 St wall (4E+4) - -	1E+5 - 2E+5 1E+5	6E-5 - 6E-5 5E-5	2E-7 - 2E-7 2E-7	- 6E-4 -	- 6E-3 -
77	Iridium-184	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	8E+3 - -	2E+4 3E+4 3E+4	1E-5 1E-5 1E-5	3E-8 5E-8 4E-8	1E-4 - -	1E-3 - -
77	Iridium-185	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	5E+3 - -	1E+4 1E+4 1E+4	5E-6 5E-6 4E-6	2E-8 2E-8 1E-8	7E-5 - -	7E-4 - -
77	Iridium-186	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	2E+3 - -	8E+3 6E+3 6E+3	3E-6 3E-6 2E-6	1E-8 9E-9 8E-9	3E-5 - -	3E-4 - -
77	Iridium-187	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$	1E+4 -	3E+4 3E+4	1E-5 1E-5	5E-8 4E-8	1E-4 -	1E-3 -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide Class ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Oral	Inhalation	DAC	Air	Water	
Ingestion	ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	( $\mu\text{Ci}/\text{ml}$ )					( $\mu\text{Ci}/\text{ml}$ )
		Y, see $^{182}\text{Ir}$	-	3E+4	1E-5	4E-8	-	-
77	Iridium-188	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	2E+3 - -	5E+3 4E+3 3E+3	2E-6 1E-6 1E-6	6E-9 5E-9 5E-9	3E-5 - -	3E-4 - -
77	Iridium-189	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	5E+3 - -	5E+3 4E+3 4E+3	2E-6 2E-6 1E-6	7E-9 5E-9 5E-9	- - -	- - -
77	Iridium-190m <sup>2</sup>	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	2E+5 - -	2E+5 2E+5 2E+5	8E-5 9E-5 8E-5	3E-7 3E-7 3E-7	2E-3 - -	2E-2 - -
77	Iridium-190	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	1E+3 - -	9E+2 1E+3 9E+2	4E-7 4E-7 4E-7	1E-9 1E-9 1E-9	1E-5 - -	1E-4 - -
77	Iridium-192m	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	3E+3 - -	9E+1 2E+2 2E+1	4E-8 9E-8 6E-9	1E-10 3E-10 2E-11	4E-5 - -	4E-4 - -
77	Iridium-192	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	9E+2 - -	3E+2 4E+2 2E+2	1E-7 2E-7 9E-8	4E-10 6E-10 3E-10	1E-5 - -	1E-4 - -
77	Iridium-194m	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	6E+2 - -	9E+1 2E+2 1E+2	4E-8 7E-8 4E-8	1E-10 2E-10 1E-10	9E-6 - -	9E-5 - -
77	Iridium-194	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	1E+3 - -	3E+3 2E+3 2E+3	1E-6 9E-7 8E-7	4E-9 3E-9 3E-9	1E-5 - -	1E-4 - -
77	Iridium-195m	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	8E+3 - -	2E+4 3E+4 2E+4	1E-5 1E-5 9E-6	3E-8 4E-8 3E-8	1E-4 - -	1E-3 - -
77	Iridium-195	D, see $^{182}\text{Ir}$ W, see $^{182}\text{Ir}$ Y, see $^{182}\text{Ir}$	1E+4 - -	4E+4 5E+4 4E+4	2E-5 2E-5 2E-5	6E-8 7E-8 6E-8	2E-4 - -	2E-3 - -
78	Platinum-186	D, all compounds	1E+4	4E+4	2E-5	5E-8	2E-4	2E-3
78	Platinum-188	D, all compounds	2E+3	2E+3	7E-7	2E-9	2E-5	2E-4
78	Platinum-189	D, all compounds	1E+4	3E+4	1E-5	4E-8	1E-4	1E-3

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
			Ingestion	Inhalation		Air	Water	
			ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	
78	Platinum-191	D, all compounds	4E+3	8E+3	4E-6	1E-8	5E-5	5E-4
78	Platinum-193m	D, all compounds	3E+3 LLI wall (3E+4)	6E+3	3E-6	8E-9	-	4E-5 4E-4
78	Platinum-193	D, all compounds	4E+4 LLI wall (5E+4)	2E+4	1E-5	3E-8	-	6E-4 6E-3
78	Platinum-195m	D, all compounds	2E+3 LLI wall (2E+3)	4E+3	2E-6	6E-9	-	3E-5 3E-4
78	Platinum-197m <sup>2</sup>	D, all compounds	2E+4	4E+4	2E-5	6E-8	2E-4	2E-3
78	Platinum-197	D, all compounds	3E+3	1E+4	4E-6	1E-8	4E-5	4E-4
78	Platinum-199 <sup>2</sup>	D, all compounds	5E+4	1E+5	6E-5	2E-7	7E-4	7E-3
78	Platinum-200	D, all compounds	1E+3	3E+3	1E-6	5E-9	2E-5	2E-4
79	Gold-193	D, all compounds except those given for W and Y W, halides and nitrates Y, oxides and hydroxides	9E+3 - -	3E+4 2E+4 2E+4	1E-5 9E-6 8E-6	4E-8 3E-8 3E-8	1E-4 - -	1E-3 - -
79	Gold-194	D, see <sup>193</sup> Au W, see <sup>193</sup> Au Y, see <sup>193</sup> Au	3E+3 - -	8E+3 5E+3 5E+3	3E-6 2E-6 2E-6	1E-8 8E-9 7E-9	4E-5 - -	4E-4 - -
79	Gold-195	D, see <sup>193</sup> Au W, see <sup>193</sup> Au Y, see <sup>193</sup> Au	5E+3 - -	1E+4 1E+3 4E+2	5E-6 6E-7 2E-7	2E-8 2E-9 6E-10	7E-5 - -	7E-4 - -
79	Gold-198m	D, see <sup>193</sup> Au W, see <sup>193</sup> Au Y, see <sup>193</sup> Au	1E+3 - -	3E+3 1E+3 1E+3	1E-6 5E-7 5E-7	4E-9 2E-9 2E-9	1E-5 - -	1E-4 - -
79	Gold-198	D, see <sup>193</sup> Au W, see <sup>193</sup> Au Y, see <sup>193</sup> Au	1E+3 - -	4E+3 2E+3 2E+3	2E-6 8E-7 7E-7	5E-9 3E-9 2E-9	2E-5 - -	2E-4 - -
79	Gold-199	D, see <sup>193</sup> Au  W, see <sup>193</sup> Au Y, see <sup>193</sup> Au	3E+3 LLI wall (3E+3) - -	9E+3 - 4E+3 4E+3	4E-6 - 2E-6 2E-6	1E-8 - 6E-9 5E-9	- 4E-5 - -	- 4E-4 - -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Ingestion ALI ( $\mu\text{Ci}$ )	Inhalation ALI ( $\mu\text{Ci}$ )      DAC ( $\mu\text{Ci}/\text{ml}$ )		Air ( $\mu\text{Ci}/\text{ml}$ )	Water ( $\mu\text{Ci}/\text{ml}$ )	
79	Gold-200m	D, see $^{193}\text{Au}$ W, see $^{193}\text{Au}$ Y, see $^{193}\text{Au}$	1E+3 - -	4E+3 3E+3 2E+4	1E-6 1E-6 1E-6	5E-9 4E-9 3E-9	2E-5 - -	2E-4 - -
79	Gold-200 <sup>2</sup>	D, see $^{193}\text{Au}$ W, see $^{193}\text{Au}$ Y, see $^{193}\text{Au}$	3E+4 - -	6E+4 8E+4 7E+4	3E-5 3E-5 3E-5	9E-8 1E-7 1E-7	4E-4 - -	4E-3 - -
79	Gold-201 <sup>2</sup>	D, see $^{193}\text{Au}$  W, see $^{193}\text{Au}$ Y, see $^{193}\text{Au}$	7E+4 St wall (9E+4) - -	2E+5 - 2E+5	9E-5 - 1E-4 9E-5	3E-7 - 3E-7 3E-7	- 1E-3 - -	- 1E-2 - -
80	Mercury-193m	Vapor Organic D D, sulfates W, oxides, hydroxides, halides, nitrates, and sulfides	- 4E+3 3E+3 -	8E+3 1E+4 9E+3 8E+3	4E-6 5E-6 4E-6 3E-6	1E-8 2E-8 1E-8 1E-8	- 6E-5 4E-5 -	- 6E-4 4E-4 -
80	Mercury-193	Vapor Organic D D, see $^{193\text{m}}\text{Hg}$ W, see $^{193\text{m}}\text{Hg}$	- 2E+4 2E+4 -	3E+4 6E+4 4E+4 4E+4	1E-5 3E-5 2E-5 2E-5	4E-8 9E-8 6E-8 6E-8	- 3E-4 2E-4 -	- 3E-3 2E-3 -
80	Mercury-194	Vapor Organic D D, see $^{193\text{m}}\text{Hg}$ W, see $^{193\text{m}}\text{Hg}$	- 2E+1 8E+2 -	3E+1 3E+1 4E+1 1E+2	1E-8 1E-8 2E-8 5E-8	4E-11 4E-11 6E-11 2E-10	- 2E-7 1E-5 -	- 2E-6 1E-4 -
80	Mercury-195m	Vapor Organic D D, see $^{193\text{m}}\text{Hg}$ W, see $^{193\text{m}}\text{Hg}$	- 3E+3 2E+3 -	4E+3 6E+3 5E+3 4E+3	2E-6 3E-6 2E-6 2E-6	6E-9 8E-9 7E-9 5E-9	- 4E-5 3E-5 -	- 4E-4 3E-4 -
80	Mercury-195	Vapor Organic D D, see $^{193\text{m}}\text{Hg}$ W, see $^{193\text{m}}\text{Hg}$	- 2E+4 1E+4 -	3E+4 5E+4 4E+4 3E+4	1E-5 2E-5 1E-5 1E-5	4E-8 6E-8 5E-8 5E-8	- 2E-4 2E-4 -	- 2E-3 2E-3 -
80	Mercury-197m	Vapor Organic D D, see $^{193\text{m}}\text{Hg}$ W, see $^{193\text{m}}\text{Hg}$	- 4E+3 3E+3 -	5E+3 9E+3 7E+3 5E+3	2E-6 4E-6 3E-6 2E-6	7E-9 1E-8 1E-8 7E-9	- 5E-5 4E-5 -	- 5E-4 4E-4 -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
80	Mercury-197	Vapor	-	8E+3	4E-6	1E-8	-	-
		Organic D	7E+3	1E+4	6E-6	2E-8	9E-5	9E-4
		D, see <sup>193m</sup> Hg	6E+3	1E+4	5E-6	2E-8	8E-5	8E-4
		W, see <sup>193m</sup> Hg	-	9E+3	4E-6	1E-8	-	-
80	Mercury-199m <sup>2</sup>	Vapor	-	8E+4	3E-5	1E-7	-	-
		Organic D	6E+4	2E+5	7E-5	2E-7	-	-
		St wall (1E+5)	(1E+5)	-	-	-	1E-3	1E-2
		D, see <sup>193m</sup> Hg	6E+4	1E+5	6E-5	2E-7	8E-4	8E-3
		W, see <sup>193m</sup> Hg	-	2E+5	7E-5	2E-7	-	-
80	Mercury-203	Vapor	-	8E+2	4E-7	1E-9	-	-
		Organic D	5E+2	8E+2	3E-7	1E-9	7E-6	7E-5
		D, see <sup>193m</sup> Hg	2E+3	1E+3	5E-7	2E-9	3E-5	3E-4
		W, see <sup>193m</sup> Hg	-	1E+3	5E-7	2E-9	-	-
81	Thallium-194m <sup>2</sup>	D, all compounds	5E+4	2E+5	6E-5	2E-7	-	-
		St wall (7E+4)	(7E+4)	-	-	-	1E-3	1E-2
81	Thallium-194 <sup>2</sup>	D, all compounds	3E+5	6E+5	2E-4	8E-7	-	-
		St wall (3E+5)	(3E+5)	-	-	-	4E-3	4E-2
81	Thallium-195 <sup>2</sup>	D, all compounds	6E+4	1E+5	5E-5	2E-7	9E-4	9E-3
81	Thallium-197	D, all compounds	7E+4	1E+5	5E-5	2E-7	1E-3	1E-2
81	Thallium-198m <sup>2</sup>	D, all compounds	3E+4	5E+4	2E-5	8E-8	4E-4	4E-3
81	Thallium-198	D, all compounds	2E+4	3E+4	1E-5	5E-8	3E-4	3E-3
81	Thallium-199	D, all compounds	6E+4	8E+4	4E-5	1E-7	9E-4	9E-3
81	Thallium-200	D, all compounds	8E+3	1E+4	5E-6	2E-8	1E-4	1E-3
81	Thallium-201	D, all compounds	2E+4	2E+4	9E-6	3E-8	2E-4	2E-3
81	Thallium-202	D, all compounds	4E+3	5E+3	2E-6	7E-9	5E-5	5E-4
81	Thallium-204	D, all compounds	2E+3	2E+3	9E-7	3E-9	2E-5	2E-4
82	Lead-195m <sup>2</sup>	D, all compounds	6E+4	2E+5	8E-5	3E-7	8E-4	8E-3
82	Lead-198	D, all compounds	3E+4	6E+4	3E-5	9E-8	4E-4	4E-3
82	Lead-199 <sup>2</sup>	D, all compounds	2E+4	7E+4	3E-5	1E-7	3E-4	3E-3

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide No. (μCi/m)	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
			Ingestion	Inhalation		Air	Water	
			ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	(μCi/ml)	(μCi/ml)	
82	Lead-200	D, all compounds	3E+3	6E+3	3E-6	9E-9	4E-5	4E-4
82	Lead-201	D, all compounds	7E+3	2E+4	8E-6	3E-8	1E-4	1E-3
82	Lead-202m	D, all compounds	9E+3	3E+4	1E-5	4E-8	1E-4	1E-3
82	Lead-202	D, all compounds	1E+2	5E+1	2E-8	7E-11	2E-6	2E-5
82	Lead-203	D, all compounds	5E+3	9E+3	4E-6	1E-8	7E-5	7E-4
82	Lead-205	D, all compounds	4E+3	1E+3	6E-7	2E-9	5E-5	5E-4
82	Lead-209	D, all compounds	2E+4	6E+4	2E-5	8E-8	3E-4	3E-3
82	Lead-210	D, all compounds	6E-1 Bone surf (1E+0)	2E-1 Bone surf (4E-1)	1E-10 -	- 6E-13	- 1E-8	- 1E-7
82	Lead-211 <sup>2</sup>	D, all compounds	1E+4	6E+2	3E-7	9E-10	2E-4	2E-3
82	Lead-212	D, all compounds	8E+1 Bone surf (1E+2)	3E+1 -	1E-8 -	5E-11 -	- 2E-6	- 2E-5
82	Lead-214 <sup>2</sup>	D, all compounds	9E+3	8E+2	3E-7	1E-9	1E-4	1E-3
83	Bismuth-200 <sup>2</sup>	D, nitrates W, all other compounds	3E+4 -	8E+4 1E+5	4E-5 4E-5	1E-7 1E-7	4E-4 -	4E-3 -
83	Bismuth-201 <sup>2</sup>	D, see <sup>200</sup> Bi W, see <sup>200</sup> Bi	1E+4 -	3E+4 4E+4	1E-5 2E-5	4E-8 5E-8	2E-4 -	2E-3 -
83	Bismuth-202 <sup>2</sup>	D, see <sup>200</sup> Bi W, see <sup>200</sup> Bi	1E+4 -	4E+4 8E+4	2E-5 3E-5	6E-8 1E-7	2E-4 -	2E-3 -
83	Bismuth-203	D, see <sup>200</sup> Bi W, see <sup>200</sup> Bi	2E+3 -	7E+3 6E+3	3E-6 3E-6	9E-9 9E-9	3E-5 -	3E-4 -
83	Bismuth-205	D, see <sup>200</sup> Bi W, see <sup>200</sup> Bi	1E+3 -	3E+3 1E+3	1E-6 5E-7	3E-9 2E-9	2E-5 -	2E-4 -
83	Bismuth-206	D, see <sup>200</sup> Bi W, see <sup>200</sup> Bi	6E+2 -	1E+3 9E+2	6E-7 4E-7	2E-9 1E-9	9E-6 -	9E-5 -
83	Bismuth-207	D, see <sup>200</sup> Bi W, see <sup>200</sup> Bi	1E+3 -	2E+3 4E+2	7E-7 1E-7	2E-9 5E-10	1E-5 -	1E-4 -
83	Bismuth-210m	D, see <sup>200</sup> Bi	4E+1 Kidneys	5E+0 Kidneys	2E-9	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
		W, see $^{200}\text{Bi}$	(6E+1) -	(6E+0) 7E-1	- 3E-10	9E-12 9E-13	8E-7 -	8E-6 -
83	Bismuth-210	D, see $^{200}\text{Bi}$ W, see $^{200}\text{Bi}$	8E+2 - -	2E+2 Kidneys (4E+2) 3E+1	1E-7 - 1E-8	- 5E-10 4E-11	1E-5 - -	1E-4 - -
83	Bismuth-212 <sup>2</sup>	D, see $^{200}\text{Bi}$ W, see $^{200}\text{Bi}$	5E+3 -	2E+2 3E+2	1E-7 1E-7	3E-10 4E-10	7E-5 -	7E-4 -
83	Bismuth-213 <sup>2</sup>	D, see $^{200}\text{Bi}$ W, see $^{200}\text{Bi}$	7E+3 -	3E+2 4E+2	1E-7 1E-7	4E-10 5E-10	1E-4 -	1E-3 -
83	Bismuth-214 <sup>2</sup>	D, see $^{200}\text{Bi}$ W, see $^{200}\text{Bi}$	2E+4 St wall (2E+4) -	8E+2 - 9E-2	3E-7 - 4E-7	1E-9 - 1E-9	- 3E-4 -	- 3E-3 -
84	Polonium-203 <sup>2</sup>	D, all compounds except those given for W W, oxides, hydroxides, and nitrates	3E+4 -	6E+4 9E+4	3E-5 4E-5	9E-8 1E-7	3E-4 -	3E-3 -
84	Polonium-205 <sup>2</sup>	D, see $^{203}\text{Po}$ W, see $^{203}\text{Po}$	2E+4 -	4E+4 7E+4	2E-5 3E-5	5E-8 1E-7	3E-4 -	3E-3 -
84	Polonium-207	D, see $^{203}\text{Po}$ W, see $^{203}\text{Po}$	8E+3 -	3E+4 3E+4	1E-5 1E-5	3E-8 4E-8	1E-4 -	1E-3 -
84	Polonium-210	D, see $^{203}\text{Po}$ W, see $^{203}\text{Po}$	3E+0 -	6E-1 6E-1	3E-10 3E-10	9E-13 9E-13	4E-8 -	4E-7 -
85	Astatine-207 <sup>2</sup>	D, halides W	6E+3 -	3E+3 2E+3	1E-6 9E-7	4E-9 3E-9	8E-5 -	8E-4 -
85	Astatine-211	D, halides W	1E+2 -	8E+1 5E+1	3E-8 2E-8	1E-10 8E-11	2E-6 -	2E-5 -
86	Radon-220	With daughters removed With daughters present	- -	2E+4 2E+1 (or 12 working level months)	7E-6 9E-9 (or 1.0 working level)	2E-8 3E-11	- -	- -
86	Radon-222	With daughters removed With daughters present	- -	1E+4 1E+2 (or 4 working level months)	4E-6 3E-8 (or 0.33 working)	1E-8 1E-10	- -	- -

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Radionuclide  
No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI  
(μCi)

ALI  
(μCi)

DAC  
(μCi/ml)

Air  
(μCi/ml)

Water  
(μCi/ml)

Concentration

			level)					
Atomic No.	Radionuclide	Class	ALI (μCi)	ALI (μCi)	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	Concentration
87	Francium-222 <sup>2</sup>	D, all compounds	2E+3	5E+2	2E-7	6E-10	3E-5	3E-4
87	Francium-223 <sup>2</sup>	D, all compounds	6E+2	8E+2	3E-7	1E-9	8E-6	8E-5
88	Radium-223	W, all compounds	5E+0	7E-1	3E-10	9E-13	-	-
			Bone surf (9E+0)	-	-	-	1E-7	1E-6
88	Radium-224	W, all compounds	8E+0	2E+0	7E-10	2E-12	-	-
			Bone surf (2E+1)	-	-	-	2E-7	2E-6
88	Radium-225	W, all compounds	8E+0	7E-1	3E-10	9E-13	-	-
			Bone surf (2E+1)	-	-	-	2E-7	2E-6
88	Radium-226	W, all compounds	2E+0	6E-1	3E-10	9E-13	-	-
			Bone surf (5E+0)	-	-	-	6E-8	6E-7
88	Radium-227 <sup>2</sup>	W, all compounds	2E+4	1E+4	6E-6	-	-	-
			Bone surf (2E+4)	Bone surf (2E+4)	-	3E-8	3E-4	3E-3
88	Radium-228	W, all compounds	2E+0	1E+0	5E-10	2E-12	-	-
			Bone surf (4E+0)	-	-	-	6E-8	6E-7
89	Actinium-224	D, all compounds except those given for W and Y	2E+3	3E+1	1E-8	-	-	-
			LLI wall (2E+3)	Bone surf (4E+1)	-	5E-11	3E-5	3E-4
		W, halides and nitrates	-	5E+1	2E-8	7E-11	-	-
		Y, oxides and hydroxides	-	5E+1	2E-8	6E-11	-	-
89	Actinium-225	D, see <sup>224</sup> Ac	5E+1	3E-1	1E-10	-	-	-
			LLI wall (5E+1)	Bone surf (5E-1)	-	7E-13	7E-7	7E-6
		W, see <sup>224</sup> Ac	-	6E-1	3E-10	9E-13	-	-
		Y, see <sup>224</sup> Ac	-	6E-1	3E-10	9E-13	-	-
89	Actinium-226	D, see <sup>224</sup> Ac	1E+2	3E+0	1E-9	-	-	-
			LLI wall (1E+2)	Bone surf (4E+0)	-	5E-12	2E-6	2E-5
		W, see <sup>224</sup> Ac	-	5E+0	2E-9	7E-12	-	-
		Y, see <sup>224</sup> Ac	-	5E+0	2E-9	6E-12	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III			Table I			Table II		
release to			Occupational Values			Effluent		
Sewers						Concentrations		
Monthly			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Average			Ingestion	Inhalation				
Atomic No.	Radionuclide	Class	ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci/ml}$ )	Air ( $\mu\text{Ci/ml}$ )	Water ( $\mu\text{Ci/ml}$ )	Concentration
(μCi/m)								
89	Actinium-227	D, see <sup>224</sup> Ac	2E-1 Bone surf (4E-1)	4E-4 Bone surf (8E-4)	2E-13	-	-	-
		W, see <sup>224</sup> Ac	-	2E-3	7E-13	1E-15	5E-9	5E-8
		Y, see <sup>224</sup> Ac	-	Bone surf (3E-3) 4E-3	2E-12	4E-15 6E-15	-	-
89	Actinium-228	D, see <sup>224</sup> Ac	2E+3	9E+0 Bone surf (2E+1)	4E-9	-	3E-5	3E-4
		W, see <sup>224</sup> Ac	-	4E+1 Bone surf (6E+1)	2E-8	2E-11	-	-
		Y, see <sup>224</sup> Ac	-	4E+1	2E-8	8E-11 6E-11	-	-
90	Thorium-226 <sup>2</sup>	W, all compounds except those given for Y	5E+3 St wall (5E+3)	2E+2	6E-8	2E-10	-	-
		Y, oxides and hydroxides	-	1E+2	6E-8	2E-10	7E-5	7E-4
90	Thorium-227	W, see <sup>226</sup> Th	1E+2	3E-1	1E-10	5E-13	2E-6	2E-5
		Y, see <sup>226</sup> Th	-	3E-1	1E-10	5E-13	-	-
90	Thorium-228	W, see <sup>226</sup> Th	6E+0 Bone surf (1E+1)	1E-2 Bone surf (2E-2)	4E-12	-	-	-
		Y, see <sup>226</sup> Th	-	2E-2	7E-12	3E-14 2E-14	2E-7	2E-6
90	Thorium-229	W, see <sup>226</sup> Th	6E-1 Bone surf (1E+0)	9E-4 Bone surf (2E-3)	4E-13	-	-	-
		Y, see <sup>226</sup> Th	-	2E-3 Bone surf (3E-3)	1E-12	3E-15 4E-15	2E-8	2E-7
90	Thorium-230	W, see <sup>226</sup> Th	4E+0 Bone surf (9E+0)	6E-3 Bone surf (2E-2)	3E-12	-	-	-
		Y, see <sup>226</sup> Th	-	2E-2 Bone surf (2E-2)	6E-12	2E-14 3E-14	1E-7	1E-6
90	Thorium-231	W, see <sup>226</sup> Th	4E+3	6E+3	3E-6	9E-9	5E-5	5E-4
		Y, see <sup>226</sup> Th	-	6E+3	3E-6	9E-9	-	-
90	Thorium-232	W, see <sup>226</sup> Th	7E-1	1E-3	5E-13	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide Class ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
		Y, see <sup>226</sup> Th	Bone surf (2E+0) -	Bone surf (3E-3) 3E-3 Bone surf (4E-3) -	- 1E-12	4E-15 -	3E-8 -	3E-7 -
90	Thorium-234	W, see <sup>226</sup> Th	3E+2 LLI wall (4E+2) -	2E+2 -	8E-8 -	3E-10 -	-	-
		Y, see <sup>226</sup> Th	-	2E+2	6E-8	2E-10	-	5E-6 -
91	Protactinium-227 <sup>2</sup>	W, all compounds except those given for Y Y, oxides and hydroxides	4E+3 -	1E+2 1E+2	5E-8 4E-8	2E-10 1E-10	5E-5 -	5E-4 -
91	Protactinium-228	W, see <sup>227</sup> Pa	1E+3 -	1E+1 Bone surf (2E+1) 1E+1	5E-9 -	- 3E-11 2E-11	2E-5 -	2E-4 -
91	Protactinium-230	W, see <sup>227</sup> Pa	6E+2 Bone surf (9E+2) -	5E+0 -	2E-9 -	7E-12 -	-	-
		Y, see <sup>227</sup> Pa	-	4E+0	1E-9	5E-12	1E-5 -	1E-4 -
91	Protactinium-231	W, see <sup>227</sup> Pa	2E-1 Bone surf (5E-1) -	2E-3 Bone surf (4E-3) 4E-3 Bone surf (6E-3) -	6E-13 -	- 6E-15 -	-	-
		Y, see <sup>227</sup> Pa	-	4E-3 Bone surf (6E-3)	2E-12	8E-15	6E-9 -	6E-8 -
91	Protactinium-232	W, see <sup>227</sup> Pa	1E+3 -	2E+1 Bone surf (6E+1) 6E+1 Bone surf (7E+1) -	9E-9 -	- 8E-11 -	2E-5 -	2E-4 -
		Y, see <sup>227</sup> Pa	-	6E+1 Bone surf (7E+1)	2E-8	1E-10	-	-
91	Protactinium-233	W, see <sup>227</sup> Pa	1E+3 LLI wall (2E+3) -	7E+2 -	3E-7 -	1E-9 -	-	-
		Y, see <sup>227</sup> Pa	-	6E+2	2E-7	8E-10	2E-5 -	2E-4 -
91	Protactinium-234	W, see <sup>227</sup> Pa Y, see <sup>227</sup> Pa	2E+3 -	8E+3 7E+3	3E-6 3E-6	1E-8 9E-9	3E-5 -	3E-4 -
92	Uranium-230	D, UF <sub>6</sub> , UO <sub>2</sub> F <sub>2</sub>	4E+0	4E-1	2E-10	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
		$\text{UO}_2(\text{NO}_3)_2$	Bone surf (6E+0)	Bone surf (6E-1)	-	8E-13	8E-8	8E-7
		W, $\text{UO}_3$ , $\text{UF}_4$ , $\text{UCl}_4$	-	4E-1	1E-10	5E-13	-	-
		Y, $\text{UO}_2$ , $\text{U}_3\text{O}_8$	-	3E-1	1E-10	4E-13	-	-
92	Uranium-231	D, see $^{230}\text{U}$	5E+3 LLI wall (4E+3)	8E+3	3E-6	1E-8	-	-
		W, see $^{230}\text{U}$	-	6E+3	2E-6	8E-9	6E-5	6E-4
		Y, see $^{230}\text{U}$	-	5E+3	2E-6	6E-9	-	-
92	Uranium-232	D, see $^{230}\text{U}$	2E+0 Bone surf (4E+0)	2E-1 Bone surf (4E-1)	9E-11	-	6E-13	6E-8
		W, see $^{230}\text{U}$	-	4E-1	2E-10	6E-13	5E-13	6E-7
		Y, see $^{230}\text{U}$	-	8E-3	3E-12	1E-14	-	-
92	Uranium-233	D, see $^{230}\text{U}$	1E+1 Bone surf (2E+1)	1E+0 Bone surf (2E+0)	5E-10	-	3E-12	3E-7
		W, see $^{230}\text{U}$	-	7E-1	3E-10	1E-12	-	-
		Y, see $^{230}\text{U}$	-	4E-2	2E-11	5E-14	-	-
92	Uranium-234 <sup>3</sup>	D, see $^{230}\text{U}$	1E+1 Bone surf (2E+1)	1E+0 Bone surf (2E+0)	5E-10	-	3E-12	3E-7
		W, see $^{230}\text{U}$	-	7E-1	3E-10	1E-12	-	-
		Y, see $^{230}\text{U}$	-	4E-2	2E-11	5E-14	-	-
92	Uranium-235 <sup>3</sup>	D, see $^{230}\text{U}$	1E+1 Bone surf (2E+1)	1E+0 Bone surf (2E+0)	6E-10	-	3E-12	3E-7
		W, see $^{230}\text{U}$	-	8E-1	3E-10	1E-12	3E-7	3E-6
		Y, see $^{230}\text{U}$	-	4E-2	2E-11	6E-14	-	-
92	Uranium-236	D, see $^{230}\text{U}$	1E+1 Bone surf (2E+1)	1E+0 Bone surf (2E+0)	5E-10	-	3E-12	3E-7
		W, see $^{230}\text{U}$	-	8E-1	3E-10	1E-12	-	-
		Y, see $^{230}\text{U}$	-	4E-2	2E-11	6E-14	-	-
92	Uranium-237	D, see $^{230}\text{U}$	2E+3 LLI wall (2E+3)	3E+3	1E-6	4E-9	-	-
		W, see $^{230}\text{U}$	-	2E+3	7E-7	2E-9	3E-5	3E-4
		Y, see $^{230}\text{U}$	-	2E+3	6E-7	2E-9	-	-
92	Uranium-238 <sup>3</sup>	D, see $^{230}\text{U}$	1E+1	1E+0	6E-10	-	-	-

Appendix 4-B

Table 1

Table II

Occupational Values

Effluent

Table III

release to

Sewers

Concentrations

Atomic No.	Radionuclide	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	
Average	Monthly		Ingestion	Inhalation		Air	Water	
( $\mu\text{Ci}/\text{m}$ )	( $\mu\text{Ci}/\text{m}$ )		ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	
			Bone surf (2E+1)	Bone surf (2E+0)	-	3E-12	3E-7	3E-6
		W, see <sup>230</sup> U	-	8E-1	3E-10	1E-12	-	-
		Y, see <sup>230</sup> U	-	4E-2	2E-11	6E-14	-	-
92	Uranium-239 <sup>2</sup>	D, see <sup>230</sup> U	7E+4	2E+5	8E-5	3E-7	9E-4	9E-3
		W, see <sup>230</sup> U	-	2E+5	7E-5	2E-7	-	-
		Y, see <sup>230</sup> U	-	2E+5	6E-5	2E-7	-	-
92	Uranium-240	D, see <sup>230</sup> U	1E+3	4E+3	2E-6	5E-9	2E-5	2E-4
		W, see <sup>230</sup> U	-	3E+3	1E-6	4E-9	-	-
		Y, see <sup>230</sup> U	-	2E+3	1E-6	3E-9	-	-
92	Uranium-natural <sup>3</sup>	D, see <sup>230</sup> U	1E+1	1E+0	5E-10	-	-	-
			Bone surf (2E+1)	Bone surf (2E+0)	-	3E-12	3E-7	3E-6
		W, see <sup>230</sup> U	-	8E-1	3E-10	9E-13	-	-
		Y, see <sup>230</sup> U	-	5E-2	2E-11	9E-14	-	-
93	Neptunium-232 <sup>2</sup>	W, all compounds	1E+5	2E+3	7E-7	-	2E-3	2E-2
			-	Bone surf (5E+2)	-	6E-9	-	-
93	Neptunium-233 <sup>2</sup>	W, all compounds	8E+5	3E+6	1E-3	4E-6	1E-2	1E-1
93	Neptunium-234	W, all compounds	2E+3	3E+3	1E-6	4E-9	3E-5	3E-4
93	Neptunium-235	W, all compounds	2E+4	8E+2	3E-7	-	-	-
			LLI wall (2E+4)	Bone surf (1E+3)	-	2E-9	3E-4	3E-3
93	Neptunium-236 (1.15E+5 y)	W, all compounds	3E+0	2E-2	9E-12	-	-	-
			Bone surf (6E+0)	Bone surf (5E-2)	-	8E-14	9E-8	9E-7
93	Neptunium-236 (22.5 h)	W, all compounds	3E+3	3E+1	1E-8	-	-	-
			Bone surf (4E+3)	Bone surf (7E+1)	-	1E-10	5E-5	5E-4
93	Neptunium-237	W, all compounds	5E-1	4E-3	2E-12	-	-	-
			Bone surf (1E+0)	Bone surf (1E-2)	-	1E-14	2E-8	2E-7
93	Neptunium-238	W, all compounds	1E+3	6E+1	3E-8	-	2E-5	2E-4
			-	Bone surf (2E+2)	-	2E-10	-	-
93	Neptunium-239	W, all compounds	2E+3	2E+3	9E-7	3E-9	-	-
			LLI wall					

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III		Table I			Table II			
release to		Occupational Values			Effluent			
Sewers					Concentrations			
Monthly		Col. 1	Col. 2	Col. 3	Col. 1	Col. 2		
Average		Ingestion	Inhalation		Air	Water	Concentration	
Atomic No.	Radionuclide	Class	ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci/ml}$ )	Air ( $\mu\text{Ci/ml}$ )	Water ( $\mu\text{Ci/ml}$ )	Concentration
	( $\mu\text{Ci/m}$ )							
			(2E+3)	-	-	-	2E-5	2E-4
93	Neptunium-240 <sup>2</sup>	W, all compounds	2E+4	8E+4	3E-5	1E-7	3E-4	3E-3
94	Plutonium-234	W, all compounds except PuO <sub>2</sub> Y, PuO <sub>2</sub>	8E+3 -	2E+2 2E+2	9E-8 8E-8	3E-10 3E-10	1E-4 -	1E-3 -
94	Plutonium-235 <sup>2</sup>	W, see <sup>234</sup> Pu Y, see <sup>234</sup> Pu	9E+5 -	3E+6 3E+6	1E-3 1E-3	4E-6 3E-6	1E-2 -	1E-1 -
94	Plutonium-236	W, see <sup>234</sup> Pu  Y, see <sup>234</sup> Pu	2E+0 Bone surf (4E+0) -	2E-2 Bone surf (4E-2) 4E-2	8E-12 -	- 5E-14 6E-14	- 6E-8 -	- 6E-7 -
94	Plutonium-237	W, see <sup>234</sup> Pu Y, see <sup>234</sup> Pu	1E+4 -	3E+3 3E+3	1E-6 1E-6	5E-9 4E-9	2E-4 -	2E-3 -
94	Plutonium-238	W, see <sup>234</sup> Pu  Y, see <sup>234</sup> Pu	9E-1 Bone surf (2E+0) -	7E-3 Bone surf (1E-2) 2E-2	3E-12 -	- 2E-14 2E-14	- 2E-8 -	- 2E-7 -
94	Plutonium-239	W, see <sup>234</sup> Pu  Y, see <sup>234</sup> Pu	8E-1 Bone surf (1E+0) -	6E-3 Bone surf (1E-2) 2E-2 Bone surf (2E-2)	3E-12 -	- 2E-14 -	- 2E-8 -	- 2E-7 -
94	Plutonium-240	W, see <sup>234</sup> Pu  Y, see <sup>234</sup> Pu	8E-1 Bone surf (1E+0) -	6E-3 Bone surf (1E-2) 2E-2 Bone surf (2E-2)	3E-12 -	- 2E-14 -	- 2E-8 -	- 2E-7 -
94	Plutonium-241	W, see <sup>234</sup> Pu  Y, see <sup>234</sup> Pu	4E+1 Bone surf (7E+1) -	3E-1 Bone surf (6E-1) 8E-1 Bone surf (1E+0)	1E-10 -	- 8E-13 -	- 1E-6 -	- 1E-5 -
94	Plutonium-242	W, see <sup>234</sup> Pu	8E-1 Bone surf (1E+0)	7E-3 Bone surf (1E-2)	3E-12 -	- 2E-14	- 2E-8	- 2E-7

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Average Radionuclide (μCi/m)	Class	Occupational Values			Effluent Concentrations		
			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	Concentration
			Oral	Inhalation	DAC (μCi/ml)	Air (μCi/ml)	Water (μCi/ml)	
			Ingestion					
			ALI (μCi)	ALI (μCi)				
		Y, see <sup>234</sup> Pu	-	2E-2	7E-12	-	-	-
			-	Bone surf (2E-2)	-	2E-14	-	-
94	Plutonium-243	W, see <sup>234</sup> Pu	2E+4	4E+4	2E-5	5E-8	2E-4	2E-3
		Y, see <sup>234</sup> Pu	-	4E+4	2E-5	5E-8	-	-
94	Plutonium-244	W, see <sup>234</sup> Pu	8E-1	7E-3	3E-12	-	-	-
			Bone surf (2E+0)	Bone surf (1E-2)	-	2E-14	2E-8	2E-7
		Y, see <sup>234</sup> Pu	-	2E-2	7E-12	-	-	-
			-	Bone surf (2E-2)	-	2E-14	-	-
94	Plutonium-245	W, see <sup>234</sup> Pu	2E+3	5E+3	2E-6	6E-9	3E-5	3E-4
		Y, see <sup>234</sup> Pu	-	4E+3	2E-6	6E-9	-	-
94	Plutonium-246	W, see <sup>234</sup> Pu	4E+2	3E+2	1E-7	4E-10	-	-
			LLI wall (4E+2)	-	-	-	6E-6	6E-5
		Y, see <sup>234</sup> Pu	-	3E+2	1E-7	4E-10	-	-
95	Americium-237 <sup>2</sup>	W, all compounds	8E+4	3E+5	1E-4	4E-7	1E-3	1E-2
95	Americium-238 <sup>2</sup>	W, all compounds	4E+4	3E+3	1E-6	-	5E-4	5E-3
			-	Bone surf (6E+3)	-	9E-9	-	-
95	Americium-239	W, all compounds	5E+3	1E+4	5E-6	2E-8	7E-5	7E-4
95	Americium-240	W, all compounds	2E+3	3E+3	1E-6	4E-9	3E-5	3E-4
95	Americium-241	W, all compounds	8E-1	6E-3	3E-12	-	-	-
			Bone surf (1E+0)	Bone surf (1E-2)	-	2E-14	2E-8	2E-7
95	Americium-242m	W, all compounds	8E-1	6E-3	3E-12	-	-	-
			Bone surf (1E+0)	Bone surf (1E-2)	-	2E-14	2E-8	2E-7
95	Americium-242	W, all compounds	4E+3	8E+1	4E-8	-	5E-5	5E-4
			-	Bone surf (9E+1)	-	1E-10	-	-
95	Americium-243	W, all compounds	8E-1	6E-3	3E-12	-	-	-
			Bone surf (1E+0)	Bone surf (1E-2)	-	2E-14	2E-8	2E-7
95	Americium-244m <sup>2</sup>	W, all compounds	6E+4	4E+3	2E-6	-	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Radionuclide  
No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI  
(μCi)

ALI  
(μCi)

DAC  
(μCi/ml)

Air  
(μCi/ml)

Water  
(μCi/ml)

Concentration

Atomic No.	Radionuclide	Class	Col. 1 Oral Ingestion ALI (μCi)	Col. 2 Inhalation ALI (μCi)	Col. 3 DAC (μCi/ml)	Col. 1 Air (μCi/ml)	Col. 2 Water (μCi/ml)	Concentration
			St wall (8E+4)	Bone surf (7E+3)	-	1E-8	1E-3	1E-2
95	Americium-244	W, all compounds	3E+3	2E+2 Bone surf (3E+2)	8E-8	-	4E-5	4E-4
			-	-	-	4E-10	-	-
95	Americium-245	W, all compounds	3E+4	8E+4	3E-5	1E-7	4E-4	4E-3
95	Americium-246m <sup>2</sup>	W, all compounds	5E+4 St wall (6E+4)	2E+5	8E-5	3E-7	-	-
			-	-	-	-	8E-4	8E-3
95	Americium-246 <sup>2</sup>	W, all compounds	3E+4	1E+5	4E-5	1E-7	4E-4	4E-3
96	Curium-238	W, all compounds	2E+4	1E+3	5E-7	2E-9	2E-4	2E-3
96	Curium-240	W, all compounds	6E+1 Bone surf (8E+1)	6E-1 Bone surf (6E-1)	2E-10	-	-	-
			-	-	-	9E-13	1E-6	1E-5
96	Curium-241	W, all compounds	1E+3	3E+1 Bone surf (4E+1)	1E-8	-	2E-5	2E-4
			-	-	-	5E-11	-	-
96	Curium-242	W, all compounds	3E+1 Bone surf (5E+1)	3E-1 Bone surf (3E-1)	1E-10	-	-	-
			-	-	-	4E-13	7E-7	7E-6
96	Curium-243	W, all compounds	1E+0 Bone surf (2E+0)	9E-3 Bone surf (2E-2)	4E-12	-	-	-
			-	-	-	2E-14	3E-8	3E-7
96	Curium-244	W, all compounds	1E+0 Bone surf (3E+0)	1E-2 Bone surf (2E-2)	5E-12	-	-	-
			-	-	-	3E-14	3E-8	3E-7
96	Curium-245	W, all compounds	7E-1 Bone surf (1E+0)	6E-3 Bone surf (1E-2)	3E-12	-	-	-
			-	-	-	2E-14	2E-8	2E-7
96	Curium-246	W, all compounds	7E-1 Bone surf (1E+0)	6E-3 Bone surf (1E-2)	3E-12	-	-	-
			-	-	-	2E-14	2E-8	2E-7
96	Curium-247	W, all compounds	8E-1 Bone surf (1E+0)	6E-3 Bone surf (1E-2)	3E-12	-	-	-
			-	-	-	2E-14	2E-8	2E-7

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	Concentration
96	Curium-248	W, all compounds	2E-1 Bone surf (4E-1)	2E-3 Bone surf (3E-3)	7E-13 -	-	-	-
96	Curium-249 <sup>2</sup>	W, all compounds	5E+4 -	2E+4 Bone surf (3E+4)	7E-6 -	-	7E-4 -	7E-3 -
96	Curium-250	W, all compounds	4E-2 Bone surf (6E-2)	3E-4 Bone surf (5E-4)	1E-13 -	-	-	-
97	Berkelium-245	W, all compounds	2E+3	1E+3	5E-7	2E-9	3E-5	3E-4
97	Berkelium-246	W, all compounds	3E+3	3E+3	1E-6	4E-9	4E-5	4E-4
97	Berkelium-247	W, all compounds	5E-1 Bone surf (1E+0)	4E-3 Bone surf (9E-3)	2E-12 -	-	-	-
97	Berkelium-249	W, all compounds	2E+2 Bone surf (5E+2)	2E+0 Bone surf (4E+0)	7E-10 -	-	-	-
97	Berkelium-250	W, all compounds	9E+3 -	3E+2 Bone surf (7E+2)	1E-7 -	-	1E-4 -	1E-3 -
98	Californium-244 <sup>2</sup>	W, all compounds except those given for Y	3E+4 St wall (3E+4)	6E+2 -	2E-7 -	8E-10 -	-	-
		Y, oxides and hydroxides	-	6E+2	2E-7	8E-10	-	4E-4 -
98	Californium-246	W, see <sup>244</sup> Cf Y, see <sup>244</sup> Cf	4E+2 -	9E+0 9E+0	4E-9 4E-9	1E-11 1E-11	5E-6 -	5E-5 -
98	Californium-248	W, see <sup>244</sup> Cf Y, see <sup>244</sup> Cf	8E+0 Bone surf (2E+1) -	6E-2 Bone surf (1E-1) 1E-1	3E-11 -	-	-	-
			-	4E-11	4E-11	2E-13 1E-13	2E-7 -	2E-6 -
98	Californium-249	W, see <sup>244</sup> Cf Y, see <sup>244</sup> Cf	5E-1 Bone surf (1E+0) -	4E-3 Bone surf (9E-3) 1E-2 Bone surf (1E-2)	2E-12 -	-	-	-
			-	4E-12	4E-12	1E-14 -	2E-8 -	2E-7 -
			-	-	-	2E-14	-	-

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent  
Concentrations

Table III

release to  
Sewers

Atomic No.	Radionuclide ( $\mu\text{Ci}/\text{m}$ )	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral Ingestion ALI ( $\mu\text{Ci}$ )	Col. 2 Inhalation ALI ( $\mu\text{Ci}$ )	Col. 3 Inhalation DAC ( $\mu\text{Ci}/\text{ml}$ )	Col. 1 Air ( $\mu\text{Ci}/\text{ml}$ )	Col. 2 Water ( $\mu\text{Ci}/\text{ml}$ )	
98	Californium-250	W, see <sup>244</sup> Cf	1E+0 Bone surf (2E+0)	9E-3 Bone surf (2E-2)	4E-12	-	-	-
		Y, see <sup>244</sup> Cf	-	3E-2	1E-11	3E-14 4E-14	3E-8	3E-7
98	Californium-251	W, see <sup>244</sup> Cf	5E-1 Bone surf (1E+0)	4E-3 Bone surf (9E-3)	2E-12	-	-	-
		Y, see <sup>244</sup> Cf	-	1E-2 Bone surf (1E-2)	4E-12	1E-14 - 2E-14	2E-8	2E-7
98	Californium-252	W, see <sup>244</sup> Cf	2E+0 Bone surf (5E+0)	2E-2 Bone surf (4E-2)	8E-12	-	-	-
		Y, see <sup>244</sup> Cf	-	3E-2	1E-11	5E-14 5E-14	7E-8	7E-7
98	Californium-253	W, see <sup>244</sup> Cf	2E+2 Bone surf (4E+2)	2E+0	8E-10	3E-12	-	-
		Y, see <sup>244</sup> Cf	-	-	-	-	5E-6	5E-5
98	Californium-254	W, see <sup>244</sup> Cf	2E+0	2E-2	9E-12	3E-14	3E-8	3E-7
		Y, see <sup>244</sup> Cf	-	2E-2	7E-12	2E-14	-	-
99	Einsteinium-250	W, all compounds	4E+4	5E+2 Bone surf (1E+3)	2E-7	-	6E-4	6E-3
			-	-	-	2E-9	-	-
99	Einsteinium-251	W, all compounds	7E+3	9E+2 Bone surf (1E+3)	4E-7	-	1E-4	1E-3
			-	-	-	2E-9	-	-
99	Einsteinium-253	W, all compounds	2E+2	1E+0	6E-10	2E-12	2E-6	2E-5
99	Einsteinium-254m	W, all compounds	3E+2 LLI wall (3E+2)	1E+1	4E-9	1E-11	-	-
			-	-	-	-	4E-6	4E-5
99	Einsteinium-254	W, all compounds	8E+0 Bone surf (2E+1)	7E-2 Bone surf (1E-1)	3E-11	-	-	-
			-	-	-	2E-13	2E-7	2E-6
100	Fermium-252	W, all compounds	5E+2	1E+1	5E-9	2E-11	6E-6	6E-5
100	Fermium-253	W, all compounds	1E+3	1E+1	4E-9	1E-11	1E-5	1E-4

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Rationuclide No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI (μCi)

ALI (μCi)

DAC (μCi/ml)

Air (μCi/ml)

Water (μCi/ml)

Concentration

100	Fermium-254	W, all compounds	3E+3	9E+1	4E-8	1E-10	4E-5	4E-4
100	Fermium-255	W, all compounds	5E+2	2E+1	9E-9	3E-11	7E-6	7E-5
100	Fermium-257	W, all compounds	2E+1 Bone surf (4E+1)	2E-1 Bone surf (2E-1)	7E-11 -	- 3E-13	- 5E-7	- 5E-6
101	Mendelevium-257	W, all compounds	7E+3	8E+1 Bone surf (9E+1)	4E-8 -	- 1E-10	1E-4 -	1E-3 -
101	Mendelevium-258	W, all compounds	3E+1 Bone surf (5E+1)	2E-1 Bone surf (3E-1)	1E-10 -	- 5E-13	- 6E-7	- 6E-6
-	Any single radionuclide not listed above with decay mode other than alpha emission or spontaneous fission and with radioactive half-life less than 2 hours Submersion <sup>1</sup>		-	2E+2	1E-7	1E-9	-	-
-	Any single radionuclide not listed above with decay mode other than alpha emission or spontaneous fission and with radioactive half-life greater than 2 hours		-	2E-1	1E-10	1E-12	1E-8	1E-7
-	Any single radionuclide not listed above that decays by alpha emission or spontaneous fission, or any mixture for which either the identity or the concentration of any radionuclide in the mixture is not known		-	4E-4	2E-13	1E-15	2E-9	2E-8

FOOTNOTES:

<sup>1</sup>"Submersion" means that values given are for submersion in a hemispherical semi-infinite cloud of airborne material.

<sup>2</sup>These radionuclides have radiological half-lives of less than 2 hours. The total effective dose equivalent received during operations with these radionuclides might include a significant contribution from external exposure. The DAC values for all radionuclides, other than those designated Class "Submersion," are based upon the committed effective dose equivalent due to the intake of the radionuclide into the body and do NOT include potentially significant contributions to dose equivalent from external exposures. The licensee may substitute 1E-7 μCi/ml for the listed DAC to account for the submersion dose prospectively, but should use individual monitoring devices or other radiation measuring instruments that measure external exposure to demonstrate compliance with the limits. (See 180 NAC 4-007.)

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Atomic No.	Radionuclide	Class	Occupational Values			Effluent Concentrations		Concentration
			Col. 1 Oral	Col. 2	Col. 3	Col. 1	Col. 2	
	Average		Ingestion	Inhalation		Air	Water	
	( $\mu\text{Ci}/\text{m}$ )		ALI ( $\mu\text{Ci}$ )	ALI ( $\mu\text{Ci}$ )	DAC ( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	( $\mu\text{Ci}/\text{ml}$ )	

<sup>3</sup>For soluble mixtures of U-238, U-234, and U-235 in air, chemical toxicity may be the limiting factor (see 180 NAC 4-004, item 5). If the percent by weight (enrichment) of U-235 is not greater than 5, the concentration value for a 40-hour workweek is 0.2 milligrams uranium per cubic meter of air average. For any enrichment, the product of the average concentration and time of exposure during a 40-hour workweek shall not exceed 8E-3 (SA)  $\mu\text{Ci}\cdot\text{hr}/\text{ml}$ , where SA is the specific activity of the uranium inhaled. The specific activity for natural uranium is 6.77E-7 curies per gram U. The specific activity for other mixtures of U-238, U-235, and U-234, if not known, shall be:

$$\text{SA} = 3.6\text{E-}7 \text{ curies/gram U U-depleted}$$

$$\text{SA} = [0.4 + 0.38 (\text{enrichment}) + 0.0034 (\text{enrichment})^2] \text{E-}6, \text{ enrichment} \geq 0.72$$

where enrichment is the percentage by weight of U-235, expressed as percent.

NOTE:

1. If the identity of each radionuclide in a mixture is known but the concentration of one or more of the radionuclides in the mixture is not known, the DAC for the mixture shall be the most restrictive DAC of any radionuclide in the mixture.
2. If the identity of each radionuclide in the mixture is not known, but it is known that certain radionuclides specified in this appendix are not present in the mixture, the inhalation ALI, DAC, and effluent and sewage concentrations for the mixture are the lowest values specified in this appendix for any radionuclide that is not known to be absent from the mixture; or

+If it is known that Ac-227-D and Cm-250-W are not present

-	7E-4	3E-13	-	-	-
---	------	-------	---	---	---

If, in addition, it is known that Ac-227-W,Y, Th-229-W,Y, Th-230-W, Th-232-W,Y, Pa-231-W,Y, Np-237-W, Pu-239-W, Pu-240-W, Pu-242-W, Am-241-W, Am-242m-W, Am-243-W, Cm-245-W, Cm-246-W, Cm-247-W, Cm-248-W, Bk-247-W, Cf-249-W, and Cf-251-W are not present

-	7E-3	3E-12	-	-	-
---	------	-------	---	---	---

If, in addition, it is known that Sm-146-W, Sm-147-W, Gd-148-D,W, Gd-152-D,W, Th-228-W,Y, Th-230-Y, U-232-Y, U-233-Y, U-234-Y, U-235-Y, U-236-Y, U-238-Y, Np-236-W, Pu-236-W,Y, Pu-238-W,Y, Pu-239-Y, Pu-240-Y, Pu-242-Y, Pu-244-W,Y, Cm-243-W, Cm-244-W, Cf-248-W, Cf-249-Y, Cf-250-W,Y, Cf-251-Y, Cf-252-W,Y, and Cf-254-W,Y are not present

-	7E-2	3E-11	-	-	-
---	------	-------	---	---	---

If, in addition, it is known that Pb-210-D, Bi-210m-W, Po-210-D,W, Ra-223-W, Ra-225-W, Ra-226-W, Ac-225-D,W,Y, Th-227-W,Y, U-230-D,W,Y, U-232-D,W, Pu-241-W, Cm-240-W, Cm-242-W, Cf-248-Y, Es-254-W, Fm-257-W, and Md-258-W are not present

-	7E-1	3E-10	-	-	-
---	------	-------	---	---	---

If, in addition, it is known that Si-32-Y, Ti-44-Y, Fe-60-D, Sr-90-Y, Zr-93-D,

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III

release to

Sewers

Monthly

Average

Atomic Radionuclide No. (μCi/m)

Class

Col. 1  
Oral

Col. 2

Col. 3

Col. 1

Col. 2

Ingestion

Inhalation

ALI (μCi)

ALI (μCi)

DAC (μCi/ml)

Air (μCi/ml)

Water (μCi/ml)

Concentration

Cd-113m-D, Cd-113-D, In-115-D,W, La-138-D, Lu-176-W, Hf-178m-D,W, Hf-182-D,W, Bi-210m-D, Ra-224-W, Ra-228-W, Ac-226-D,W,Y, Pa-230-W,Y, U-233-D,W, U-234-D,W, U-235-D,W, U-236-D,W, U-238-D,W, Pu-241-Y, Bk-249-W, Cf-253-W,Y, and Es-253-W are not present

- 7E+0 3E-9 - - -

If it is known that Ac-227-D,W,Y, Th-229-W,Y, Th-232-W,Y, Pa-231-W,Y, Cm-248-W, and Cm-250-W are not present -

- - 1E-14 - - -

If, in addition, it is known that Sm-146-W, Gd-148-D,W, Gd-152-D, Th-228-W,Y, Th-230-W,Y, U-232-Y, U-233-Y, U-234-Y, U-235-Y, U-236-Y, U-238-Y, U-Nat-Y, Np-236-W, Np-237-W, Pu-236-W,Y, Pu-238-W,Y, Pu-239-W,Y, Pu-240-W,Y, Pu-242-W,Y, Pu-244-W,Y, Am-241-W, Am-242m-W, Am-243-W, Cm-243-W, Cm-244-W, Cm-245-W, Cm-246-W, Cm-247-W, Bk-247-W, Cf-249-W,Y, Cf-250-W,Y, Cf-251-W,Y, Cf-252-W,Y, and Cf-254-W,Y are not present

- - - 1E-13 - - -

If, in addition, it is known that Sm-147-W, Gd-152-W, Pb-210-D, Bi-210m-W, Po-210-D,W, Ra-223-W, Ra-225-W, Ra-226-W, Ac-225-D,W,Y, Th-227-W,Y, U-230-D,W,Y, U-232-D,W, U-Nat-W, Pu-241-W, Cm-240-W, Cm-242-W, Cf-248-W,Y, Es-254-W, Fm-257-W, and Md-258-W are not present

- - - 1E-12 - - -

If, in addition it is known that Fe-60, Sr-90, Cd-113m, Cd-113, In-115, I-129, Cs-134, Sm-145, Sm-147, Gd-148, Gd-152, Hg-194 (organic), Bi-210m, Ra-223, Ra-224, Ra-225, Ac-225, Th-228, Th-230, U-233, U-234, U-235, U-236, U-238, U-Nat, Cm-242, Cf-248, Es-254, Fm-257, and Md-258 are not present

- - - - 1E-6 1E-5

3. If a mixture of radionuclides consists of uranium and its daughters in ore dust (10 μm AMAD particle distribution assumed) prior to chemical separation of the uranium from the ore, the following values may be used for the DAC of the mixture: 6E-11 μCi of gross alpha activity from uranium-238, uranium-234, thorium-230, and radium-226 per milliliter of air; 3E-11 μCi of natural uranium per milliliter of air; or 45 micrograms of natural uranium per cubic meter of air.
4. If the identity and concentration of each radionuclide in a mixture are known, the limiting values should be derived as follows: determine, for each radionuclide in the mixture, the ratio between the concentration present in the mixture and the concentration otherwise established in 180 NAC Appendix 4-B for the specific radionuclide when not in a mixture. The sum of such ratios for all of the radionuclides in the mixture may not exceed "1" (i.e., "unity").

Appendix 4-B

Table 1

Occupational Values

Table II

Effluent

Concentrations

Table III			Table I			Table II		
release to			Occupational Values			Effluent		
Sewers						Concentrations		
			Col. 1	Col. 2	Col. 3	Col. 1	Col. 2	
Monthly			Oral					
Average			Ingestion	Inhalation				
Atomic	Radionuclide	Class	ALI	ALI	DAC	Air	Water	Concentration
No.			( $\mu\text{Ci}$ )	( $\mu\text{Ci}$ )	( $\mu\text{Ci/ml}$ )	( $\mu\text{Ci/ml}$ )	( $\mu\text{Ci/ml}$ )	
	( $\mu\text{Ci/m}$ )							

Example: If radionuclides "A," "B," and "C" are present in concentrations CA, CB, and CC, and if the applicable DACs are DAC<sub>A</sub>, DAC<sub>B</sub>, and DAC<sub>C</sub>, respectively, then the concentrations shall be limited so that the following relationship exists:

$$\frac{C_A}{\overline{\text{DAC}}_A} + \frac{C_B}{\overline{\text{DAC}}_B} + \frac{C_C}{\overline{\text{DAC}}_C} \leq 1$$

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	( $\mu$ Ci)*
Hydrogen-3	1,000	Manganese-52m	1,000
Beryllium-7	1,000	Manganese-52	100
Beryllium-10	1	Manganese-53	1,000
Carbon-11	1,000	Manganese-54	100
Carbon-14	100	Manganese-56	1,000
Fluorine-18	1,000	Iron-52	100
Sodium-22	10	Iron-55	100
Sodium-24	100	Iron-59	10
Magnesium-28	100	Iron-60	1
Aluminum-26	10	Cobalt-55	100
Silicon-31	1,000	Cobalt-56	10
Silicon-32	1	Cobalt-57	100
Phosphorus-32	10	Cobalt-58m	1,000
Phosphorus-33	100	Cobalt-58	100
Sulfur-35	100	Cobalt-60m	1,000
Chlorine-36	10	Cobalt-60	1
Chlorine-38	1,000	Cobalt-61	1,000
Chlorine-39	1,000	Cobalt-62m	1,000
Argon-39	1,000	Nickel-56	100
Argon-41	1,000	Nickel-57	100
Potassium-40	100	Nickel-59	100
Potassium-42	1,000	Nickel-63	100
Potassium-43	1,000	Nickel-65	1,000
Potassium-44	1,000	Nickel-66	10
Potassium-45	1,000	Copper-60	1,000
Calcium-41	100	Copper-61	1,000
Calcium-45	100	Copper-64	1,000
Calcium-47	100	Copper-67	1,000
Scandium-43	1,000	Zinc-62	100
Scandium-44m	100	Zinc-63	1,000
Scandium-44	100	Zinc-65	10
Scandium-46	10	Zinc-69m	100
Scandium-47	100	Zinc-69	1,000
Scandium-48	100	Zinc-71m	1,000
Scandium-49	1,000	Zinc-72	100
Titanium-44	1	Gallium-65	1,000
Titanium-45	1,000	Gallium-66	100
Vanadium-47	1,000	Gallium-67	1,000
Vanadium-48	100	Gallium-68	1,000
Vanadium-49	1,000	Gallium-70	1,000
Chromium-48	1,000	Gallium-72	100
Chromium-49	1,000	Gallium-73	1,000
Chromium-51	1,000	Germanium-66	1,000
Manganese-51	1,000	Germanium-67	1,000

<sup>1</sup>To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	( $\mu$ Ci)*
Germanium-68	10	Rubidium-81m	1,000
Germanium-69	1,000	Rubidium-81	1,000
Germanium-71	1,000	Rubidium-82m	1,000
Germanium-75	1,000	Rubidium-83	100
Germanium-77	1,000	Rubidium-84	100
Germanium-78	1,000	Rubidium-86	100
Arsenic-69	1,000	Rubidium-87	100
Arsenic-70	1,000	Rubidium-88	1,000
Arsenic-71	100	Rubidium-89	1,000
Arsenic-72	100	Strontium-80	100
Arsenic-73	100	Strontium-81	1,000
Arsenic-74	100	Strontium-83	100
Arsenic-76	100	Strontium-85m	1,000
Arsenic-77	100	Strontium-85	100
Arsenic-78	1,000	Strontium-87m	1,000
Selenium-70	1,000	Strontium-89	10
Selenium-73m	1,000	Strontium-90	0.1
Selenium-73	100	Strontium-91	100
Selenium-75	100	Strontium-92	100
Selenium-79	100	Yttrium-86m	1,000
Selenium-81m	1,000	Yttrium-86	100
Selenium-81	1,000	Yttrium-87	100
Selenium-83	1,000	Yttrium-88	10
Bromine-74m	1,000	Yttrium-90m	1,000
Bromine-74	1,000	Yttrium-90	10
Bromine-75	1,000	Yttrium-91m	1,000
Bromine-76	100	Yttrium-91	10
Bromine-77	1,000	Yttrium-92	100
Bromine-80m	1,000	Yttrium-93	100
Bromine-80	1,000	Yttrium-94	1,000
Bromine-82	100	Yttrium-95	1,000
Bromine-83	1,000	Zirconium-86	100
Bromine-84	1,000	Zirconium-88	10
Krypton-74	1,000	Zirconium-89	10
Krypton-76	1,000	Zirconium-93	1
Krypton-77	1,000	Zirconium-95	10
Krypton-79	1,000	Zirconium-97	100
Krypton-81	1,000	Niobium-88	1,000
Krypton-83m	1,000	Niobium-89 (66 min)	1,000
Krypton-85m	1,000	Niobium-89 (122 min)	1,000
Krypton-85	1,000	Niobium-90	100
Krypton-87	1,000	Niobium-93m	10
Krypton-88	1,000	Niobium-94	1
Rubidium-79	1,000	Niobium-95m	100

<sup>1</sup>To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	( $\mu$ Ci)*
Niobium-95	100	Silver-103	1,000
Niobium-96	100	Silver-104m	1,000
Niobium-97	1,000	Silver-104	1,000
Niobium-98	1,000	Silver-105	100
Molybdenum-90	100	Silver-106m	100
Molybdenum-93m	100	Silver-106	1,000
Molybdenum-93	10	Silver-108m	1
Molybdenum-99	100	Silver-110m	10
Molybdenum-101	1,000	Silver-111	100
Technetium-93m	1,000	Silver-112	100
Technetium-93	1,000	Silver-115	1,000
Technetium-94m	1,000	Cadmium-104	1,000
Technetium-94	1,000	Cadmium-107	1,000
Technetium-96m	1,000	Cadmium-109	1
Technetium-96	100	Cadmium-113m	0.1
Technetium-97m	100	Cadmium-113	100
Technetium-97	1,000	Cadmium-115m	10
Technetium-98	10	Cadmium-115	100
Technetium-99m	1,000	Cadmium-117m	1,000
Technetium-99	100	Cadmium-117	1,000
Technetium-101	1,000	Indium-109	1,000
Technetium-104	1,000	Indium-110 (69.1m)	1,000
Ruthenium-94	1,000	Indium-110 (4.9h)	1,000
Ruthenium-97	1,000	Indium-111	100
Ruthenium-103	100	Indium-112	1,000
Ruthenium-105	1,000	Indium-113m	1,000
Ruthenium-106	1	Indium-114m	10
Rhodium-99m	1,000	Indium-115m	1,000
Rhodium-99	100	Indium-115	100
Rhodium-100	100	Indium-116m	1,000
Rhodium-101m	1,000	Indium-117m	1,000
Rhodium-101	10	Indium-117	1,000
Rhodium-102m	10	Indium-119m	1,000
Rhodium-102	10	Tin-110	100
Rhodium-103m	1,000	Tin-111	1,000
Rhodium-105	100	Tin-113	100
Rhodium-106m	1,000	Tin-117m	100
Rhodium-107	1,000	Tin-119m	100
Palladium-100	100	Tin-121m	100
Palladium-101	1,000	Tin-121	1,000
Palladium-103	100	Tin-123m	1,000
Palladium-107	10	Tin-123	10
Palladium-109	100	Tin-125	10
Silver-102	1,000	Tin-126	10

<sup>1</sup>To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	Quantity Quantity ( $\mu$ Ci)*
Tin-127	1,000	Iodine-126	1
Tin-128	1,000	Iodine-128	1,000
Antimony-115	1,000	Iodine-129	1
Antimony-116m	1,000	Iodine-130	10
Antimony-116	1,000	Iodine-131	1
Antimony-117	1,000	Iodine-132m	100
Antimony-118m	1,000	Iodine-132	100
Antimony-119	1,000	Iodine-133	10
Antimony-120 (16min.)	1,000	Iodine-134	1,000
Antimony-120 (5.76d)	100	Iodine-135	100
Antimony-122	100	Xenon-120	1,000
Antimony-124m	1,000	Xenon-121	1,000
Antimony-124	10	Xenon-122	1,000
Antimony-125	100	Xenon-123	1,000
Antimony-126m	1,000	Xenon-125	1,000
Antimony-126	100	Xenon-127	1,000
Antimony-127	100	Xenon-129m	1,000
Antimony-128 (10.4min.)	1,000	Xenon-131m	1,000
Antimony-128 (9.01h)	100	Xenon-133m	1,000
Antimony-129	100	Xenon-133	1,000
Antimony-130	1,000	Xenon-135m	1,000
Antimony-131	1,000	Xenon-135	1,000
Tellurium-116	1,000	Xenon-138	1,000
Tellurium-121m	10	Cesium-125	1,000
Tellurium-121	100	Cesium-127	1,000
Tellurium-123m	10	Cesium-129	1,000
Tellurium-123	100	Cesium-130	1,000
Tellurium-125m	10	Cesium-131	1,000
Tellurium-127m	10	Cesium-132	100
Tellurium-127	1,000	Cesium-134m	1,000
Tellurium-129m	10	Cesium-134	10
Tellurium-129	1,000	Cesium-135m	1,000
Tellurium-131m	10	Cesium-135	100
Tellurium-131	100	Cesium-136	10
Tellurium-132	10	Cesium-137	10
Tellurium-133m	100	Cesium-138	1,000
Tellurium-133	1,000	Barium-126	1,000
Tellurium-134	1,000	Barium-128	100
Iodine-120m	1,000	Barium-131m	1,000
Iodine-120	100	Barium-131	100
Iodine-121	1,000	Barium-133m	100
Iodine-123	100	Barium-133	100
Iodine-124	10	Barium-135m	100
Iodine-125	1	Barium-139	1,000

<sup>1</sup>To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	( $\mu$ Ci)*
Barium-140	100	Promethium-148m	10
Barium-141	1,000	Promethium-148	10
Barium-142	1,000	Promethium-149	100
Lanthanum-131	1,000	Promethium-150	1,000
Lanthanum-132	100	Promethium-151	100
Lanthanum-135	1,000	Samarium-141m	1,000
Lanthanum-137	10	Samarium-141	1,000
Lanthanum-138	100	Samarium-142	1,000
Lanthanum-140	100	Samarium-145	100
Lanthanum-141	100	Samarium-146	1
Lanthanum-142	1,000	Samarium-147	100
Lanthanum-143	1,000	Samarium-151	10
Cerium-134	100	Samarium-153	100
Cerium-135	100	Samarium-155	1,000
Cerium-137m	100	Samarium-156	1,000
Cerium-137	1,000	Europium-145	100
Cerium-139	100	Europium-146	100
Cerium-141	100	Europium-147	100
Cerium-143	100	Europium-148	10
Cerium-144	1	Europium-149	100
Praseodymium-136	1,000	Europium-150 (12.62h)	100
Praseodymium-137	1,000	Europium-150 (34.2y)	1
Praseodymium-138m	1,000	Europium-152m	100
Praseodymium-139	1,000	Europium-152	1
Praseodymium-142m	1,000	Europium-154	1
Praseodymium-142	100	Europium-155	10
Praseodymium-143	100	Europium-156	100
Praseodymium-144	1,000	Europium-157	100
Praseodymium-145	100	Europium-158	1,000
Praseodymium-147	1,000	Gadolinium-145	1,000
Neodymium-136	1,000	Gadolinium-146	10
Neodymium-138	100	Gadolinium-147	100
Neodymium-139m	1,000	Gadolinium-148	0.001
Neodymium-139	1,000	Gadolinium-149	100
Neodymium-141	1,000	Gadolinium-151	10
Neodymium-147	100	Gadolinium-152	100
Neodymium-149	1,000	Gadolinium-153	10
Neodymium-151	1,000	Gadolinium-159	100
Promethium-141	1,000	Terbium-147	1,000
Promethium-143	100	Terbium-149	100
Promethium-144	10	Terbium-150	1,000
Promethium-145	10	Terbium-151	100
Promethium-146	1	Terbium-153	1,000
Promethium-147	10	Terbium-154	100

<sup>1</sup>To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	Quantity ( $\mu$ Ci)*
Terbium-155	1,000	Lutetium-169	100
Terbium-156m (5.0h)	1,000	Lutetium-170	100
Terbium-156m (24.4h)	1,000	Lutetium-171	100
Terbium-156	100	Lutetium-172	100
Terbium-157	10	Lutetium-173	10
Terbium-158	1	Lutetium-174m	10
Terbium-160	10	Lutetium-174	10
Terbium-161	100	Lutetium-176m	1,000
Dysprosium-155	1,000	Lutetium-176	100
Dysprosium-157	1,000	Lutetium-177m	10
Dysprosium-159	100	Lutetium-177	100
Dysprosium-165	1,000	Lutetium-178m	1,000
Dysprosium-166	100	Lutetium-178	1,000
Holmium-155	1,000	Lutetium-179	1,000
Holmium-157	1,000	Hafnium-170	100
Holmium-159	1,000	Hafnium-172	1
Holmium-161	1,000	Hafnium-173	1,000
Holmium-162m	1,000	Hafnium-175	100
Holmium-162	1,000	Hafnium-177m	1,000
Holmium-164m	1,000	Hafnium-178m	0.1
Holmium-164	1,000	Hafnium-179m	10
Holmium-166m	1	Hafnium-180m	1,000
Holmium-166	100	Hafnium-181	10
Holmium-167	1,000	Hafnium-182m	1,000
Erbium-161	1,000	Hafnium-182	0.1
Erbium-165	1,000	Hafnium-183	1,000
Erbium-169	100	Hafnium-184	100
Erbium-171	100	Tantalum-172	1,000
Erbium-172	100	Tantalum-173	1,000
Thulium-162	1,000	Tantalum-174	1,000
Thulium-166	100	Tantalum-175	1,000
Thulium-167	100	Tantalum-176	100
Thulium-170	10	Tantalum-177	1,000
Thulium-171	10	Tantalum-178	1,000
Thulium-172	100	Tantalum-179	100
Thulium-173	100	Tantalum-180m	1,000
Thulium-175	1,000	Tantalum-180	100
Ytterbium-162	1,000	Tantalum-182m	1,000
Ytterbium-166	100	Tantalum-182	10
Ytterbium-167	1,000	Tantalum-183	100
Ytterbium-169	100	Tantalum-184	100
Ytterbium-175	100	Tantalum-185	1,000
Ytterbium-177	1,000	Tantalum-186	1,000
Ytterbium-178	1,000	Tungsten-176	1,000

<sup>1</sup>To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	( $\mu$ Ci)*
Tungsten-177	1,000	Platinum-186	1,000
Tungsten-178	1,000	Platinum-188	100
Tungsten-179	1,000	Platinum-189	1,000
Tungsten-181	1,000	Platinum-191	100
Tungsten-185	100	Platinum-193m	100
Tungsten-187	100	Platinum-193	1,000
Tungsten-188	10	Platinum-195m	100
Rhenium-177	1,000	Platinum-197m	1,000
Rhenium-178	1,000	Platinum-197	100
Rhenium-181	1,000	Platinum-199	1,000
Rhenium-182 (12.7h)	1,000	Platinum-200	100
Rhenium-182 (64.0h)	100	Gold-193	1,000
Rhenium-184m	10	Gold-194	100
Rhenium-184	100	Gold-195	10
Rhenium-186m	10	Gold-198m	100
Rhenium-186	100	Gold-198	100
Rhenium-187	1,000	Gold-199	100
Rhenium-188m	1,000	Gold-200m	100
Rhenium-188	100	Gold-200	1,000
Rhenium-189	100	Gold-201	1,000
Osmium-180	1,000	Mercury-193m	100
Osmium-181	1,000	Mercury-193	1,000
Osmium-182	100	Mercury-194	1
Osmium-185	100	Mercury-195m	100
Osmium-189m	1,000	Mercury-195	1,000
Osmium-191m	1,000	Mercury-197m	100
Osmium-191	100	Mercury-197	1,000
Osmium-193	100	Mercury-199m	1,000
Osmium-194	1	Mercury-203	100
Iridium-182	1,000	Thallium-194m	1,000
Iridium-184	1,000	Thallium-194	1,000
Iridium-185	1,000	Thallium-195	1,000
Iridium-186	100	Thallium-197	1,000
Iridium-187	1,000	Thallium-198m	1,000
Iridium-188	100	Thallium-198	1,000
Iridium-189	100	Thallium-199	1,000
Iridium-190m	1,000	Thallium-200	1,000
Iridium-190	100	Thallium-201	1,000
Iridium-192 (73.8d)	1	Thallium-202	100
Iridium-192m (1.4min.)	10	Thallium-204	100
Iridium-194m	10	Lead-195m	1,000
Iridium-194	100	Lead-198	1,000
Iridium-195m	1,000	Lead-199	1,000
Iridium-195	1,000	Lead-200	100

<sup>1</sup>To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide	( $\mu$ Ci)*
Lead-201	1,000	Thorium-227	0.01
Lead-202m	1,000	Thorium-228	0.001
Lead-202	10	Thorium-229	0.001
Lead-203	1,000	Thorium-230	0.001
Lead-205	100	Thorium-231	100
Lead-209	1,000	Thorium-232	100
Lead-210	0.01	Thorium-234	10
Lead-211	100	Thorium-natural	100
Lead-212	1	Protactinium-227	10
Lead-214	100	Protactinium-228	1
Bismuth-200	1,000	Protactinium-230	0.1
Bismuth-201	1,000	Protactinium-231	0.001
Bismuth-202	1,000	Protactinium-232	1
Bismuth-203	100		
Bismuth-205	100	Protactinium-233	100
Bismuth-206	100	Protactinium-234	100
Bismuth-207	10	Uranium-230	0.01
Bismuth-210m	0.1	Uranium-231	100
Bismuth-210	1	Uranium-232	0.001
Bismuth-212	10	Uranium-233	0.001
Bismuth-213	10	Uranium-234	0.001
Bismuth-214	100	Uranium-235	0.001
Polonium-203	1,000	Uranium-236	0.001
Polonium-205	1,000	Uranium-237	100
Polonium-207	1,000	Uranium-238	100
Polonium-210	0.1	Uranium-239	1,000
Astatine-207	100	Uranium-240	100
Astatine-211	10	Uranium-natural	100
Radon-220	1	Neptunium-232	100
Radon-222	1	Neptunium-233	1,000
Francium-222	100	Neptunium-234	100
Francium-223	100	Neptunium-235	100
Radium-223	0.1	Neptunium-236 (1.15x10 <sup>5</sup> y)	0.001
Radium-224	0.1	Neptunium-236 (22.5h)	1
Radium-225	0.1	Neptunium-237	0.001
Radium-226	0.1	Neptunium-238	10
Radium-227	1,000	Neptunium-239	100
Radium-228	0.1	Neptunium-240	1,000
Actinium-224	1	Plutonium-234	10
Actinium-225	0.01	Plutonium-235	1,000
Actinium-226	0.1	Plutonium-236	0.001
Actinium-227	0.001	Plutonium-237	100
Actinium-228	1	Plutonium-238	0.001
Thorium-226	10	Plutonium-239	0.001

\*To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu$ Ci)*	Radionuclide ( $\mu$ Ci)*	
Plutonium-240	0.001	Any alpha emitting radionuclide not listed above or mixtures of alpha emitters of unknown composition	
Plutonium-241	0.01		
Plutonium-242	0.001		
Plutonium-243	1,000	Einsteinium-250	0.001
Plutonium-244	0.001	Einsteinium-251	100
Plutonium-245	100	Einsteinium-253	100
Americium-237	1,000	Einsteinium-254m	0.1
Americium-238	100	Einsteinium-254	1
Americium-239	1,000	Fermium-252	0.01
Americium-240	100	Fermium-253	1
Americium-241	0.001	Fermium-254	10
Americium-242m	0.001	Fermium-255	1
Americium-242	10	Fermium-257	0.01
Americium-243	0.001	Mendelevium-257	10
Americium-244m	100	Mendelevium-258	0.01
Americium-244	10	Any radionuclide other than alpha-emitting radionuclides not listed above, or mixtures of beta- emitters of unknown composition	
Americium-245	1,000		
Americium-246m	1,000		
Americium-246	1,000		
Curium-238	100		
Curium-240	0.1	<sup>1</sup> The quantities listed above were derived by taking 1/10th of the most restrictive ALI listed in Table I, Columns 1 and 2, of Appendix 004-B to Section 004, rounding to the nearest factor of 10, and constraining the values listed between 37 Bq and 37 MBq (0.001 and 1,000 $\mu$ Ci). Values of 3.7 MBq (100 $\mu$ Ci) have been assigned for radionuclides having a radioactive half-life in excess of 10 <sup>9</sup> years, except rhenium, 37 MBq (1,000 $\mu$ Ci), to take into account their low specific activity.	
Curium-241	1		
Curium-242	0.01		
Curium-243	0.001		
Curium-244	0.001		
Curium-245	0.001		
Curium-246	0.001		
Curium-247	0.001		
Curium-248	0.001		
Curium-249	1,000		
Berkelium-245	100		
Berkelium-246	100		
Berkelium-247	0.001		
Berkelium-249	0.1		
Berkelium-250	10		
Californium-244	100		
Californium-246	1		
Californium-248	0.01		
Californium-249	0.001		
Californium-250	0.001		
Californium-251	0.001		
Californium-252	0.001		
Californium-253	0.1		
Californium-254	0.001		

NOTE: For purposes of 180 NAC 4-32.05, 4-035.01 and 4-055.01, item 1 where there is involved a combination of radionuclides in known amounts, the limit for the combination should be derived as follows: determine, for each radionuclide in the combination, the ratio between the quantity present in the combination and the limit otherwise established for the specific radionuclide when not in combination. The sum of such ratios for all radionuclides in the combination may not exceed "1" -- that is, unity.

\*To convert  $\mu$ Ci to kBq, multiply the  $\mu$ Ci value by 37.

**APPENDIX 4-C**

**QUANTITIES<sup>1</sup> MATERIAL REQUIRING LABELING**

Radionuclide	Quantity Quantity ( $\mu\text{Ci}$ )*	R a d i o n u c l i d e  ( $\mu\text{Ci}$ )*
--------------	---	--

\*To convert  $\mu\text{Ci}$  to kBq, multiply the  $\mu\text{Ci}$  value by 37.

APPENDIX 4-D

REQUIREMENTS FOR TRANSFERS OF LOW-LEVEL RADIOACTIVE WASTE INTENDED FOR  
DISPOSAL AT LICENSED DISPOSAL FACILITIES AND MANIFESTS

Section I. - Manifest.

A waste generator, collector, or processor who transports, or offers for transportation, low-level radioactive waste intended for ultimate disposal at a licensed low-level radioactive waste disposal facility must prepare a Manifest reflecting information requested on the following forms, U.S. Nuclear Regulatory Commission (U.S. NRC) U.S. NRC 540, (3-95) (Uniform Low-Level Radioactive Waste Manifest (Shipping Paper) and U.S. Form NRC 541 (3-95) (Uniform Low-Level Radioactive Waste Manifest (Container and Waste Description) and if necessary, on Agency Form NRC 542 (3-95) (Uniform Low-Level Radioactive Waste Manifest (Manifest Index and Regional Compact Tabulation). U.S. NRC 540 (3-95) and U.S. NRC 540A (3-95) must be completed and must physically accompany the pertinent low-level radioactive waste shipment. Upon agreement between shipper and consignee, U.S. Forms U.S. NRC 541 and U.S. NRC 541A and U.S. NRC 542 and U.S. NRC 542A may be completed, transmitted, and stored in electronic media with the capability for producing legible, accurate, and complete records on the respective forms. Licensees are not required by the Agency to comply with the manifesting requirements of this section when they ship:

- (a) Low-Level Waste for processing and expect its return (i.e., for storage under their license) prior to disposal at a licensed land disposal facility;
- (b) Low-Level Waste that is being returned to the licensee who is the "waste generator" or "generator," as defined in this section; or
- (c) Radioactively contaminated material to a "waste processor" that becomes the processor's "residual waste".

For guidance in completing these forms, refer to the instructions that accompany the forms. Copies of manifests required by this appendix may be legible carbon copies, photocopies, or computer printouts that reproduce the data in the format of the uniform manifest.

Forms U.S. NRC 540, U.S. NRC 541, U.S. NRC 541A and U.S. NRC 542 and U.S. NRC 542A and the accompanying instructions, in hard copy, may be obtained from

Department of Health and Human Services Regulation and Licensure  
Public Health Assurance Division  
301 Centennial Mall South  
P.O. Box 95007  
Lincoln, Nebraska 68509-5007

This appendix includes information requirements of the Department of Transportation, as codified in 49 CFR part 172. Information on hazardous, medical, or other waste, required to meet Environmental Protection Agency regulations, as codified in 40 CFR parts 259, 261 or elsewhere, is not addressed in this section, and must be provided on the required EPA forms. However, the required EPA forms must accompany the Uniform Low-Level Radioactive Waste Manifest required by this section.

As used in this appendix, the following definitions apply:

"Chelating agent" has the same meaning as that given in 180 NAC 1-002.

"Chemical description" means a description of the principal chemical characteristics of a low-level radioactive waste.

APPENDIX 4-D

“Computer-readable medium” means that the Agency’s computer can transfer the information from the medium into its memory.

“Consignee” means the designated receiver of the shipment of low-level radioactive waste.

Decontamination facility” means a facility operating under an Agency, U.S. Nuclear Regulatory Commission or Agreement State or license whose principal purpose is decontamination of equipment or materials to accomplish recycle, reuse, or other waste management objectives, and, for purposes of this section, is not considered to be a consignee for low-level waste shipments.

“Disposal container” means a container principally used to confine low-level radioactive waste during disposal operations at a land disposal facility (also see “high integrity container”). Note that for some shipments, the disposal container may be the transport package.

“EPA identification number” means the number received by a transporter following application to the Administrator of EPA as required by 40 CFR part 263.

“Generator” means a licensee operating under an Agency, U.S. Nuclear Regulatory Commission or Agreement State license who (1) is a waste generator as defined in this part, or (2) is the licensee to whom waste can be attributed within the context of the Low-Level Radioactive Waste Policy Amendments Act of 1985 (e.g., waste generated as a result of decontamination or recycle activities).

“High integrity container (HIC)” means a container commonly designed to meet the structural stability requirements of Appendix 180 NAC 4-E, Section II , and to meet Department of Transportation requirements for a Type A package.

U.S. NRC Forms 540, 540A, 541, 541A, 542, and 542A are Forms referenced in this appendix. Licensees need not use originals of these U.S. NRC Forms as long as any substitute forms are equivalent to the original document in respect to content, clarity, size, and location of information. Upon agreement between the shipper and consignee, U.S. NRC Forms 541 (and 541A) and U.S. NRC Forms 542 and (542A) may be completed, transmitted, and stored in electronic media. The electronic media must have the capability for producing legible, accurate, and complete records in the format of the uniform manifest.

“Package” means the assembly of components necessary to ensure compliance with the packaging requirements of DOT regulations, together with its radioactive contents, as presented for transport.

“Physical description” means the items called for on Form U.S. NRC 541 to describe a low-level radioactive waste.

“Residual waste” means low-level radioactive waste resulting from processing or decontamination activities that cannot be easily separated into distinct batches attributable to specific waste generators. This waste is attributable to the processor or decontamination facility, as applicable.

“Shipper” means the licensed entity (i.e., the waste generator, waste collector, or waste processor) who offers low-level radioactive waste for transportation, typically consigning this type of waste to a licensed waste collector, waste processor, or land disposal facility operator.

“Shipping paper” means U.S. NRC 540 and, if required Form U.S. NRC 540A, which includes the information required by DOT in 49 CFR part 172.

“Source material” has the same meaning as that given in 180 NAC 1-002.

“Special nuclear material” has the same meaning as that given in 180 NAC 1-002.

APPENDIX 4-D

“Uniform Low-Level Radioactive Waste Manifest” or “Uniform Manifest” means the combination of U.S. NRC Forms 540, 541, and if necessary, 542, and their respective continuation sheets as needed, or equivalent.

“Waste collector” means an entity, operating under an Agency, U.S. Nuclear Regulatory Commission or Agreement State license, whose principal purpose is to collect and consolidate waste generated by others, and to transfer this waste, without processing or repackaging the collected waste, to another licensed waste collector, licensed waste processor, or licensed disposal facility.

“Waste description” means the physical, chemical and radiological description of a low-level radioactive waste as called for on Form U.S. NRC 541.

“Waste generator” means an entity, operating under an Agency, U.S. Nuclear Regulatory Commission or Agreement State license, who (1) possesses any material or component that contains radioactivity or is radioactively contaminated for which the licensee foresees no further use, and (2) transfers this material or component to a licensed disposal facility or to a licensed waste collector or processor for handling or treatment prior to disposal. A licensee performing processing or decontamination services may be a “waste generator” if the transfer of low-level radioactive waste from its facility is defined as “residual waste.”

“Waste processor” means an entity, operating under an Agency, U.S. Nuclear Regulatory Commission or Agreement State license, whose principal purpose is to process, repackage, or otherwise treat low-level radioactive material or waste generated by others prior to eventual transfer of waste to a licensed low-level radioactive waste disposal facility.

“Waste type” means a waste within a disposal container having a unique physical description (i.e., a specific waste descriptor code or description; or a waste sorbed on or solidified in a specifically defined media).

INFORMATION REQUIREMENTS

A. General Information

The shipper of the low-level radioactive waste, shall provide the following information on the uniform manifest:

1. The name, facility address, and telephone number of the licensee shipping the waste;
2. An explicit declaration indicting whether the shipper is acting as a waste generator, collector, processor, or a combination of these identifiers for purposes of the manifested shipment; and
3. The name, address, and telephone number, or the name and EPA identification number for the carrier transporting the waste.

B. Shipment Information

The shipper of the radioactive waste shall provide the following information regarding the waste shipment on the uniform manifest:

1. The date of the waste shipment;
2. The total number of packages/disposal containers;
3. The total disposal volume and disposal weight in the shipment;

APPENDIX 4-D

4. The total radionuclide activity in the shipment.
5. The activity of each of the radionuclides H-3, C-14, Tc-99, and I-129 contained in the shipment; and
6. The total masses of U-233, U-235, and plutonium in the form of special nuclear material, and the total mass of uranium and thorium in the form of source material.

C. Disposal Container and Waste Information

The shipper of the radioactive waste shall provide the following information on the uniform manifest regarding the waste and each disposal container of waste in the shipment:

1. An alphabetic or numeric identification that uniquely identifies each disposal container in the shipment;
2. A physical description of the disposal container, including the manufacturer and model of any high integrity container;
3. The volume displaced by the disposal container;
4. The gross weight of the disposal container, including the waste;
5. For waste consigned to a disposal facility, the maximum radiation level at the surface of each disposal container;
6. A physical and chemical description of the waste;
7. The total weight percentage of chelating agent for any waste containing more than 0.1% chelating agent by weight, plus the identify of the principal chelating agent;
8. The approximate volume of waste within a container;
9. The sorbing or solidification media, if any, and the identity of the solidification media vendor and brand name;
10. The identities and activities of individual radionuclides contained in each container, the masses of U-233, U-235, and plutonium in the form of special nuclear material, and the masses of uranium and thorium in the form of source material. For discrete waste types (i.e., activated materials, contaminated equipment, mechanical filters, sealed source/devices, and wastes in solidification/stabilization media), the identities and activities of individual radionuclides associated with a disposal container shall be reported;
11. The total radioactivity within each container; and
12. For wastes consigned to a disposal facility, the classification of the waste pursuant to Appendix 4-E, Section I. Waste not meeting the structural stability requirements of Appendix 4-E, Section II(b) must be identified.

D. Uncontainerized Waste Information

The shipper of the radioactive waste shall provide the following information on the uniform manifest regarding a waste shipment delivered without a disposal container:

APPENDIX 4-D

1. The approximate volume and weight of the waste;
2. A physical and chemical description of the waste;
3. The total weight percentage of chelating agent if the chelating agent exceeds 0.1% by weight, plus the identity of the principal chelating agent;
4. For waste consigned to a disposal facility, the classification of the waste pursuant to Appendix 180 NAC 4-E, Section I. Waste not meeting the structural stability requirements of Appendix 180 NAC 4-E, Section II(b) must be identified.
5. The identities and activities of individual radionuclides contained in the waste, the masses of U-233, U-235, and plutonium in the form of special nuclear material, and the masses of uranium and thorium in the form of source material; and
6. For wastes consigned to a disposal facility, the maximum radiation levels at the surface of the waste.

E. Multi-Generator Disposal Container Information

This section applies to disposal containers enclosing mixtures of waste originating from different generators. (Note: The origin of the low-level waste resulting from a processor's activities may be attributable to one or more "generators" (including "waste generators") as defined in this section). It also applies to mixtures of wastes shipped in an uncontainerized form, for which portions of the mixture within the shipment originate from different generators.

1. For homogeneous mixtures of waste, such as incinerator ash, provide the waste description applicable to the mixture and the volume of the waste attributed to each generator.
2. For heterogeneous mixtures of waste, such as the combined products from a large compactor, identify each generator contributing waste to the disposal container, and, for discrete waste types (i.e., activated materials, contaminated equipment, mechanical filters, sealed source/devices, and wastes in solidification/stabilization media), the identities and activities of individual radionuclides contained on these waste types within the disposal container. For each generator, provide the following:
  - (a) The volume of waste within the disposal container;
  - (b) A physical and chemical description of the waste, including the solidification agent, if any;
  - (c) The total weight percentage of chelating agents for any disposal container containing more than 0.1% chelating agent by weight, plus the identity of the principal chelating agent;
  - (d) The sorbing or solidification media, if any, and the identity of the solidification media vendor and brand name if the media is claimed to meet stability requirements in Appendix 180 NAC 4-E, Section II(b); and
  - (e) Radionuclide identities and activities contained in the waste, the masses of U-233, U-235, and plutonium in the form of special nuclear material, and the masses of uranium and thorium in the form of source material if contained in the waste.

Section II - Certification

APPENDIX 4-D

An authorized representative of the waste generator, processor, or collector shall certify by signing and dating the shipment manifest that the transported materials are properly classified, described, packaged, marked, and labeled and are in proper condition for transportation according to the applicable regulations of the Department of Transportation and the Agency. A collector in signing the certification is certifying that nothing has been done to the collected waste which would invalidate the waste generator's certification.

Section III - Control and Tracking

- A. Any licensee who transfers radioactive waste to a land disposal facility or a licensed waste collector shall comply with the requirements in A.1 through 9 of this section. Any licensee who transfers waste to a licensed waste processor for waste treatment or repackaging of A.4 through 9 of this section. A licensee shall:
1. Prepare all wastes so that the waste is classified according to Appendix 180 NAC 4-E, Section I and meets waste characteristics requirements in, Appendix 180 NAC 4-E, Section II.
  2. Label each disposal container (or transport package if potential radiation hazards preclude labeling of the individual disposal container) of waste to identify whether it is Class A waste, Class B waste, Class C waste, or greater than Class C waste, in accordance with Appendix 180 NAC 4-E, Section I.
  3. Conduct a quality assurance program to assure compliance with Appendix 180 NAC 4-E, Section I and Section II (the program must include management evaluation of audits);
  4. Prepare the Agency Uniform Low-Level Radioactive Waste Manifest as required by this appendix;
  5. Forward a copy or electronically transfer the Uniform Low-Level Radioactive Waste Manifest to the intended consignee so that either (i) receipt of the manifest precedes the low-level waste shipment or (ii) the manifest is delivered to the consignee with the waste at the time the waste is transferred to the consignee. Using both (i) and (ii) is also acceptable;
  6. Include Forms U.S. NRC 540 and U.S. NRC 540A, if required, with the shipment regardless of the option in Paragraph A.5 of this section;.
  7. Retain a copy of the manifest and documentation of acknowledgment of receipt as the record of transfer of licensed material as required by 180 NAC 3. This includes those manifests and documents required under the standards for protection against radiation in effect prior to May 30, 1994; and
  8. Retain a copy of or electronically store the Uniform Low-Level Radioactive Waste Manifest and documentation of acknowledgment of receipt as the record of transfer of licensed material as required by Appendix 180 NAC 4-D.
  9. For any shipments or any part of a shipment for which acknowledgment of receipt has not been received within the times set forth in this appendix, conduct an investigation in accordance with Paragraph E of this appendix.
- B. Any waste collector licensee who handles only prepackaged waste shall:
1. Acknowledge receipt of the waste from the shipper within one week of receipt by returning a signed copy Form U.S. NRC 540.

APPENDIX 4-D

2. Prepare a new manifest to reflect consolidated shipments that meet the requirements of this appendix. The waste collector shall ensure that, for each container of waste in the shipment, the manifest identifies the generator of that container of waste;
  3. Forward a copy or electronically transfer the Uniform Low-Level Radioactive Waste Manifest to the intended consignee so that either: (i) Receipt of the manifest precedes the low-level waste shipment or (ii) the manifest is delivered to the consignee with the waste at the time the waste is transferred to the consignee. Using both (i) and (ii) is also acceptable;
  4. Include Forms U.S. NRC 540 and NRC 540A, if required, with the shipment regardless of the option chosen in Paragraph B.3 of this section;
  5. Retain a copy of the manifest and documentation of acknowledgment of receipt as the record of transfer of licensed material as required by 180 NAC 3, and retain information from generator manifest until the license is terminated. This includes those manifests and documents of acknowledgment of receipt required under the standards for protection against radiation in effect prior to May 30, 1994; and
  6. Retain a copy of or electronically store the Uniform Low-Level Radioactive Waste Manifest and documentation of acknowledgment of receipt;
  7. For any shipments or any part of a shipment for which acknowledgment of receipt has not been received within the times set forth in this appendix, conduct an investigation in accordance with Paragraph E of this appendix; and
  8. Notify the shipper and the Agency when any shipment, or part of a shipment, has not arrived within 60 days after receipt of an advance manifest, unless notified by the shipper that the shipment has been canceled.
- C. Any licensed waste processor who treats or repackages waste shall:
1. Acknowledge receipt of the waste from the shipper within one week of receipt by returning a signed copy of Form U.S. NRC 540;
  2. Prepare a new manifest that meets the requirements of this appendix. Preparation of the new manifest reflects that the processor is responsible for meeting these requirements. For each container of waste in the shipment, the manifest shall identify the waste generators, the preprocessed waste volume, and other information as required in Paragraph 1.E. of this appendix;
  3. Prepare all wastes so that the waste is classified according to Appendix 18- NAC 4-E, Section I, of Appendix 180 NAC 4-D and meets the waste characteristics requirements in Appendix 180 NAC 4-E, Section II;
  4. Label each package of waste to identify whether it is Class A waste, Class B waste, or Class C waste, in accordance with Appendix 180 NAC 4-E, Section I and Section III;
  5. Conduct a quality assurance program to assure compliance with Appendix 180 NAC 4- E, Section I and II (the program shall include management evaluation of audits);
  6. Forward a copy or electronically transfer the Uniform Low-Level Radioactive Waste Manifest to the intended consignee so that either: (i) receipt of the manifest precedes the low-level waste shipment or (ii) the manifest is delivered to the consignee with the waste at the time the waste is transferred to the consignee. Using both (i) and (ii) is also acceptable;

APPENDIX 4-D

7. Include Forms U.S. NRC 540 and NRC 540A, if required, with the shipment regardless of the option chosen in Paragraph C.6 of this section;
  8. Retain copies of the original manifests and new manifests and documentation of acknowledgment of receipt as the record of transfer of licensed material as required by 180 NAC 3. This includes those manifests and documents of acknowledgment of receipt required under the standards for protection against radiation in effect prior to May 30, 1994; and
  9. Retain a copy of or electronically store the Uniform Low-Level Radioactive Waste Manifest and documentation of acknowledgment of receipt as the record of transfer of licensed material as required by 180 NAC 3;
  10. For any shipment or any part of a shipment for which acknowledgment of receipt has not been received within the times set forth in this appendix, conduct an investigation in accordance with Paragraph E of this appendix; and
  11. Notify the shipper and the Agency when any shipment, or any part of a shipment, has not arrived within 60 days after receipt of an advance manifest, unless notified by the shipper that the shipment has been canceled.
- D. The land disposal facility operator shall:
1. Acknowledge receipt of the waste within one week of receipt by returning, as a minimum, a signed copy of Form U.S. NRC 540 to the shipper. The shipper to be notified is the licensee who last possessed the waste and transferred the waste to the operator. If any discrepancy exists between materials listed on the Uniform Low-Level Radioactive Waste Manifest and materials received, copies or electronic transfer of the affected forms must be returned indicating that discrepancy.
  2. Maintain copies of all completed manifests or equivalent documentation until the license is terminated. This includes those manifests or equivalent documents required under the standards for protection against radiation in effect prior to May 30, 1994.
  3. Notify the shipper and the Agency when any shipment, or part of a shipment, has not arrived within 60 days after receipt of an advance manifest, unless notified by the shipper that the shipment has been canceled.
- E. Any shipments or part of a shipment for which acknowledgment is not received within the times set forth in this section must:
1. Be investigated by the shipper if the shipper has not received notification or receipt within 20 days after transfer; and
  2. Be traced and reported. The investigation shall include tracing the shipment and filing a report with the Agency. Each licensee who conducts a trace investigation shall file a written report with the Agency within 2 weeks of completion of the investigation.

APPENDIX 4-E

CLASSIFICATION AND CHARACTERISTICS OF LOW-LEVEL RADIOACTIVE WASTE

I. Classification of Radioactive Waste for Land Disposal

- a) Considerations. Determination of the classification of radioactive waste involves two considerations. First, consideration must be given to the concentration of long-lived radionuclides (and their shorter-lived precursors) whose potential hazard will persist long after such precautions as institutional controls, improved waste form, and deeper disposal have ceased to be effective. These precautions delay the time when long-lived radionuclides could cause exposures. In addition, the magnitude of the potential dose is limited by the concentration and availability of the radionuclide at the time of exposure. Second, consideration must be given to the concentration of shorter-lived radionuclides for which requirements on institutional controls, waste form, and disposal methods are effective.
- b) Classes of waste.
  - 1) Class A waste is waste that is usually segregated from other waste classes at the disposal site. The physical form and characteristics of Class A waste must meet the minimum requirements set forth in Section II. (a). If Class A waste also meets the stability requirements set forth in Section II. (b), it is not necessary to segregate the waste for disposal.
  - 2) Class B waste is waste that must meet more rigorous requirements on waste form to ensure stability after disposal. The physical form and characteristics of Class B waste must meet both the minimum and stability requirements set forth in Section II.
  - 3) Class C waste is waste that not only must meet more rigorous requirements on waste form to ensure stability but also requires additional measures at the disposal facility to protect against inadvertent intrusion. The physical form and characteristics of Class C waste must meet both the minimum and stability requirements set forth in Section II.
- c) Classification determined by long-lived radionuclides. If the radioactive waste contains only radionuclides listed in Table I, classification shall be determined as follows:
  - 1) If the concentration does not exceed 0.1 times the value in Table I, the waste is Class A.
  - 2) If the concentration exceeds 0.1 times the value in Table I, but does not exceed the value in Table I, the waste is Class C.
  - 3) If the concentration exceeds the value in Table I, the waste is not generally acceptable for near surface disposal.
  - 4) For wastes containing mixtures of radionuclides listed in Table I, the total concentration shall be determined by the sum of fractions rule described in Section I. (g).

APPENDIX 4-E

Table I		
Radionuclide	Concentration	
	curie/cubic meter <sup>a</sup>	nanocurie/gram <sup>b</sup>
C-14	8	
C-14 in activated metal	80	
Ni-59 in activated metal	220	
Nb-94 in activated metal	0.2	
Tc-99	3	
I-129	0.08	
Alpha emitting transuranic radionuclides with half-life greater than five years		100
Pu-241		3,500
Cm-242		20,000
Ra-226		100

<sup>a</sup>To convert the Ci/m<sup>3</sup> values to gigabecquerel (Gbg) per cubic meter, multiply the Ci/m<sup>3</sup> value by 37.

<sup>b</sup>To convert the nCi/g values to becquerel (Bq) per gram, multiply the nCi/g value by 37.

- d) Classification determined by short-lived radionuclides. If the waste does not contain any of the radionuclides listed in Table I classification shall be determined based on the concentrations shown in Table II. However, as specified in Section I. (f), if radioactive waste does not contain any nuclides listed in either Table I or II, it is Class A.
- 1) If the concentration does not exceed the value in Column 1, the waste is Class A.
  - 2) If the concentration exceeds the value in Column 1 but does not exceed the value in Column 2, the waste is Class B.
  - 3) If the concentration exceeds the value in Column 2 but does not exceed the value in Column 3, the waste is Class C.
  - 4) If the concentration exceeds the value in Column 3, the waste is not generally acceptable for near-surface disposal.
  - 5) For wastes containing mixtures of the radionuclides listed in Table II, the total concentration shall be determined by the sum of fractions rule described in Section I. (g).

APPENDIX 4-E

Table II			
Concentration, curie/cubic meter*			
Radionuclide	Column 1	Column 2	Column 3
Total of all radionuclides with less than 5-year half-life	700	-----	-----
H-3	40	-----	-----
Co-60	700	-----	-----
Ni-63	3.5	70	700
Ni-63 in activated metal	35	700	7000
Sr-90	0.04	150	7000
Cs-137	1	44	4600

\*AGENCY NOTE: To convert the Ci/m<sup>3</sup> value to gigabecquerel (G bq) per cubic meter, multiply the Ci/m<sup>3</sup> value by 37. There are no limits established for these radionuclides in Class B or C wastes. Practical considerations such as the effects of external radiation and internal heat generation on transportation, handling, and disposal will limit the concentrations for these wastes. These wastes shall be Class B unless the concentrations of other radionuclides in Table II determine the waste to be Class C independent of these radionuclides.

e) Classification determined by both long- and short-lived radionuclides. If the radioactive waste contains a mixture of radionuclides, some of which are listed in Table I and some of which are listed in Table II, classification shall be determined as follows:

- 1) If the concentration of a radionuclide listed in Table I is less than 0.1 times the value listed in Table I, the class shall be that determined by the concentration of radionuclides listed in Table II.
- 2) If the concentration of a radionuclide listed in Table I exceeds 0.1 times the value listed in Table I, but does not exceed the value in Table I, the waste shall be Class C, provided the concentration of radionuclides listed in Table II does not exceed the value shown in Column 3 of Table II.

f) Classification of wastes with radionuclides other than those listed in Tables I and II. If the waste does not contain any radionuclides listed in either Table I or II, it is Class A.

g) The sum of the fractions rule for mixtures of radionuclides. For determining classification for waste that contains a mixture of radionuclides, it is necessary to determine the sum of fractions by dividing each radionuclide's concentration by the appropriate limit and adding the resulting values. The appropriate limits must all be taken from the same column of the same table. The sum of the fractions for the column must be less than 1.0 if the waste class is to be determined by that column. Example: A waste contains Sr-90 in a concentration of 1.85 TBq/m<sup>3</sup> (50 Ci/m<sup>3</sup>) and Cs-137 in a concentration of 814 GBq/m<sup>3</sup> (22 Ci/m<sup>3</sup>). Since the concentrations both exceed the values in Column 1, Table II, they must be compared to Column 2 values. For Sr-90 fraction, 50/150 = 0.33., for Cs-137 fraction, 22/44 = 0.5; the sum of the fractions = 0.83. Since the sum is less than 1.0, the waste is Class B.

h) Determination of concentrations in wastes. The concentration of a radionuclide may be determined by indirect methods such as use of scaling factors which relate the inferred concentration of one radionuclide to another that is measured, or radionuclide material accountability, if there is reasonable

APPENDIX 4-E

assurance that the indirect methods can be correlated with actual measurements. The concentration of a radionuclide may be averaged over the volume of the waste, or weight of the waste if the units are expressed as becquerel (nanocurie) per gram.

II. Radioactive Waste Characteristics

a) The following are minimum requirements for all classes of waste and are intended to facilitate handling and provide protection of health and safety of personnel at the disposal site.

- 1) Wastes shall be packaged in conformance with the conditions of the license issued to the site operator to which the waste will be shipped. Where the conditions of the site license are more restrictive than the provisions of 180 NAC 4, the site license conditions shall govern.
- 2) Wastes shall not be packaged for disposal in cardboard or fiberboard boxes.
- 3) Liquid waste shall be packaged in sufficient absorbent material to absorb twice the volume of the liquid.
- 4) Solid waste containing liquid shall contain as little free-standing and non-corrosive liquid as is reasonably achievable, but in no case shall the liquid exceed 1% of the volume.
- 5) Waste shall not be readily capable of detonation or of explosive decomposition or reaction at normal pressures and temperatures, or of explosive reaction with water.
- 6) Waste shall not contain, or be capable of generating, quantities of toxic gases, vapors, or fumes harmful to persons transporting, handling, or disposing of the waste. This does not apply to radioactive gaseous waste packaged in accordance with Section II.(a)(8).
- 7) Waste must not be pyrophoric. Pyrophoric materials contained in wastes shall be treated, prepared, and packaged to be nonflammable.<sup>1</sup>
- 8) Wastes in a gaseous form shall be packaged at an absolute pressure that does not exceed 1.5 atmospheres at 20EC. Total activity shall not exceed 3.7 TBq (100 Ci) per container.
- 9) Wastes containing hazardous, biological, pathogenic, or infectious material shall be treated to reduce to the maximum extent practicable the potential hazard from the non-radiological materials.

b) The following requirements are intended to provide stability of the waste. Stability is intended to ensure that the waste does not degrade and affect overall stability of the site through slumping, collapse, or other failure of the disposal unit and thereby lead to water infiltration. Stability is also a factor in limiting exposure to an inadvertent intruder, since it provides a recognizable and nondispersible waste.

- 1) Waste shall have structural stability. A structurally stable waste form will generally maintain its physical dimensions and its form, under the expected disposal conditions such as weight of overburden and compaction equipment, the presence of moisture, and microbial activity, and internal factors such as radiation effects and chemical changes. Structural stability can be provided by the waste form itself, processing the waste to a stable form, or placing the waste in a disposal container or structure that provides stability after disposal.
- 2) Notwithstanding the provisions in Section II. (a)(3) and (4), liquid wastes, or wastes containing liquid, shall be converted into a form that contains as little free-standing and non-corrosive liquid as

---

<sup>1</sup> See 180 NAC 1-002 for definition of pyrophoric.

APPENDIX 4-E

is reasonably achievable, but in no case shall the liquid exceed 1% of the volume of the waste when the waste is in a disposal container designed to ensure stability, or 0.5% of the volume of the waste for waste processed to a stable form.

3) Void spaces within the waste and between the waste and its package shall be reduced to the extent practicable.

III. Labeling

Each package of waste shall be clearly labeled to identify whether it is Class A, Class B, or Class C waste, in accordance with Section I.

**QUANTITIES FOR USE WITH DECOMMISSIONING**

(To convert  $\mu\text{Ci}$  to kBq, multiply the  $\mu\text{Ci}$  value by 37.)

<u>Material</u>	<u>Microcurie</u>
Americium-241	0.01
Antimony-122	100
Antimony-124	10
Antimony-125	10
Arsenic-73	100
Arsenic-74	10
Arsenic-76	10
Arsenic-77	100
Barium-131	10
Barium-133	10
Barium-140	10
Bismuth-210	1
Bromine-82	10
Cadmium-109	10
Cadmium-115m	10
Cadmium-115	100
Calcium-45	10
Calcium-47	10
Carbon-14	100
Cerium-141	100
Cerium-143	100
Cerium-144	1
Cesium-131	1,000
Cesium-134m	100
Cesium-134	1
Cesium-135	10
Cesium-136	10
Cesium-137	10
Chlorine-36	10
Chlorine-38	10
Chromium-51	1,000
Cobalt-58m	10
Cobalt-58	10
Cobalt-60	1
Copper-64	100
Dysprosium-165	10
Dysprosium-166	100
Erbium-169	100
Erbium-171	100
Europium-152 (9.2 h)	100
Europium-152 (13 yr)	1
Europium-154	1
Europium-155	10
Fluorine-18	1,000
Gadolinium-153	10
Gadolinium-159	100
Gallium-72	10
Germanium-71	100
Gold-198	100
Gold-199	100
Hafnium-181	10

**QUANTITIES FOR USE WITH DECOMMISSIONING**  
(To convert  $\mu\text{Ci}$  to kBq, multiply the  $\mu\text{Ci}$  value by 37.)

<u>Material</u>	<u>Microcurie</u>
Holmium-166	100
Hydrogen-3	1,000
Indium-113m	100
Indium-114m	10
Indium-115m	100
Indium-115	10
Iodine-125	1
Iodine-126	1
Iodine-129	0.1
Iodine-131	1
Iodine-132	10
Iodine-133	1
Iodine-134	10
Iodine-135	10
Iridium-192	10
Iridium-194	100
Iron-55	100
Iron-59	10
Krypton-85	100
Krypton-87	10
Lanthanum-140	10
Lutetium-177	100
Manganese-52	10
Manganese-54	10
Manganese-56	10
Mercury-197m	100
Mercury-197	100
Mercury-203	10
Molybdenum-99	100
Neodymium-147	100
Neodymium-149	100
Nickel-59	100
Nickel-63	10
Nickel-65	100
Niobium-93m	10
Niobium-95	10
Niobium-97	10
Osmium-185	10
Osmium-191m	100
Osmium-191	100
Osmium-193	100
Palladium-103	100
Palladium-109	100
Phosphorus-32	10
Platinum-191	100
Platinum-193m	100
Platinum-193	100
Platinum-197m	100
Platinum-197	100
Plutonium-239	0.01
Polonium-210	0.1

**QUANTITIES FOR USE WITH DECOMMISSIONING**

(To convert  $\mu\text{Ci}$  to kBq, multiply the  $\mu\text{Ci}$  value by 37.)

<u>Material</u>	<u>Microcurie</u>
Potassium-42 . . . . .	10
Praseodymium-142 . . . . .	100
Praseodymium-143 . . . . .	100
Promethium-147 . . . . .	10
Promethium-149 . . . . .	10
Radium-226 . . . . .	0.01
Rhenium-186 . . . . .	100
Rhenium-188 . . . . .	100
Rhodium-103m . . . . .	100
Rhodium-105 . . . . .	100
Rubidium-86 . . . . .	10
Rubidium-87 . . . . .	10
Ruthenium-97 . . . . .	100
Ruthenium-103 . . . . .	10
Ruthenium-105 . . . . .	10
Ruthenium-106 . . . . .	1
Samarium-151 . . . . .	10
Samarium-153 . . . . .	100
Scandium-46 . . . . .	10
Scandium-47 . . . . .	100
Scandium-48 . . . . .	10
Selenium-75 . . . . .	10
Silicon-31 . . . . .	100
Silver-105 . . . . .	10
Silver-110m . . . . .	1
Silver-111 . . . . .	100
Sodium-22 . . . . .	1
Sodium-24 . . . . .	10
Strontium-85 . . . . .	10
Strontium-89 . . . . .	1
Strontium-90 . . . . .	0.1
Strontium-91 . . . . .	10
Strontium-92 . . . . .	10
Sulfur-35 . . . . .	100
Tantalum-182 . . . . .	10
Technetium-96 . . . . .	10
Technetium-97m . . . . .	100
Technetium-97 . . . . .	100
Technetium-99m . . . . .	100
Technetium-99 . . . . .	10
Tellurium-125m . . . . .	10
Tellurium-127m . . . . .	10
Tellurium-127 . . . . .	100
Tellurium-129m . . . . .	10
Tellurium-129 . . . . .	100

**APPENDIX 4-F**  
**QUANTITIES FOR USE WITH DECOMMISSIONING**  
(To convert  $\mu\text{Ci}$  to  $\text{kBq}$ , multiply the  $\mu\text{Ci}$  value by 37.)

<u>Material</u>	<u>Microcurie</u>
Tellurium-131m	10
Tellurium-132	10
Terbium-160	10
Thallium-200	100
Thallium-201	100
Thallium-202	100
Thallium-204	10
Thorium (natural) <sup>1</sup>	100
Thulium-170	10
Thulium-171	10
Tin-113	10
Tin-125	10
Tungsten-181	10
Tungsten-185	10
Tungsten-187	100
Uranium (natural) <sup>2</sup>	100
Uranium-233	0.01
Uranium-234	0.01
Uranium-235	0.01
Vanadium-48	10
Xenon-131m	1,000
Xenon-133	100
Xenon-135	100
Ytterbium-175	100
Yttrium-90	10
Yttrium-91	10
Yttrium-92	100
Yttrium-93	100
Zinc-65	10
Zinc-69m	100
Zinc-69	1,000
Zirconium-93	10
Zirconium-95	10
Zirconium-97	10

Any alpha emitting radionuclide not listed above or mixtures of alpha emitters of unknown composition . . . . . 0.01

Any radionuclide other than alpha emitting radionuclides, not listed above or mixtures of beta emitters of unknown composition . . . . . 0.1

**NOTE:** Where there is involved a combination of isotopes in known amounts, the limit for the combination should be derived as follows: Determine, for each isotope in the combination, the ratio between the quantity present in the combination and the limit otherwise established for the specific isotope when not in combination. The sum of such ratios for all the isotopes in the combination may not exceed "1" -- that is, unity.

---

<sup>1</sup> Based on alpha disintegration rate of Th-232, Th-230 and their daughter products.  
<sup>2</sup> Based on alpha disintegration rate of U-238, U-234 and U-235.

Draft  
3/01/2001

NEBRASKA DEPARTMENT OF HEALTH AND HUMAN SERVICES  
REGULATION AND LICENSURE 180 NAC 4

**APPENDIX 4-F**  
**QUANTITIES FOR USE WITH DECOMMISSIONING**  
(To convert  $\mu\text{Ci}$  to  $\text{kBq}$ , multiply the  $\mu\text{Ci}$  value by 37.)

Material

Microcurie

**APPENDIX 4-G**  
**CONCENTRATION AND ACTIVITY LIMITS OF NUCLIDES FOR**  
**DISPOSAL IN A CITY OR COUNTY LANDFILL DISPOSAL FACILITY**  
(For use in 180 NAC 4-038)

<u>Nuclides</u> <u>(Ci/yr)</u>	<u>Concentration Limits (Ci/m<sup>3</sup>)</u>	<u>Annual Generator Disposal Limit</u>
F-18	3E-1	8
Si-31	1E-2	3E+3
Na-24	9E-4	2E-2
P-32	2	5E+1
P-33	10	3E+2
S-35	9	2E+2
Ar-41	3E-1	8
K-42	2E-2	5E-1
Ca-45	4	1E+2
Ca-47	2E-2	5E-1
Sc-46	2E-3	5E-2
Cr-51	6E-1	2E+1
Fe-59	5E-3	1E-1
Co-57	6E-2	2
Co-58	1E-2	3E-1
Zn-65	7E-3	2E-1
Ga-67	3E-1	8
Se-75	5E-2	1
Br-82	2E-3	5E-2
Rb-86	4E-2	1
Sr-85	2E-2	5E-1
Sr-89	8	2E+2
Y-90	4	1E+2
Y-91	4E-1	10
Zr-95	8E-3	2E-1
Nb-95	8E-3	2E-1
Mo-99	5E-2	1
Tc-99m	1	3E+1
Rh-106	1	3E+1



**APPENDIX 4-G**  
**CONCENTRATION AND ACTIVITY LIMITS OF NUCLIDES FOR**  
**DISPOSAL IN A CITY OR COUNTY LANDFILL DISPOSAL FACILITY**  
(For use in 180 NAC 4-038)

<u>Nuclides</u> <u>(Ci/yr)</u>	<u>Concentration Limits (Ci/m<sup>3</sup>)</u>	<u>Annual Generator Disposal Limit</u>
-----------------------------------	--	--

For each radionuclide in the mixture, calculate the ratio between the quantity present in the mixture and the limit established in Appendix 004-G for the specific radionuclide when not in a mixture. The sum of such ratios for all the radionuclides in the mixture may not exceed "1" (i.e., "unity").

Examples: If radionuclides a, b, and c are present in concentrations C<sub>a</sub>, C<sub>b</sub>, and C<sub>c</sub>, and if the applicable concentrations are CL<sub>a</sub>, CL<sub>b</sub>, and CL<sub>c</sub> respectively, then the concentrations shall be limited so that the following relationship exists:

$$(C_a/CL_a) + (C_b/CL_b) + (C_c/CL_c) \leq 1$$

If the total curies for radionuclides a, b, and c are represented A<sub>a</sub>, A<sub>b</sub>, and A<sub>c</sub>, and the annual curie limit for each radionuclide is AL<sub>a</sub>, AL<sub>b</sub>, and AL<sub>c</sub>, then the generator is limited to the following:

$$(A_a/AL_a) + (A_b/AL_b) + (A_c/AL_c) \leq 1$$

Draft  
03/01/01

NEBRASKA DEPARTMENT OF HEALTH AND HUMAN SERVICES  
REGULATION AND LICENSURE 180 NAC 4

**APPENDIX 4-G**  
**CONCENTRATION AND ACTIVITY LIMITS OF NUCLIDES FOR**  
**DISPOSAL IN A CITY OR COUNTY LANDFILL DISPOSAL FACILITY**  
(For use in 180 NAC 4-038)

<u>Nuclides</u> <u>(Ci/yr)</u>	<u>Concentration Limits (Ci/m<sup>3</sup>)</u>	<u>Annual Generator Disposal Limit</u>
-----------------------------------	--	--

Nebraska Department of Health and Human Services Regulation and Licensure  
**CUMULATIVE OCCUPATIONAL EXPOSURE HISTORY**

NRH-1  
 Revised March-2001

1. NAME (LAST, FIRST, MIDDLE INITIAL)				2. IDENTIFICATION NUMBER		3. ID TYPE		4. SEX MALE <input type="checkbox"/> FEMALE <input type="checkbox"/>		5. DATE OF BIRTH	
6. MONITORING PERIOD			7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER		9. RECORD ESTIMATE <input type="checkbox"/> NO RECORD <input type="checkbox"/>		10. ROUTINE <input type="checkbox"/> PSE <input type="checkbox"/>		
11. DDE	12. LDE	13. SDE, WB	14. SDE, ME	15. CEDE	16. CDE	17. TEDE		18. TODE			
6. MONITORING PERIOD			7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER		9. RECORD ESTIMATE <input type="checkbox"/> NO RECORD <input type="checkbox"/>		10. ROUTINE <input type="checkbox"/> PSE <input type="checkbox"/>		
11. DDE	12. LDE	13. SDE, WB	14. SDE, ME	15. CEDE	16. CDE	17. TEDE		18. TODE			
6. MONITORING PERIOD			7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER		9. RECORD ESTIMATE <input type="checkbox"/> NO RECORD <input type="checkbox"/>		10. ROUTINE <input type="checkbox"/> PSE <input type="checkbox"/>		
11. DDE	12. LDE	13. SDE, WB	14. SDE, ME	15. CEDE	16. CDE	17. TEDE		18. TODE			
6. MONITORING PERIOD			7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER		9. RECORD ESTIMATE <input type="checkbox"/> NO RECORD <input type="checkbox"/>		10. ROUTINE <input type="checkbox"/> PSE <input type="checkbox"/>		
11. DDE	12. LDE	13. SDE, WB	14. SDE, ME	15. CEDE	16. CDE	17. TEDE		18. TODE			
6. MONITORING PERIOD			7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER		9. RECORD ESTIMATE <input type="checkbox"/> NO RECORD <input type="checkbox"/>		10. ROUTINE <input type="checkbox"/> PSE <input type="checkbox"/>		
11. DDE	12. LDE	13. SDE, WB	14. SDE, ME	15. CEDE	16. CDE	17. TEDE		18. TODE			
6. MONITORING PERIOD			7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER		9. RECORD ESTIMATE <input type="checkbox"/> NO RECORD <input type="checkbox"/>		10. ROUTINE <input type="checkbox"/> PSE <input type="checkbox"/>		
11. DDE	12. LDE	13. SDE, WB	14. SDE, ME	15. CEDE	16. CDE	17. TEDE		18. TODE			
6. MONITORING PERIOD			7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER		9. RECORD ESTIMATE <input type="checkbox"/> NO RECORD <input type="checkbox"/>		10. ROUTINE <input type="checkbox"/> PSE <input type="checkbox"/>		
11. DDE	12. LDE	13. SDE, WB	14. SDE, ME	15. CEDE	16. CDE	17. TEDE		18. TODE			
19. SIGNATURE OF MONITORED INDIVIDUAL			20. DATE SIGNED	21. CERTIFYING ORGANIZATION		22. SIGNATURE OF DESIGNEE			23. DATE SIGNED		

INSTRUCTIONS AND ADDITIONAL INFORMATION PERTINENT TO THE  
COMPLETION OF NRH-1  
(All doses should be stated in rems)

1. Type or print the full name of the monitored individual in the order of last name (include "Jr," "Sr," "III," etc.), first name, middle initial (if applicable).
2. Enter the individual's identification number, including punctuation. This number should be the 9-digit social security number if at all possible. If the individual has no social security number, enter the number from another official identification such as a passport or work permit.
3. Enter the code for the type of identification used as shown below:
 

CODE	ID TYPE
SSN	U.S. Social Security Number
PPN	Passport Number
CSI	Canadian Social Insurance Number
WPN	Work Permit Number
IND	INDEX Identification Number
OTH	Other
4. Check the box that denotes the sex of the individual being monitored.
5. Enter the date of birth of the individual being monitored in the format MM/DD/YY.
6. Enter the monitoring period for which this report is filed. The format should be MM/DD/YY - MM/DD/YY.
7. Enter the name of the licensee, registrant, or facility not licensed by the Agency that provided monitoring.
8. Enter the Agency license or registration number or numbers.
9. Place an "X" in Record, Estimate, or No Record. Choose "Record" if the dose data listed represent a final determination of the dose received to the best of the licensee's or registrant's knowledge. Choose "Estimate" only if the listed dose data are preliminary and will be superseded by a final determination resulting in a subsequent report. An example of such an instance would be dose data based on self-reading dosimeter results and the licensee or registrant intends to assign the record dose on the basis of TLD results that are not yet available.

10. Place an "X" in either Routine or PSE. Choose "Routine" if the data represent the results of monitoring for routine exposures. Choose "PSE" if the listed dose data represents the results of monitoring of planned special exposures received during the monitoring period. If more than one PSE was received in a single year, the licensee should sum them and report the total of all PSEs.
11. Enter the deep dose equivalent (DDE) to the whole body.
12. Enter the eye dose equivalent (LDE) recorded for the lens of the eye.
13. Enter the shallow dose equivalent recorded for the skin of the whole body (SDE, WB).
14. Enter the shallow dose equivalent recorded for the skin of the extremity receiving the maximum dose (SDE, ME).
15. Enter the committed effective dose equivalent (CEDE).
16. Enter the committed dose equivalent (CDE) recorded for the maximally exposed organ.
17. Enter the total effective dose equivalent (TEDE). The TEDE is the sum of items 11 and 15.
18. Enter the total organ dose equivalent (TODE) for the maximally exposed organ. The TODE is the sum of items 11 and 16.
19. Signature of the monitored individual. The signature of the monitored individual on this form indicates that the information contained on the form is complete and correct to the best of his or her knowledge.
20. Enter the date this form was signed by the monitored individual.
21. [OPTIONAL] Enter the name of the licensee, registrant or facility not licensed by the Agency, providing monitoring for exposure to radiation (such as a DOE facility) or the employer if the individual is not employed by the licensee or registrant and the employer chooses to maintain exposure records for its employees.

22. [OPTIONAL] Signature of the person designated to represent the licensee, registrant or employer entered in item 21. The licensee, registrant or employer who chooses to countersign the form should have on file documentation of all the information on the Agency Form Y being signed.
23. [OPTIONAL] Enter the date this form was signed by the designated representative.

Nebraska Department of Health and Human Services Regulation and Licensure

NRH-2  
Revised March-2001

# OCCUPATIONAL EXPOSURE RECORD FOR A MONITORING PERIOD

1. NAME (LAST, FIRST, MIDDLE INITIAL)		2. IDENTIFICATION NUMBER	3. ID TYPE	4. SEX MALE _____ FEMALE _____	5. DATE OF BIRTH
6. MONITORING PERIOD	7. LICENSEE OR REGISTRANT NAME		8. LICENSE OR REGISTRATION NUMBER(S)	9A.	9B.
				RECORD	ROUTINE
				ESTIMATE	PSE

INTAKES				DOSES (in rem)	
10A. RADIONUCLIDE	10B. CLASS	10C. MODE	10D. INTAKE IN $\phi$ Ci		
				DEEP DOSE EQUIVALENT (DDE)	11.
				EYE DOSE EQUIVALENT TO THE LENS OF THE EYE (LDE)	12.
				SHALLOW DOSE EQUIVALENT, WHOLE BODY (SDE,WB)	13.
				SHALLOW DOSE EQUIVALENT, MAX EXTREMITY (SDE,ME)	14.
				COMMITTED EFFECTIVE DOSE EQUIVALENT (CEDE)	15.
				COMMITTED DOSE EQUIVALENT, MAXIMALLY EXPOSED ORGAN (CDE)	16.
				TOTAL EFFECTIVE DOSE EQUIVALENT (BLOCKS 11+15) (TEDE)	17.
				TOTAL ORGAN DOSE EQUIVALENT, MAX ORGAN (BLOCKS 11+16) (TODE)	18.
				19. COMMENTS	

20. SIGNATURE -- LICENSEE OR REGISTRANT	21. DATE PREPARED
---	-------------------

INSTRUCTIONS AND ADDITIONAL INFORMATION PERTINENT TO THE  
COMPLETION OF NRH-2  
(All doses should be stated in rems)

1. Type or print the full name of the monitored individual in the order of last name (include "Jr," "Sr," "III," etc.), first name, middle initial (if applicable).
2. Enter the individual's identification number, including punctuation. This number should be the 9-digit social security number if at all possible. If the individual has no social security number, enter the number from another official identification such as a passport or work permit.
3. Enter the code for the type of identification used as shown below:
 

<u>CODE</u>	<u>ID TYPE</u>
SSN	U.S. Social Security Number
PPN	Passport Number
CSI	Canadian Social Insurance Number
WPN	Work Permit Number
IND	INDEX Identification Number
OTH	Other
4. Check the box that denotes the sex of the individual being monitored.
5. Enter the date of birth of the individual being monitored in the format MM/DD/YY.
6. Enter the monitoring period for which this report is filed. The format should be MM/DD/YY - MM/DD/YY.
7. Enter the name of the licensee or registrant.
8. Enter the Agency license or registration number or numbers.
- 9A. Place an "X" in Record or Estimate. Choose "Record" if the dose data listed represent a final determination of the dose received to the best of the licensee's or registrant's knowledge. Choose "Estimate" only if the listed dose data are preliminary and will be superseded by a final determination resulting in a subsequent report. An example of such an instance would be dose data based on self-reading dosimeter results and the licensee intends to assign the record dose on the basis of TLD results that are not yet available.
- 9B. Place an "X" in either Routine or PSE. Choose "Routine" if the data represent the results of monitoring for routine exposures. Choose "PSE" if the listed dose data represents the results of monitoring of planned special exposures received during the monitoring

- period. If more than one PSE was received in a single year, the licensee or registrant should sum them and report the total of all PSEs.
- 10A. Enter the symbol for each radionuclide that resulted in an internal exposure recorded for the individual, using the format "X-###x," for instance, Cs-137 or Tc-99m.
  - 10B. Enter the lung clearance class as listed in Appendix B to Part D (D, W, Y, V, or O for other) for all intakes by inhalation.
  - 10C. Enter the mode of intake. For inhalation, enter "H." For absorption through the skin, enter "B." For oral ingestion, enter "G." For injection, enter "J."
  - 10D. Enter the intake of each radionuclide in  $\mu\text{Ci}$ .
  11. Enter the deep dose equivalent (DDE) to the whole body.
  12. Enter the eye dose equivalent (LDE) recorded for the lens of the eye.
  13. Enter the shallow dose equivalent recorded for the skin of the whole body (SDE,WB).
  14. Enter the shallow dose equivalent recorded for the skin of the extremity receiving the maximum dose (SDE,ME).
  15. Enter the committed effective dose equivalent (CEDE) or "NR" for "Not Required" or "NC" for "Not Calculated".
  16. Enter the committed dose equivalent (CDE) recorded for the maximally exposed organ or "NR" for "Not Required" or "NC" for "Not Calculated".
  17. Enter the total effective dose equivalent (TEDE). The TEDE is the sum of items 11 and 15.
  18. Enter the total organ dose equivalent (TODE) for the maximally exposed organ. The TODE is the sum of items 11 and 16.

19. Signature of the person designated to represent the licensee or registrant.
20. Enter the date this form was prepared.
21. COMMENTS.  
In the space provided, enter additional information that might be needed to determine compliance with limits. An example might be to enter the note that the SDE,ME was the result of exposure from a discrete hot particle. Another possibility would be to indicate that an overexposed report has been sent to the Agency in reference to the exposure report.