


FIGURE 3

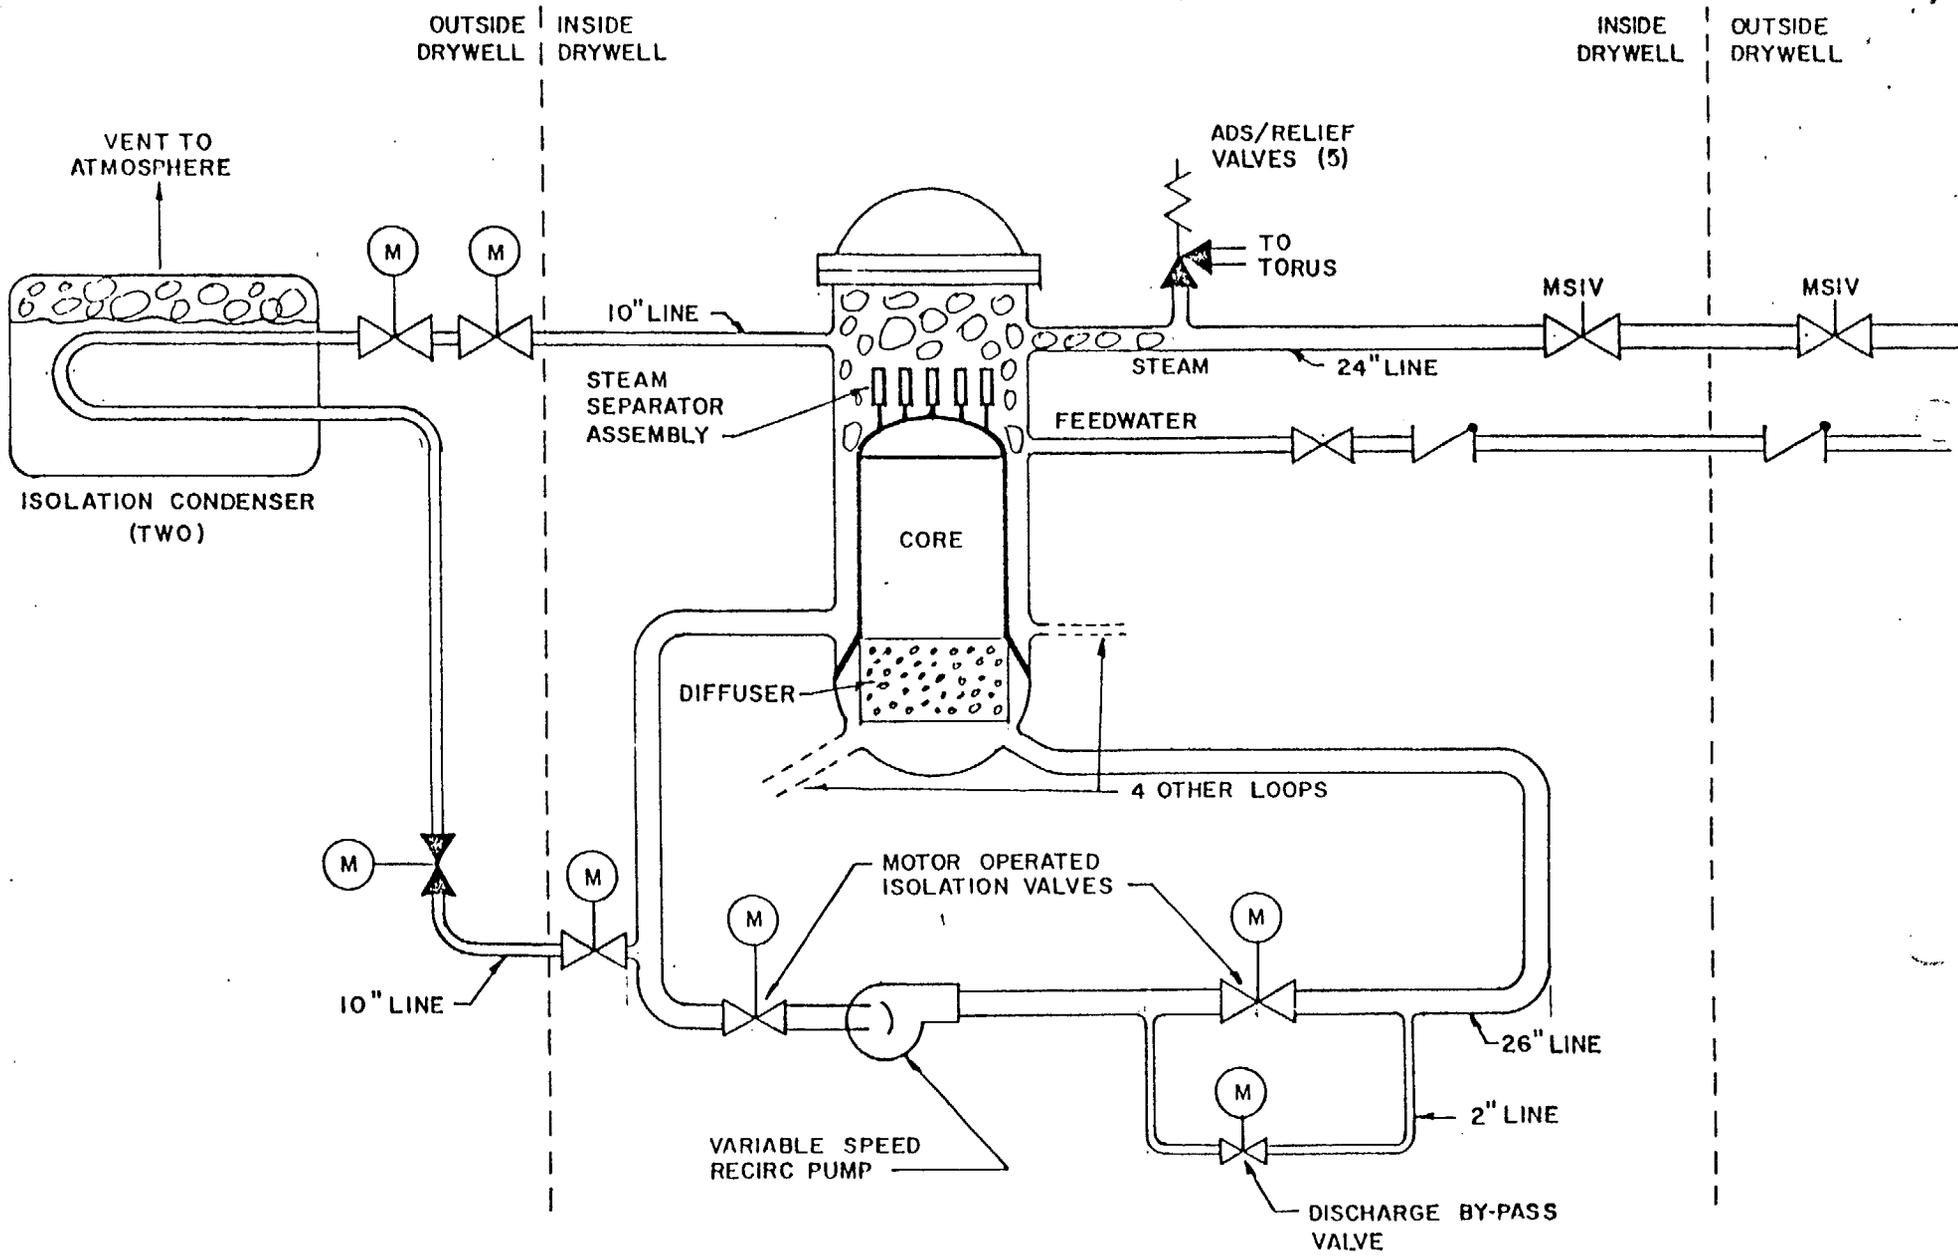

SEQUENCE OF EVENTS

<u>TIME (SEC.)</u>	<u>EVENT</u>
0	REACTOR SCRAM/RECIRC. PUMP TRIP
13	TURBINE TRIP/LOSS OF FEEDWATER/CONDENSATE PUMPS
13.6	LOW WATER LEVEL SCRAM POINT
16.8	#2 RPS MOTOR GEN. SET TRIP
31	#2 DIESEL GENERATOR BREAKER CLOSED
43	MSIV CLOSED
76	B ISO. CONDENSER IN SERVICE
90	LOW WATER LEVEL ALARM CLEARED
172	LOW LOW LOW WATER LEVEL TRIP POINT
186	RECIRC. LOOP DISCHARGE VALVES NOTED CLOSED
1914	C RECIRC. PUMP STARTED THEN TRIPPED
2208	FEEDWATER PUMP STARTED
2340	RECIRC. PUMP STARTED
2700	RPS #2 RESTARTED/SCRAM RESET
3600	STARTUP TRANSFORMER SB RETURNED TO SERVICE