

MAY 12 1981

Docket Nos. 50-315
and 50-316

Mr. John Dolan, Vice President
Indiana and Michigan Electric Company
Post Office Box 18
Bowling Green Station
New York, New York 10004

Dear Mr. Dolan:

The Commission has issued the enclosed Amendment No. 46 to Facility Operating License No. DPR-58 and Amendment No. 30 to Facility Operating License No. DPR-74 for the Donald C. Cook Nuclear Plant, Unit Nos. 1 and 2, respectively. The amendments consist of changes to the Technical Specifications in response to your application transmitted by letter dated June 16, 1980.

These amendments revise Appendix A Technical Specifications by providing further clarification of the term "Operable" as it applies to the single failure criteria for safety systems. During our review of the proposed changes, we suggested certain modifications to your proposed technical specifications to bring them in line with our current standard technical specifications. The modifications were discussed with your staff and with their agreement were included in this amendment. The acceptability of these revisions to the Technical Specifications is contained in our letter to you of April 10, 1980, which includes our Safety Evaluation as an attachment.

We have determined that the amendments do not authorize a change in effluent types or total amounts not an increase in power level and will not result in any significant environmental impact. Having made this determination, we have further concluded that the amendments involve an action which is insignificant from the standpoint of environmental impact and, pursuant to 10 CFR §51.5(d)(4), that an environmental impact statement or negative declaration and environmental impact appraisal need not be prepared in connection with the issuance of these amendments.

We have concluded, based on the considerations discussed above, that: (1) because the amendments do not involve a significant increase in the probability or consequences of accidents previously considered and do not involve a significant decrease in a safety margin, the amendments do not involve a significant hazards consideration, (2) there is reasonable assurance that the health and safety of the public

DISTRIBUTION
Dockets Gray File-4
NRC PDR Chairman, ASLAB
L PDR
TERA
NSIC
ORB#1 Rdg
DEisenhut
OELD
IE-4
GDeegan-8
BScharf-10
JWetmore
ACRS-10
OPA
RDiggs
SMiner
CParrish



8105210493

P

CP
1

OFFICE							
SURNAME							
DATE							

Mr. John Dolan

-2-

will not be endangered by operation in the proposed manner, and (3) such activities will be conducted in compliance with the Commission's regulations and the issuance of these amendments will not be inimical to the common defense and security or to the health and safety of the public.

A copy of the Notice of Issuance is enclosed.

Sincerely,

Original signed by:
S. A. Varga
Steven A. Varga, Chief
Operating Reactors Branch #1
Division of Licensing

Enclosures:

- 1. Amendment No. 46 to DPR-58
- 2. Amendment No. 30 to DPR-74
- 3. Notice of Issuance

cc: w/enclosures
See next page

OFFICE	ORB#1:DL	ORB#1:DL	ORB#1:DL	AD/OR:DL	OELD		
SURNAME	CParrish	SMiner:ds	SVarga	TNovak	R. B. A. K.		
DATE	4/29/81	5/5/81	5/11/81	5/6/81	5/18/81		



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

May 12, 1981

Docket Nos. 50-315
and 50-316

Mr. John Dolan, Vice President
Indiana and Michigan Electric Company
Post Office Box 18
Bowling Green Station
New York, New York 10004

Dear Mr. Dolan:

The Commission has issued the enclosed Amendment No. 46 to Facility Operating License No. DPR-58 and Amendment No. 30 to Facility Operating License No. DPR-74 for the Donald C. Cook Nuclear Plant, Unit Nos. 1 and 2, respectively. The amendments consist of changes to the Technical Specifications in response to your application transmitted by letter dated June 16, 1980.

These amendments revise Appendix A Technical Specifications by providing further clarification of the term "Operable" as it applies to the single failure criteria for safety systems. During our review of the proposed changes, we suggested certain modifications to your proposed technical specifications to bring them in line with our current standard technical specifications. The modifications were discussed with your staff and with their agreement were included in this amendment. The acceptability of these revisions to the Technical Specifications is contained in our letter to you of April 10, 1980, which includes our Safety Evaluation as an attachment.

We have determined that the amendments do not authorize a change in effluent types or total amounts not an increase in power level and will not result in any significant environmental impact. Having made this determination, we have further concluded that the amendments involve an action which is insignificant from the standpoint of environmental impact and, pursuant to 10 CFR §51.5(d)(4), that an environmental impact statement or negative declaration and environmental impact appraisal need not be prepared in connection with the issuance of these amendments.

We have concluded, based on the considerations discussed above, that:
(1) because the amendments do not involve a significant increase in the probability or consequences of accidents previously considered and do not involve a significant decrease in a safety margin, the amendments do not involve a significant hazards consideration, (2) there is reasonable assurance that the health and safety of the public


Mr. John Dolan

-2-

will not be endangered by operation in the proposed manner, and (3) such activities will be conducted in compliance with the Commission's regulations and the issuance of these amendments will not be inimical to the common defense and security or to the health and safety of the public.

A copy of the Notice of Issuance is enclosed.

Sincerely,

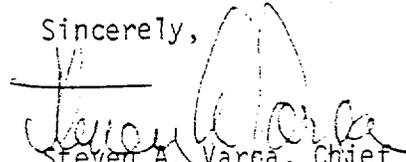

Steven A. Varga, Chief
Operating Reactors Branch #1
Division of Licensing

Enclosures:

1. Amendment No. 46 to DPR-58
2. Amendment No. 30 to DPR-74
3. Notice of Issuance

cc: w/enclosures
See next page

Mr. John Dolan
Indiana and Michigan Electric Company

cc: Mr. Robert W. Jurgensen
Chief Nuclear Engineer
American Electric Power
Service Corporation
2 Broadway
New York, New York 10004

Gerald Charnoff, Esquire
Shaw, Pittman, Potts and Trowbridge
1800 M Street, N.W.
Washington, D. C. 20036

Maude Preston Palenske Memorial
Library
500 Market Street
St. Joseph, Michigan 49085

Mr. D. Shaller, Plant Manager
Donald C. Cook Nuclear Plant
P. O. Box 458
Bridgman, Michigan 49106

U. S. Nuclear Regulatory Commission
Resident Inspectors Office
7700 Red Arrow Highway
Stevensville, Michigan 49127

Mr. Wade Schuler, Supervisor
Lake Township
Baroda, Michigan 49101

Mr. William R. Rustem (2)
Office of the Governor
Room 1 - Capitol Building
Lansing, Michigan 48913

Honorable James Bemnek, Mayor
City of Bridgman, Michigan 49106

Director, Criteria and Standards Division
Office of Radiation Programs (ANR-460)
U. S. Environmental Protection Agency
Washington, D. C. 20460

U. S. Environmental Protection Agency
Federal Activities Branch
Region V Office
ATTN: EIS COORDINATOR
230 South Dearborn Street
Chicago, Illinois 60604

Maurice S. Reizen, M.D.
Director
Department of Public Health
P. O. Box 30035
Lansing, Michigan 48909

William J. Scanlon, Esquire
2034 Pauline Boulevard
Ann Arbor, Michigan 48103



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

INDIANA AND MICHIGAN ELECTRIC COMPANY

DOCKET NO. 50-315

DONALD C. COOK NUCLEAR PLANT UNIT NO. 1

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 46
License No. DPR-58

1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by Indiana and Michigan Electric Company (the licensee) dated June 16, 1980, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act) and the Commission's rules and regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
 - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.

8105210 496


2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of Facility Operating License No. DPR-58 is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 46, are hereby incorporated in the license. The licensee shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of the date of its issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

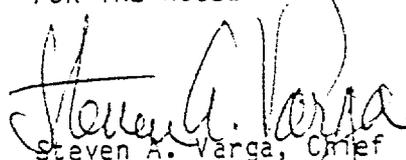

Steven A. Varga, Chief
Operating Reactors Branch #1
Division of Licensing

Attachment:
Changes to the Technical
Specifications

Date of Issuance: May 12, 1981

ATTACHMENT TO LICENSE AMENDMENT

AMENDMENT NO. 46 TO FACILITY OPERATING LICENSE NO. DPR-58

DOCKET NO. 50-315

Revise Appendix A as follows:

Remove Pages

3/4 0-1

3/4 0-2

B3/4 0-1

B3/4 0-2

Insert Pages

3/4 0-1

3/4 0-2

B3/4 0-1

B3/4 0-2

B3/4 0-3

B3/4 0-4

3/4 LIMITING CONDITIONS FOR OPERATION AND SURVEILLANCE REQUIREMENTS

3/4.0 APPLICABILITY

LIMITING CONDITION FOR OPERATION

3.0.1 Limiting Conditions for Operation and ACTION requirements shall be applicable during the OPERATIONAL MODES or other conditions specified for each specification.

3.0.2 Adherence to the requirements of the Limiting Condition for Operation and/or associated ACTION within the specified time interval shall constitute compliance with the specification. In the event the Limiting Condition for Operation is restored prior to expiration of the specified time interval, completion of the ACTION statement is not required.

3.0.3 When a Limiting Condition for Operation is not met, except as provided in the associated ACTION requirements, within one hour action shall be initiated to place the unit in a MODE in which the Specification does not apply by placing it, as applicable, in:

1. At least HOT STANDBY within the next 6 hours,
2. At least HOT SHUTDOWN within the following 6 hours, and
3. At least COLD SHUTDOWN within the subsequent 24 hours.

Where corrective measures are completed that permit operation under the ACTION requirements, the ACTION may be taken in accordance with the specified time limits as measured from the time of failure to meet the Limiting Condition for Operation. Exceptions to these requirements are stated in the individual Specifications.

3.0.4 Entry into an OPERATIONAL MODE or other specified applicability condition shall not be made unless the conditions of the Limiting Condition for Operation are met without reliance on provisions contained in the ACTION statements unless otherwise excepted. This provision shall not prevent passage through OPERATIONAL MODES as required to comply with ACTION statements.

3.0.5 When a system, subsystem, train, component or device is determined to be inoperable solely because its emergency power source is inoperable, or solely because its normal power source is inoperable, it may be considered OPERABLE for the purpose of satisfying the requirements of its applicable Limiting Condition for Operation, provided: (1) its corresponding normal or emergency power source is OPERABLE; and (2) all of its redundant system(s), subsystem(s), train(s), component(s) and device(s) are OPERABLE, or likewise satisfy the requirements of this specification. Unless both conditions (1) and (2) are satisfied, within 2 hours action shall be initiated to place the unit in a MODE in which the applicable Limiting Condition for Operation does not apply by placing it as applicable in:

1. At least HOT STANDBY within the next 6 hours,
2. At least HOT SHUTDOWN within the following 6 hours, and
3. At least COLD SHUTDOWN within the subsequent 24 hours.

This Specification is not applicable in MODES 5 or 6.

3/4.0 APPLICABILITY

SURVEILLANCE REQUIREMENTS

4.0.1 Surveillance Requirements shall be applicable during the OPERATIONAL MODES or other conditions specified for individual Limiting Conditions for Operation unless otherwise stated in an individual Surveillance Requirement.

4.0.2 Each Surveillance Requirement shall be performed within the specified time interval with:

- a. A maximum allowable extension not to exceed 25% of the surveillance interval, and
- b. A total maximum combined interval time for any 3 consecutive surveillance intervals not to exceed 3.25 times the specified surveillance interval.

4.0.3 Performance of a Surveillance Requirement within the specified time interval shall constitute compliance with OPERABILITY requirements for a Limiting Condition for Operation and associated ACTION statements unless otherwise required by the specification.

4.0.4 Entry into an OPERATIONAL MODE or other specified applicability condition shall not be made unless the Surveillance Requirement(s) associated with the Limiting Condition for Operation have been performed within the stated surveillance interval or as otherwise specified.

The provisions of Specification 4.0.4 are not applicable to the performance of surveillance activities associated with fire protection technical specifications, 4.3.3.7, 4.7.9 and 4.7.10, until the completion of the initial surveillance interval associated with each specification.

3/4.C APPLICABILITY

BASES

The specifications of this section provide the general requirements applicable to each of the Limiting Conditions for Operation and Surveillance Requirements within Section 3/4.

3.0.1 This specification defines the applicability of each specification in terms of defined OPERATIONAL MODES or other specified conditions and is provided to delineate specifically when each specification is applicable.

3.0.2 This specification defines those conditions necessary to constitute compliance with the terms of an individual Limiting Condition for Operation and associated ACTION requirement.

3.0.3 The specification delineates the measures to be taken for those circumstances not directly provided for in the ACTION Statements and whose occurrence would violate the intent of a specification. For example, Specification 3.5.2 requires two independent ECCS Subsystems to be OPERABLE and provides explicit ACTION requirements if one ECCS Subsystem is inoperable. Under the requirements of Specification 3.0.3, if both the required ECCS Subsystems are inoperable, within one hour measures must be initiated to place the unit in at least HOT STANDBY within the next 6 hours, and in at least HOT SHUTDOWN within the following 6 hours. As a further example, Specification 3.6.2.1 requires two Containment Spray Systems to be OPERABLE and provides explicit ACTION requirements if one Spray System is inoperable. Under the requirements of Specification 3.0.3 if both the required Containment Spray Systems are inoperable, within one hour measure must be initiated to place the unit in at least HOT STANDBY within the next 6 hours, in at least HOT SHUTDOWN within the following 6 hours, and in COLD SHUTDOWN within the subsequent 24 hours.

3.0.4 This specification provides that entry into an OPERATIONAL MODE or other specified applicability condition must be made with (a) the full complement of required systems, equipment or components OPERABLE and (b) all other parameters as specified in the Limiting Conditions for Operation being met without regard for allowable deviations and out of service provisions contained in the ACTION statements.

The intent of this provision is to insure that facility operation is not initiated with either required equipment or systems inoperable or other specified limits being exceeded.

Exceptions to this provision have been provided for a limited number of specifications when startup with inoperable equipment would not affect plant safety. These exceptions are stated in the ACTION statements of the appropriate specifications.

APPLICABILITY

BASES

3.0.5 This specification delineates what additional conditions must be satisfied to permit operation to continue, consistent with the ACTION statements for power sources, when a normal or emergency power source is not OPERABLE. It specifically prohibits operation when one division is inoperable because its normal or emergency power source is inoperable and a system, subsystem, train, component or device in another division is inoperable for another reason.

The provisions of this specification permit the ACTION statements associated with individual systems, subsystems, trains, components, or devices to be consistent with the ACTION statements of the associated electrical power source. It allows operation to be governed by the time limits of the ACTION statement associated with the Limiting Condition for Operation for the normal or emergency power source, not the individual ACTION statements for each system, subsystem, train, component or device that is determined to be inoperable solely because of the inoperability of its normal or emergency power source.

For example, Specification 3.8.1.1 requires in part that two emergency diesel generators be OPERABLE. The ACTION statement provides for a 72 hour out-of-service time when one emergency diesel generator is not OPERABLE. If the definition of OPERABLE were applied without consideration of Specification 3.0.5, all systems, subsystems, trains, components and devices supplied by the inoperable emergency power source would also be inoperable. This would dictate invoking the applicable ACTION statements for each of the applicable Limiting Conditions for Operation. However, the provisions of Specification 3.0.5 permit the time limits for continued operation to be consistent with the ACTION statement for the inoperable emergency diesel generator instead, provided the other specified conditions are satisfied. In this case, this would mean that the corresponding normal power source must be OPERABLE, and all redundant systems, subsystems, trains, components, and devices must be OPERABLE, or otherwise satisfy Specification 3.0.5 (i.e., be capable of performing their design function and have at least one normal or one emergency power source OPERABLE). If they are not satisfied, action is required in accordance with this specification.

As a further example, Specification 3.8.1.1 requires in part that two physically independent circuits between the offsite transmission network and the onsite Class IE distribution system be OPERABLE. The ACTION statement provides a 24-hour out-of-service time when both required offsite circuits are not OPERABLE. If the definition of OPERABLE were applied without consideration of Specification 3.0.5, all systems, subsystems, trains, components and devices supplied by the inoperable normal power sources, both of the offsite circuits, would also be inoperable. This would dictate invoking the applicable ACTION statements for each of the applicable LCOs. However, the provisions of Specification 3.0.5 permit the time limits for continued operation to be consistent with the

APPLICABILITY

BASES

3.0.5 (Continued)

ACTION statement for the inoperable normal power sources instead, provided the other specified conditions are satisfied. In this case, this would mean that for one division the emergency power source must be OPERABLE (as must be the components supplied by the emergency power source) and all redundant systems, subsystems, trains, components and devices in the other division must be OPERABLE, or likewise satisfy Specification 3.0.5 (i.e., be capable of performing their design functions and have an emergency power source OPERABLE). In other words, both emergency power sources must be OPERABLE and all redundant systems, subsystems, trains, components and devices in both divisions must also be OPERABLE. If these conditions are not satisfied, action is required in accordance with this specification.

In MODES 5 or 6, Specification 3.0.5 is not applicable, and thus the individual ACTION statements for each applicable Limiting Condition for Operation in these MODES must be adhered to.

APPLICABILITY

BASES

4.0.1 This specification provides that surveillance activities necessary to insure the Limiting Conditions for Operation are met and will be performed during the OPERATIONAL MODES or other conditions for which the Limiting Conditions for Operation are applicable. Provisions for additional surveillance activities to be performed without regard to the applicable OPERATIONAL MODES or other conditions are provided in the individual Surveillance Requirements.

4.0.2 The provisions of this specification provide allowable tolerances for performing surveillance activities beyond those specified in the nominal surveillance interval. These tolerances are necessary to provide operational flexibility because of scheduling and performance considerations.

The tolerance values, taken either individually or consecutively over 3 test intervals, are sufficiently restrictive to ensure that the reliability associated with the surveillance activity is not significantly degraded beyond that obtained from the nominal specified interval.

4.0.3 The provisions of this specification set forth the criteria for determination of compliance with the OPERABILITY requirements of the Limiting Conditions for Operation. Under this criteria, equipment, systems or components are assumed to be OPERABLE if the associated surveillance activities have been satisfactorily performed within the specified time interval. Nothing in this provision is to be construed as defining equipment, systems or components OPERABLE, when such items are found or known to be inoperable although still meeting the Surveillance Requirements.

4.0.4 This specification ensures that the surveillance activities associated with a Limiting Condition for Operation have been performed within the specified time interval prior to entry into an OPERATIONAL MODE or other applicable condition. The intent of this provision is to ensure that surveillance activities have been satisfactorily demonstrated on a current basis as required to meet the OPERABILITY requirements of the Limiting Condition for Operation.

Under the terms of this specification, for example, during initial plant startup or following extended plant outages, the applicable surveillance activities must be performed within the stated surveillance interval prior to placing or returning the system or equipment into OPERABLE status.



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

INDIANA AND MICHIGAN ELECTRIC COMPANY

DOCKET NO. 50-316

DONALD C. COOK NUCLEAR PLANT UNIT NO. 2

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 30
License No. DPR-74

1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by Indiana and Michigan Electric Company (the licensee) dated June 16, 1980, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act) and the Commission's rules and regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
 - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.

2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of Facility Operating License No. DRR-74 is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 30, are hereby incorporated in the license. The licensee shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of the date of its issuance.

FOR THE NUCLEAR REGULATORY COMMISSION



Steven A. Varga, Chief
Operating Reactors Branch #1
Division of Licensing

Attachment:
Changes to the Technical
Specifications

Date of Issuance: May 12, 1981

ATTACHMENT TO LICENSE AMENDMENT

AMENDMENT NO. 30 TO FACILITY OPERATING LICENSE NO. DPR-74

DOCKET NO. 50-316

Revise Appendix A as follows:

<u>Remove Pages</u>	<u>Insert Pages</u>
3/4 0-1	3/4 0-1
3/4 0-2	3/4 0-2
-----	3/4 0-3
B3/4 0-1	B3/4 0-1
B3/4 0-2	B3/4 0-2
-----	B3/4 0-3
-----	B3/4 0-4

3/4 LIMITING CONDITIONS FOR OPERATION AND SURVEILLANCE REQUIREMENTS

3/4.6 APPLICABILITY

LIMITING CONDITION FOR OPERATION

3.0.1 Limiting Conditions for Operation and ACTION requirements shall be applicable during the OPERATIONAL MODES or other conditions specified for each specification.

3.0.2 Adherence to the requirements of the Limiting Condition for Operation and/or associated ACTION within the specified time interval shall constitute compliance with the specification. In the event the Limiting Condition for Operation is restored prior to expiration of the specified time interval, completion of the ACTION statement is not required.

3.0.3 When a Limiting Condition for Operation is not met, except as provided in the associated ACTION requirements, within one hour action shall be initiated to place the unit in a MODE in which the Specification does not apply by placing it, as applicable, in:

1. At least HOT STANDBY within the next 6 hours,
2. At least HOT SHUTDOWN within the following 6 hours, and
3. At least COLD SHUTDOWN within the subsequent 24 hours.

Where corrective measures are completed that permit operation under the ACTION requirements, the ACTION may be taken in accordance with the specified time limits as measured from the time of failure to meet the Limiting Condition for Operation. Exceptions to these requirements are stated in the individual Specifications.

3.0.4 Entry into an OPERATIONAL MODE or other specified applicability condition shall not be made unless the conditions of the Limiting Condition for Operation are met without reliance on provisions contained in the ACTION statements unless otherwise excepted. This provision shall not prevent passage through OPERATIONAL MODES as required to comply with ACTION statements.

3.0.5 When a system, subsystem, train, component or device is determined to be inoperable solely because its emergency power source is inoperable, or solely because its normal power source is inoperable, it may be considered OPERABLE for the purpose of satisfying the requirements of its applicable Limiting Condition for Operation, provided: (1) its corresponding normal or emergency power source is OPERABLE; and (2) all of its redundant system(s), subsystem(s), train(s), component(s) and device(s) are OPERABLE, or likewise satisfy the requirements of this specification. Unless both conditions (1) and (2) are satisfied, within 2 hours action shall be initiated to place the unit in a MODE in which the applicable Limiting Condition for Operation does not apply by placing it as applicable in:

1. At least HOT STANDBY within the next 6 hours,
2. At least HOT SHUTDOWN within the following 6 hours, and
3. At least COLD SHUTDOWN within the subsequent 24 hours.

This Specification is not applicable in MODES 5 or 6.

3/4.0 APPLICABILITY

SURVEILLANCE REQUIREMENTS

4.0.1 Surveillance Requirements shall be applicable during the OPERATIONAL MODES or other conditions specified for individual Limiting Conditions for Operation unless otherwise stated in an individual Surveillance Requirement.

4.0.2 Each Surveillance Requirement shall be performed within the specified time interval with:

- a. A maximum allowable extension not to exceed 25% of the surveillance interval, and
- b. A total maximum combined interval time for any 3 consecutive surveillance intervals not to exceed 3.25 times the specified surveillance interval.

4.0.3 Performance of a Surveillance Requirement within the specified time interval shall constitute compliance with OPERABILITY requirements for a Limiting Condition for Operation and associated ACTION statements unless otherwise required by the specification. Surveillance Requirements do not have to be performed on inoperable equipment.

4.0.4 Entry into an OPERATIONAL MODE or other specified applicability condition shall not be made unless the Surveillance Requirement(s) associated with the Limiting Condition for Operation have been performed within the stated surveillance interval or as otherwise specified.

4.0.5 Surveillance Requirements for inservice inspection and testing of ASME Code Class 1, 2 and 3 components shall be applicable as follows:

- a. During the time period:
 1. From issuance of the Facility Operating License to the start of facility commercial operation, inservice testing of ASME Code Class 1, 2 and 3 pumps and valves shall be performed in accordance with Section XI of the ASME Boiler and Pressure Vessel Code 1974 Edition, and Addenda through Summer 1975, except where specific written relief has been granted by the Commission.
 2. Following start of facility commercial operation, inservice inspection of ASME Code Class 1, 2 and 3 components and inservice testing of ASME Code Class 1, 2 and 3 pumps and valves shall be performed in accordance with Section XI of the ASME Boiler and Pressure Vessel Code and applicable Addenda as required by 10 CFR 50, Section 50.55a(g), except where specific written relief has been granted by the Commission pursuant to 10 CFR 50, Section 50.55a(g)(6)(i).

3/4.0 APPLICABILITY

SURVEILLANCE REQUIREMENTS

- b. Surveillance intervals specified in Section XI of the ASME Boiler and Pressure Vessel Code and applicable Addenda for the inservice inspection and testing activities required by the ASME Boiler and Pressure Vessel Code and applicable Addenda shall be applicable as follows in these Technical Specifications:

<u>ASME Boiler and Pressure Vessel Code and applicable Addenda terminology for inservice inspection and testing criteria</u>	<u>Required frequencies for performing inservice inspection and testing activities</u>
Weekly	At least once per 7 days
Monthly	At least once per 31 days
Quarterly or every 3 months	At least once per 92 days
Semiannually or every 6 months	At least once per 184 days
Yearly or annually	At least once per 366 days

- c. The provisions of Specification 4.0.2 are applicable to the above required frequencies for performing inservice inspection and testing activities.
- d. Performance of the above inservice inspection and testing activities shall be in addition to other specified Surveillance Requirements.
- e. Nothing in the ASME Boiler and Pressure Vessel Code shall be construed to supersede the requirements of any Technical Specification.

3/4.0 APPLICABILITY

BASES

The specifications of this section provide the general requirements applicable to each of the Limiting Conditions for Operation and Surveillance Requirements within Section 3/4.

3.0.1 This specification defines the applicability of each specification in terms of defined OPERATIONAL MODES or other specified conditions and is provided to delineate specifically when each specification is applicable.

3.0.2 This specification defines those conditions necessary to constitute compliance with the terms of an individual Limiting Condition for Operation and associated ACTION requirement.

3.0.3 The specification delineates the measures to be taken for those circumstances not directly provided for in the ACTION Statements and whose occurrence would violate the intent of a specification. For example, Specification 3.5.2 requires two independent ECCS Subsystems to be OPERABLE and provides explicit ACTION requirements if one ECCS Subsystem is inoperable. Under the requirements of Specification 3.0.3, if both the required ECCS Subsystems are inoperable, within one hour measures must be initiated to place the unit in at least HOT STANDBY within the next 6 hours, and in at least HOT SHUTDOWN within the following 6 hours. As a further example, Specification 3.6.2.1 requires two Containment Spray Systems to be OPERABLE and provides explicit ACTION requirements if one Spray System is inoperable. Under the requirements of Specification 3.0.3 if both the required Containment Spray Systems are inoperable, within one hour measure must be initiated to place the unit in at least HOT STANDBY within the next 6 hours, in at least HOT SHUTDOWN within the following 6 hours, and in COLD SHUTDOWN within the subsequent 24 hours.

3.0.4 This specification provides that entry into an OPERATIONAL MODE or other specified applicability condition must be made with (a) the full complement of required systems, equipment or components OPERABLE and (b) all other parameters as specified in the Limiting Conditions for Operation being met without regard for allowable deviations and out of service provisions contained in the ACTION statements.

The intent of this provision is to insure that facility operation is not initiated with either required equipment or systems inoperable or other specified limits being exceeded.

Exceptions to this provision have been provided for a limited number of specifications when startup with inoperable equipment would not affect plant safety. These exceptions are stated in the ACTION statements of the appropriate specifications.

APPLICABILITY

BASES

3.0.5 This specification delineates what additional conditions must be satisfied to permit operation to continue, consistent with the ACTION statements for power sources, when a normal or emergency power source is not OPERABLE. It specifically prohibits operation when one division is inoperable because its normal or emergency power source is inoperable and a system, subsystem, train, component or device in another division is inoperable for another reason.

The provisions of this specification permit the ACTION statements associated with individual systems, subsystems, trains, components, or devices to be consistent with the ACTION statements of the associated electrical power source. It allows operation to be governed by the time limits of the ACTION statement associated with the Limiting Condition for Operation for the normal or emergency power source, not the individual ACTION statements for each system, subsystem, train, component or device that is determined to be inoperable solely because of the inoperability of its normal or emergency power source.

For example, Specification 3.8.1.1 requires in part that two emergency diesel generators be OPERABLE. The ACTION statement provides for a 72 hour out-of-service time when one emergency diesel generator is not OPERABLE. If the definition of OPERABLE were applied without consideration of Specification 3.0.5, all systems, subsystems, trains, components and devices supplied by the inoperable emergency power source would also be inoperable. This would dictate invoking the applicable ACTION statements for each of the applicable Limiting Conditions for Operation. However, the provisions of Specification 3.0.5 permit the time limits for continued operation to be consistent with the ACTION statement for the inoperable emergency diesel generator instead, provided the other specified conditions are satisfied. In this case, this would mean that the corresponding normal power source must be OPERABLE, and all redundant systems, subsystems, trains, components, and devices must be OPERABLE, or otherwise satisfy Specification 3.0.5 (i.e., be capable of performing their design function and have at least one normal or one emergency power source OPERABLE). If they are not satisfied, action is required in accordance with this specification.

As a further example, Specification 3.8.1.1 requires in part that two physically independent circuits between the offsite transmission network and the onsite Class IE distribution system be OPERABLE. The ACTION statement provides a 24-hour out-of-service time when both required offsite circuits are not OPERABLE. If the definition of OPERABLE were applied without consideration of Specification 3.0.5, all systems, subsystems, trains, components and devices supplied by the inoperable normal power sources, both of the offsite circuits, would also be inoperable. This would dictate invoking the applicable ACTION statements for each of the applicable LCOs. However, the provisions of Specification 3.0.5 permit the time limits for continued operation to be

APPLICABILITY

BASES

3.0.5 (Continued)

consistent with the ACTION statement for the inoperable normal power sources instead, provided the other specified conditions are satisfied. In this case, this would mean that for one division the emergency power source must be OPERABLE (as must be the components supplied by the emergency power source) and all redundant systems, subsystems, trains, components and devices in the other division must be OPERABLE, or likewise satisfy Specification 3.0.5 (i.e., be capable of performing their design functions and have an emergency power source OPERABLE). In other words, both emergency power sources must be OPERABLE and all redundant systems, subsystems, trains, components and devices in both divisions must also be OPERABLE. If these conditions are not satisfied, action is required in accordance with this specification.

In MODES 5 or 6, Specification 3.0.5 is not applicable, and thus the individual ACTION statements for each applicable Limiting Condition for Operation in these MODES must be adhered to.

4.0.1 This specification provides that surveillance activities necessary to insure the Limiting Conditions for Operation are met and will be performed during the OPERATIONAL MODES or other conditions for which the Limiting Conditions for Operation are applicable. Provisions for additional surveillance activities to be performed without regard to the applicable OPERATIONAL MODES or other conditions are provided in the individual Surveillance Requirements.

4.0.2 The provisions of this specification provide allowable tolerances for performing surveillance activities beyond those specified in the nominal surveillance interval. These tolerances are necessary to provide operational flexibility because of scheduling and performance considerations.

The tolerance values, taken either individually or consecutively over 3 test intervals, are sufficiently restrictive to ensure that the reliability associated with the surveillance activity is not significantly degraded beyond that obtained from the nominal specified interval.

4.0.3 The provisions of this specification set forth the criteria for determination of compliance with the OPERABILITY requirements of the Limiting Conditions for Operation. Under this criteria, equipment, systems or components are assumed to be OPERABLE if the associated surveillance activities have been satisfactorily performed within the specified time interval. Nothing in this provision is to be construed as defining equipment, systems or components OPERABLE, when such items are found or known to be inoperable although still meeting the Surveillance Requirements.

APPLICABILITY

BASES

4.0.4 This specification ensures that the surveillance activities associated with a Limiting Condition for Operation have been performed within the specified time interval prior to entry into an OPERATIONAL MODE or other applicable condition. The intent of this provision is to ensure that surveillance activities have been satisfactorily demonstrated on a current basis as required to meet the OPERABILITY requirements of the Limiting Condition for Operation.

Under the terms of this specification, for example, during initial plant startup or following extended plant outages, the applicable surveillance activities must be performed within the stated surveillance interval prior to placing or returning the system or equipment into OPERABLE status.

4.0.5 This specification ensures that inservice inspection of ASME Code Class 1, 2 and 3 components and inservice testing of ASME Code Class 1, 2 and 3 pumps and valves will be performed in accordance with a periodically updated version of Section XI of the ASME Boiler and Pressure Vessel Code and Addenda as required by 10 CFR 50.55a. Relief from any of the above requirements has been provided in writing by the Commission and is not a part of these technical specifications.

This specification includes a clarification of the frequencies for performing the inservice inspection and testing activities required by Section XI of the ASME Boiler and Pressure Vessel Code and applicable Addenda. This clarification is provided to ensure consistency in surveillance intervals throughout these technical specifications and to remove any ambiguities relative to the frequencies for performing and the required inservice inspection and testing activities.

Under the terms of this specification, the more restrictive requirements of the Technical Specifications take precedence over the ASME Boiler and Pressure Vessel Code and applicable Addenda. For example, the requirements of Specification 4.0.4 to perform surveillance activities prior to entry into an OPERATIONAL MODE or other specified applicability condition takes precedence over the ASME Boiler and Pressure Vessel Code provision which allows pumps to be tested up to one week after return to normal operation. And, for example, the Technical Specification definition of OPERABLE does not grant a grace period before a device that is not capable of performing its specified function is declared inoperable and takes precedence over the ASME Boiler and Pressure Vessel Code provision which allows a valve to be incapable of performing its specified function for up to 24 hours before being declared inoperable.

UNITED STATES NUCLEAR REGULATORY COMMISSIONDOCKET NOS. 50-315 AND 50-316INDIANA AND MICHIGAN ELECTRIC COMPANYNOTICE OF ISSUANCE OF AMENDMENT TO FACILITY
OPERATING LICENSE

The U. S. Nuclear Regulatory Commission (the Commission) has issued Amendment No. 46 to Facility Operating License No. DPR-58, and Amendment No. 30 to Facility Operating License No. DPR-74 issued to Indiana and Michigan Electric Company (the licensee), which revised Technical Specifications for operation of Donald C. Cook Nuclear Plant, Unit Nos. 1 and 2 (the facilities) located in Berrien County, Michigan. The amendments are effective as of the date of issuance.

The amendments provide further clarification of the term OPERABLE, employed in the facilities Technical Specifications, as it applies to single failure criteria for safety systems.

The application for the amendments complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations. The Commission has made appropriate findings as required by the Act and the Commission's rules and regulations in 10 CFR Chapter I, which are set forth in the license amendments. Prior public notice of these amendments was not required since the amendments do not involve a significant hazards consideration.

8105210501


-2-

The Commission has determined that the issuance of these amendments will not result in any significant environmental impact and that pursuant to 10 CFR §51.5(d)(4) an environmental impact statement or negative declaration and environmental impact appraisal need not be prepared in connection with issuance of these amendments.

For further details with respect to this action, see (1) the application for amendments dated June 16, 1980, (2) Amendment Nos. 46 and 30 to License Nos. DPR-58 and DPR-74, and (3) the Commission's letter dated May 12, 1981. All of these items are available for public inspection at the Commission's Public Document Room, 1717 H Street, N.W., Washington D.C. and at the Maude Reston Palenski Memorial Library, 500 Market Street, St. Joseph, Michigan 49085. A copy of items (2) and (3) may be obtained addressed to the U. S. Nuclear Regulatory Commission, Washington D.C. 20555, Attention: Director, Division of Licensing.

Dated at Bethesda, Maryland, this 12th day of May 1981.

FOR THE NUCLEAR REGULATORY COMMISSION

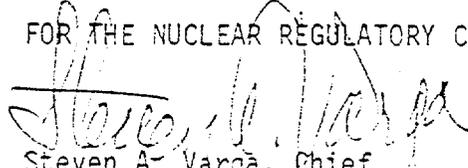
Steven A. Varga, Chief
Operating Reactors Branch #1
Division of Licensing