DISTRIBUTION:

NRC PDR	BScharf (15)	Gray file
Local PDR	JMcGough	extra cps
Docket	JSaltzman	
ORB#3 Rdg	SVarga	
KRGoller/TJCarter		
CParrish 2cpd	CHebron	
EVerdery	AESteen	
OELD	OPA (Clare Miles	
OI&E (3)	ACRS (16)	
BJones (4)	BAltman	
TBAbernathy	JRBuchanan	

JAN 29 1976

Docket No. 50-278

Philadelphia Electric Company
ATTN: Mr. Edward G. Bauer, Jr., Esquire
Vice President and General Counsel
2301 Market Street
Philadelphia, Pennsylvania 19101

Gentlemen:

The Commission has issued the enclosed Amendment No. 14 to Facility License No. DPR-56 for Peach Bottom Atomic Power Station Unit 3. The amendment includes changes to the Technical Specifications and is in response to your requests dated July 9, 1975 and Supplements thereto dated September 10, 1975, October 1, 24 and 30, 1975, November 18 and 20, 1975, and December 29, 1975.

The amendment authorizes operation of Peach Bottom Unit 3 (1) using operating limits based on the General Electric Thermal Analysis Basis (GETAB), (2) with modified operating limits based on an acceptable evaluation model that conforms with the requirements of Section 50.46 of 10 CFR Part 50 of the Commission's regulations, and (3) with a modification to the Low Pressure Coolant Injection System (LPCIS) authorized by Amendment No. 12 to the license.

Based on our review of the information submitted by you on the proposed modifications to the LPCIS for Peach Bottom Unit 3, we have determined that Peach Bottom Unit 3 can operate with the LPCIS modification provided that at a future outage, date to be proposed by Philadelphia Electric Company (PECO) and approved by the NRC staff, separate, redundant and independent buses would replace the existing swing buses supplying the valve motor operators for the LPCIS injection valves. Also included in Amendment No. 14 are additional surveillance requirements on the swing buses and associated electrical systems which are to be implemented following the completion of the proposed LPCIS modifications.

The Commission also has issued the enclosed Order for Modification of License which authorizes operation of Peach Bottom Unit 3 with plugged bypass flow holes, subject to the conditions set forth in the Technical Specification changes issued with Amendment No. 14 to the license, in accordance with your application dated December 29, 1975 as supplemented. This Order supersedes the December 27, 1974 Order for Modification of

OFFICE	ORB#3	OELD	RL:AD/ORs	D:DPR	DD:NRR	NRR
SURNAME	CParrish:kmf EVerdery GLear	S. Sohinki	KRGoller	VStello	EGCase	BCRusche
DATE	1/23/76	1/27/76	1/27/76	1/27/76	1/27/76	1/28/76

License and the January 7, 1976 Order for Modification of License in their entirety.

The Commission's staff has evaluated the potential for environmental impact associated with operation of Peach Bottom Unit 3 in accordance with this license amendment. From this evaluation the staff has determined that there will be no change in effluent types or total amounts, no change in authorized power level and no significant environmental impact attributable to that action. Having made this determination, the Commission has further concluded pursuant to 10 CFR Section 51.5(c)(1) that no environmental impact statement need be prepared for this action. Copies of the related Negative Declaration and supporting Environmental Impact Appraisal also are enclosed. As required by Part 51, the Negative Declaration is being filed with the Office of the Federal Register for publication.

Please note that we have discontinued the use of separate identifying numbers for changes to technical specifications. Sequential amendment numbers will be continued as in the past.

Copies of the related Safety Evaluation and Federal Register Notice and Negative Declaration are also enclosed.

Sincerely,

George Lear, Chief
Operating Reactors Branch #3
Division of Operating Reactors

Enclosures:
1. Amendment No. 14
2. Order for Modification of License
3. Federal Register Notice and Negative Declaration
4. Environmental Impact Appraisal
5. Safety Evaluation

cc w/enclosures:
See next page

ORB#3	ORB#3
CSParrish:kmf	GLear
1/ /76	1/ /76

OFFICE	ORB#3	OELD	RL:AD/ORs	D:OR	DD:NRR	NRR
SURNAME	EVerdery:kmf	S. Sohinki	KRGoller	VStello	EGCase	BCRusche
DATE	1/ /76	1/ 27 /76	1/ /76	1/ /76	1/ /76	1/ /76

UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

PHILADELPHIA ELECTRIC COMPANY
PUBLIC SERVICE ELECTRIC AND GAS COMPANY
DELMARVA POWER AND LIGHT COMPANY
ATLANTIC CITY ELECTRIC COMPANY

DOCKET NO. 50-278

PEACH BOTTOM ATOMIC POWER STATION, UNIT 3

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 14
License No. DPR-56

1. The Nuclear Regulatory Commission (the Commission) has found that:

   A. The application for amendment by Philadelphia Electric Company, Public Service Electric and Gas Company, Delmarva Power and Light Company, and Atlantic City Electric Company (the licensees), dated July 9, 1975, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;

   B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;

   C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations; and

   D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public.

2. Accordingly, the license is amended by a change to the Technical Specifications as indicated in the attachment to this license amendment and Paragraph 2.(c).2 of Facility License No. DPR-56 is hereby amended to read as follows:

   "2. Technical Specifications

   The Technical Specifications contained in Appendices A and B, as revised, are hereby incorporated in the license. The licensees shall operate the facility in accordance with the Technical Specifications, as revised".

3. This license amendment is effective as of the date of its issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

for George Lear

Karl R. Goller, Assistant Director
for Operating Reactors
Division of Operating Reactors

Attachment:
Changes to the
Technical Specifications

Date of Issuance: January 29, 1976

ATTACHMENT TO LICENSE AMENDMENT NO. 14

TO THE TECHNICAL SPECIFICATIONS

FACILITY OPERATING LICENSE NO. DPR-56

DOCKET NO. 50-278

Replace page i, ii, iii, iv, 5, 6, 9 through 28, 33 through 36, 53, 54, 65, 66, 69 through 72, 81, 82, 91, 92, 103, 104, 110a, 111, 112, 131, 133a, 133b, 140, 140a, 141, 142b, 142c, 142d, 148, 149, 150, 159 and 160 with the attached revised pages.

Add pages 15a through 15d, 140b, 140c, 141a, 141b, and 218a.

TABLE OF CONTENTS

			Page No.
1.0	DEFINITIONS		1
	SAFETY LIMITS	LIMITING SAFETY SYSTEM SETTINGS	
1.1	FUEL CLADDING INTEGRITY	2.1	9
1.2	REACTOR COOLANT SYSTEM INTEGRITY	2.2	29
	LIMITING CONDITIONS FOR OPERATION	SURVEILLANCE REQUIREMENTS	
3.1	REACTOR PROTECTION SYSTEM	4.1	35
3.2	PROTECTIVE INSTRUMENTATION	4.2	57
3.3	REACTIVITY CONTROL	4.3	99
	A. Reactivity Limitations	A	99
	B. Control Rods	B	100
	C. Scram Insertion Times	C	103
	D. Control Rod Accumulators	D	105
	E. Reactivity Anomalies	E	105
3.4	STANDBY LIQUID CONTROL SYSTEM	4.4	115
	A. Normal Operation	A	115
	B. Operation with Inoperable Components	B	116
	C. Sodium Pentaborate Solution	C	117
3.5	CORE AND CONTAINMENT COOLING SYSTEMS	4.5	124
	A. Core Spray and LPCI Subsystems	A	124
	B. Containment Cooling Subsystem (HPSW)	B	127
	C. HPCI Subsystem	C	128
	D. RCIC Subsystem	D	130
	E. Automatic Pressure Relief Subsystem	E	131
	F. Minimum Low Pressure Cooling System Diesel Generator Availability	F	132
	G. Maintenance of Filled Discharge Pipe	G	133
	H. Engineered Safeguards Compartments Cooling and Ventilation	H	133
	I. Average Planar LHGR	I	133a
	J. Local LHGR	J	133a
	K. Minimum Critical Power Ratio (MCPR)	K	133b

TABLE OF CONTENTS (Cont'd.)

	LIMITING CONDITIONS FOR OPERATION	SURVEILLANCE REQUIREMENTS	Page No.
3.6	PRIMARY SYSTEM BOUNDARY	4.6	143
	A. Thermal and Pressurization Limitations	A	143
	B. Coolant Chemistry	B	115
	C. Coolant Leakage	C	146
	D. Safety and Relief Valves	D	147
	E. Jet Pumps	E	148
	F. Jet Pump Flow Mismatch	F	148
	G. Structural Integrity	G	149
3.7	CONTAINMENT SYSTEMS	4.7	165
	A. Primary Containment	A	165
	B. Standby Gas Treatment System	B	175
	C. Secondary Containment	C	176
	D. Primary Containment Isolation Valves	D	177
3.8	RADIOACTIVE MATERIALS	4.8	203
	A. General	A	203
	B. Liquid Effluents	B	204
	C. Airborne Effluents	C	206
	D Mechanical Vacuum Pump	D	209
3.9	AUXILIARY ELECTRICAL SYSTEMS	4.9	217
	A. Auxiliary Electrical Equipment	A	217
	B. Operation with Inoperable Equipment	B	219
	C. Emergency Service Water System	C	221
3.10	CORE	4.10	225
	A. Refueling Interlocks	A	225
	B. Core Monitoring	B	227
	C. Spent Fuel Pool Water Level	C	228
3.11	ADDITIONAL SAFETY RELATED PLANT CAPABILITIES	4.11	233
	A. Main Control Room Ventilation	A	233
	B. Alternate Heat Sink Facility	B	234
	C. Emergency Shutdown Control Panel	C	234
3.12	RIVER LEVEL	4.12	237
	A. High River Water Level	A	237
	B. Low River Water Level	B	237
	C. Level Instrumentation	C	238

TABLE OF CONTENTS (Cont'd.)

		Page No.
	LIMITING CONDITIONS FOR OPERATION	
5.0	MAJOR DESIGN FEATURES	241
6.0	ADMINISTRATIVE CONTROLS	243
	6.1 Organization	243
	6.2 Review and Audit	246
	6.3 Actions to be Taken if a Safety Limit is Exceeded	251
	6.4 Actions to be Taken in the Event of an Abnormal Occurrence in Plant Operation	252
	6.5 Unit Operating Procedures	253
	6.6 Plant Operating Records	259
	6.7 Plant Reporting Requirements	260
	6.8 Industrial Security Program	267
	6.9 Emergency Plan	267

LIST OF FIGURES

Figure	Title	Page
1.1-1	APRM Flow Bias Scram Relationship to Normal Operating Conditions	16
4.1.1	Instrument Test Interval Determination Curves	55
4.2.2	Probability of System Unavailability vs. Test Interval	98
3.4.1	Required Volume and Concentration of Standby Liquid Control System Solution	122
3.4.2	Required Temperature vs. Concentration for Standby Liquid Control System Solution	123
3.5.1.C.	Maximum Average Planar Linear Heat Generation Rate (MAPLHGR) vs. Planar Average Exposure	142 b
3.5.1.D.	Maximum Average Planar Linear Heat Generation Rate (MAPLHGR) vs. Planar Average Exposure	142 c
3.5.1.E.	K_f Factor vs. Core Flow	142d
3.6.1	RPV Pressurization Temperature Limits vs. Neutron Exposure	164
6.1.1	Management Organization Chart	244
6.1.2	Organization for Conduct of Plant Organizations	245

1.0 DEFINITIONS (Cont'd.)

Normal control rod movement with the control drive hydraulic system is not defined as a core alteration. Normal movement of in-core instrumentation and the traversing in-core probe is not defined as a core alteration.

T. Reactor Vessel Pressure - Unless otherwise indicated, reactor vessel pressures listed in the Technical Specifications are those measured by the reactor vessel steam space detectors.

U. Thermal Parameters

1. Critical Power Ratio (CPR) - The critical power ratio is the ratio of that assembly power which causes some point in the assembly to experience transition boiling to the assembly power at the reactor condition of interest as calculated by application of the GEXL correlation. (Reference NEDO-10958).

2. Maximum Total Peaking Factor - The Maximum Total Peaking Factor (MTPF) is the lowest Total Peaking Factor which limits a fuel type to a Linear Heat Generation Rate (LHGR) corresponding to the operating limit at 100% power.

3. Minimum Critical Power Ratio (MCPR) - The minimum in-core critical power ratio corresponding to the most limiting fuel assembly in the core.

4. Total Peaking Factor - The ratio of the maximum fuel rod surface heat flux in an assembly to the average surface heat flux of the core.

5. Transition Boiling - Transition boiling means the boiling regime between nucleate and film boiling. Transition boiling is the regime in which both nucleate and film boiling occur intermittently with neither type being completely stable.

V. Instrumentation

1. Instrument Calibration - An instrument calibration means the adjustment of an instrument signal output so that it corresponds, within acceptable range, and accuracy, to a known value(s) of the parameter which the instrument monitors.

2. Channel - A channel is an arrangement of a sensor and associated components used to evaluate plant variables and produce discrete outputs used in logic. A channel terminates and loses its identity where individual channel outputs are combined in logic.

3. Instrument Functional Test - An instrument functional test means the injection of a simulated signal into the instrument primary sensor to verify the proper instrument channel response, alarm and/or initiating action.

4. Instrument Check - An instrument check is qualitative determination of acceptable operability by observation of instrument behavior during

operation. This determination shall include, where possible, comparison of the instrument with other independent instruments measuring the same variable.

5. Logic System Functional Test - A logic system functional test means a test of all relays and contacts of a logic circuit to insure all components are operable per design intent. Where practicable, action will go to completion; i.e., pumps will be started and valves operated.

6. Trip System - A trip system means an arrangement of instrument channel trip signals and auxiliary equipment required to initiate action to accomplish a protective trip function. A trip system may require one or more instrument channel trip signals related to one or more plant parameters in order to initiate trip system action. Initiation or protective action may require the tripping of a single trip system or the coincident tripping of two trip systems.

7. Protective Action - An action initiated by the protection system when a limit is reached. A protective action can be at at a channel or system level.

8. Protective Function - A system protective action which results from the protective action of the channels monitoring a particular plant condition.

9. Simulated Automatic Actuation - Simulated automatic actuation means applying a simulated signal to the sensor to actuate the circuit in question.

10. Logic - A logic is an arrangement of relays, contacts, and other components that produces a decision output.

    (a) Initiating - A logic that receive signals from channels and produces decision outputs to the actuation logic.

    (b) Actuation - A logic that receives signals (either from initiation logic or channels) and produces decision outputs to accomplish a protective action.

W. Functional Tests - A functional test is the manual operation or initiation of a system, subsystem, or component to verify that it functions within design

SAFETY LIMIT

1.1 FUEL CLADDING INTEGRITY

Applicability:

The Safety Limits established to preserve the fuel cladding integrity apply to those variables which monitor the fuel thermal behavior.

Objective

The objective of the Safety Limits is to establish limits which assure the integrity of the fuel cladding.

Specification:

A. Reactor Pressure ≥ 800 psia and Core Flow ≥ 10% of Rated

The existence of a minimum critical power ratio MCPR less then 1.06 shall constitute violation of the fuel cladding integrity safety limit.

To ensure that this safety limit is not exceeded, neutron flux shall not be above the scram setting established in specification 2.1.A for longer than 1.15 seconds as indicated by the process computer. When the process computer is out of service this safety limit shall be assumed to be exceeded if the neutron flux exceeds its scram setting and a control rod scram does not occur.

LIMITING SAFETY SYSTEM SETTING

2.1 FUEL CLADDING INTEGRITY

Applicability

The Limiting Safety System Settings apply to trip settings of the instruments and devices which are provided to prevent the fuel cladding integrity Safety Limits from being exceeded.

Objective

The objective of the Limiting Safety System Settings is to define the level of the process variables at which automatic protective action is initiated to prevent the fuel cladding integrity Safety Limits from being exceeded.

Specification:

The limiting safety system settings shall be as specified below:

A. Neutron Flux Scram

1. APRM Flux Scram Trip Setting (Run Mode)

When the Mode Switch is in the RUN position, the APRM flux scram trip setting shall be:

$$S \leq 0.66\,W + 54\%$$

where:

S = Setting in percent of rated thermal power (3293 MWt)

W = Loop recirculating flow rate in percent of rated (rated loop recirculation flow rate equals 34.2×10^6 lb/hr).

SAFETY LIMIT	LIMITING SAFETY SYSTEM SETTING
	2.1.A (cont'd.) In the event of operation with a maximum total peaking factor (MTPF) greater than the design value of 2.63, the setting shall be modified as follows: $S \leq (0.66\,W + 54\%)\,\frac{2.63}{MTPF}$ Where: MTPF = The value of the existing maximum total peaking factor For no combination of loop recirculation flow rate and core thermal power shall the APRM flux scram trip setting be allowed to exceed 120% of rated thermal power.
	2. APRM--When the reactor mode switch is in the STARTUP position, the APRM scram shall be set at less than or equal to 15 percent of rated power
	3. IRM--The IRM scram shall be set at less than or equal to 120/125 of full scale.

SAFETY LIMIT	LIMITING SAFETY SYSTEM SETTING
B. Core Thermal Power Limit (Reactor Pressure $\leq$ 800 psia) When the reactor pressure is $\leq$ 800 psia or core flow is less than 10% of rated, the core thermal power shall not exceed 25% of rated thermal power.	B. APRM Rod Block Trip Setting $S_{RB} \leq 0.66 + 42\%$ where: S_{RB} = Rod block setting in percent of rated thermal power (3293 MWt) W = Loop recirculation flow rate in percent of rated (rated loop recirculation flow rate equals 34.2×10^6 lb/hr). In the event of operation with a maximum total peaking factor (MTPF) greater than the design value of 2.63, the setting shall be modified as follows: $S_{RB} \leq (0.66\ W + 42\%)\ \frac{2.63}{MTPF}$ where: MTPF = The value of the existing maximum toal peak factor.
C. Whenever the reactor is in the shutdown condition with irradiated fuel in the reactor vessel, the water level shall not be less than 17.7 in. above the top of the normal active fuel zone.	C. Scram and isolation--reactor low water level $\geq$538 in. above vessel zero (0" on level instruments) D. Scram--turbine stop $\leq$10 percent valve closure E. Scram-turbine control valve fast closure on loss of control oil pressure. 500 < P < 850 psig.

SAFETY LIMIT	LIMITING SAFETY SYSTEM SETTING	
	F. Scram--low condenser vacuum	≥23 inches Hg vacuum
	G. Scram--main steam line isolation	≤10 percent valve closure
	H. Main steam isolation valve closure --nuclear system low pressure	≥850 psig
	I. Core spray and LPCI actuation--reactor low water level	≥378 in. above vessel zero (-159.5 in. indicated level)
	J. HPCI and RCIC actuation--reactor low water level	≥490 in. above vessel zero (-49.5 in. indicated level)
	K. Main steam isolation valve closure --reactor low water level	≥490 in. above vessel zero (-49.5 in. indicated level)

1.1 BASES: FUEL CLADDING INTEGRITY

A. Fuel Cladding Integrity Limit at Reactor Pressure ≥ 800 psia and Core Flow ≥10% of Rated

The fuel cladding integrity safety limit is set such that no fuel damage is calculated to occur if the limit is not violated. Since the parameters which result in fuel damage are not directly observable during reactor operation the thermal and hydraulic conditions resulting in a departure from nucleate boiling have been used to mark the beginning of the region where fuel damage could occur. Although it is recognized that a departure from nucleate boiling would not necessarily result in damage to BWR fuel rods, the critical power at which boiling transition is calculated to occur has been adopted as a convenient limit. However, the uncertainties in monitoring the core operating state and in the procedure used to calculate the critical power result in an uncertainty in the value of the critical power. Therefore the fuel cladding integrity safety limit is defined as the critical power ratio in the limiting fuel assembly for which more than 99.9% of the fuel rods in the core are expected to avoid boiling transition considering the power distribution within the core and all uncertainties.

The Safety Limit MCPR is determined using the General Electric Thermal Analysis Basis, GETAB[1], which is a statistical model that combines all of the uncertainties in operating parameters and the procedures used to calculate critical power.
The probability of the occurrence of boiling transition is determined using the General Electric Critical Quality (X) - Boiling Length (L), GEXL, correlation.

The GEXL correlation is valid over the range of conditions used in the tests of the data used to develop the correlation. These conditions are:

Pressure:	800 to 1400 psia	
Mass flux:	0.1 to 1.25 x 10^6 lb/hr.-ft.^{2}	
Inlet Subcooling:	0 to 100 Btu/lb.	
Local Peaking:	1.61 at a corner rod to	
	1.47 at an interior rod	
Axial Peaking:	Shape	Max/Avg.
	Uniform	1.0
	Outlet Peaked	1.60
	Inlet Peaked	1.60
	Double Peak	1.46 and 1.38
	Cosine	1.39
Rod Array:	16, 64 Rods in an 8 x 8 array	
	49 Rods in a 7 x 7 array	

The required input to the statistical model are the uncertainties listed on Table 1.1-1, the nominal values of the core parameters listed in Table 1.1-2, and the relative assembly power distribution shown in Table 1.1-3. Table 1.1-4 shows the R-factor distributions that are input to the statistical model which is used to establish the safety limit MCPR. The R-factor distributions shown are taken near the beginning of the fuel cycle.

The basis for the uncertainties in the core parameters are given in NEDO-20340[2] and the basis for the uncertainty in the GEXL correlation is given in NEDO-10958[1]. The power distribution is based on a typical 764 assembly core in which the rod pattern was arbitrarily chosen to produce a skewed power distribution having the greatest number of assemblies at the highest power levels. The worst distribution in Peach Bottom Atomic Power Station Unit 3 during any fuel cycle would not be as severe as the distribution used in the analysis.

B. Core Thermal Power Limit (Reactor Pressure < 800 psia on Core Flow < 10% of Rated)

The use of the GEXL correlation is not valid for the critical power calculations at pressures below 800 psia or core flows less than 10% of rated. Therefore, the fuel cladding integrity safety limit is established by other means. This is done by establishing a limiting condition of core thermal power operation with the following basis.

Since the pressure drop in the bypass region is essentially all elevation head which is 4.56 psi the core pressure drop at low power and all flows will always be greater than 4.56 psi. Analyses show that with a flow of 28×10^3 lbs/hr bundle flow, bundle pressure drop is nearly independent of bundle power and has a vlue of 3.5 psi. Thus, the bundle flow with a 4.56 psi driving head will be greater than 28×10^3 lbs/hr irrespective of total core flow and independent of bundle power for the range of bundle powers of concern. Full scale ATLAS test data taken at pressures from 14.7 psia to 800 psia indicate that the fuel assembly critical power at this flow is approximately 3.35 MWt bundle power corresponds to a core thermal power of more than 50%. Therefore a core thermal power limit of 25% for reactor pressures below 800 psia or core flow less than 10% is conservative.

C. Power Transient

Plant safety analyses have shown that the scrams caused by exceeding any safety setting will assure that the Safety Limit of Specification 1.1A or 1.1B will not be exceeded. Scram times are checked periodically to assure the insertion times are adequate. The thermal power transient resulting when a scram is accomplished other than by the expected scram signal (e.g., scram from neutron flux following closure of the main turbine stop valves) does not necessarily cause fuel damage. However, for this specification a Safety Limit violation will be assumed when a scram is only accomplished by means of a backup feature of the plant design.

The concept of not approaching a Safety Limit provided scram signals are operable is supported by the extensive plant safety analysis.

The computer provided with Peach Bottom Unit 3 has a sequence annunciation program which will indicate the sequence in which events such as scram, APRM trip initiation, pressure scram initiation, etc. occur. This program also indicates when the scram setpoint is cleared. This will provide information on how long a scram condition exists and thus provide some measure of the energy added during a transient. Thus, computer information normally will be available for analyzing scrams; however, if the computer information should not be available for any scram analysis, Specification 1.1C will be relied on to determine if a Safety Limit has been violated.

D. Reactor Water Level (Shutdown Condition)

During periods when the reactor is shutdown, consideration must also be given to water level requirements due to the effect of decay heat. If reactor water level should drop below the top of the active fuel during this time, the ability to cool the core is reduced. This reduction in core cooling capability could lead to elevated cladding temperatures and clad perforation. The core can be cooled sufficiently should the water level be reduced to two-thirds the core height. Establishment of the safety limit at 17.7 inches above the top of the fuel provides adequate margin. This level will be continuously monitored.

E. References

1. General Electric Thermal Analysis Basis (GETAB): Data, Correlation and Design Application, General Electric Co. BWR Systems Department, November 1973 (NEDO-10958).

2. Process Computer Performance Evaluation Accuracy, General Electric Company BWR Systems Department, June 1974 (NEDO-20340).

Table 1.1-1

UNCERTAINTIES USED IN THE DETERMINATION

OF THE FUEL CLADDING SAFETY LIMIT

Quantity	Standard Deviation (% of Point)
Feedwater Flow	1.76
Feedwater Temperature	0.76
Reactor Pressure	0.5
Core Inlet Temperature	0.2
Core Total Flow	2.5
Channel Flow Area	3.0
Friction Factor Multiplier	10.0
Channel Friction Factor Multiplier	5.0
TIP Readings	6.3
Bypass void effect on TIP	4.08 (core midplane) 5.21 (core exit)
R Factor	1.6
Critical Power	3.6

Table 1.1-2

NOMINAL VALUES OF PARAMETERS USED IN

THE STATISTICAL ANALYSIS OF FUEL CLADDING INTEGRITY SAFETY LIMIT

Core Thermal Power	3293 MW
Core Flow	102.5 Mlb/hr
Dome Pressure	1010.4 psig
Channel Flow Area	0.1078 ft^2
R-Factor	1.098 (High Enriched Bundle)
	1.154 (Low Enriched Bundle)

Table 1.1-3

RELATIVE BUNDLE POWER DISTRIBUTION

USED IN THE GETAB STATISTICAL ANALYSIS

Range of Relative Bundle Power	Percent of Fuel Bundles Within Power Interval
1.275 to 1.325	16.8
1.225 to 1.275	8.2
1.175 to 1.225	7.2
1.125 to 1.175	5.0
1.075 to 1.125	12.0
1.025 to 1.075	4.6
0.975 to 1.025	7.0
0.875 to 0.975	4.0
0.875 to 0.925	2.0
0.825 to 0.875	4.4
0.775 to 0.825	3.0
0.675 to 0.775	2.0
0.625 to 0.675	5.0
0.575 to 0.625	4.2
0.275 to 0.575	14.6
	Sum =100

Table 1.1-4

R-FACTOR DISTRIBUTION USED IN GETAB STATISTICAL ANALYSIS

7x7 Rod Array

R-Factor	Rod Sequence No.
1.098	1
1.083	2
1.075	3
1.062	4
1.052	5
1.042	6
1.042	7
$\leq$ 1.027	8 thru 49

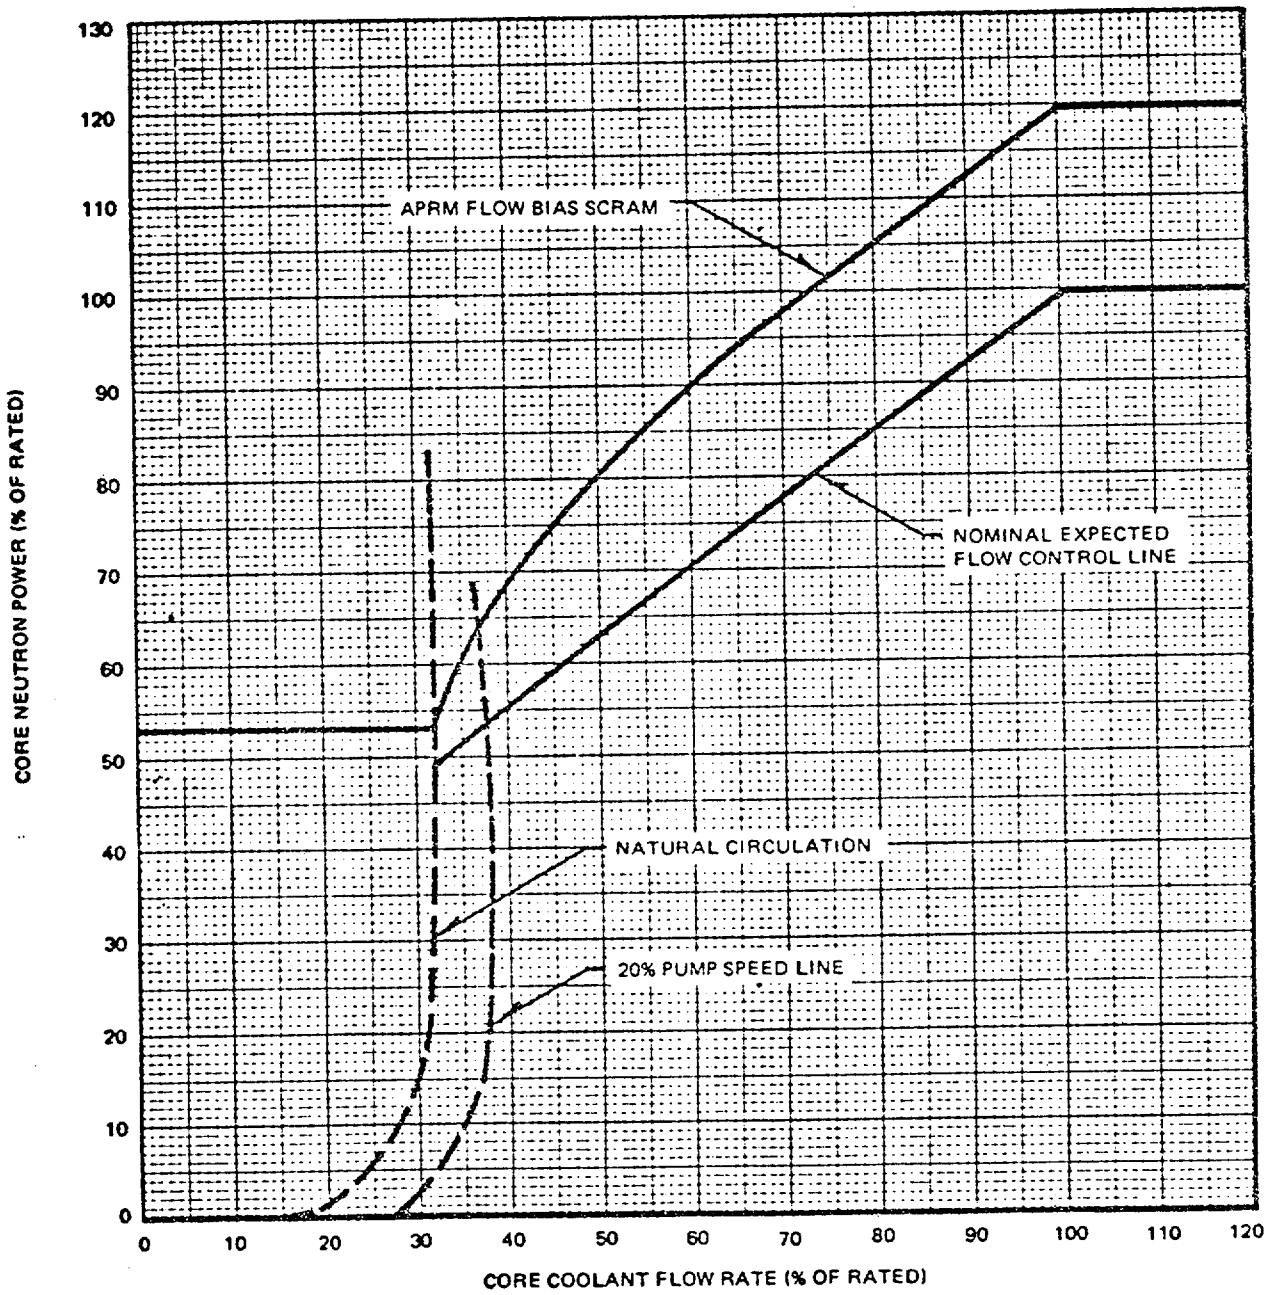

APRM FLOW BIAS SCRAM RELATIONSHIP TO NORMAL OPERATING CONDITIONS

FIGURE 1.1-1

2.1 BASES: LIMITING SAFETY SYSTEM SETTINGS RELATED TO FUEL CLADDING INTEGRITY

The abnormal operational transients applicable to operation of the Peach Bottom Atomic Power Station Units have been analyzed throughout the spectrum of planned operating conditions up to the thermal power condition of 3440 MWt. The analyses were based upon plant operation in accordance with the operating map given in Figure 3.7.1 of the FSAR. In addition, 3293 MWt is the licensed maximum power level of each Peach Bottom Atomic Power Station Unit, and this represents the maximum steady state power which shall not knowingly be exceeded.

Conservatism is incorporated in the transient analyses in estimating the controlling factors, such as void reactivity coefficient, control rod scram worth, scram delay time, peaking factors, and axial power shapes. These factors are selected conservatively with respect to their effect on the applicable transient results as determined by the current analysis model. This transient model, evolved over many years, has been substantiated in operation as a conservative tool for evaluating reactor dynamic performance. Results obtained from a General Electric boiling water reactor have been compared with predictions made by the model. The comparisons and results are summarized in NEDO 10802.

The absolute value of the void reactivity coefficient used in the analysis is conservatively estimated to be about 25% greater than the nominal maximum value expected to occur during the core lifetime. The scram worth used has been derated to be equivalent to approximately 80% of the total scram worth of the control rods. The scram delay time and rate of rod insertion allowed by the analyses are conservatively set equal to the longest delay and slowest insertion rate acceptable by Technical Specifications. Active coolant flow is equal to 88% of total core flow. The effect of scram worth, scram delay time and rod insertion rate, all conservatively applied, are of greatest significance in the early portion of the negative reactivity insertion. The rapid insertion of negative reactivity is assured by the time requirements for 5% and 25% insertion. By the time the rods are 60% inserted, approximately four dollars of negative reactivity have been inserted which strongly turns the transient, and accomplishes the desired effect. The times for 50% and 90% insertion are given to assure proper completion of the expected performance in the earlier portion of the transient, and to establish the ultimate fully shutdown steady state condition.

For analyses of the thermal consequences of the transients a MCPR of 1.25 is conservatively assumed to exist prior to initiation of the transients. This choice of using conservative values of controlling parameters and initiating transients at the design power level, produces more pessimistic answers than would result by using expected values of control parameters and analyzing at higher power levels.

Steady state operation without forced recirculation will not be permitted, except during startup testing. The analysis to support operation at various power and flow relationships has considered operation with either one or two recirculating pumps.

In summary:

i. The abnormal operational transients were analyzed to a power level of 3440 MWt.

ii. The licensed maximum power level is 3293 MWt.

iii. Analyses of transients employ adequately conservative values of the controlling reactor parameters.

iv. The analytical procedures now used result in a more logical answer than the alternative method of assuming a higher starting power in conjunction with the expected values for the parameters.

The bases for individual trip settings are discussed in the following paragraphs.

A. Neutron Flux Scram

The average power range monitoring (APRM) system, which is calibrated using heat balance data taken during steady state conditions, reads in percent of rated thermal power (3293 MWt). Because fission chambers provide the basic input signals, the APRM system responds directly to average neutron flux. During transients, the instantaneous rate of heat transfer from the fuel (reactor thermal power) is less than the instantaneous neutron flux due to the time constant of the fuel. Therefore, during abnormal operational transients, the thermal power of the fuel will be less than that indicated by the neutron flux at the scram setting. Analyses demonstrate that with a 120 percent scram trip setting, none of the abnormal operational transients analyzed violate the fuel Safety Limit and there is a substantial margin from fuel damage. Therefore, the use of flow referenced scram trip provides even additional margin.

An increase in the APRM scram trip setting would decrease the margin present before the fuel cladding integrity Safety Limit is reached. The APRM scram trip setting was determined by an analysis of margins required to provide a reasonable range for maneuvering during operation. Reducing this operating margin would increase the frequency of spurious scrams which have an adverse effect on reactor safety because of the resulting thermal stresses. Thus, the APRM scram trip setting was selected because it provides adequate margin for the fuel cladding integrity Safety Limit yet allows operating margin that reduces the possibility of unnecessary scrams.

The scram trip setting must be adjusted to assure that the LHGR transient peak is not increased for any combination of MTPF and reactor core thermal power. The scram setting is adjusted in accordance with the formula in Specification 2.1.A.1, when the maximum total peaking factor is greater than 2.63.

Analyses of the limiting transients show that no scram adjustment is required to assure MCPR > 1.06 when the transient is initiated from MCPR > 1.25.

For operation in the startup mode while the reactor is at low pressure, the APRM scram setting of 15 percent of rated power provides adequate thermal margin between the setpoint and the safety limit, 25 percent of rated. The margin is adequate to accomodate anticipated maneuvers associated with power plant startup. Effects of increasing pressure at zero or low void content are minor, cold water from sources available during startup is not much colder than that

2.1 BASES (Cont'd.)

already in the system, temperature coefficients are small, and control rod patterns are constrained to be uniform by operating procedures backed up by the rod worth minimizer and the Rod Sequence Control System. Worth of individual rods is very low in a uniform rod pattern. Thus, of all possible sources of reactivity input, uniform control rod withdrawal is the most probable cause of significant power rise. Because the flux distribution associated with uniform rod withdrawals does not involve high local peaks, and because several rods must be moved to change power by a significant percentage of rated power, the rate of power rise is very slow. Generally, the heat flux is in near equilibrium with the fission rate. In an assumed uniform rod withdrawal approach to the scram level, the rate of power rise is no more than 5 percent of rated power per minute, and the APRM system would be more than adequate to assure a scram before the power could exceed the safety limit. The 15 percent APRM scram remains active until the mode switch is placed in the RUN position. This switch occurs when reactor pressure is greater than 850 psig.

The IRM system consists of 8 chambers, 4 in each of the reactor protection system logic channels. The IRM is a 5-decade instrument which covers the range of power level between that covered by the SRM and the APRM. The 5 decades are covered by the IRM by means of a range switch and the 5 decades are broken down into 10 ranges, each being one-half of a decade in size. The IRM scram trip setting of 120 divisions is active in each range of the IRM. For example, if the instrument were on range 1, the scram setting would be a 120 divisions for that range; likewise, if the instrument were on range 5, the scram would be 120 divisions on that range. Thus, as the IRM is ranged up to accomodate the increase in power level, the scram trip setting is also ranged up. The most significant sources of reactivity change during the power increase are due to control rod withdrawal. For insequence control rod withdrawal, the rate of change of power is slow enough due to the physical limitation of withdrawing control rods, that heat flux is in equilibrium with the neutron flux and an IRM scram would result in a reactor shutdown well before any Safety Limit is exceeded.

In order to assure that the IRM provided adequate protection against the single rod withdrawal error, a range of rod withdrawal accidents was analyzed. This analysis included starting the accident at various power levels. The most severe case involves an initial condition in which the reactor is just subcritical and the IRM system is not yet on scale. This condition exists at quarter rod density. Additional conservatism was taken in this analyses by assuming that the IRM channel closest to the withdrawn rod is bypassed. The results of this analysis show that the reactor is scrammed and peak power limited to one percent of rated power, thus maintaining MCPR above 1.06. Based on the above analysis, the IRM provides protection against local control rod withdrawal errors and continuous withdrawal of control rods in sequence and provides backup protection for the APRM.

2.1 BASES (Cont'd.)

B. APRM Control Rod Block

Reactor power level may be varied by moving control rods or by varying the recirculation flow rate. The APRM system provides a control rod block to prevent rod withdrawal beyond a given point at constant recirculation flow rate, and thus to protect against the condition of a MCPR less than 1.06. This rod block trip setting, which automatically varies with recirculation loop flow rate, prevents an increase in the reactor power level to excessive values due to control rod withdrawal. The flow variable trip setting provides substantial margin from fuel damage, assuming a steady state operation at the trip setting, over the entire recirculation flow range. The margin to the Safety Limit increases as the flow decreases for the specified trip setting versus flow relationship; therefore the worst case MCPR which could occur during steady state operation is at 108% of rated thermal power because of the APRM rod block trip setting. The actual power distribution in the core is established by specified control rod sequences and is monitored continuously by the incore LPRM system. As with the APRM scram trip setting, the APRM rod block trip setting is adjusted downward if the maximum total peaking factor exceeds 2.63, thus preserving the APRM rod block safety margin.

C. Reactor Water Low Level Scram and Isolation (Except Main Steamlines)

The set point for the low level scram is above the bottom of the separator skirt. This level has been used in transient analyses dealing with coolant inventory decrease. The results reported in FSAR subsection 14.5 show that scram and isolation of all process lines (except main steam) at this level adequately protects the fuel and the pressure barrier, because MCPR is greater than 1.06 in all cases, and system pressure does not reach the safety valve settings. The scram setting is approximately 31 in. below the normal operating range and is thus adequate to avoid spurious scrams.

D. Turbine Stop Valve Closure Scram

The turbine stop valve closure scram trip anticipates the pressure, neutron flux and heat flux increase that could result from rapid closure of the turbine stop valves. With a scram trip setting of $\leq$ 10 percent of valve closure from full open, the resultant increase in surface heat flux is limited such that MCPR remains above 1.06 even during the worst case transient that assumes the turbine bypass is closed. This scram is bypassed when turbine steam flow is below 30% of rated, as measured by turbine first stage pressure.

E. Turbine Control Valve Scram

The turbine control valve fast closure scram anticipates the pressure, neutron flux and heat flux increase that could result from fast closure of the turbine control valves due to a load rejection exceeding the capacity of the bypass valves or a failure in the hydraulic control system which results in a loss of oil pressure. This scram is initiated from pressure switches in the hydraulic control system which sense loss of oil pressure due to the opening of the fast acting solenoid valves or a failure in the hydraulic control

2.1 BASES: (Cont'd)

system piping. Two turbine first stage pressure switches for each trip system initiate automatic bypass of the turbine control valve fast closure scram when the first stage pressure is below that required to produce 30% of rated power. Control valve closure time is approximately twice as long as that for stop valve closure. No significant change in MCPR occurs.

LEFT BLANK INTENTIONALLY

2.1 BASES (Cont'd)

F. Main Condenser Low Vacuum Scram

To protect the main condenser against overpressure, a loss of condenser vacuum initiates automatic closure of the turbine stop valves and turbine bypass valves. To anticipate the transient and automatic scram resulting from the closure of the turbine stop valves, low condenser vacuum initiates a scram. The low vacuum scram set point is selected to initiate a scram before the closure of the turbine stop valves is initiated.

G. & H. Main Steam Line Isolation on Low Pressure and Main Steam Line Isolation Scram

The low pressure isolation of the main steam lines at 850 psig was provided to protect against rapid reactor depressurization and the resulting rapid cooldown of the vessel. Advantage is taken of the scram feature that occurs when the main steam line isolation valves are closed, to provide for reactor shutdown so that high power operation at low reactor pressure does not occur, thus providing protection for the fuel cladding integrity safety limit. Operation of the reactor at pressures lower than 850 psig requires that the reactor mode switch be in the STARTUP position, where protection of the fuel cladding integrity safety limit is provided by the IRM and APRM high neutron flux scrams. Thus, the combination of main steam line low pressure isolation and isolation valve closure scram assures the availability of neutron flux scram protection over the entire range of applicability of the fuel cladding integrity safety limit. In addition, the isolation valve closure scram anticipates the pressure and flux transients that occur during normal or inadvertent isolation valve closure. With the scrams set at 10 percent of valve closure, neutron flux does not increase.

I.J.K. Reactor Low Water Level Set Point for Initiation of HPCI and RCIC, Closing Main Steam Isolation Valves, and Starting LPCI and Core Spray Pumps.

These systems maintain adequate coolant inventory and provide core cooling with the objective of preventing excessive clad temperatures. The design of these systems to adequately perform the intended function is based on the specified low level scram set point and initiation set points. Transient analyses reported in Section 14 of the FSAR demonstrate that these conditions result in adequate safety margins for both the fuel and the system pressure.

2.1 BASES: (Cont'd)

L. References

1. Linford, R. B., "Analytical Methods of Plant Transient Evaluations for the General Electric Boiling Water Reactor", NEDO 10802, February 1973.

LEFT BLANK INTENTIONALLY

LEFT BLANK INTENTIONALLY

LEFT BLANK INTENTIONALLY

LEFT BLANK INTENTIONALLY

2.2 BASES

REACTOR COOLANT SYSTEM INTEGRITY

The pressure relief system for each unit at the Peach Bottom Atomic Power Station has been sized to meet two design bases. First, the total safety/relief valve capacity has been established to meet the overpressure protection criteria of the ASME Code. Second, the distribution of this required capacity between safety valves and relief valves has been set to meet design basis 4.4.4.1 of subsection 4.4 which states that the nuclear system relief valves shall prevent opening of the safety valves during normal plant isolations and load rejections.

The details of the analysis which shows compliance with the ASME Code requirements is presented in subsection 4.4 of the PSAR and the Reactor Vessel Overpressure Protection Summary Technical Report submitted in Appendix K.

Eleven safety/relief valves and two safety valves have been installed on Peach Bottom Unit 3. The analysis of the worst overpressure transient, (3-second closure of all main steamline isolation valves) neglecting the direct scram (valve position scram) results in a maximum vessel pressure 1303 psig for Peach Bottom Unit 3 if a neutron flux scram is assumed. This results in a 72 psig margin to the code allowable overpressure limit of 1375 psig.

The analysis of the plant isolation transient (turbine trip with bypass valve failure to open) assuming a turbine trip scram is presented in Section 7.2 and Figures 7-2 and 7-3 of NEDO-21140 for Peach Bottom 3. This analysis shows that the 11 relief valves limit pressure at the safety valves to 33 psig, below the setting of the safety valves. Therefore, the safety valves will not open.

The relief valve settings satisfy the Code requirements that the lowest valve set point be at or below the vessel design pressure of 1250 psig. These settings are also sufficiently above the normal operating pressure range to prevent unnecessary cycling caused by minor transients.

The results of postulated transients where inherent relief valve actuation is required are given in Section 14.0 of the Final Safety Analysis Report.

The design pressure of the shutdown cooling piping of the Residual Heat Removal System is not exceeded with the reactor vessel steam dome less than 75 psig.

LEFT BLANK INTENTIONALLY

LIMITING CONDITION FOR OPERATION	SURVEILLANCE REQUIREMENTS
3.1 REACTOR PROTECTION SYSTEM	**4.1 REACTOR PROTECTION SYSTEM**
Applicability:	**Applicability:**
Applies to the instrumentation and associated devices which initiate a reactor scram.	Applies to the surveillance of the instrumentation and associated devices which initiate reactor scram.
Objective:	**Objective:**
To assure the operability of the reactor protection system.	To specify the type and frequency of surveillance to be applied to the protection instrumentation.
Specification:	**Specification:**
The setpoints, minimum number of trip systems, and minimum number of instrument channels that must be operable for each position of the reactor mode switch shall be as given in Table 3.1.1. The designed system response times from the opening of the sensor contact up to and including the opening of the trip actuator contacts shall not exceed 100 milli-seconds.	A. Instrumentation systems shall be functionally tested and calibrated as indicated in Tables 4.1.1 and 4.1.2 respectively. B. Daily during reactor power operation, the peak heat flux and peaking factor shall be checked and the SCRAM and APRM Rod Block settings given by equations in Specification 2.1.A.1 and 2.1.B shall be calculated if the peaking factor exceeds 2.63.

LIMITING CONDITION FOR OPERATION	SURVEILLANCE REQUIREMENTS
	c. When it is determined that a channel has failed in the unsafe condition, the other RPS channels that monitor the same variable shall be functionally tested immediately before the trip system containing the failure is tripped. The trip system containing the unsafe failure may be placed in the untripped condition during the period in which surveillance testing is being performed on the other RPS channels. The trip system may be in the untripped position for no more than eight hours per functional trip period for this testing.

4.1 BASES (Cont'd)

A study was conducted of the instrumentation channels included in the Group (B) devices to calculate their "unsafe" failure rates. The analog devices (sensors and amplifiers) are predicted to have an unsafe failure rate of less than 20 X 10-6 failure/hour. The bi-stable trip circuits are predicted to have unsafe failure rate of less than 2×10^{-6} failures/hour. Considering the two hour monitoring interval for the analog devices as assumed above, and a weekly test interval for the bi-stable trip circuits, the design reliability goal of 0.99999 is attained with ample margin.

The bi-stable devices are monitored during plant operation to record their failure history and establish a test interval using the curve of Figure 4.1.1. There are numerous identical bi-stable devices used throughout the plant's instrumentation system. Therefore, significant data on the failure rates for the bi-stable devices should be accumulated rapidly.

The frequency of calibration of the APRM Flow Biasing Network has been established as each refueling outage. The flow biasing network is functionally tested at least once per month and in addition, cross calibration checks of the flow input to the flow biasing network can be made during the functional test by direct meter reading. There are several instruments which must be calibrated and it will take several days to perform the calibration of the entire network. While the calibration is being performed, a zero flow signal will be sent to half of the APRM's resulting in a half scram and rod block condition. Thus, if the calibration were performed during operation, flux shaping would not be possible. Based on experience at other generating stations, drift of instruments, such as those in the Flow Biasing Network, is not significant and therefore, to avoid spurious scrams, a calibration frequency of each refueling outage is established.

Group (C) devices are active only during a given portion of the operational cycle. For example, the IRM is active during startup and inactive during full-power operation. Thus, the only test that is meaningful is the one performed just prior to shutdown or startup; i.e., the tests that are performed just prior to use of the instrument.

Calibration frequency of the instrument channel is divided into two groups. These are as follows:

1. Passive type indicating devices that can be compared with like units on a continuous basis.

2. Vacuum tube or semi-conductor devices and detectors that drift or lose sensitivity.

4.1 BASES (Cont'd.)

Experience with passive type instruments in generating stations and substations indicates that the specified calibrations are adequate. For those devices which employ amplifiers, etc., drift specifications call for drift to be less than 0.4%/month; e.e., in the period of a month a maximum drift of 0.4% could occur, thus providing for adequate margin.

For the APRM system, drift of electronic apparatus is not the only consideration in determining a calibration frequency. Change in power distribution and loss of chamber sensitivity dictate a calibration every seven days. Calibration on this frequency assures plant operation at or below thermal limits.

A comparison of Tables 4.1.1 and 4.1.2 indicates that two instrument channels have not been included in the latter table. These are: mode switch in shutdown and manual scram. All of the devices or sensors associated with these scram functions are simple on-off switches and, hence, calibration during operation is not applicable.

B. The peak heat flux is checked once per day to determine if the APRM scram requires adjustment. This will normally be done by checking the LPRM readings. Only a small number of control rods are moved daily and thus the peaking factors are not expected to change significantly and thus a daily check of the peak heat flux is adequate.

The sensitivity of LPRM detectors decreases with exposure to neutron flux at a slow and approximately constant rate. This is compensated for in the APRM system by calibrating twice a week using heat balance data and by calibrating individual LPRM's every 6 weeks, using TIP traverse data.

It is highly improbable that in actual operation with MTPF at 2.63 that MCPR will be as low as 1.25. Usually with peaking factors of this magnitude the peak occurs low in the core in a low quality region where the initial heat flux is very high. The MCPR design power shape (TPF = 2.43) assumes that the peak occurs higher in the core and represents the worst combination of individual peaking factor magnitude and shape, from a MCPR consideration that can be expected to occur in the core. Therefore, with TPF < 2.43 there are not technical specification requirements for calculating MCPR. With TPF greater than 2.43 the daily requirement for calculating MCPR is sufficient since power distribution shifts are very slow when there have not been significant power or control rod changes. The requirement for calculating MCPR when a limiting control pattern is approached insures that MCPR will be known following a change in power or power shape (regardless of magnitude) that could place operation at a thermal limit.

TABLE 3.2.B (Cont'd.)

INSTRUMENTATION THAT INITIATES OR CONTROLS THE CORE AND CONTAINMENT COOLING SYSTEMS

Minimum No. of Operable Instrument Channels Per Trip System(1)	Trip Function	Trip Level Setting	Number of Instrument Channels Provided by Design	Remarks
2	Reactor High Water Level	$\leq$+45 in. indicated level	2 Inst. Channels	Trips HPCI and RCIC turbines.
1	Reactor Low Level (inside shroud)	$\geq$+312 in. above vessel zero (2/3 core height)	2 Inst. Channels	Prevents inadvertent operation of containment spray during accident condition.
2	Containment High Pressure	$1 < p < 2$ psig	4 Inst. Channels	Prevents inadvertent operation of containment spray during accident condition.
1	Confirmatory Low Level	$\geq$+6 in. indicated level	2 Inst. Channels	ADS Permissive
2	High Drywell Pressure	$\leq$2 psig	4 HPCI Inst. Channels 4 RHR & Core Spray Inst. Channels	1. Initiates Core Spray LPCI; HPCI. 2. Initiates starting of Diesel Generators

Amendment No. 14

Dated: JAN 29 1976

TABLE 3.2.A

INSTRUMENTATION THAT INITIATES OR CONTROLS THE CORE AND CONTAINMENT COOLING SYSTEMS

Minimum No. of Operable Instrument Channels Per Trip System (1)	Trip Function	Trip Level Setting	Number of Instrument Channels Provided by Design	Remarks
2	Reactor Low Pressure	300-350 psig	4 Inst. Channels	Permissive for opening Core Spray and LPCI Admission valves. Coincident with high drywell pressure, starts LPCI and Core Spray pumps.
1	Reactor Low Pressure	$50 \leq P \leq 75$ psig	2 Inst. Channels	In conjunction with PCIS signal permits closure of RHR (LPCI) injection valves.
2	Reactor Drywell Pressure	≤ 2 psig	4 Inst. Channels	1. In conjunction with Low-Low Reactor Water Level, 120 second time delay and LPCI or Core Spray pump running, initiates Auto Blowdown (ADS).

Amendment No. 14

Dated: JAN 29 1976

TABLE 3.2.B

INSTRUMENTATION THAT INITIATES OR CONTROLS THE CORE AND CONTAINMENT COOLING SYSTEMS

Minimum No. of Operable Instrument Channels Per Trip System (1)	Trip Function	Trip Level Setting	Number of Instrument Channels Provided by Design	Remarks
1	Core Spray Sparger to Reactor Pressure Vessel d/p	5 (± 1.5) psid	2 Inst. Channels	Alarm to detect core spray sparger pipe break.
2	Condensate Storage Tank Low Level	≥5' above tank bottom	2 Inst. Channels	Provides interlock to HPCI pump suction valves.
2	Supression Chamber	≤5" above normal water level	2 Inst. Channels	Transfers HPCI pump suction to suppression chamber.

Amendment No. 14

Dated: JAN 2 9 1976

TABLE 3.2.B (Cont'd)

INSTRUMENTATION THAT INITIATES OR CONTROLS THE CORE AND CONTAINMENT COOLING SYSTEMS

Minimum No. of Operable Instrument Channels Per Trip System (1)	Trip Function	Trip Level Setting	Number of Instrument Channels Provided by Design	Remarks
1	RCIC Turbine High Flow	$\leq$ 450" H_2O (2)	2 Inst. Channels	
2	RCIC Turbine Compartment Wall	$\leq$ 200 deg. F (2)	4 Inst. } 16 Inst.	
6	RCIC Steam Line Area Temp.	$\leq$ 200 deg. F (2)	12 Inst. }	
2	RCIC Steam Line Low Pressure	100 >P >50 psig (2)	4 Inst.	
1	HPCI Turbine Steam Line High Flow	$\leq$ 225" H_2O (3)	2 Inst. Channels	

Amendment No. 14

Dated: JAN 29 1976

TABLE 3.2.B (Cont'd.)

INSTRUMENTATION THAT INITIATES OR CONTROLS THE CORE AND CONTAINMENT COOLING SYSTEMS

Minimum No. of Operable Instrument Channels Per Trip System (1)	Trip Function	Trip Level Setting	Number of Instrument Channels Provided By Design	Remarks
4 (5)	HPCI Steam Line Low Pressure	100 > p > 50 psig (3)	4 Inst.	
2	HPCI Turbine Compartment Temperature	≤ 200 deg. F (3)	4 Inst. } 16 Inst.	
4	HPCI Steam Line Area Temperature	≤ 200 deg. F (3)	8 Inst. } 16 Inst.	
2	HPCI/RHR Valve Station Area Temperature	≤ 200 deg. F (3)	4 Inst. } 16 Inst.	
1 per 4KV Bus	4KV Emergency Bus Undervoltage Relay	25% ± 5% of Rated Voltage		1. Trips all loaded breakers 2. Fast transfer permissive 3. Dead bus start of diesel
1 per 4KV Bus	4KV Emergency Bus Sequential Loading Relay	95% $^{+0\%}_{-10\%}$ of Rated Voltage		Permits sequential starting of vital loads
2 per 4KV Bus	Emergency Transformer Undervoltage	60% ± 5% of Rated Voltage		1. Trips emergency transformer feed to 4KV emergency bus 2. Fast Transfer permissive
1	LPCI Cross-Connect Position	NA	1 Inst.	Initiates annunciation when valve is not closed

NOTES FOR TABLE 3.2.B

1. Whenever any CSCS subsystem is required by Section 3.5 to be operable, there shall be two operable trip systems. If the first column cannot be met for one of the trip systems, that trip system shall be placed in the tripped condition or the reactor shall be placed in the Cold Shutdown Condition within 24 hours.

2. Close isolation valves in RCIC subsystem.

3. Close isolation valves in HPCI subsystem.

4. Instrument set point corresponds to 18" above the top of active fuel.

5. HPCI has only one trip system for these sensors.

TABLE 4.2.B

MINIMUM TEST AND CALIBRATION FREQUENCY FOR CSCS

Instrument Channel	Instrument Functional Test	Calibration Frequency	Instrument Chec
1) Reactor Water Level	(1)	Once/3 months	Once/day
2) Drywell Pressure	(1)	Once/3 months	None
3) Reactor Pressure	(1)	Once/3 months	None
4) Auto Sequencing Timers	NA	Once/operating cycle	None
5) ADS - LPCI or CS Pump Disch. Pressure Interlock	(1)	Once/3 months	None
6) Trip System Bus Power Monitors	(1)	None	None
)			
7) Core Spray Sparger d/p	(1)	once/6 months	Once/day
8) Steam Line High Flow (HPCI & RCIC)	(1)	Once/3 months	None
9) Steam Line High Temp. (HPCI & RCIC)	(1)	Once/operating cycle	Once/day
10) Safeguards Area High Temp.	(1)	Once/3 months	None
11) HPCI and RCIC Steam Line Low Pressure	(1)	Once/3 months	None
12) HPCI Suction Source Levels	(1)	Once/3 months	None
13) LKV Emergency Power System Voltage Relays	Once/operating cycle	Once/5 year	None
14) ADS Relief Valves Bellows Pressure Switches	Once/operating cycle	Once /operating cycle	None
15) LPCI/Cross Connect Valve Position	Once/refueling outage	N/A	N/A

PBAPS

TABLE 4.2.B

MINIMUM TEST AND CALIBRATION FREQUENCY FOR CSCS

Logic System Functional Test (4) (6)	Frequency
1) Core Spray Subsystem	Once/6 months
2) Low Pressure Coolant Injection Subsystem	Once/6 months
3) Containment Cooling Subsystem	Once/6 months
4) HPCI Subsystem	Once/6 months
5) HPCI Subsystem Auto Isolation	Once/6 months
6) ADS Subsystem	Once/6 months
7) RCIC Subsystem Auto Isolation	Once/6 months
8) Area Cooling for Safeguard System	Once/6 months

3.2 BASES (Cont'd)

Pressure instrumentation is provided to close the main steam isolation valves in RUN Mode when the main steam line pressure drops below 850 psig. The Reactor Pressure Vessel thermal transient due to an inadvertent opening of the turbine bypass valves when not in the RUN Mode is less severe than the loss of feedwater analyzed in section 14.5 of the FSAR, therefore, closure of the Main Steam Isolation valves for thermal transient protection when not in RUN mode is not required.

The HPCI high flow and temperature instrumentation are provided to detect a break in the HPCI steam piping. Tripping of this instrumentation results in actuation of HPCI isolation valves. Tripping logic for the high flow is a 1 out of 2 logic.

Temperature is monitored at four (4) locations with four (4) temperature sensors at each location. Two (2) sensors at each location are powered by "A" direct current control bus and two (2) by "B" direct current control bus. Each pair of sensors, e.g., "A" or "B", at each location are physically separated and the tripping of either "A" or "B" bus sensor will actuate HPCI isolation valves.

The trip settings of $\leq$ 300% of design flow for high flow and 200°F for high temperature are such that core uncovery is prevented and fission product release is within limits.

The RCIC high flow and temperature instrumentation are arranged the same as that for the HPCI. The trip setting of $\leq$ 300% for high flow and 200°F for temperature are based on the same criteria as the HPCI.

The Reactor Water Cleanup System high flow and temperature instrumentation are arranged similar to that for the HPCI. The trip settings are such that core uncovery is prevented and fission product release is within limits.

The instrumentation which initiates CSCS action is arranged in a dual bus system. As for other vital instrumentation arranged in this fashion, the Specification preserves the effectiveness of the system even during periods when maintenance or testing is being performed. An exception to this is when logic functional testing is being performed.

The control rod block functions are provided to prevent excessive control rod withdrawal so that MCPR does not decrease to 1.06. The trip logic for this function is 1 out of n: e.g., any trip on one of six APRM's, eight IRM's, or four SRM's will result in a rod block.

The minimum instrument channel requirements assure sufficient instrumentation to assure the single failure criteria is met. The minimum instrument channel requirements for the RBM may be reduced by one for maintenance, testing, or calibration. This time period is only 3% of the operating time in a month and does not significantly increase the risk of preventing an inadvertent control rod withdrawal.

3.2 BASES (Cont'd)

The APRM rod block function is flow biased and prevents a significant reduction in MCPR, especially during operation at reduced flow. The APRM provides gross core protection; i.e., limits the gross core power increase from withdrawal of control rods in the normal withdrawal sequence. The trips are set so that MCPR is maintained greater than 1.6.

The RBM rod block function provides local protection of the core; i.e., the prevention of boiling transition in a local region of the core, for a single rod withdrawal error from a limiting control rod pattern.

The IRM rod block function provides local as well as gross core protection. The scaling arrangement is such that trip setting is less than a factor of 10 above the indicated level.

A downscale indication on an APRM or IRM is an indication the instrument has failed or the instrument is not sensitive enough. In either case the instrument will not respond to changes in control rod motion and thus, control rod motion is prevented. The downscale trips are set at 2.5 indicated on scale.

The flow comparator and scram discharge volume high level components have only one logic channel and are not required for safety. The flow comparator must be bypassed when operating with one recirculation water pump.

The refueling interlocks also operate one logic channel, and are required for safety only when the mode switch is in the refueling position.

For effective emergency core cooling for small pipe breaks, the HPCI system must function since reactor pressure does not decrease rapid enough to allow either core spray or LPCI to operate in time. The automatic pressure relief function is provided as a backup to the HPCI in the event the HPCI does not operate. The arrangement of the tripping contacts is such as to provide this function when necessary and minimize spurious operation. The trip settings given in the specification are adequate to assure the above criteria are met. The specification preserves the effectiveness of the system during periods of maintenance, testing, or calibration, and also minimizes the risk of inadvertent operation; i.e., only one instrument channel out of service.

Two air ejector off-gas monitors are provided and when their trip point is reached, cause an isolation of the air ejector off-gas line. Isolation is initiated when both instruments reach their high trip point or one has an upscale

LIMITING CONDITION FOR OPERATION

3.3.B (cont'd)

4. Control rods shall not be withdrawn for startup or refueling unless at least two source range channels have an observed count rate equal to or greater than three counts per second.

5. During operation with limiting control rod patterns, as determined by the designated qualified personnel, either:

   a. Both RBM channels shall be operable:
   or

   b. Control rod withdrawal shall be blocked:
   or

   c. The operating power level shall be limited so that the MCPR will remain above 1.06 assuming a single error that results in complete withdrawal of any single operable control rod.

C. Scram Insertion Times

1. The average scram insertion time, based on the deenergization of the scram pilot valve solenoids as time zero, of all operable control rods in the reactor power operation condition shall be no greater than:

Above 950 psig

% Inserted From Fully Withdrawn	Avg. Scram Insertion Times (sec)
5	0.375
20	0.90
50	2.0
90	5.0

SURVEILLANCE REQUIREMENTS

4.3.B (cont'd)

4. Prior to control rod withdrawal for startup or during refueling, verify that at least two source range channels have an observed count rate of at least three counts per second.

5. When a limiting control rod pattern exists, an instrument functional test of the RBM shall be performed prior to withdrawal of the designated rod(s).

C. Scram Insertion Times

1. After each refueling outage all operable fully withdrawn insequence rods shall be scram time tested during operational hydrostatic testing or during startup from the fully withdrawn position with the nuclear system pressure above 800 psig. This testing shall be completed prior to synchronizing the main turbine generator initially following restart of the plant.

LIMITING CONDITION FOR OPERATION

3.3.C (Cont'd.)

Below 950 psig

% Inserted From Fully Withdrawn	Avg. Scram Insertion Times (Sec)
5	0.475
20	1.10
50	2.0
90	5.0

2. The average of the scram insertion times for the three fastest control rods of all groups of four control rods in a two-by-two array shall be no greater than:

Above 950 psig

% Inserted From Fully Withdrawn	Avg. Scram Insertion Times (Sec)
5	0.398
20	0.954
50	2.120
90	5.300

Below 950 psig

% Inserted from Fully Withdrawn	Avg. Scram Insertion Times (Sec)
5	0.504
20	1.166
50	2.12
90	5.300

3. The maximum scram insertion time for 90% insertion of any operable control rod shall not exceed 7.00 seconds.

SURVEILLANCE REQUIREMENT

4.3.C (Cont'd.)

After exceeding 30 percent power all previously untested operable control rods shall be tested as described above prior to exceeding 40 percent power.

2. Whenever such scram time measurements are made (such as when a scram occurs and the scram insertion time recorders are operable) an evaluation shall be made to provide reasonable assurance that proper control rod drive performance is being maintained.

3.3 and 4.3 BASES (Cont'd.)

A limiting control rod pattern is a pattern which results in the core being on a thermal hydraulic limit (i.e., operating on a limiting value for APLHGR, LHGR, or MCPR as defined in Technical Specifications 3.5.I., 3.5.J., and 3.5.K.) During use of such patterns, it is judged that testing of the RBM system prior to withdrawal of such rods to assure its operability will assure that improper withdrawal does not occur. It is the responsibility of the Reactor Engineer to identify these limiting patterns and the designated rods either when the patterns are initially established or as they develop due to the occurrence of inoperable control rods in other than limiting patterns. Other personnel qualified to perform this function may be designated by the station superintendent.

3.3 and 4.3 BASES (Cont'd.)

C. Scram Insertion Times

The control rod system is designed to bring the reactor subcritical at a rate fast enough to prevent fuel damage; i.e., to prevent the MCPR from becoming less than 1.06. The limiting power transient is that resulting from turbine bypass system. Analysis of this transient shows that the negative reactivity rates resulting from the scram (FSAR Figure 3.6.14) with the average response of all the drives as given in the above specification, provide the required protection, and MCPR remains greater than 1.06.

The numerical values assigned to the specified scram performance are based on the analysis of data from other BWR's with control rod drives the same as those on Peach Bottom.

The occurrence of scram times within the limits, but significantly longer than the average, should be viewed as an indication of a systematic problem with control rod drives especially if the number of drives exhibiting such scram times exceeds eight, the allowable number of inoperable rods.

In the analytical treatment of the transients, 390 milliseconds are allowed between a neutron sensor reaching the scram point and the start of negative reactivity insertion. This is adequate and conservative when compared to the typically observed time delay of about 270 milliseconds. Approximately 70 milliseconds after neutron flux reaches the trip point, the pilot scram valve solenoid power supply voltage goes to zero and approximately 200 milliseconds later, control rod motion begins. The 200 milliseconds are included in the allowable scram insertion times specified in Specification 3.3.C. In addition the control rod drop accident has been analyzed in NEDO 10527 and its supplements 1 & 2 for the scram times given in specification 33.C.

Surveillance requirement 4.3.C was originally written and used as a diagnostic surveillance technique during pre-operational and startup testing of Dresden 2 & 3 for the early discovery and identification of significant changes in drive scram performance following major changes in plant operation. The reason for the application of this surveillance was the unpredictable and degraded scram performance of drives at Dresden 2. The cause of the slower scram performances has been conclusively

3.3 and 4.3 BASES (Cont'd.)

identified as the resistance to drive motion by an internal control rod drive filter. The filter had been loaded by foreign material, probably accelerated by construction debris. The sudden changes in drive scram performance which were observed at that plant were due to stepwise release into reactor coolant of particulate matter as the reactor and subsystems were subsequently started up. The design of the present control rod drive (Model 7RDB144B) is grossly improved by the relocation of the filter to a location out of the scram drive path; i.e., it can no longer interfere with scram performance, even if completely blocked.

The degraded performance of the original drive (CRD7RDB144A) under dirty operating conditions and the insensitivity of the redesigned drive (CRD7RDB144B) has been demonstrated by a series of engineering tests under simulated reactor operating conditions. The successful performance of the new drive under actual operating conditions has also been demonstrated by consistently good in-service test results for plants using the new drive and may be inferred from plants using the older model drive with a modified (larger screen size) internal filter which is less prone to plugging. Data has been documented by surveillance reports in various operating plants. These include Oyster Creek, Monticello, Dresden 2 and Dresden 3. Dresden 2 has currently 27"B" type drives. Approximately 4718 drive tests have been recorded to date. Data documenting the successful performance of the modified drive has been submitted to the AEC with a letter from Commonwealth Edison Company to the Commission dated November 6, 1972 with the subject of the letter being Proposed Changes to Quad-Cities Power Station Operating License, including Appendices A and B, DPR 29 and 30, AEC Dkts 50-254 and 50-265.

Although the cause and cure of the dirt problem were known at the time of the writing of the Dresden 3 Tech Specs, the progressive surveillance requirement was incorporated into that technical specification to ostensibly detect any other unforeseen drive problems. The possibility of this being a temporary requirement may be inferred from the provision for review of all surveillance requirements after the first operating cycle.

LIMITING CONDITIONS FOR OPERATION	SURVEILLANCE REQUIREMENT
3.5.E Automatic Depressurization System (ADS)	4.5.E Automatic Depressurization System (ADS)
1. The Automatic Depressurization Subsystem shall be operable whenever there is irradiated fuel in the reactor vessel and the reactor pressure is greater than 105 psig and prior to a startup from a Cold Condition, except as specified in 3.5.E.2 below.	1. During each operating cycle the following tests shall be performed on the ADS: A simulated automatic actuation test shall be performed prior to startup after each refueling outage.
2. From and after the date that one valve in the automatic depressurization subsystem is made or found to be inoperable for any reason, continued reactor operation is permissible only during the succeeding seven days unless such valve is sooner made operable, provided that during such seven days the HPCI subsystem is operable.	2. When it is determined that one valve of the ADS is inoperable, the ADS subsystem actuation logic for the other ADS valves and the HPCI subsystem shall be demonstrated to be operable immediately and at least weekly thereafter.
3. If the requirements of 3.5.E cannot be met, an orderly shutdown shall be initiated and the reactor pressure shall be reduced to at least 105 psig within 24 hours.	

LIMITING CONDITIO OR RATION	SU ILLANCE REQUIREMENT
3.5.I. Average Planar LHGR	4.5.I. Average Planar LHGR
During steady state power operation, the APLHGR for each type of fuel as a function of average planar exposure shall not exceed the limiting value shown in Figure 3.5.1-C or 3.5.1-D as applicable. If at any time during steady state operation it is determined by normal surveillance that the limiting value for APLHGR is being exceeded, action shall then be initiated to restore operation to within the prescribed limits. Surveillance and corresponding action shall continue until the prescribed limits are again being met.	The APLHGR for each type of fuel as a function of average planar exposure shall be determined daily during reactor operation at ≥ 25% rated thermal power. This daily requirement is relaxed provided there has been no significant change in power level or distribution as determined by the reactor engineer.
3.5.J. Local LHGR	4.5.J. Local LHGR
During steady state power operation, the linear heat generation rate (LHGR) of any rod in any fuel assembly at any axial location shall not exceed the maximum allowable LHGR as calculated by the following equation:	The LHGR as a function of core height shall be checked daily during reactor operation at ≥ 25% rated thermal power. This daily requirement is relaxed provided there has been no significant change in power level or distribution as determined by the reactor engineer.

$$LHGR \leq LHGR_d \left[1 - (\Delta P/P)_{max}(L/LT)\right]$$

$LHGR_d$ = Design LHGR = 18.5 kW/ft

$(\Delta P/P)_{max}$ = Maximum power spiking penalty = 0.026

LT = Total core length = 12.167 ft Unit 3

L = Axial position above bottom of core

LIMITING CONDITION OF OPERATION	SURVEILLANCE REQUIREMENT
3.5.J. Local LHGR (Cont'd.) If at any time during steady state operation it is determined by normal surveillance that the limiting value for LHGR is being exceeded, action shall then be initiated to restore operation to within the prescribed limits. Surveillance and corresponding action shall continue until the prescribed limits are again being met.	
3.5.K. Minimum Critical Power Ratio (MCPR) During steady state power operation, MCPR shall be $\geq$ 1.25 at rated power and flow. For core flows other than rated the MCPR shall be $\geq$ 1.25 times k_f, where k_f is as shown in Figure 3.5.1-E. If at any time during steady state operation it is determined by normal surveillance that the limiting value for MCPR is being exceeded, action shall then be initiated to restore operation to within the prescribed limits. Surveillance and corresponding limits are again being met.	4.5.K. Minimum Critical Power Ratio (MCPR) MCPR shall be determined daily during reactor power operation at $\geq$ 25% rated thermal power. This daily requirement is relaxed provided there has been no significant change in power level or distribution as determined by the reactor engineer.

3.5 BASES (Cont'd)

H. Engineered Safeguards Compartments Cooling and Ventilation

One unit cooler in each pump compartment is capable of providing adequate ventilation flow and cooling. Engineering analyses indicate that the temperature rise in safeguards compartments without adequate ventilation flow or cooling is such that continued operation of the safeguards equipment or associated auxiliary equipment cannot be assured. Ventilation associated with the High Pressure Service Water Pumps is also associated with the Emergency Service Water pumps, and is specified in Specification 3.9.

I. Average Planar Linear Heat Generation Rate (APLHGR)

This specification assures that the peak cladding temperature following the postulated design basis loss-of-coolant accident will not exceed the limit specified in the 10 CFR Part 50, Appendix K.

The peak cladding temperature (PCT) following a postulated loss-of-coolant accident is primarily a function of the average heat generation rate of all the rods of a fuel assembly at any axial location and is only dependent, secondarily on the rod to rod power distribution within an assembly. The peak clad temperature is calculated assuming a LHGR for the highest powered rod which is equal to or less than the design LHGR corrected for densification. This LHGR times 1.02 is used in the heat-up code along with the exposure dependent steady state gap conductance and rod-to-rod local peaking factors. The Technical Specification APLHGR is this LHGR of the highest powered rod divided by its local peaking factor. The limiting value for APLHGR is shown in Figure 3.5.1-C and D.

The calculational procedure used to establish the APLHGR shown on Figures 3.5.1-C and D is based on a loss-of-coolant accident analysis. The analysis was performed using General Electric (GE) calculational models which are consistent with the requirements of Appendix K to 10 CFR Part 50. A complete discussion of each code employed in the analysis is presented in Reference 1. Differences in this analysis as compared to previous analyses performed with Reference 1 are: (1) The analyses assumes a fuel assembly planar power consistent with 102% of the MAPLHGR shown in Figure 3.5.1-C and D; (2) Fission product decay is computed assuming an energy release rate of 200 MEV/Fission; (3) Pool boiling is assumed after nucleate boiling is lost during the flow stagnation period; (4) The effects of core spray entrainment and counter-current flow limiting as described in Reference 2, are included in the reflooding calculations.

A list of the significant plant input parameters to the loss-of-coolant accident analysis is presented in Table 3.5-1.

J. Local LHGR

This specification assures that the linear heat generation rate in any rod is less than the design linear heat generation if fuel pellet densification is postulated. The power spike penalty specified is based on the analysis presented in Section 3.2.1 of Reference 1 and in References 2 and 3, and assumes a linearly increasing variation in axial gaps between core bottom and top, and assures with a 95% confidence, that no more than one fuel rod exceeds the design linear heat generation rate due to power spiking. The LHGR as a function of core height shall be checked daily during reactor operation at $\geq$ 25% power to determine if fuel burnup, or control rod movement has caused changes in power distribution. For LHGR to be a limiting value below 25% rated thermal power, the MTPF would have to be greater than 10 which is precluded by a considerable margin when employing any permissible control rod pattern.

K. Minimum Critical Power Ratio (MCPR)

Operating Limit MCPR

The required operating limit MCPR's at steady state operating conditions as specified in Specification 3.5.K are derived from the established fuel cladding integrity Safety Limit MCPR of 1.06, and an analysis of abnormal operational transients presented in Reference 1. For any abnormal operating transient analysis evaluation with the initial condition of the reactor being at the steady state operating limit it is required that the resulting MCPR does not decrease below the Safety Limit MCPR at any time during the transient assuming instrument trip setting given in Specification 2.1.

To assure that the fuel cladding integrity Safety Limit is not exceeded during any anticipated abnormal operational transient, the most limiting transients have been analyzed to determine which result in the largest reduction in critical power ratio (CPR). The type of transients evaluated were loss of flow, increase in pressure and power, positive reactivity insertion, and coolant temperature decrease.

The limiting transient which determines the required steady state MCPR limit is the turbine trip without bypass. This transient yields the largest Δ MCPR. When added to the safety limit MCPR of 1.06 the required minimum operating limit MCPR of specification 3.5.K are obtained.

Prior to the analysis of abnormal operational transients an initial fuel bundle MCPR was determined. This parameter is based on the bundle flow calculated by a GE multi-channel steady state flow distribution model as described in Section 4.4 of Reference 2 and on core parameters shown in Table 7-1 (pages 7-6) of Reference 1.

The evaluation of a given transient begins with the system initial parameters shown in Table 7-1 (page 7-6) of Reference 1 that are input to a GE core dynamic behavior transient computer program described in Reference 3. Also, the void reactivity coefficients that were input to the transient calculational procedure are based on a new method of calculation termed NEV which provides a better agreement between the calculated and plant instrument power distribution. The outputs of this program along with the initial MCPR from the input for further analyses of the thermally limiting bundle with the single channel transient thermal hydraulic SCAT code described in Reference 4. The principal result of this evaluation is the reduction in MCPR caused by the transient.

A brief summary of the analytical methods used to determine the nuclear characteristics is given in Section 5.3 of Reference 2.

L. References

1. "Peach Bottom Atomic Power Station Unit 3 Channel Inspection and Safety Analyses with Bypass Holes Plugged," NEDO-21140, December 1975.

2. General Electric BWR Generic Reload Application for 8 x 8 fuel, NEDO-20360, Revision 1, November 1974.

3. R. B. Linford, Analytical Methods of Plant Transient Evaluations for the GE BWR, February 1973, (NEDO-10802).

4. General Electric Company Analytical Model for Loss-of-Coolant Analysis in Accordance with 10 CFR Part 50, Appendix K, NEDE-20566 (Draft), August 1974.

TABLE 3.5-1

PEACH BOTTOM 3 (PLUGGED)

SIGNIFICANT INPUT PARAMETERS TO THE

LOSS-OF-COOLANT ACCIDENT ANALYSIS

PLANT PARAMETERS:

Core Thermal Power	3440 MWt which corresponds to 105% of rated steam flow
Vessel Steam Output	14.049×10^6 lbm/h which corresponds to 105% of rated steam flow
Vessel Steam Dome Pressure	1055 psia
Design Basis Recirculation Line Break Area	4.28* and 1.0
Recirculation Line Break Area for Small Breaks	1.0 and 0.07

FUEL PARAMETERS:

Fuel Type	Fuel Bundle Geometry	Peak Technical Specification Linear Heat Generation Rate (kW/ft)	Design Axial Peaking Factor	Initial Minimum Critical Power Ratio
Initial Core	7 x 7	18.5	1.5	1.17

A more detailed list of input to each model and its source is presented in Section II of Reference 1.

*The DBA area includes: the area of the recirculation suction line (3.66 ft^2); plus the throat area of ten jet pumps (0.54 ft.) and the reactor water cleanup system line (0.08 $ft.^2$).

4.5 BASES

Core and Containment Cooling Systems Surveillance Frequencies

The testing interval for the core and containment cooling systems is based on industry practice, quantitative reliability analysis, judgment and practicality. The core cooling systems have not been designed to be fully testable during operation. For example, in the case of the HPCI, automatic initiation during power operation would result in pumping cold water into the reactor vessel which is not desirable. Complete ADS testing during power operation causes an undesirable loss-of-coolant inventory. To increase the availability of the core and containment cooling systems, the components which make up the system; i.e., instrumentation, pumps, valves, etc., are tested frequently. The pumps and motor operated injection valves are also tested each month to assure their operability. A simulated automatic actuation test once each cycle combined with frequent tests of the pumps and injection valves is deemed to be adequate testing of these systems.

When components and subsystems are out-of-service, overall core and containment cooling reliability is maintained by demonstrating the operability of the remaining equipment. The degree of operability to be demonstrated depends on the nature of the reason for the out-of-service equipment. For routine out-of-service periods caused by preventative maintenance, etc., the pump and valve operability checks will be performed to demonstrate operability of the remaining components. However, if a failure, design deficiency, caused the outage, then the demonstration of operability should be thorough enough to assure that a generic problem does not exist. For example, if an out-of-service period were caused by failure of a pump to deliver rated capacity due to a design deficiency, the other pumps of this type might be subjected to a flow rate test in addition to the operability checks.

Redundant operable components are subjected to increased testing during equipment out-of-service times. This adds further conservatism and increases assurance that adequate cooling is available should the need arise.

4.5 I&J Surveillance Requirements Bases

Average and Local LHGR

The LHGR shall be checked daily to determine if fuel burnup or control rod movement has cuased changes in power distribution. Since changes due to burnup are slow and only a few control rods are moved daily, a daily check of power distribution is adequate.

4.5.K Minimum Critical Power Ratio (MCPR) - Surveillance Requirement

At core thermal power levels less than or equal to 25%, the reactor will be operating at minimum recirculation pump speed and the moderator void content will be very small. For all designated control rod patterns which may be employed at this point, operating plant experience indicated that the resulting MCPR value is in excess of requirements by a considerable margin. With this low void content, any inadvertent core flow increase would only place operation in a more conservative mode relative to MCPR. During initial start-up testing of the plant, a MCPR evaluation will be made at 25% thermal power level with minimum recirculation pump speed. The MCPR margin will thus be demonstrated such that future MCPR evaluation below this power level will be shown to be unnecessary. The daily requirement for calculating MCPR above 25% rated thermal power is sufficient since power distribution shifts are very slow when there have not been significant power or control rod changes. The requirement for calculating MCPR when a limiting control rod pattern is approached ensures that MCPR will be known following a change in power or power shape (regardless of magnitude) that could place operation at a thermal limit.

4.5.L MCPR Limits for Core Flows Other than Rated

The purpose of the K_f factor is to define operating limits at other than rated flow conditions. At less than 100% flow the required MCPR is the product of the operating limit MCPR and the K_f factor. Specifically, the K_f factor provides the required thermal margin to protect against a flow increase transient. The most limiting transient initiated from less than rated flow conditions is the recirculation pump speed up caused by a motor-generator speed control failure.

For operation in the automatic flow control mode, the K_f factors assure that the operating limit MCPR of 1.25 will not be violated should the most limiting transient occur at less than rated flow. In the manual flow control mode, the K_f factors assure that the Safety Limit MCPR will not be violated for the same postulated transient event.

The K_f factor curves shown in Figure 3.5.1-E were developed generically and are applicable to all BWR/2, BWR/3, and BWR/4 reactors. The K_f factors were derived using the flow control line corresponding to rated thermal power at rated core flow.

For the manual flow control mode, the K_f factors were calculated such that at the maximum flow rate (as limited by the pump scoop tube set point) and the corresponding core power (along the rated flow control line), the limiting bundle's relative power was

adjusted until the MCPR was slightly above the Safety Limit. Using this relative bundle power, the MCPR's were calculated at different points along the rated flow control line corresponding to different core flows. The ratio of the MCPR calculated at a given point of core flow, divided by the operating limit MCPR determines the K_f.

For operation in the automatic flow control mode, the same procedure was employed except the initial power distribution was established such that the MCPR was equal to the operating limit MCPR at rated power and flow.

The K_f factors shown in Figure 3.5.1-E, are acceptable for Peach Bottom Unit 3 operation because the operating limit MCPR of 1.25 is greater than the original 1.20 operating limit MCPR used for the generic derivation of K_f.

4.5.M References

1. General Electric Company Analytical Model for Loss-of-Coolant Analysis in Accordance with 10 CFR Part 50, Appendix K, NEDE-20566 (Draft), submitted August 1974.

2. General Electric Refill Reflood Calculation (Supplement to SAFE Code Description) transmitted to USAEC by letter, G. L. Gyorey to V. Stello, Jr., dated December 20, 1974.

PEACH BOTTOM ATOMIC POWER STATION
UNIT 3
INITIAL CORE FUEL TYPE 2

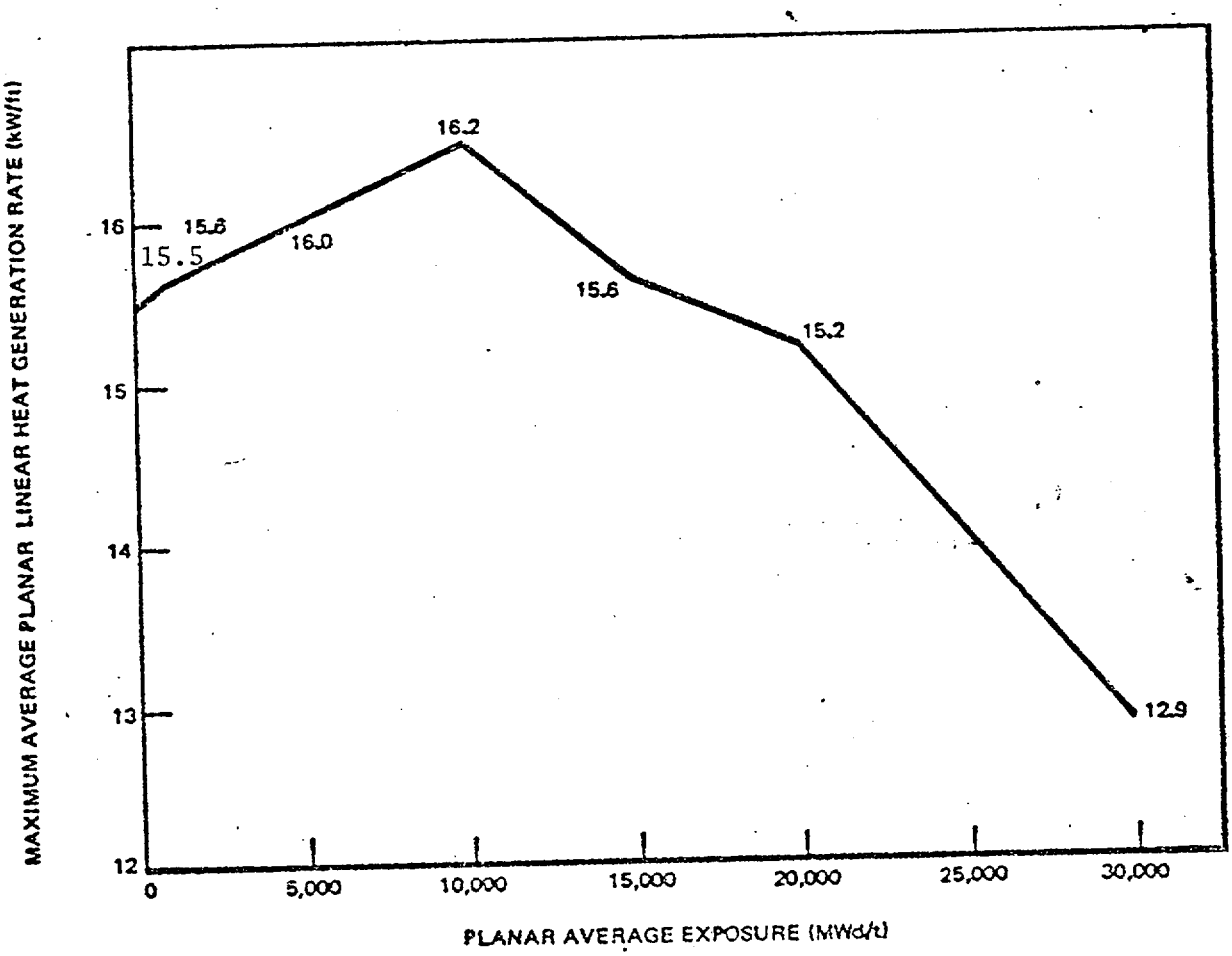

FIGURE 3.5.1.D - MAXIMUM AVERAGE LINEAR HEAT GENERATION RATE (MAPLHGR) versus PLANAR AVERAGE EXPOSURE

PEACH BOTTOM ATOMIC POWER STATION
UNIT 3
INITIAL CORE FUEL TYPES 1 & 3

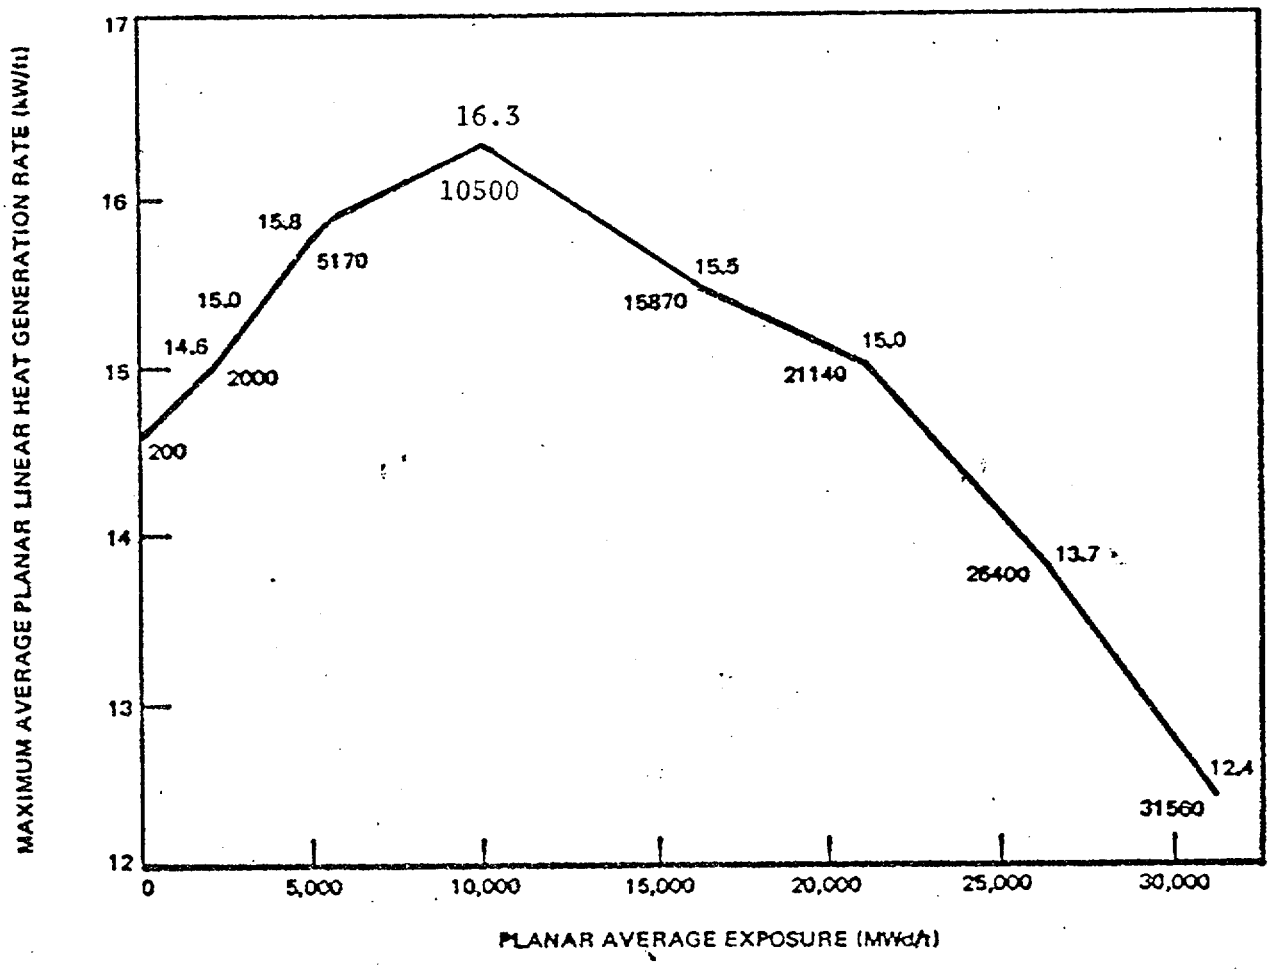

FIGURE 3.5.1.C - MAXIMUM AVERAGE LINEAR HEAT GENERATION RATE (MAPLHGR) versus PLANAR AVERAGE EXPOSURE

FIGURE 3.5.1-E

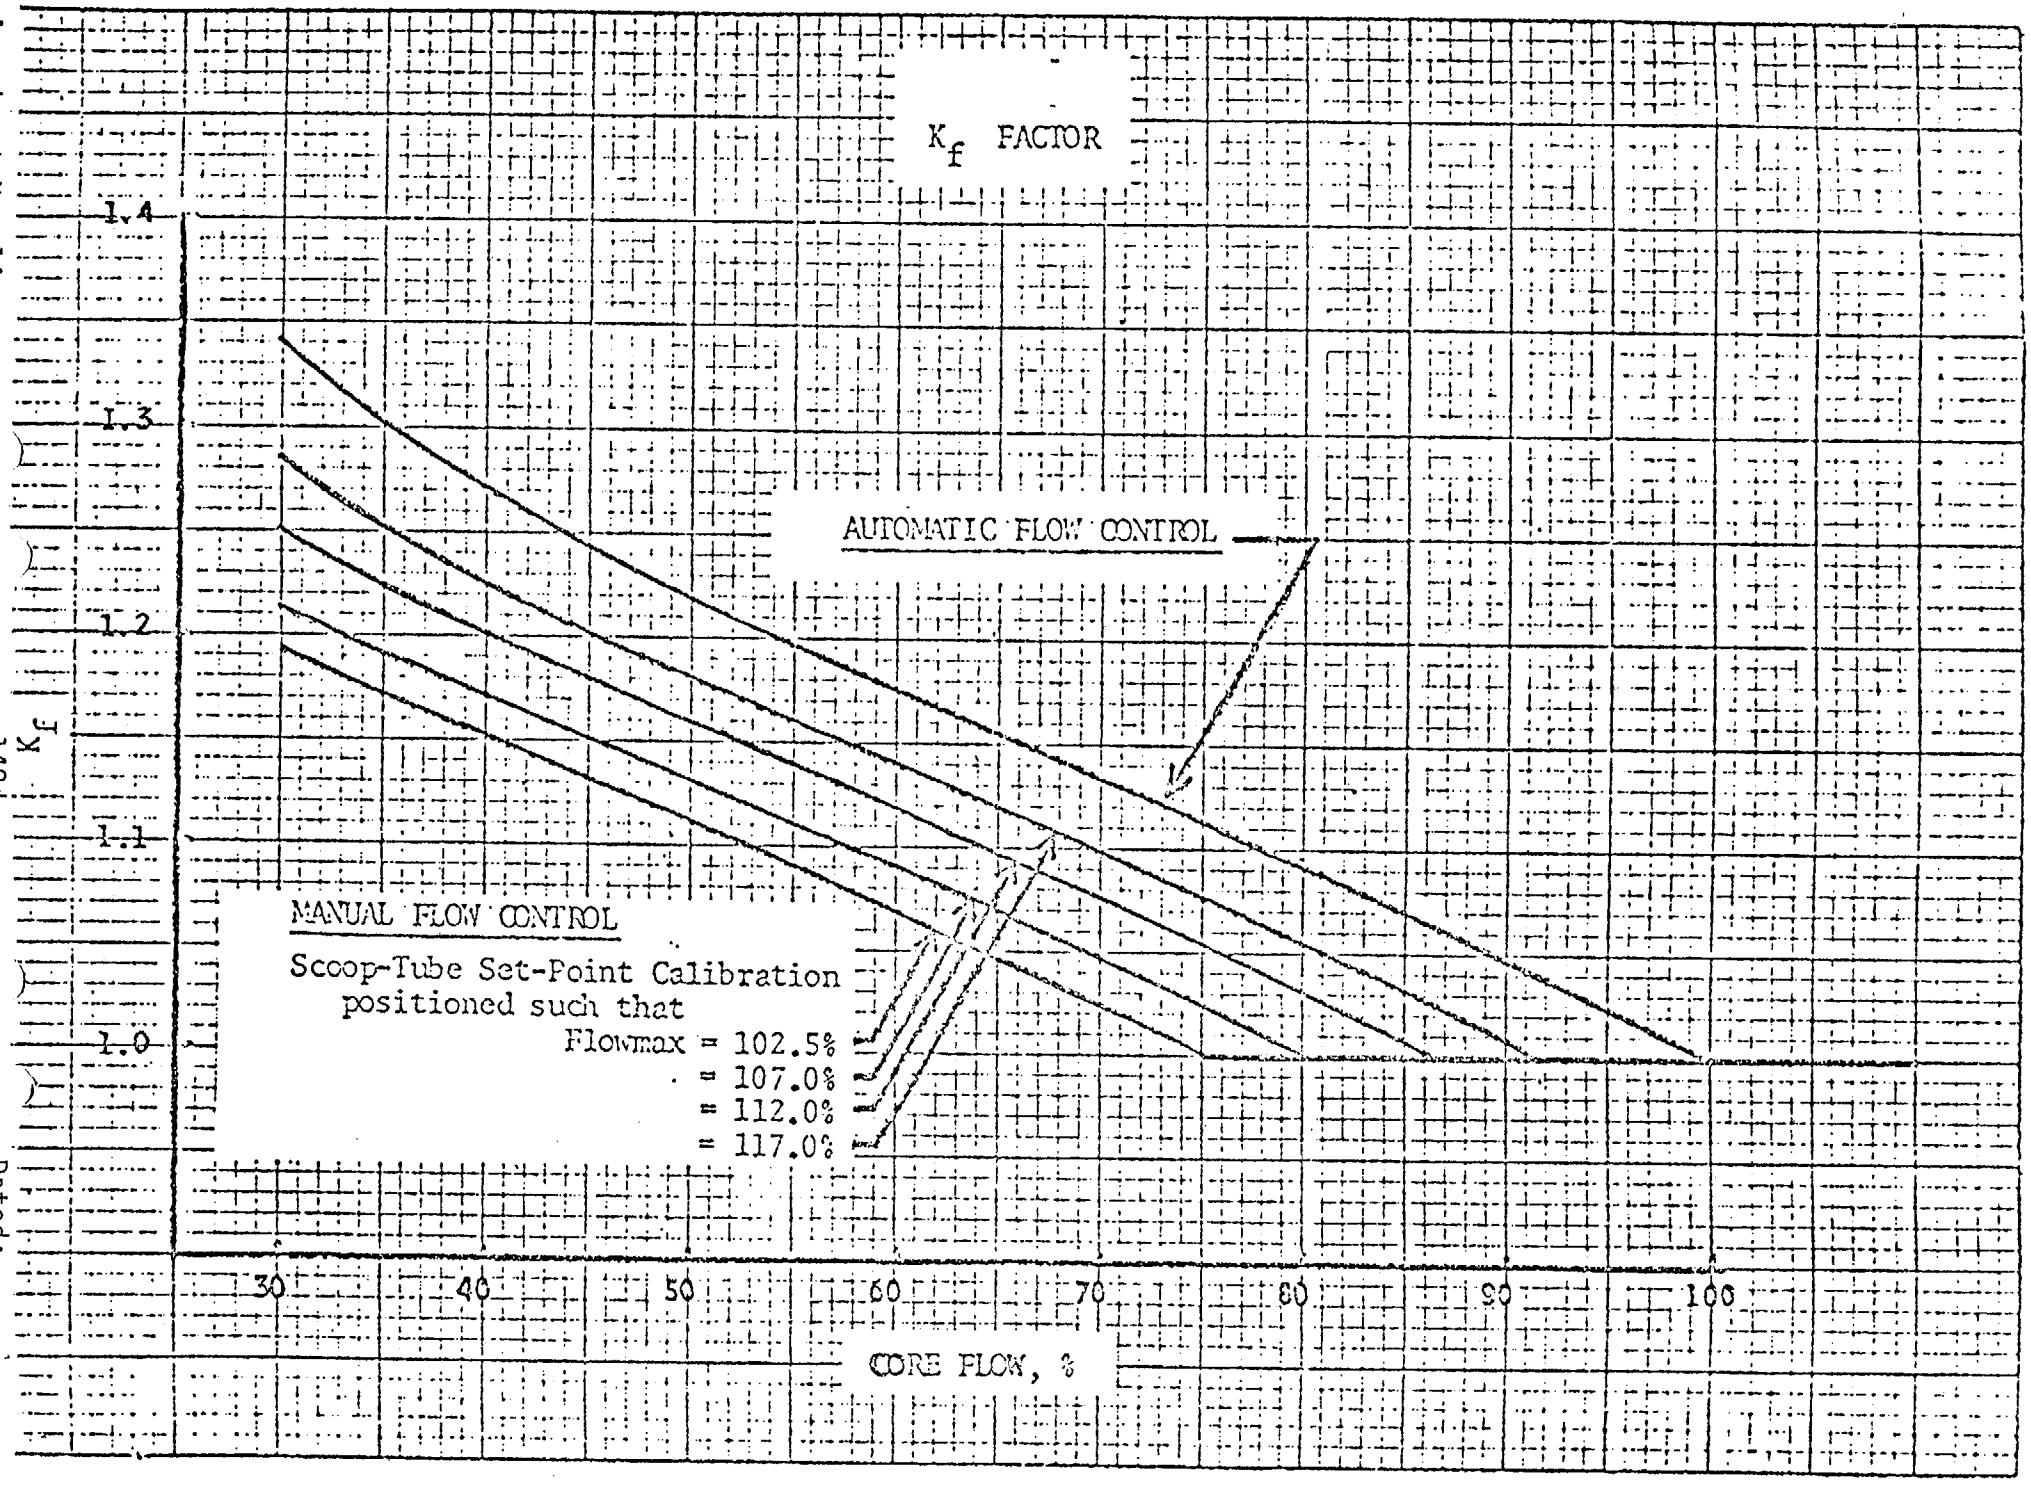
K_f FACTOR
1.4
1.3
1.2
1.1
1.0
K_f
AUTOMATIC FLOW CONTROL
MANUAL FLOW CONTROL
Scoop-Tube Set-Point Calibration positioned such that
Flowmax = 102.5%
= 107.0%
= 112.0%
= 117.0%
30
40
50
60
70
80
90
100
CORE FLOW, %

LIMITING CONDITIONS FOR OPERATION

3.6.E Jet Pumps

1. Whenever the reactor is in the startup or run modes, all jet pumps shall be operable. If it is determined that a jet pump is inoperable, an orderly shutdown shall be initiated and the reactor shall be in a Cold Shutdown Condition within 24 hours.

2. Flow indications from each of the 20 jet pumps shall be verified prior to initiation of reactor startup from a cold shutdown condition.

3. The indicated core flow is the sum of the flow indication from each of the 20 jet pumps. If flow indication failure occurs for two or more jet pumps immediate corrective action shall be taken. If flow indication for all but 1 jet pump cannot be obtained within 12 hours on orderly shutdown shall be initiated, and the reactor shall be in a cold shutdown condition within 24 hours.

SURVEILLANCE REQUIREMENTS

4.6.E Jet Pumps

1. Whenever there is recirculation flow with the reactor in the startup or run modes, jet pump operability shall be checked daily by verifying that the following conditions do not occur simultaneously:

(a) The two recirculation loops have a flow imbalance of 15% or more when the pumps are operated at the same speed.

(b) The indicated value of core flow rate varies from the value derived from loop flow measurements by more than 10%.

(c) The diffuser to lower plenum differential pressure reading on an individual jet pump varies from the mean of all jet pump differential pressures by more than 10%.

2. Additionally when operating with one recirculation pump with the equalizer valves closed, the diffuser to lower plenum differential pressure shall be checked daily and the differential pressure of any jet pump in the idle loop shall not vary by more than 10% from established pattern.

3. The baseline data required to evaluate the conditions in Specification 4.6.E.1 and 4.6.E.2 will be obtained each operating cycle.

LIMITING CONDITIONS FOR OPERATION	SURVEILLANCE REQUIREMENTS
3.6.F (cont'd)	
1. Following one-pump operation, the discharge valve of the low speed pump may not be opened unless the speed of the faster pump is less than 50% of its rated speed.	
2. The reactor shall not be operated for a period in excess of 24 hours with one recirculation loop out of service.	
3.6.G Structural Integrity The structural integrity of the primary system boundary shall be maintained at the level required by the original acceptance standards throughout the life of the station. The reactor shall be maintained in a Cold Shutdown condition until each indication of a defect has been investigated and evaluated.	4.6.G Structural Integrity The nondestructive inspections listed in Table 4.6.1 shall be performed as specified. The results obtained from compliance with this specification will be evaluated after 5 years and the conclusions of this evaluation will be reviewed with the AEC.

Table 4.6.1

IN-SERVICE INSPECTION PROGRAM FOR PEACH BOTTOM UNITS 2 AND 3

Area of Interest (See Notes)

Item No.	Category	Comp. & Parts to be Examined	Method	Exam Schedule in 1-year Period	Exam Schedule in 10-year Interval	Remarks
Reactor Vessel						
1.1	A	Longitudinal and circumferential welds in core region	Volumetric	5% of circumferential 10% of longitudinal welds	5% of circumferential 10% of longitudinal welds	
1.2	B	Code	Volumetric	5% of 1/2 of the core welds in the closure head; 5% of circumferential welds above sacrificial shield; 10% of longitudinal welds above sacrificial shield	5% of all circumferential welds 10% of all longitudinal welds	
1.3	C	Code	Volumetric	33% of head-to-flange weld; 33% of vessel-to-flange weld including ligaments	100% of head-to-flange weld and 100% of vessel-to-flange weld including ligaments	
1.4	D	Code	Volumetric	One recirculation outlet nozzle; five recirculation inlet nozzles; two steam nozzles; two feed water nozzles; one core spray nozzle; two instrument nozzles	All nozzles in vessel greater than 2 inches in size	Results of volumetric examination of inner nozzle radii from the vessel O.D. are not definitive except for high-stress locations
1.5	E-1	Code	----------	----------	----------	There are no penetrations in this category due to exclusion criteria of paragraph IS-130 (d)
1.6	E-2	Code	Visual	10% of penetrations	25% of penetrations	The examinations will be performed when the system is pressurized after refueling and prior to operation
1.7	F	Code	Visual and surface and volumetric	The dissimilar metal welds on the nozzles enumerated in Item 1.4	All dissimilar metal welds on nozzles	The pre-service examination will indicate if these welds are amenable to ultrasonic examination. Welds not amenable to ultrasonic examination will be radiographically examined when techniques are developed and/or the system is drained for other reasons
1.8	G-1	Code	Volumetric and visual of surface	33% of all studs and nuts	100% of all studs and nuts	
1.9	G-2	Code	Volumetric	33% of ligaments in vessel	100% of ligaments in vessel	
1.10	G-3	Code	Visual	33% of washers and bushings	100% of washers and bushings	Washers will be examined only if studs are removed for examination
1.11	G-4	Code	Visual	33% of bolting	100% of bolting	
1.12	H	Code	Volumetric	5% of weld	10% of weld	
1.13	I-1	Code	Visual	Three patches	Six patches	
1.14	H	Code	Visual	Two examinations	Four examinations	
1.15	F	Code	Visual and surface and volumetric	33% of dissimilar welds	All dissimilar welds	
1.16	J	Code	Visual and volumetric	33% of pipe butt welds including 1 foot of adjacent longitudinal welds	25% of pipe butt welds including 1 foot of adjacent longitudinal welds	It is intended that the volumetric examination be performed by ultrasonic. Weld not amenable to ultrasonic examination will be examined by radiography with the exception of those in pipe which cannot be drained without draining the reactor. These welds will be examined if the reactor is drained for some other reason
1.17	K-1	Code	----------	----------	----------	Not applicable
1.18	K-2	Code	Visual	33% of bolts, nuts, and studs	100% of bolts, nuts, and studs	
1.19	K-3	Code	Visual and volumetric	33% of supports	25% of supports	
1.20	K-4	Code	Visual	33% of supports	100% of supports	Excluded are supports whose failure satisfies the exclusion criteria of paragraph IS-130 (d)
Pumps						
2.1	L-1	Code	----------	----------	----------	Not applicable
2.2	L-2	Code	Visual	None	None	A pump will be examined if disassembled for other reasons
2.3	P	Code	----------	----------	----------	Not applicable
2.4	Q-1	Code	Visual and volumetric	33% of bolts, studs, and nuts, including ligaments between threaded holes	100% of bolts, studs, and nuts, including ligaments between threaded holes	
2.5	Q-2	Code	Visual	33% of bolts, studs, and nuts	100% of bolts, studs, and nuts	
2.6	R-1	Code	Visual and volumetric	33% of supports	25% of supports	
2.7	R-2	Code	Visual	33% of supports	100% of supports	Excluded are supports whose failure satisfies the exclusion criteria of paragraph IS-130 (d)
Valves						
3.1	M-1	Code	----------	----------	----------	Not applicable
3.2	M-2	Code	Visual	----------	----------	Only valves requiring maintenance will be examined
3.3	P	Code	----------	----------	----------	Included in piping inspections
3.4	Q-1	Code	Visual and volumetric	33% of bolts, studs, and nuts, including ligaments between threaded holes	100% of bolts, studs, and nuts, including ligaments between threaded holes	
3.5	Q-2	Code	Visual	33% of bolts, studs, and nuts	100% of bolts, studs, and nuts	
3.6	R-1	Code	Visual and volumetric	33% of supports	25% of supports	
3.7	R-2	Code	Visual	33% of supports	100% of supports	Excluded are supports whose failure satisfies the exclusion criteria of paragraph IS-130 (d)

Notes

Area of Interest

Item No.

1.1 Pressure-Containing Welds in Reactor Pressure Vessel

1.2 Pressure-Containing Welds in Remainder of Vessel

1.3 Pressure-Containing Welds, Vessel-to-Flange and Head-to-Flange

1.4 Pressure-Containing Nozzles in Vessels

1.5 Pressure-Containing Welds in Vessel Penetrations

1.6 Pressure-Containing Welds in Vessel Penetrations

1.7 Pressure-Containing Dissimilar Metal Welds

1.8 Pressure-Retaining Bolting

1.9 Pressure-Retaining Bolting

1.10 Pressure Retaining Bolting

1.11 Pressure Retaining Bolting

1.12 Vessel External Supports

1.13 Vessel Interior Clad Surfaces

1.14 Vessel Interior Clad Surfaces

1.15 Interior Surfaces and Internal Components of Reactor Vessels

4.1 Pressure-Containing Dissimilar Metal Welds

4.2 Pressure-Containing Welds in Piping

4.3 Pressure-Retaining Bolting

4.4 Pressure-Retaining Bolting

4.5 Support Members and Structures for Piping, Valves, and Pumps

4.6 Support Members and Structures for Piping, Valves, and Pumps

5.1 Pressure-Containing Welds in Pump Casings

5.2 Pump Casings

5.3 Pressure-Containing Dissimilar Metal Welds

5.4 Pressure-Retaining Bolting

5.5 Pressure-Retaining Bolting

5.6 Support Members and Structures for Piping, Valves, and Pumps

5.7 Support Members and Structures for Piping, Valves, and Pumps

6.1 Pressure-Containing Welds in Valve Bodies

6.2 Valve Bodies

6.3 Pressure-Containing Dissimilar Metal Welds

6.4 Pressure Retaining Bolting

6.5 Pressure Retaining Bolting

6.6 Support Members and Structures for Piping, Valves, and Pumps.

6.7 Support Members and Structures for Piping, Valves, and Pumps.

Amendment No. 14

Dated: JAN 2 9 1976

3.6.E & 4.6.E BASES

Jet Pumps - Failure of a jet pump nozzle assembly hold down mechanism, nozzle assembly and/or riser increases the cross sectional flow area for blowdown following the postulated design basis double-ended recirculation line break. Therefore, if a failure occurs, repairs must be made to assure the validity of the calculated consequences.

The following factors form the basis for the surveillance requirements:

A break in a jet pump decreases the flow resistance characteristic of the external piping loop causing the recirculation pump to operate at a higher flow condition when compared to previous operation.

The change in flow rate of the failed jet pump produces a change in the indicated flow rate of that pump relative to the other pumps in that loop. Comparison of the data with a normal relationship or pattern provides the indication necessary to detect a failed jet pump.

The jet pump flow deviation pattern derived from the diffuser to lower plenum differential pressure readings will be used to further evaluate jet pump operability in the event that the jet pumps fail the tests in Section 4.6.G.1 and 2.

Agreement of indicated core flow with established power-core flow relationships provides the most assurance that recirculation flow is not bypassing the core through inactive jet pumps. This bypass flow is reverse with respect to normal jet pump flow. The indicated total core flow is a summation of the flow indications for the twenty individual jet pumps. The total core flow measuring instrumentation sums reverse jet pump flow as though it were forward flow. Thus the indicated flow is higher than actual core flow by at least twice the normal flow through any backflowing pump. Reactivity inventory is known to a high degree of confidence so that even if a jet pump failure occurred during a shutdown period, subsequent power ascension would promptly demonstrate abnormal control rod withdrawal for any power-flow operating map point.

A nozzle-riser system failure could also generate the coincident failure of a jet pump body; however, the converse is not true. The lack of any substantial stress in the jet pump body makes failure impossible without an initial nozzle riser system failure.

3.6.F & 4.6.F BASES

Jet Pump Flow Mismatch

Requiring the discharge valve of the lower speed loop to remain closed until the speed of faster pump is below 50% of its rated speed provides assurance when going from one to two pump operation that excessive vibration of the jet pump risers will not occur.

LIMITING CONDITIONS FOR OPERATION	SURVEILLANCE REQUIREMENT
3.9.A	4.9.A (Cont'd.) 3. Swing Buses a. Every two months the swing buses supplying power to the Low Pressure Coolant Injection System (LPCIS) valves shall be tested to assure that the transfer circuits operate as designed.

UNITED STATES OF AMERICA
NUCLEAR REGULATORY COMMISSION

In the Matter of	)	
	)	
PHILADELPHIA ELECTRIC COMPANY	)	
	)	Docket No. 50-278
(Peach Bottom Atomic Power Station, Unit 3)	)	
	)	

ORDER FOR MODIFICATION OF LICENSE

I.

Philadelphia Electric Company (PECO or Licensee) is the holder of Facility Operating License No. DPR-56 which authorizes operation of Peach Bottom Atomic Power Station Unit 3 (Unit 3 or the Facility) at steady-state reactor core power levels not in excess of 3293 megawatts thermal (rated power).. The Facility is a boiling water reactor (BWR) located at the Licensee's site in Peach Bottom, York County, Pennsylvania.

II.

1. On July 23, 1975, the Nuclear Regulatory Commission (the Commission) issued an "Order for Modification of License" (40 F.R. 32179 of July 31, 1975) which confirmed a plan for limited additional operation of the facility. As explained in the Order of July 23, 1975, the Facility's channel box wear, as indicated by the noise-to-signal ratio recorded by the traversing incore probe (TIP), had exceeded the threshold for remedial action. The remedial action, confirmed by the Order, limited operation of the facility at not more than 40 percent of rated core flow and with a maximum fuel bundle power of 3.35 MWt. In addition, the Order permitted operation up to full flow and power for a brief period of time needed to collect flow vibration data and to conduct fuel preconditioning. The Order further stipulated that the Licensee was to shutdown the facility following approximately 45 equivalent full

flow days from June 2, 1975 unless within that period certain specified tests have been completed which demonstrated the efficacy of the 40% flow limit.

2. By letter dated December 29, 1975, the Licensee proposed a plan, previously discussed with the NRC staff, setting forth a course of remedial action, which would allow operation with flow rates above 40 percent of rated flow and maximum bundle power above 3.35 MWt. The plan would involve shutdown of the reactor and appropriate replacement of worn channel boxes and plugging of the core support plate bypass holes. The reactor was shutdown on January 2, 1976, for visual inspection of the channel boxes and the necessary repairs.

3. By its letter dated December 29, 1975, the Licensee provided details relating to the fuel channel inspection program and the installation of core bypass flow plugs in the lower core plate and supplied analyses to demonstrate the adequacy of the procedures for plug installation.

4. On January 7, 1976, the Commission issued an "Order for Modification of License" (January 14, 1976, 41 F.R. 2129) that approved the repair program and authorized the installation of bypass hole plugs in the facility's lower core plate. As discussed in the January 7, 1976 Order, the NRC staff concluded that the plugs will reduce the vibration of the instrument thimbles caused by flow through the bypass holes. By telecon on January 21, 1976, Philadelphia Electric

Company confirmed that the licensee's inspection and repair program was completed. The inspection program resulted in the rejection of 138 channel boxes with unacceptable wear as defined in the repair program. These channel boxes were replaced. Ninety-one channel boxes with indications of wear, but within the criteria of the repair program, were also replaced. Philadelphia Electric Company also confirmed that all flow bypass holes in the core plate were plugged.

5. By letters dated November 18 and 20, 1975, and December 29, 1975[1/], the Licensee provided analyses, including an emergency core cooling performance analysis, for reactor power operation with the plugs installed in the bypass holes. The December 29, 1975 letter supplemented letters of July 9, September 10, October 1 and 30, 1975 related to ECCS analyses.

6. The Commission's staff has reviewed the analyses submitted by the Licensee on December 29, 1975 and supplements thereto to support operation with the bypass flow hole plugs installed. As discussed in the Commission's concurrently issued Safety Evaluation for Amendment No. 14 to the license the proposed operation with plugs will require modified limits relating to emergency core cooling system performance. The modified limits specified in the concurrently issued Amendment No. 14 would be based upon an evaluation of ECCS performance calculated in accordance with an acceptable evaluation model that conforms to the requirements of the Commission's regulations in 10 CFR Section 50.46.

1/Copies of the December 29, 1975 filing by the Licensee are available for public inspection in the Commission's Public Document Room, 1717 H Street, N. W., Washington, D. C., and are being placed in the Martin Memorial Library, 189 E. Market Street, York, Pennsylvania.

The amendment would modify various limits established in accordance with the Commission's Interim Acceptance Criteria, and would, with respect to the facility, terminate the further restrictions imposed by the Commission's December 27, 1974 Order for Modification of License (40 F.R. 1772, January 9, 1975), and would impose instead, limitations established in accordance with the Commission's Acceptance Criteria for Emergency Core Cooling Systems for Light Water Nuclear Power Reactors, 10 CFR Section 50.46. The amendment would also revise the Technical Specifications to permit operation of the facility using operating limits based on the General Electric Thermal Analysis Basis (GETAB) and with the Low Pressure Coolant Injection System modified in accordance with the Licensee's application for license amendment dated July 9, 1975 as supplemented.

It also should be noted that plugs identical to those to be used in Peach Bottom Unit 3 have been installed in the Cooper, Vermont Yankee, Duane Arnold, Pilgrim, and Peach Bottom Unit 2 reactors. The plugs installed in Vermont Yankee were removed during a refueling operation after ten months of successful service. No abnormalities or loose pieces were reported. Vermont Yankee has since reinstalled the plugs.

7. Based on our review of the Licensee's submittals of November 18 and 20, 1975 and December 29, 1975, and the prior related experience at the Pilgrim and Vermont Yankee reactors, the NRC staff concluded in its concurrently issued Safety Evaluation that operation of Peach Bottom Unit 3 in accordance

with the additional restrictions set forth in Amendment No. 14 to the License would provide reasonable assurance that the Public health and safety would not be endangered.

III.

Accordingly, pursuant to the Atomic Energy Act of 1954, as amended, and the Commission's Rules and Regulations in 10 CFR Parts 2 and 50, IT IS ORDERED THAT Facility Operating License No. DPR-56 is hereby amended by substituting the following provisions for the provisions set out in the Commission's Orders for Modification of License dated December 27, 1974 and January 7, 1976.

1. Operation of Peach Bottom Atomic Power Station Unit 3 with plugged bypass flow holes is hereby authorized subject to the conditions set forth in the concurrently issued Amendment No. 14 to the Facility License No. DPR-56, and

2. A monitoring program using LPRM and TIP traces and available accelerometers on incore instrument guide tubes shall be performed for the purpose of detecting any instrument tube - channel box interaction.

FOR THE NUCLEAR REGULATORY COMMISSION

Ben C. Rusche, Director
Office of Nuclear Reactor Regulation

Dated at Bethesda, Maryland
this 29thday of January, 1976.

UNITED STATES NUCLEAR REGULATORY COMMISSION

DOCKET NO. 50-278

PHILADELPHIA ELECTRIC COMPANY
PUBLIC SERVICE ELECTRIC & GAS COMPANY
DELMARVA POWER AND LIGHT COMPANY
ATLANTIC CITY ELECTRIC COMPANY

NOTICE OF ISSUANCE OF AMENDMENT TO FACILITY OPERATING LICENSE

AND NEGATIVE DECLARATION

Notice is hereby given that the U.S. Nuclear Regulatory Commission (the Commission) has issued Amendment No. 14 to Facility Operating License No. DPR-56 issued to Philadelphia Electric Company, Public Service Electric & Gas Company, Delmarva Power and Light Company, and Atlantic City Electric Company, which revised Technical Specifications for operation of the Peach Bottom Atomic Power Station Unit 3, located in Peach Bottom, York County, Pennsylvania. The amendment is effective as of its date of issuance.

The amendment modifies the provisions in the Technical Specifications relating to Limiting Conditions for Operation associated with the Emergency Core Cooling System (ECCS) and Reactor Core Power Distribution Limits; and provides for modification of the ECCS to improve its performance in accordance with the licensees' application for amendment dated July 9, 1975.

Notice of proposed Issuance of Amendment to Facility Operating License in connection with this action was published in the FEDERAL REGISTER on August 18, 1975 (40 F.R. 34647). No request for a hearing or petition for leave to intervene was filed following notice of the proposed action.

The Commission has prepared an environmental impact appraisal for the revised Technical Specifications and has concluded that an environmental impact statement for this particular action is not warranted because there

will be no environmental impact attributable to the proposed action other than that which has already been predicted and described in the Commission's Final Environmental Statement for Peach Bottom Atomic Power Station, Units 2 and 3 published in April 1973, and that a negative declaration to this effect is appropriate.

For further details with respect to this action, see (1) the application for amendment dated July 9, 1975 and supplements thereto dated September 10, 1975, October 1, 24 and 30, 1975, November 18 and 20, 1975, and December 29, 1975, (2) Amendment No. 14 to License No. DPR-56, (3) the Commission's related Safety Evaluation, (4) the Commission's Negative Declaration dated January 29, 1976 . All of these items are available for public inspection at the Commission's Public Document Room, 1717 H Street, N. W., Washington, D. C. and at the Martin Memorial Library, 189 E. Market Street, York, Pennsylvania.

A copy of items (2), (3) and (4) may be obtained upon request addressed to the U.S. Nuclear Regulatory Commission, Washington, D. C. 20555, Attention: Director, Division of Operating Reactors.

Dated at Bethesda, Maryland, this 29th day of January, 1976.

FOR THE NUCLEAR REGULATORY COMMISSION

George Lear

George Lear, Chief
Operating Reactors Branch #3
Division of Operating Reactors

UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

ENVIRONMENTAL IMPACT APPRAISAL BY THE DIVISION OF OPERATING REACTORS

SUPPORTING AMENDMENT NO. 14 TO DPR-56

PHILADELPHIA ELECTRIC COMPANY

PEACH BOTTOM ATOMIC POWER STATION UNIT 3

ENVIRONMENTAL IMPACT APPRAISAL

1. Description of Proposed Action

By letter dated July 9, 1975, the Philadelphia Electric Company (the licensee) proposed changes to the Technical Specifications in Appendix A of Facility License No. DPR-56. The licensee provided further supportive information by letters dated September 10, 1975, November 18 and 20, 1975, and December 29, 1975.

The proposed change would incorporate the "Acceptance Criteria for the Emergency Core Cooling Systems for Light Water Nuclear Power Reactors" (ECCS) as specified in Section 50.46 of Part 50 CFR into the operating license for Peach Bottom Unit 3. Philadelphia Electric Company is presently licensed to operate Peach Bottom Unit 3 at power levels up to 3,293 megawatts thermal. The proposed action would result in a decrease in the power level amounting to less than 15 percent for no longer than 12 months. The Commission's staff has independently reviewed the expected environmental impact of the proposed action.

2. Environmental Impacts of Proposed Action

In the absence of any significant change in power levels, there would be no change in cooling water requirements. Further, there would be no change in radioactive effluents or thermal effluents from normal operation or post accident conditions. The restrictions on heat generation rates will require careful control of fuel operating history; however, there should be no reduction in total burnup resulting from the revised ECCS evaluation methods. It is not anticipated that the issuance of this change to the Appendix A Technical Specifications would affect the cost-benefit balance nor would it require changes in the Environmental Technical Specifications in Appendix B of the license.

No environmental impacts are expected other than those described in the Commission's Final Environmental Statement for the Peach Bottom Atomic Power Station, Units 2 and 3, issued April 1973. The Commission's calculated releases of radioactive effluents, both gaseous and liquid, are based on expected release rates from the total quantity of nuclear fuel within the reactor units. The proposed action would not affect the total quantity of fuel used at Peach Bottom. No increases in radiation doses to humans or other biota are expected.

3. Conclusion and Basis for Negative Declaration

On the basis of the foregoing analysis, it is concluded that there will be no environmental impact attributable to the proposed action other than those impacts described in the Final Environmental Statement, issued April 1973. Having made this conclusion, the Commission has further concluded that no environmental impact statement for the proposed action need be prepared and that a negative declaration to this effect is appropriate.

Dated: January 29, 1976

UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

SAFETY EVALUATION BY THE OFFICE OF NUCLEAR REACTOR REGULATION

AMENDMENT NO. 14 TO LICENSE NO. DPR-56

AND

ORDER FOR MODIFICATION OF LICENSE

PHILADELPHIA ELECTRIC COMPANY

PEACH BOTTOM ATOMIC POWER STATION UNIT 3

DOCKET NO. 50-278

1.0 Introduction

Philadelphia Electric Company has proposed to operate Peach Bottom Atomic Power Station Unit 3 under the following conditions:

(1) with plugged bypass flow holes in the lower core support plate as requested in its submittal dated December 29, 1975 which referenced previous submittals dated November 18 and 20, 1975;

(2) using limits based on the General Electric Thermal Analysis Basis (GETAB) as requested in its submittal dated July 9, 1975 and supplements dated October 1 and 30, November 18 and 20, 1975;

(3) using modified operating limits based on an acceptable evaluation model that conforms with Section 50.46 of 10 CFR Part 50 as requested in its submittal dated July 9, 1975 and supplements dated September 10, October 30, November 18 and 20, 1975 and December 29, 1975; and

(4) with a modification to the low pressure coolant injection system (LPCIS) as requested in its submittal dated July 9, 1975.

2.0 Nuclear Design

The primary nuclear effect caused by plugging the bypass flow holes is an increased bypass void fraction and a reduction in the average in-channel void fraction. The in- and out-of-channel void fraction changes give a net increase in the core average void fraction.

At steady state conditions, the increased bypass void fraction results in a small reduction in the maximum local peaking factor within a fuel bundle and an increase in the local bundle power calculational uncertainty. Another consequence of the reduced bypass flow is a small reduction in the infinite multiplication factor of uncontrolled fuel.

The presence of voids in the bypass region affects the relationship between the traversing incore probe (TIP) signal and the local bundle power. The TIP signal is reduced by the presence of voids and could lead to an underprediction of the peak heat flux. The relationship of the power in the four bundles surrounding a TIP instrument tube and the TIP signal as a function of bypass voids was determined by the General Electric Company (GE) by performing three group, two-dimensional diffusion theory calculations. A correction factor was developed and algorithms for computing the bypass void fraction and for making appropriate corrections in the local bundle power have been incorporated in the process computer.

The uncertainty in the local bundle power caused by bypass voids is taken into account in determining the minimum critical power ratio (MCPR) safety limit. The TIP uncertainty introduced by the bypass voids is zero in the bottom half of the core and increases from 4.08% at the core mid-plane to 5.21% at the core exit.

After the bypass flow holes are plugged, the fuel will be placed in its original core location. The following observations can be made:

(1) the control rod worths are not significantly changed and, consequently, the previous results of the control rod drop analysis remain valid,

(2) the shutdown margin will remain the same as previously analyzed,

(3) the standby liquid control system reactivity insertion rate and magnitude will not be affected.

We conclude that the analysis of the nuclear performance of the plant with plugged bypass holes is acceptable.

3.0 Mechanical Design

The only mechanical design change in the reactor is the use of plugs to fill the bypass flow holes[1]. The plug consists of two

(1) "Peach Bottom Atomic Power Station Unit 3 Channel Inspection and Safety Analysis with Bypass Holes Plugged," NEDO-21140, December 1975.

stainless steel parts (body and shaft) which are connected by an Inconel spring. The shoulder of the body rests on the top of the core plate along the rim of a one-inch bypass hole and is pressed down by the spring. An equal and opposite force is applied on the shaft. A stainless steel latch is connected to the bottom of the shaft by means of a pin. This latch is free to rotate about the pin and latches the shaft to the core plate. The spring exerts a minimum of 35 pounds on the body and latch and a maximum of 46 pounds (with the worst tolerance combination).

Removal of a plug can be accomplished by applying about 500 pounds of force and deforming the latch plastically. More than 10 plugs were removed in tests performed at the GE test facility with consistent latch deformations without damaging other parts.

Plugs identical to those to be used in Peach Bottom Unit 2 have been installed in the Vermont Yankee, Duane Arnold and Pilgrim reactors. The plugs installed in Vermont Yankee were removed during a refueling operation after 10 months of successful service. No abnormalities or loose pieces were reported. Vermont Yankee has since reinstalled the plugs.

Pressure differentials across the core plate during normal steady state operation and following a steam line break accident are expected to be on the order of 20 to 32 psi. These loads together with the spring preload will produce yielding of the latch in bending but will be significantly below about 500 pounds of force necessary for removing the plug. The 1973 GE full scale flow mockup test shows that, with up to 40 psi differential pressure, there is negligible leakage flow through the plugged holes. No plug vibration was observed during the test and no apparent deformation on the latch was evident after the test. No fatigue and plastic strain ratcheting is expected since the plant power cycle during the anticipated service period will be minimal.

Stainless steel and Inconel are compatible with other reactor internals and are not expected to introduce any unusual oxidation and stress corrosion problems. The flux level at the core plate elevation is estimated to be quite low and an insignificant reduction in ductility due to irradiation is anticipated. GE has performed creep tests with both Inconel springs and stainless steel latches and found that stress relaxation or creep deformation were insignificant. The tests were performed at 550°F.

Philadelphia Electric Company presented to the NRC staff a summary of channel inspections on BWR-2s and BWR-3s. These older plants have instrument tubes similar to Peach Bottom Unit 3, but no bypass flow holes in the core support plate. The bypass flow for these

enters through clearances in the assembly end fittings, which is similar to the proposed Peach Bottom Unit 3 configuration with plugged bypass holes. One hundred sixty-four channels (adjacent to instrument tubes and source tubes) were inspected during normal fuel outages in 7 plants. No significant channel wear was observed at the corners adjacent to the instrument tubes.

General Electric has a design criteria for channel box wastage of 0.010 inches for the lower 80 inches of the channel and 0.020 inches for the remaining length. All of the channels (new and old) in the core will meet this requirement. Channels with observed acceptable wear on the corner will not be reinserted in the core next to an in-core instrument where additional wear could occur during subsequent reactor operation.

Based on a review of the design, the test rig, the installation methods and primarily the previously successful operating experience at Vermont Yankee and Pilgrim, we conclude that the plugs will not fail so as to result in loose parts in the core or result in unplugging of the bypass flow holes. Also, we conclude that the installed plugs will substantially reduce the instrument tube vibration, due to flow through the bypass holes, sufficient to preclude any unacceptable wear for at least one fuel cycle.

4.0 Thermal Hydraulic Design

The licensee's letter of July 9, 1975, and supplements dated October 1 and 30, November 18 and 20, 1975 and December 29, 1975, requested that the license for Peach Bottom Unit 3 be amended to include operating limits based on the General Electric Thermal Analysis Basis (GETAB) described in the General Electric report NEDO-10958[2]. The analyses are based on a core loading with 7 x 7 fuel and with the bypass flow holes plugged.

The proposed changes involve the adoption of a new transition boiling correlation termed GEXL which would replace the Hench-Levy critical heat flux correlation as the basis for determining the thermal-hydraulic conditions which would result in a departure from nucleate boiling. One of the safety requirements for light water cooled nuclear reactors is prevention of damage to the fuel cladding. To prevent damage to the fuel cladding, light water

(2) "General Electric BWR Thermal Analysis Basis (GETAB) Data Correlation and Design Application," NEDO-10958 and NEDE-10958 (Proprietary), November 1973.

cooled reactors must be designed and operated such that during normal operation and anticipated transients the heat transfer rate from the fuel cladding to the coolant are sufficient to prevent overheating of the fuel cladding. Although transition boiling would not necessarily result in damage to boiling water reactor (BWR) fuel rods, historically it has been used as a fuel damage limit because of the large reduction in heat transfer rate when film boiling occurs. A critical power ratio (CPR) is defined which is the ratio of that assembly power which causes some point in the assembly to experience transition boiling to the assembly power at the reactor condition of interest. The MCPR is the critical power ratio corresponding to the most limiting fuel assembly in the core. The fuel assembly power at which boiling transition would be predicted to occur, using the GEXL correlation, is termed the critical power. The GEXL transition boiling correlation is more recent than the previously used Hench-Levy critical heat flux correlation and is based on an extensive data base. The methods for applying the GEXL correlation to determine thermal limits has been termed the General Electric Thermal Analysis Basis (GETAB). We have accepted the GEXL correlation and the GETAB methods in a previous report[3] as a basis for establishing the safety limit and limiting conditions for operation related to prevention of fuel damage for General Electric BWR 8 x 8 and 7 x 7 fuel. To apply GETAB to the Technical Specifications involves establishing (1) the fuel damage safety limit, (2) limiting conditions of operation such that the safety limit is not exceeded for normal operation and anticipated transients, and (3) limiting conditions for operation such that the initial conditions assumed in accident analyses are satisfied. We have evaluated the thermal margins for Peach Bottom Unit 3 based on the NEDO-10958 report[2] and plant specific input information provided by the licensee. As described below, we conclude that the calculated consequences of the anticipated abnormal transients do not violate the thermal and plastic strain limits of the fuel.

---

(3) "Review and Evaluation of GETAB (General Electric Thermal Analysis Basis) for BWRs," Division of Technical Review, Directorate of Licensing, United States Atomic Energy Commission, September, 1974.

4.1 Fuel Cladding Integrity Safety Limit-MCPR

The safety limit on MCPR is based on the GETAB statistical analysis which assures that more than 99.9% of the fuel rods in the core are expected to avoid boiling transition. The uncertainties in the core and system operating parameters and the GEXL correlation, Table 5-1 of the licensee submittal,[1] combined with the relative bundle power distribution in the core form the basis for the GETAB statistical determination of the safety limit MCPR. These uncertainties are the same as or more conservative than those reported in NEDO-10958[2] and NEDO-20340[4]. The uncertainty of the bypass void effect on TIP readings accounts for the additional uncertainty due to the bypass void content resulting from plugging the core support plate bypass holes. The reactor core selected for the GETAB statistical analyses is a typical core (251" diameter vessel/764 fuel assemblies). This typical core is of the same reactor class as the Peach Bottom Unit 3 core. The bundle power distribution used for the GETAB application has more high power bundles than the distribution expected during operation of Peach Bottom Unit 3 reactor. This results in a conservative value of the MCPR which meets the 99.9% criterion.

We conclude that the proposed fuel integrity safety limit, a MCPR of 1.06, is acceptable for the Peach Bottom Unit 3 plant current fuel cycle with plugged bypass holes.

4.2 Limiting Condition for Operation - MCPR

Various transient events will reduce the required operating limit MCPR. To assure that the fuel cladding integrity safety limit (MCPR of 1.06) is not violated during anticipated abnormal operational transients, the most limiting transients have been analyzed to determine which one results in the largest reduction in critical power ratio (ΔMCPR). The licensee has submitted the results of those core wide transient analyses which show a significant decrease in MCPR. The types of transients evaluated were losses of flow, pressure and power increases, and coolant temperature decreases. The most limiting transients in the stated categories were a two-pump trip, a turbine trip without bypass, and a loss of feedwater heating. Of these, the most limiting transient was turbine trip without bypass resulting in a ΔMCPR of 0.19. Addition of the ΔMCPR to the safety limit MCPR gives the minimum operating limit MCPR required to avoid violation of the safety limit, should this limiting transient occur.

---

(4) General Electric, "Process Computer Performance Evaluation Accuracy," NEDO-20340, and Amendment 1, NEDO-20340-1, dated June, 1974 and December, 1974.

The transient analyses were evaluated with the end-of-cycle 1 scram reactivity insertion rates that include a design conservatism factor of 0.80. The initial condition parameters[1] used for the worst operational transient analysis are acceptable. The initial MCPR assumed in the transient analyses (1.27) was greater than the established operating limit MCPR of 1.25 which results in conservative (high) predictions of MCPR values.

Conservatism was applied in the determination of the required operating limit MCPR because the assumed axial and local peaking factors were representative of the beginning of the fuel cycle. This is the worst consistent set of axial and local peaking factors.

A GE study[2] has shown that the required operating MCPR varies with the axial and local power peaking distribution. Axial peaking in the middle or upper portion of the core results in higher required MCPR's than peaking in the lower portion of the core. In the analyses the axial power peak was assumed to be representative of beginning-of-cycle conditions to be located at the midplane (axial peak-to-average of 1.40).

The R-factors, which are a function of the local power peaking, assumed in the analyses are also representative of beginning-of-cycle conditions. The value assumed is 1.098. During the cycle the local peaking and therefore the R-factor is reduced while the peak in the axial shape moves toward the bottom of the core. Although the operating limit MCPR would be increased by approximately 1% by the reduced end-of-cycle R-factor, this is offset by the reduction in MCPR resulting from the relocation of the axial peak to below the midplane.

4.3 Local Event-Rod Withdrawal Error

The rod withdrawal error (limiting local event) transient is discussed in NEDO-21140[1] in terms of worst case conditions. Assumptions and descriptions of the rod withdrawal event are given in NEDO-20360[5]. The information in these two references indicate that the local power range monitor subsystem (LPRM's) will detect high local powers and alarm. However, if the operator ignores the LPRM alarm, the rod block monitor subsystem (RBM) will stop the rod withdrawal while the critical power ratio is still equal to or greater than the 1.06 MCPR safety limit and the cladding is under the one percent plastic strain limit.

(5) General Electric, "BWR Generic Reload Application for 8 x 8 Fuel," NEDO-20360, Revision 1, dated November 1974 and Supplement 2 to Revision 1, dated May 30, 1975.

This rod withdrawal error transient is not limiting for the Peach Bottom Unit 3 initial cycle with the RBM setting at 107% of rated power at rated flow. We conclude that the consequences of this local-transient are acceptable.

4.4 Operating MCPR Limit for Less than Rated Power and Flow

For the limiting transient of recirculation pump speed control failure at lower than rated power and flow condition, the licensee will conform to Technical Specification limiting conditions for operating, Paragraph 3.5.K.(2) This requires the licensee to maintain the required operating MCPR greater than 1.25 times the K_f factor for core flows less than rated. The K_f factor curves were generically derived and assure that most limiting transient, a speed control increase, occurring at less than rated flow will not exceed the safety limit MCPR of 1.06.

5.0 OVERPRESSURE TRANSIENTS

The licensee has reanalyzed the worst case overpressure transient for operation with the bypass flow holes in the lower core support plate plugged. The transient analyzed was the closure of all main steam isolation valves with a high neutron flux scram. The assumptions used in the analysis were: Operation at 105% of power, end-of-cycle scram reactivity insertion rate curve and one safety/relief valve fails to operate. The reanalysis predicts a peak pressure at the vessel bottom of 1303 psig which is 72 psi below the code allowable pressure. The reanalysis and calculated pressure margin are acceptable.

6.0 EMERGENCY CORE COOLING SYSTEMS ANALYSIS

On December 27, 1974, the Atomic Energy Commission issued an Order for Modification of License implementing the requirements of Section 50.46 of 10 CFR Part 50 of the Commission's Regulations "Acceptance Criteria and Emergency Core Cooling Systems for Light Water Nuclear Power Reactors." One of the requirements of the Order was that prior to any license amendment authorizing any core reloading "... the licensee shall submit a reevaluation of ECCS cooling performance calculated in accordance with an acceptable evaluation model which conforms with the provisions of Section 50.46." The order also required that the evaluation shall be accompanied by such proposed changes in Technical Specifications or license amendments as may be necessary to implement the evaluation results.

On July 9, 1975 the licensee submitted an evaluation of the ECCS performance for the design basis pipe break for Peach Bottom Units 2 and 3 along with an amendment requesting changes to the Technical Specifications for Peach Bottom Units 2 and 3 to implement the results of the evaluation.[6] The licensee incorporated further information relating to the details of the ECCS evaluation, by referencing an appropriate lead plant analysis,[7] to show compliance with the Section 50.46 criteria and Appendix K to 10 CFR Part 50.

The Order for Modification of License issued December 27, 1974, stated that evaluation of ECCS cooling performance may be based on the vendor's evaluation model as modified in accordance with the changes described in the staff Safety Evaluation Report of the Peach Bottom Atomic Power Station Units 2 and 3 dated December 27, 1974.

The background of the staff review of the GE ECCS models and their application to Peach Bottom Unit 3 is described in the staff Safety Evaluation Report (SER) for these facilities dated December 27, 1974 issued in connection with the Order. The bases for acceptance of the principal portions of the evaluation model are set forth in the staff's Status Report of October, 1974 which are referenced in the December 27, 1974 SER. The December 27, 1974 SER and the Status Report and its Supplement describe an acceptable ECCS evaluation model and the basis for the staff's acceptance of the model. The Peach Bottom Unit 3 evaluation which is covered by this SER properly conforms to the accepted model.

With respect to reflood and refill computations, the Peach Bottom Unit 3 analysis was based on a modified version of the SAFE computer code, with explicit consideration of the staff recommended limitations, as described in the December 27, 1974 SER. The Peach Bottom Unit 3 evaluation did not attempt to include any further credit for other potential changes which the December 27, 1974 SER indicated were under consideration by GE at that time.

---

(6) Letter from E. J. Bradley, Philadelphia Electric Company, to B. C. Rusche, USNRC, dated July 9, 1975.

(7) Brunswick 2 Loss-of-Coolant Analysis, Conformance with 10 CFR Part 50 Appendix K, dated June, 1975.

During the course of our review, we concluded that additional individual break sizes should be analyzed to substantiate the break spectrum curves submitted in connection with the evaluation provided in August, 1974. We also requested that other break locations be studied to substantiate that the limiting break location was the recirculation line.

The additional analyses (performed on the lead plant, Brunswick Unit 2[6] and incorporated by reference) supported the earlier submittal which concluded that the worst break was the complete severence of the recirculation line. These additional calculations provided further details with regard to the limiting location and size of break as well as the worst single failure for the Peach Bottom Unit 3 design. The limiting break continues to be the complete severence of the recirculation suction line assuming a failure of the LPCI injection valve.

The December 29, 1975 submittal contains the ECCS analysis for operation with the plugged bypass flow holes. The results for this ECCS Appendix K calculation show a peak cladding temperature of 2200°F; a peak local oxidation of 7.5%, and a maximum core average hydrogen generation of 0.2% for the worst large size pipe break assuming failure of the LPCI injection valve (the worst single failure). The calculations show a peak cladding temperature of 1770°F, and a peak local oxidation of less than 1.0% for the worst small size pipe break area (0.07 ft^2) assuming failure of the HPCI system (the worst concurrent single failure). We have reviewed the evaluation of ECCS performance submitted by PECO for Peach Bottom Unit 3 with plugged bypass holes and conclude that the evaluation has been performed wholly in conformance with the requirements of Section 50.46. Therefore, operation of the reactor would meet the requirements of Section 50.46 provided that operation is limited to the maximum planar linear heat generation rates (MAPLHGR) of figures 8-10A, and 8-10B of the PECO submittal dated December 29, 1975, and to a minimum critical power ratio (MCPR) greater than 1.17. The ECCS performance analysis assumed that reactor operation will be limited to a MCPR of 1.17. However, a more restrictive technical specification limits operation of the reactor to a MCPR of 1.25 based on consideration of a turbine trip without bypass transient. A statement should be added to the bases for the limiting condition of operation indicating the MCPR used in the ECCS performance evaluation.

Certain operating conditions presently allowed are not in conformance with the analysis performed in accordance with Section 50.46. Certain changes must be made to the proposed technical specifications to conform with the evaluation of ECCS performance. An evaluation was not provided for ECCS performance during reactor operation with one recirculation loop out of service. Therefore, continuous reactor operation under such conditions should not be permitted until the necessary analyses have been performed, evaluated and determined acceptable. The reactor may, however, operate for periods up to 24 hours with one recirculation loop out-of-service. This short time period permits corrective action to be taken and minimizes unnecessary shutdowns which is consistent with other Technical Specifications. During this period of time the reactor will be operated within the restrictions of the thermal analysis and will be protected from fuel damage resulting from anticipated transients.

The LOCA analysis assumed all ADS valves operated for small line breaks with HPCI failure. Since the licensee did not provide a LOCA analysis with one ADS valve out of service for small size line breaks the Technical Specifications will not permit continuous operation with any ADS valve out of service except as with other ECCS equipment one valve may be out of service for seven days.

Based on the above, we conclude that with the Technical Specifications discussed above operation of the reactor will meet the requirements of Section 50.46 of 10 CFR Part 50 of the Commission's Regulations.

7.0 LPCIS Modification

The NRC staff previously issued a safety evaluation for the LPCIS modification at Peach Bottom dated December 30, 1975[8]. The acceptability of the LPCIS modification was addressed in that document. Approval for operation of Peach Bottom Unit 3 with the LPCIS modification was withheld at that time pending our review and acceptance of a revised ECCS analysis with plugged bypass flow holes. Since we have herein approved the revised ECCS analysis for Peach Bottom Unit 3, we conclude that operation of Peach Bottom Unit 3 with the LPCIS modification completed is acceptable.

(8) Safety Evaluation by the Office of Nuclear Reactor Regulation for Amendment No. 12 to Facility Operating License No. DPR-56, December 30, 1975.

8.0 Inspection Program

During the January 1976 outage Philadelphia Electric Company (PECO) performed an inspection of all Peach Bottom Unit 3 fuel bundle channel boxes from locations adjacent to in-core instrument tubes. The inspection revealed 138 channel boxes with an unacceptable amount of wear. These channel boxes were replaced. Ninety-one channel boxes were worn less than the amount established for replacement. PECO replaced these channel boxes as well, but retained them for future use in locations which are not adjacent to instrument channels.

The core instrument tube adjacent to the maximum wear width channel was inspected and was found to be acceptable. Based on the results of the inspection and replacement program we have concluded that the condition of the installed channel boxes and in-core instrument tubes are acceptable.

9.0 Technical Specification and License Changes

The specific proposed changes to the Technical Specifications and license which we consider acceptable are itemized below:

Section 1.0 Definitions

Subsections would be added which would define maximum total peaking factor, critical power ratio and minimum critical power ratio. We would also modify the definition of minimum critical power ratio from that proposed by PECO. We have discussed these changes with PECO and they do not object. The new definitions are needed to be consistent with the revised format of the limits discussed below.

Section 1.1 Fuel Cladding Integrity Safety Limits

Subsection 1.1.A for operation with reactor primary system pressure greater than 800 psig or core flow greater than or equal to 10% of rated would be revised to state a MCPR safety limit.

Subsection 1.1.B would be revised to limit core thermal power to 25% or less of rated thermal power when reactor pressure is less than or equal to 800 psig or core flow is less than 10% of rated.

These changes are consistent with the GETAB analyses discussed earlier in this safety evaluation.

Sections 2.1.A.1 and 2.1.B APRM Flux Scram and Rod Block Trip Settings

The existing specifications would be changed to reflect a MCPR limitation rather than a MCHFR limitation so that the specifications would be consistent with the GETAB analysis.

Section 3.3.B.5 Control Rods Limiting Condition for Operation

The existing specification 3.3.B.5.c would be revised from a MCHFR limitation to a MCPR limitation so that the specification would be consistent with the GETAB analysis.

Section 3.5.E. Automatic Pressure Relief Subsystem Limiting Condition for Operation

The existing specification allows continued operation for up to 30 days after one relief valve of the automatic depressurization system (ADS) is made or found to be inoperable. The loss-of-coolant accident analyses submitted in accordance with 10 CFR 50.46 were based on the assumption that all ADS valves operated for small line breaks with HPCI failure. Because the analyses submitted do not support extended periods of operation with one ADS valve out of service, we would reduce the time the valve can be out of service to 7 days. This is consistent with out of service times for other ECCS equipment. We have discussed this change with the PECO staff and they did not object.

Section 3.5.I Average Planar LHGR Limiting Conditions for Operation

The average planar linear heat generation limits would be revised to be consistent with the analyses performed in accordance with 10 CFR Part 50.46 for operation with plugged bypass holes in the lower core plate.

Section 3.5.R Minimum Critical Power Ratio (MCPR)

Subsection 3.5.K would be added to place operating MCPR limits on the fuel. The limits are consistent with the GETAB analyses discussed earlier in this report and require a MCPR more limiting than that needed to satisfy the requirements of the LOCA analysis.

Section 3.6.F Jet Pump Flow Mismatch

This section would be modified to limit operation to a period of twenty-four hours when one recirculation loop is out of service. The additional restriction would be consistent with the analysis discussed earlier in this report.

Section 4.9 Auxiliary Electrical System

Additional surveillance requirements would be added to check the operability of the swing buses which power the LPCIS injection valves as discussed earlier in this report.

GETAB Bases

The bases would also be changed to discuss the justification for the revised specifications itemized above.

Proposed Reporting Exclusion

The specifications proposed by the licensee would exclude reporting, as a reportable occurrence, operation in excess of the limiting MAPLHGR, local LHGR and MCPR values providing corrective action was taken upon discovery. We would not include these provisions. We believe that such events should be reported in conformity with the Technical Specifications.

APRM Flux Trip, APRM Rod Block and RBM Rod Block Settings

The specifications proposed by the licensee would change the primary coolant flow referenced trip settings to provide greater operating margin. The licensee has not fully justified the proposed revisions. Therefore we would retain the existing flow referenced limits.

Instrument Tube-Channel Box Interaction Surveillance

Excessive instrument tube-channel interaction previously has been determined from the noise level in the LPRM signals. The plugged bypass flow holes are expected to affect the noise content of the LPRM signals. The noise content in the 1.4 to 3 Hz frequency range caused by vibration of the LPRM instrument tube should be reduced relative to the power dependent noise content. Some increase in the boiling noise, 5 to 50 Hz range, is expected because of boiling in the bypass water region.

Before the plant was shutdown in 1976, extensive LPRM time traces, TIP traces, and power spectral density (PSD) calculations were obtained for a number of combinations of power and flow. These data will provide a basis for evaluating the efficiency of plugging the bypass flow holes. After reactor startup, comparison of similar measurements with pre-shutdown data will be made to confirm that the mechanical vibration of the instrument tubes has been substantially reduced.

The licensee has agreed to provide NRC with a plan for monitoring instrument tube-channel box interaction. The monitoring would be performed on a periodic basis using the available LPRM and TIP traces and the available accelerometers on core instrument guide tubes. This monitoring program should be required by the licensee.

9.0 CONCLUSION

We have concluded, based on the considerations discussed above, that: (1) there is reasonable assurance that the health and safety of the public will not be endangered by operation in the proposed manner, and (2) such activities will be conducted in compliance with the Commission's regulations and the issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public.

DATED: January 29, 1976

with the additional restrictions set forth in Amendment No. 14 to the License would provide reasonable assurance that the Public health and safety would not be endangered.

III.

Accordingly, pursuant to the Atomic Energy Act of 1954, as amended, and the Commission's Rules and Regulations in 10 CFR Parts 2 and 50, IT IS ORDERED THAT Facility Operating License No. DPR-56 is hereby amended by substituting the following provisions for the provisions set out in the Commission's Orders for Modification of License dated December 27, 1974 and January 7, 1976.

1. Operation of Peach Bottom Atomic Power Station Unit 3 with plugged bypass flow holes is hereby authorized subject to the conditions set forth in the concurrently issued Amendment No. 14 to the Facility License No. DPR-56, and

2. A monitoring program using LPRM and TIP traces and available accelerometers on incore instrument guide tubes shall be performed for the purpose of detecting any instrument tube - channel box interaction.

FOR THE NUCLEAR REGULATORY COMMISSION

Ben C. Rusche, Director
Office of Nuclear Reactor Regulation

Dated at Bethesda, Maryland
this 26th day of January, 1976.

ORB#3	ORB#3
CParrish:kmf	GLear
1/ 21 /76	1/ 26 /76

OFFICE	ORB#3	OELD	RL:AD/ORs	D:DOR	DD:NRR	NRR
SURNAME	EVordery:kmf	S Schwartz	RRGoller	VStello	ECase	BCRusche
DATE	1/ 23 /76	1/ 27 /76	1/ 27 /76	1/ 27 /76	1/ 27 /76	1/ 28 /76

UNITED STATES OF AMERICA
NUCLEAR REGULATORY COMMISSION

In the Matter of	)	
	)	
PHILADELPHIA ELECTRIC COMPANY	)	
	)	Docket No. 50-278
(Peach Bottom Atomic Power Station, Unit 3)	)	
	)	

ORDER FOR MODIFICATION OF LICENSE

I.

Philadelphia Electric Company (PECO or Licensee) is the holder of Facility Operating License No. DPR-56 which authorizes operation of Peach Bottom Atomic Power Station Unit 3 (Unit 3 or the Facility) at steady-state reactor core power levels not in excess of 3293 megawatts thermal (rated power). The Facility is a boiling water reactor (BWR) located at the Licensee's site in Peach Bottom, York County, Pennsylvania.

II.

1. On July 23, 1975, the Nuclear Regulatory Commission (the Commission) issued an "Order for Modification of License" (40 F.R. 32179 of July 31, 1975) which confirmed a plan for limited additional operation of the facility. As explained in the Order of July 23, 1975, the Facility's channel box wear, as indicated by the noise-to-signal ratio recorded by the traversing incore probe (TIP), had exceeded the threshold for remedial action. The remedial action, confirmed by the Order, limited operation of the facility at not more than 40 percent of rated core flow and with a maximum fuel bundle power of 3.35 MWt. In addition, the Order permitted operation up to full flow and power for a brief period of time needed to collect flow vibration data and to conduct fuel preconditioning. The Order further stipulated that the Licensee was to shutdown the facility following approximately 45 equivalent full

flow days from June 2, 1975 unless within that period certain specified tests have been completed which demonstrated the efficacy of the 40% flow limit.

2. By letter dated December 29, 1975, the Licensee proposed a plan, previously discussed with the NRC staff, setting forth a course of remedial action, which would allow operation with flow rates above 40 percent of rated flow and maximum bundle power above 3.35 MWt. The plan would involve shutdown of the reactor and appropriate replacement of worn channel boxes and plugging of the core support plate bypass holes. The reactor was shutdown on January 2, 1976, for visual inspection of the channel boxes and the necessary repairs.

3. By its letter dated December 29, 1975, the Licensee provided details relating to the fuel channel inspection program and the installation of core bypass flow plugs in the lower core plate and supplied analyses to demonstrate the adequacy of the procedures for plug installation.

4. On January 7, 1976, the Commission issued an "Order for Modification of License" (January 14, 1976, 41 F.R. 2129) that approved the repair program and authorized the installation of bypass hole plugs in the facility's lower core plate. As discussed in the January 7, 1976 Order, the NRC staff concluded that the plugs will reduce the vibration of the instrument thimbles caused by flow through the bypass holes. By telecon on January 21, 1976, Philadelphia Electric

Company confirmed that the licensee's inspection and repair program was completed. The inspection program resulted in the rejection of 138 channel boxes with unacceptable wear as defined in the repair program. These channel boxes were replaced. Ninety-one channel boxes with indications of wear, but within the criteria of the repair program, were also replaced. Philadelphia Electric Company also confirmed that all flow bypass holes in the core plate were plugged.

5. By letters dated November 18 and 20, 1975, and December 29, 1975[1/], the Licensee provided analyses, including an emergency core cooling performance analysis, for reactor power operation with the plugs installed in the bypass holes. The December 29, 1975 letter supplemented letters of July 9, September 10, October 1 and 30, 1975 related to ECCS analyses.

6. The Commission's staff has reviewed the analyses submitted by the Licensee on December 29, 1975 and supplements thereto to support operation with the bypass flow hole plugs installed. As discussed in the Commission's concurrently issued Safety Evaluation for Amendment No. 14 to the license the proposed operation with plugs will require modified limits relating to emergency core cooling system performance. The modified limits specified in the concurrently issued Amendment No. 14 would be based upon an evaluation of ECCS performance calculated in accordance with an acceptable evaluation model that conforms to the requirements of the Commission's regulations in 10 CFR Section 50.46.

1/Copies of the December 29, 1975 filing by the Licensee are available for public inspection in the Commission's Public Document Room, 1717 H Street, N. W., Washington, D. C., and are being placed in the Martin Memorial Library, 189 E. Market Street, York, Pennsylvania.

The amendment would modify various limits established in accordance with the Commission's Interim Acceptance Criteria, and would, with respect to the facility, terminate the further restrictions imposed by the Commission's December 27, 1974 Order for Modification of License (40 F.R. 1772, January 9, 1975), and would impose instead, limitations established in accordance with the Commission's Acceptance Criteria for Emergency Core Cooling Systems for Light Water Nuclear Power Reactors, 10 CFR Section 50.46. The amendment would also revise the Technical Specifications to permit operation of the facility using operating limits based on the General Electric Thermal Analysis Basis (GETAB) and with the Low Pressure Coolant Injection System modified in accordance with the Licensee's application for license amendment dated July 9, 1975 as supplemented.

It also should be noted that plugs identical to those to be used in Peach Bottom Unit 3 have been installed in the Cooper, Vermont Yankee, Duane Arnold, Pilgrim, and Peach Bottom Unit 2 reactors. The plugs installed in Vermont Yankee were removed during a refueling operation after ten months of successful service. No abnormalities or loose pieces were reported. Vermont Yankee has since reinstalled the plugs.

7. Based on our review of the Licensee's submittals of November 18 and 20, 1975 and December 29, 1975, and the prior related experience at the Pilgrim and Vermont Yankee reactors, the NRC staff concluded in its concurrently issued Safety Evaluation that operation of Peach Bottom Unit 3 in accordance

will be no environmental impact attributable to the proposed action other than that which has already been predicted and described in the Commission's Final Environmental Statement for Peach Bottom Atomic Power Station, Units 2 and 3 published in April 1973, and that a negative declaration to this effect is appropriate.

For further details with respect to this action, see (1) the application for amendment dated July 9, 1975 and supplements thereto dated September 10, 1975, October 1, 24 and 30, 1975, November 18 and 20, 1975, and December 29, 1975, (2) Amendment No. 14 to License No. DPR-56, (3) the Commission's related Safety Evaluation, (4) the Commission's Negative Declaration dated JAN 29 1976. All of these items are available for public inspection at the Commission's Public Document Room, 1717 H Street, N. W., Washington, D. C. and at the Martin Memorial Library, 189 E. Market Street, York, Pennsylvania.

A copy of items (2), (3) and (4) may be obtained upon request addressed to the U.S. Nuclear Regulatory Commission, Washington, D. C. 20555, Attention: Director, Division of Operating Reactors.

Dated at Bethesda, Maryland, this 29th day of January, 1976.

FOR THE NUCLEAR REGULATORY COMMISSION

/S/

George Lear, Chief
Operating Reactors Branch #3
Division of Operating Reactors

	ORB#3	ORB#3
	CSParris:kmf	GLear
	1/ 26 /76	1/ 26 /76

OFFICE	ORB#3	OELD	RL:AD/ORs	D:DOR	BD:NRR	NRR
SURNAME	EWverdery:kmf	S. Sohinki	KRGoller	VSTello	EGCase	BCRusche
DATE	1/ 26 /76	1/ 27 /76	1/ 27 /76	1/ 27 /76	1/ 27 /76	1/ 28 /76

Form AEC-318 (Rev. 9-53) AECM 0240

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974-526-166

UNITED STATES NUCLEAR REGULATORY COMMISSION

DOCKET NO. 50-278

PHILADELPHIA ELECTRIC COMPANY
PUBLIC SERVICE ELECTRIC & GAS COMPANY
DELMARVA POWER AND LIGHT COMPANY
ATLANTIC CITY ELECTRIC COMPANY

NOTICE OF ISSUANCE OF AMENDMENT TO FACILITY OPERATING LICENSE

AND NEGATIVE DECLARATION

Notice is hereby given that the U.S. Nuclear Regulatory Commission (the Commission) has issued Amendment No. 14 to Facility Operating License No. DPR-56 issued to Philadelphia Electric Company, Public Service Electric & Gas Company, Delmarva Power and Light Company, and Atlantic City Electric Company, which revised Technical Specifications for operation of the Peach Bottom Atomic Power Station Unit 3, located in Peach Bottom, York County, Pennsylvania. The amendment is effective as of its date of issuance.

The amendment modifies the provisions in the Technical Specifications relating to Limiting Conditions for Operation associated with the Emergency Core Cooling System (ECCS) and Reactor Core Power Distribution Limits; and provides for modification of the ECCS to improve its performance in accordance with the licensees' application for amendment dated July 9, 1975.

Notice of proposed Issuance of Amendment to Facility Operating License in connection with this action was published in the FEDERAL REGISTER on August 18, 1975 (40 F.R. 34647). No request for a hearing or petition for leave to intervene was filed following notice of the proposed action.

The Commission has prepared an environmental impact appraisal for the revised Technical Specifications and has concluded that an environmental impact statement for this particular action is not warranted because there

SURNAME ➤						
DATE ➤						