

May 31, 1996

Dr. Robert C. Mecredy
Vice President, Nuclear Operations
Rochester Gas and Electric Corporation
89 East Avenue
Rochester, NY 14649

SUBJECT: EXEMPTION FROM CERTAIN REQUIREMENTS OF 10 CFR PART 50,
APPENDIX K, PARAGRAPHS I.D.3 AND I.D.5 - R. E. GINNA NUCLEAR
POWER PLANT (TAC NO. M92763)

Dear Dr. Mecredy:

By letter dated November 5, 1992, as supplemented June 19, 1995, Rochester Gas and Electric Corporation requested an exemption from certain requirements of 10 CFR Part 50, Appendix K, Paragraphs I.D.3 and I.D.5.

The NRC staff reviewed this exemption request and found the evaluation model described in the NRC-approved version of WCAP-10924-P, Volume 1, Revision 1, Addendum 4, "Westinghouse UPI Model Improvements," dated August 1990, acceptable for use in the Ginna large-break loss-of-coolant accident analyses.

A copy of the exemption has been forwarded to the Office of the Federal Register for publication.

Sincerely,

Original signed by:

Guy S. Vissing, Project Manager
Project Directorate I-1
Division of Reactor Projects - I/II
Office of Nuclear Reactor Regulation

Docket No. 50-244

Enclosure: Exemption

cc w/encl: See next page

DISTRIBUTION: See attached sheet

DOCUMENT NAME: G:\GINNA\3GI92763.EXE

To receive a copy of this document, indicate in the box: "C" = Copy without enclosures "E" = Copy with enclosures "N" = No copy

OFFICE	LA:PDIA	PM:PDI-1	BC:SRXB	D:PDI-1	OGC
NAME	SLittle	Gvissing:smm	RJones	JM/TCH/ET	W.D. Molyneux
DATE	05/20/96	05/21/96	05/21/96	05/20/96	05/28/96
OFFICE	D:DRPE	ADPR	D:NR		
NAME	Svarga	RZimmerman	W.T. Boswell		
DATE	05/20/96	05/31/96	05/31/96	05/ /96	05/ /96

OFFICIAL RECORD COPY

9606040288 960531
PDR ADOCK 05000244
PDR

DISTRIBUTION:

Docket File (50-244)

PUBLIC

PDI-1 Reading

SVarga

JZwolinski

JMitchell

AJohnson

MBoyle

SLittle

RJones

FOrr

VMcCree

OGC

GHill

ACRS

WDean, 017/G21

LDoerflein RI/DRP

040086

DFI



UNITED STATES
NUCLEAR REGULATORY COMMISSION

WASHINGTON, D.C. 20555-0001

May 31, 1996

Dr. Robert C. Mecredy
Vice President, Nuclear Operations
Rochester Gas and Electric Corporation
89 East Avenue
Rochester, NY 14649

SUBJECT: EXEMPTION FROM CERTAIN REQUIREMENTS OF 10 CFR PART 50,
APPENDIX K, PARAGRAPHS I.D.3 AND I.D.5 - R. E. GINNA NUCLEAR
POWER PLANT (TAC NO. M92763)

Dear Dr. Mecredy:

By letter dated November 5, 1992, as supplemented June 19, 1995, Rochester Gas and Electric Corporation requested an exemption from certain requirements of 10 CFR Part 50, Appendix K, Paragraphs I.D.3 and I.D.5.

The NRC staff reviewed this exemption request and found the evaluation model described in the NRC-approved version of WCAP-10924-P, Volume 1, Revision 1, Addendum 4, "Westinghouse UPI Model Improvements," dated August 1990, acceptable for use in the Ginna large-break loss-of-coolant accident analyses.

A copy of the exemption has been forwarded to the Office of the Federal Register for publication.

Sincerely,

A handwritten signature in cursive script that reads "Guy S. Vissing".

Guy S. Vissing, Senior Project Manager
Project Directorate I-1
Division of Reactor Projects - I/II
Office of Nuclear Reactor Regulation

Docket No. 50-244

Enclosure: Exemption

cc w/encl: See next page

INDG FILE CENTER COPY

Dr. Robert C. Mecredy

R.E. Ginna Nuclear Power Plant

cc:

Peter D. Drysdale, Senior Resident Inspector
R.E. Ginna Plant
U.S. Nuclear Regulatory Commission
1503 Lake Road
Ontario, NY 14519

Regional Administrator, Region I
U.S. Nuclear Regulatory Commission
475 Allendale Road
King of Prussia, PA 19406

Mr. F. William Valentino, President
New York State Energy, Research,
and Development Authority
2 Rockefeller Plaza
Albany, NY 12223-1253

Charlie Donaldson, Esq.
Assistant Attorney General
New York Department of Law
120 Broadway
New York, NY 10271

Nicholas S. Reynolds
Winston & Strawn
1400 L St. N.W.
Washington, DC 20005-3502

Ms. Thelma Wideman
Director, Wayne County Emergency
Management Office
Wayne County Emergency Operations Center
7336 Route 31
Lyons, NY 14489

Ms. Mary Louise Meisenzahl
Administrator, Monroe County
Office of Emergency Preparedness
111 West Fall Road, Room 11
Rochester, NY 14620

UNITED STATES OF AMERICA
NUCLEAR REGULATORY COMMISSION

In the Matter of)	
ROCHESTER GAS AND ELECTRIC CORPORATION)	Docket No. 50-244
R. E. Ginna Nuclear Power Plant)	

EXEMPTION

I.

On December 10, 1984, the Nuclear Regulatory Commission issued Facility Operating License No. DPR-18 to Rochester Gas and Electric Corporation (RG&E) for the R.E. Ginna Nuclear Power Plant (Ginna). The license stipulated, among other things, that the facility is subject to all rules, regulations, and orders of the Commission.

II.

The Code of Federal Regulations, Paragraph I.D.3, "Calculation of Reflood Rate for Pressurized Water Reactors [PWRs]," of Appendix K to Part 50 of Title 10 of the Code of Federal Regulations (10 CFR) requires that the refilling of the reactor vessel and the time and rate of reflooding of the core be calculated by an acceptable model that considers the thermal and hydraulic characteristics of the core and of the reactor system. In particular, Paragraph I.D.3 requires, in part, that, "The ratio of the total fluid flow at the core exit plane to the total flow at the core inlet plane (carryover fraction) shall be used to determine the core exit flow and shall be determined in accordance with applicable experimental data." The purpose

of this requirement is to assure that the core exit flow during the post-loss-of-coolant accident (LOCA) refill/reflood phase is determined using a model that accounts for appropriate experimental data.

Paragraph I.D.5, "Refill and Reflood Heat Transfer for Pressurized Reactors," of Appendix K to 10 CFR Part 50 requires that for (1) reflood rates of 1 inch per second or higher, the reflood heat transfer coefficients be based on applicable experimental data for unblocked cores, and (2) reflood rates less than 1 inch per second during refill and reflood, heat transfer calculations be based on the assumption that cooling is only by steam.

License Condition 2.D provided an exemption from 10 CFR 50.46(a)(1) that the emergency core cooling system (ECCS) performance be calculated in accordance with an acceptable calculational model which conforms to the provisions of Appendix K (SER dated April 18, 1978). The exemption will expire upon receipt and approval of revised ECCS calculations.

By letter dated November 5, 1992, as supplemented on June 19, 1995, RG&E (the licensee) requested an exemption from 10 CFR Part 50, Appendix K, Paragraphs I.D.3 and I.D.5 based on revised ECCS calculations.

The November 5, 1992, exemption request was supported first by a plant specific ECCS evaluation model (EM) using a methodology not yet approved by NRC (WCAP-10924-P, Volume 2, Revision 2, Addendum 3). The proposed EM would have supported the May 1993, 1994, and 1995 core reloads. However, the WCAP-10924-P, Revision 2, Volume 2, Addendum 3 methodology has not yet been approved by NRC. On June 19, 1995, the licensee supported the November 5, 1992, exemption request by an updated plant specific EM using a methodology approved by NRC (WCAP-10924-P, Volume 1, Revision 1, Addendum 4). The

proposed June 19, 1995, EM includes larger peaking factors necessary to support conversion to an 18-month fuel-cycle reload to begin in May 1996.

The specific provision of Paragraph I.D.3 from which the licensee requested an exemption, is the calculation of core exit flow based on carryover fraction. The licensee stated that the prescriptions for this calculation given in Paragraph I.D.3 were based on data for a bottom-flooding configuration design. The Ginna design relies on upper plenum injection (UPI) for the ECCS injection during the reflood phase of a large-break LOCA. UPI is not a "lower flooding design;" its ECCS flow patterns, flow magnitudes, core cooling mechanisms, and, in fact, the meanings and impacts of the terms "inlet" and "exit" are different than those of bottom flooding plants. This EM described in WCAP 10924-P, Volume 1, Revision 2, Addendum 4, "Westinghouse UPI Model Improvements," dated August 1990, which has been generically approved in a staff SER of February 8, 1991, determines core flow, including flow "exiting" the core, flow "entering" the core, and flow within the core and elsewhere within the reactor coolant system (RCS) in accordance with applicable experimental data. The data are different than that referenced in paragraph I.D.3, however, they were found acceptable because they are specifically applicable to UPI designs. Because of the differences between UPI design considerations and those for bottom flooding designs mentioned above, the "carryover fraction" as defined in paragraph I.D.3 is not calculated in the approved EM and would not have the same technical significance if it were. The licensee, therefore, concludes that, in using the approved UPI model with its technical improvements for Ginna, it will not comply with Paragraph I.D.3. The staff SER of February 8, 1991, finds

WCAP-10924-P EM contains an empirically verified model more directly applicable to top flooding situations to calculate core exit flow, which satisfies the technical purpose of this Appendix K, paragraph I.D.3 requirement to determine the core exit flow, but does not comply with the letter of the requirement.

In more detail, the intent of the Appendix K, paragraph I.D.3, is to assure that the calculation of core exit flow is performed using an EM code model which has been verified against appropriate experimental data for LOCA accident analyses. The Westinghouse COBRA/TRAC code (WCOBRA/TRAC) consists of (1) Westinghouse Large-Break LOCA Best Estimate Methodology, Volume 1: Model Description and Validation, WCAP-10924-P, April 1986, and (2) a Westinghouse Large-Break LOCA Best Estimate Methodology, Volume 2: Application to Two-Loop PWRs Equipped with Upper Plenum Injection, WCAP-10924, Volume 2, Revision 1, April 1988.

To assess WCOBRA/TRAC's capability for predicting the correct thermal-hydraulic behavior for upper plenum injection situations, WCOBRA/TRAC has been compared to the Japanese Cylindrical Core Test Facility data which models the interaction effects of upper plenum injection in a large scale test facility. WCOBRA/TRAC predicts the thermal-hydraulic effects of the upper plenum injection such that the carryover of steam and water into the hot legs is more realistically calculated.

The staff finds that the exemption from Paragraph I.D.3 requirement is acceptable because the licensee has provided an acceptable method to satisfy the underlying purpose of the requirement that appropriately models heat

transfer mechanisms in UPI designs and application of the regulation is not necessary to achieve the underlying purpose of the rule.

Paragraph I.D.5, dealing with refill and reflood heat transfer for PWRs, provides heat transfer prescriptions for refill, reflood with a flooding rate of less than 1 inch per second, and reflood with a flooding rate of more than 1 inch per second for bottom-flooding PWRs. The purpose of the paragraph is to assure that heat transfer in the core is appropriately calculated in the refill and reflood phases of post-LOCA recovery.

Paragraph I.D.5.a requires that "New correlations or modifications to the FLECHT heat transfer correlations are acceptable only after they are demonstrated to be conservative, by comparison with FLECHT data, for a range of parameters consistent with the transient to which they are applied." The licensee requested an exemption from the prescriptions of this paragraph because the FLECHT data do not portray UPI core heat transfer mechanisms as realistically as the more recent data upon which the models in WCAP-10924 were based. The licensee also indicates that the Ginna design is not lower flooding, and that technical considerations are different between bottom flooding designs and UPI design similar to those discussed above for paragraph I.D.3. The licensee identified that the WCAP-10924-P EM contains an empirically verified model which accounts for refill and reflood heat transfer, which satisfies the purpose of the paragraph I.D.5.a requirement. The heat transfer models in the approved UPI EM are based on comparisons to data other than the FLECHT data cited in Paragraph I.D.5.a, and comparisons to the applicable data demonstrate acceptable conservatism (as identified in the staff SER of February 8, 1991). Because of the differences in bases, it is

not clear that the licensee can demonstrate monotonic conservatism with respect to FLECHT data.

Further, to meet the intent of Appendix K, paragraph I.D.5, which is to use the most applicable data for LOCA accident analyses to appropriately calculate heat transfer during the refill and reflood phases; the WCOBRA/TRAC code has been verified against two independent sets of experimental data which model the upper plenum injection flow and heat transfer situation.

The first series of tests which have been modeled by WCOBRA/TRAC are the Westinghouse G-2 refill downflow and counterflow rod bundle film boiling experiments (Westinghouse G-2, 17x17 Refill Heat Transfer Tests and Analysis, WCAP-8793, August 1976).

These experiments were performed as a full length 17x17 Westinghouse rod bundle array which had a total of 336 heated rods. The injection flow was from the top of the bundle and is scalable to the UPI injection flows. The pressures varied between 20-100 psia which is the typical range for UPI top flooding situations. Both concurrent downflow film boiling and countercurrent film boiling experiments were modeled using WCOBRA/TRAC. Both these flow situations are found in the calculated core response for a PWR with UPI.

In addition to modeling these separate effects tests, WCOBRA/TRAC has been used to model the Japanese Cylindrical Core Test Facility experiments with upper plenum injection. The tests which have been modeled included (1) a symmetrical UPI injection with maximum injection flow, (2) minimum injection flows with a nearly symmetrical injection pattern, (3) a minimum UPI injection flow with a skewed UPI injection, and (4) a cold leg injection reference test for the UPI tests.

The results of these comparisons are documented and show that WCOBRA/TRAC does predict heat transfer behavior for these complex film boiling situations as well as the system response for upper plenum injection situations.

The effect of flow blockage due to cladding burst is explicitly accounted for in WCOBRA/TRAC with models which calculate cladding swelling, burst, and area reduction due to blockage. These models are based on previously approved models used in current evaluation models and on flow blockage models determined to be acceptable by the staff. The effect of flow blockage is accounted for from the time burst is calculated to occur. The fluid models in WCAP/TRAC calculate flow diversion as a result of the blockage and take into account of the blockage from the time the cladding burst is calculated to occur. Thus, the heat transfer behavior is predicted for these complex film boiling situations and, thus, the intent of Appendix K, paragraph I.D.5, which requires flow blockage effects be taken into account, is met.

The staff finds that the exemption from the paragraph I.D.5.a requirement is acceptable based on the provision of an acceptable method to satisfy the purpose of the paragraph and the application of the regulation to calculate core reflood rates and heat transfer during a LB LOCA.

Paragraph I.D.5.b requires that "During refill and during reflood when reflood rates are less than one inch per second, heat transfer calculations shall be based on the assumption that cooling is only by steam, and shall take into account any flow blockage calculated to occur as a result of cladding swelling or rupture as such blockage might affect both local steam flow and heat transfer." The EM approved for UPI plants which the licensee proposes to reference does base heat transfer on cooling other than steam if other regimes

are calculated to occur. The bases of acceptability, including data comparisons, for this are discussed in the generic SER for the EM. By using this methodology, the licensee does not comply with this requirement, since the methodology recognizes that for a top flooding design, the preponderance of cooling water falls down into the core from above and may or may not be vaporized. Because the licensee's model does not meet the "steam cooling only" requirement of I.D.5.b, but provides an approved alternate methodology (which does consider the thermal and hydraulic effects of cladding swelling and rupture, as also required in paragraph I.D.5.b) for calculating heat transfer, the staff finds the exemption from the requirement of I.D.5.b acceptable, as compliance is demonstrated not to be necessary to achieve the underlying purpose of the rule.

III.

Section 50.12 of 10 CFR permits the granting of an exemption from the regulations under special circumstances. According to 10 CFR 50.12(a)(2)(ii), special circumstances are present whenever application of the regulation in question is not necessary to achieve the underlying purpose of the rule.

The staff finds that the requested exemptions for Ginna are acceptable, since compliance with the literal requirements of the paragraphs cited is not necessary given that the approved EM is based upon appropriate experimental data, the approved EM satisfactorily accounts for the cooling mechanisms in the Ginna UPI design for calculations of core reflood rates and heat transfer during a LB LOCA, and that the approved EM satisfies the purpose of the exempted requirements.

Thus, using the best-estimate thermal-hydraulic approved LBLOCA EM, the underlying purpose of the Appendix K, paragraphs I.D.3 and I.D.5 requirements can be achieved.

IV.

Accordingly, the Commission has determined that, pursuant to 10 CFR 50.12, this exemption is authorized by law, will not present an undue risk to the public health and safety, and is consistent with the common defense and security.

Accordingly, the Commission hereby grants an exemption from 10 CFR Part 50, Appendix K, paragraphs I.D.3 and I.D.5. The staff also finds that the LB LOCA EM described in any approved version of WCAP-10924-P incorporated in the Ginna Technical Specifications may be used in core operating report, and licensing analyses, and that further exemptions will not be necessary unless the updated approved versions of the EM do not meet other requirements of 10 CFR 50.46 and/or Appendix K.

Pursuant to 10 CFR 51.32, the Commission has determined that the granting of the exemption will have no significant impact on the quality of the human environment (61 FR 13891).

This exemption is effective upon issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

Original signed by:

Steven A. Varga, Director
Division of Reactor Projects - I/II
Office of Nuclear Reactor Regulation

Dated at Rockville, Maryland,
this 31st day of *See previous concurrence
May 1996.

DOCUMENT NAME: G:\GINNA\3GI92763.EXE

To receive a copy of this document, indicate in the box: "C" = Copy without enclosures "E" = Copy with enclosures "N" = No copy

OFFICE	LA:PDI-1	PM:PDI-1	*BC:SRXB	D:PDI-1	OGC
NAME	SLittle	GVisning:smm	RJones	JMitchell	
DATE	05/28/96	05/21/96	05/21/96	05/20/96	05/28/96
OFFICE	D:DRRE	ADPR#4 5/30			
NAME	SVarga	RZimmerman			
DATE	05/18/96	05/31/96	05/ /96	05/ /96	05/ /96

Handwritten notes: w/objekt w/changes

Thus, using the best-estimate thermal-hydraulic approved LBLOCA EM, the underlying purpose of the Appendix K, paragraphs I.D.3 and I.D.5 requirements can be achieved.

IV.


Accordingly, the Commission has determined that, pursuant to 10 CFR 50.12, this exemption is authorized by law, will not present an undue risk to the public health and safety, and is consistent with the common defense and security.

Accordingly, the Commission hereby grants an exemption from 10 CFR Part 50, Appendix K, paragraphs I.D.3 and I.D.5. The staff also finds that the LB LOCA EM described in any approved version of WCAP-10924-P incorporated in the Ginna Technical Specifications may be used in core operating report, and licensing analyses, and that further exemptions will not be necessary unless the updated approved versions of the EM do not meet other requirements of 10 CFR 50.46 and/or Appendix K.

Pursuant to 10 CFR 51.32, the Commission has determined that the granting of the exemption will have no significant impact on the quality of the human environment (61 FR 13891).

This exemption is effective upon issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

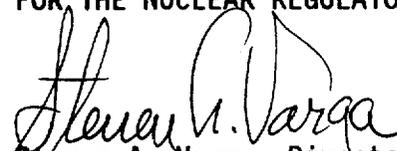

Steven A. Varga, Director
Division of Reactor Projects - I/II
Office of Nuclear Reactor Regulation

Dated at Rockville, Maryland,
this 31st day of May 1996.