


## MONITORING WELL COMPLETION LOG GRN01-0178

<b>PROJECT</b> <u>UMTRA GROUND WATER</u>	<b>NORTH COORD. (FT)</b> <u>237259.77</u>	<b>DATE DRILLED</b> <u>07/09/1990 to 07/10/1990</u>
<b>LOCATION</b> <u>GREEN RIVER, UT</u>	<b>EAST COORD. (FT)</b> <u>2387627.48</u>	<b>SURFACE ELEV. ( FT NGVD)</b> <u>4153.40</u>
<b>SITE</b> <u>GREEN RIVER</u>	<b>HOLE DEPTH (FT)</b> <u>110.00</u>	<b>TOP OF CASING (FT)</b> <u>4156.77</u>
<b>WELL NUMBER</b> <u>0178</u>	<b>WELL DEPTH (FT)</b> <u>110.00</u>	<b>MEAS. PT. ELEV. (FT)</b> <u>4156.77</u>

	<b>WELL INSTALLATION</b>	<b>INTERVAL (FT)</b>	
<b>SURFACE CASING:</b>	8 in. Steel	-2.0 to 4.0	
<b>BLANK CASING:</b>	4 in. PVC Sch 40	-3.37 to 98.0	<b>DRILLING METHOD</b> <u>ROTARY WITH BUTTON BIT</u>
<b>WELL SCREEN:</b>	4 in. Slotted PVC	98.0 to 108.0	<b>SAMPLING METHOD</b> _____
<b>SUMP/END CAP:</b>	4 in. PVC Sch 40	108.0 to 110.0	<b>DATE DEVELOPED</b> <u>07/13/1990</u>
<b>SURFACE SEAL:</b>			<b>WATER LEVEL (FT BTOC)</b> <u>53.75 on 07/13/1990</u>
<b>GROUT:</b>	Bentonite	0.0 to 9.0	<b>LOGGED BY</b> <u>Papusch, R.</u>
<b>SEAL:</b>	Bentonite Chips	9.0 to 81.0	<b>REMARKS</b> _____
<b>UPPER PACK:</b>			
<b>LOWER PACK:</b>	8-12 Silica Sand	81.0 to 110.0	

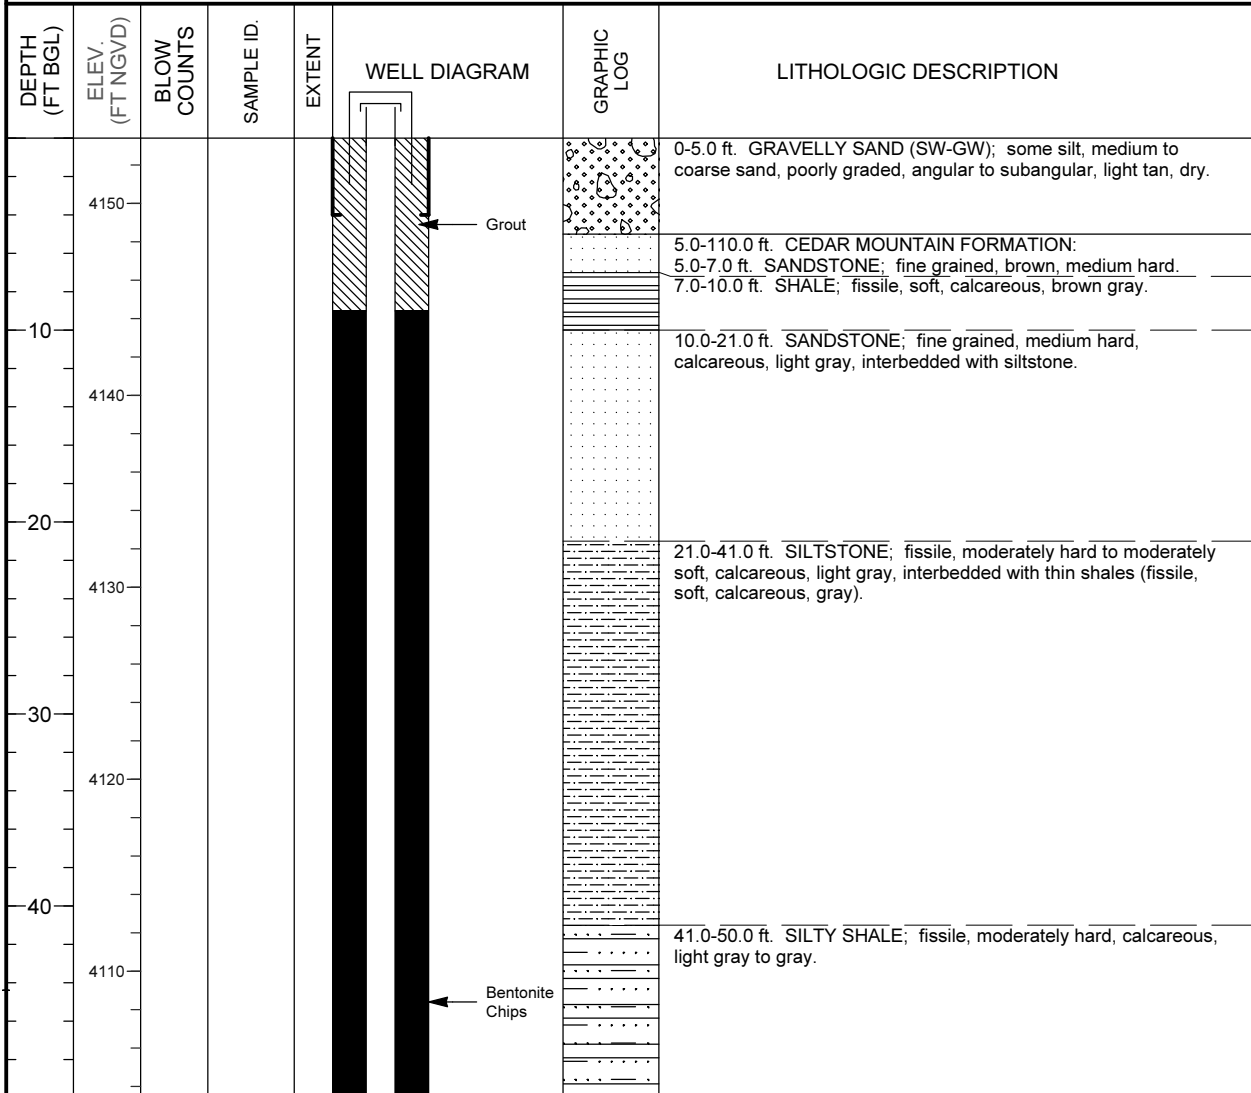

# MONITORING WELL COMPLETION LOG GRN01-0178

<b>PROJECT</b> <u>UMTRA GROUND WATER</u>	<b>WELL NUMBER</b> <u>0178</u>
<b>SITE</b> <u>GREEN RIVER</u>	<b>DATES DRILLED</b> <u>07/09/1990 to 07/10/1990</u>

*Continued from Previous Page*

