

February 2, 1990

Docket No. 50-219

DISTRIBUTION

Mr. E. E. Fitzpatrick
Vice President and Director
Oyster Creek Nuclear Generating Station
Post Office Box 388
Forked River, New Jersey 08731

Docket File
NRC & Local PDRs
SVarga
BBoger
SNorris
ADromerick
OGC (info. only)
OC/LFMB
DHagan
EJordan
GHill(4)
WJones
JCalvo
ACRS(10)
GPA/PA

Dear Mr. Fitzpatrick:

SUBJECT: ISSUANCE OF AMENDMENT (TAC NO. 75385)

The Commission has issued the enclosed Amendment No.136 to Provisional Operating License No. DPR-16 for the Oyster Creek Nuclear Generating Station, in response to your application dated December 4, 1989.

The amendment revises Technical Specification (TS) 3.7.A to clarify operability requirements for batteries B and C and, in addition specify switchgear control power requirements associated with each battery. The bases for TS Section 3.7 has also been clarified with respect to the 125 VDC System.

A copy of the related Safety Evaluation is also enclosed. The notice of issuance will be included in the Commission's bi-weekly Federal Register notice.

Sincerely,

/s/

Alexander W. Dromerick, Senior Project Manager
Project Directorate I-4
Division of Reactor Projects - I/II
Office of Nuclear Reactor Regulation

Enclosures:

- 1. Amendment No. 136 to DPR-16
- 2. Safety Evaluation

cc w/enclosures:
See next page

DFC	:LA:PDI-4	:PM:PDI-4	: OGC	:D:PDI-4	: SELB	:
NAME	:SNorris	:ADromerick:bld	: JStolz	: J. Knop	:	:
DATE	:01/17/90	:01/17/90	:01/19/90	:01/17/90	: 1/17/90	:

OFFICIAL RECORD COPY
Document Name: OYSTER CREEK AMEND 75385

9002160194 900201
FDR ADDCK 05000219
F PDC

DFOL
1/11
CP-1



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

February 2, 1990

Docket No. 50-219

Mr. E. E. Fitzpatrick
Vice President and Director
Oyster Creek Nuclear Generating Station
Post Office Box 388
Forked River, New Jersey 08731

Dear Mr. Fitzpatrick:

SUBJECT: ISSUANCE OF AMENDMENT (TAC NO. 75385)

The Commission has issued the enclosed Amendment No. 136 to Provisional Operating License No. DPR-16 for the Oyster Creek Nuclear Generating Station, in response to your application dated December 4, 1989.

The amendment revises Technical Specification (TS) 3.7.A to clarify operability requirements for batteries B and C and, in addition specify switchgear control power requirements associated with each battery. The bases for TS Section 3.7 has also been clarified with respect to the 125 VDC System.

A copy of the related Safety Evaluation is also enclosed. The notice of issuance will be included in the Commission's bi-weekly Federal Register notice.

Sincerely,

A handwritten signature in cursive script that reads "Alexander W. Dromerick".

Alexander W. Dromerick, Senior Project Manager
Project Directorate I-4
Division of Reactor Projects - I/II
Office of Nuclear Reactor Regulation

Enclosures:

1. Amendment No. 136 to DPR-16
2. Safety Evaluation

cc w/enclosures:
See next page

Mr. E. E. Fitzpatrick
Oyster Creek Nuclear Generating Station

Oyster Creek Nuclear
Generating Station

cc:

Ernest L. Blake, Jr.
Shaw, Pittman, Potts and Trowbridge
2300 N Street, NW
Washington, D.C. 20037

Resident Inspector
c/o U.S. NRC
Post Office Box 445
Forked River, New Jersey 08731

J.B. Liberman, Esquire
Bishop, Liberman, Cook, et al.
1155 Avenue of the Americas
New York, New York 10036

Commissioner
New Jersey Department of Energy
101 Commerce Street
Newark, New Jersey 07102

Regional Administrator, Region I
U.S. Nuclear Regulatory Commission
475 Allendale Road
King of Prussia, Pennsylvania 19406

Jennifer Moon, Acting Chief
New Jersey Department of Environmental
Protection
Bureau of Nuclear Engineering
CN 415
Trenton, New Jersey 08625

BWR Licensing Manager
GPU Nuclear Corporation
1 Upper Pond Road
Parsippany, New Jersey 07054

Deputy Attorney General
State of New Jersey
Department of Law and Public Safety
36 West State Street - CN 112
Trenton, New Jersey 08625

Mayor
Lacey Township
818 West Lacey Road
Forked River, New Jersey 08731

Licensing Manager
Oyster Creek Nuclear Generating Station
Mail Stop: Site Emergency Bldg.
P. O. Box 388
Forked River, New Jersey 08731



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

GPU NUCLEAR CORPORATION

AND

JERSEY CENTRAL POWER & LIGHT COMPANY

DOCKET NO. 50-219

OYSTER CREEK NUCLEAR GENERATING STATION

AMENDMENT TO PROVISIONAL OPERATING LICENSE

Amendment No. 136
License No. DPR-16

1. The Nuclear Regulatory Commission (the Commission) has found that:
 - A. The application for amendment by GPU Nuclear Corporation, et al., (the licensee), dated December 4, 1989, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;
 - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
 - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
 - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
 - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.


2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of Provisional Operating License No. DPR-16 is hereby amended to read as follows:

(2) Technical Specifications

The Technical Specifications contained in Appendices A and B, as revised through Amendment No. 136, are hereby incorporated in the license. GPU Nuclear Corporation shall operate the facility in accordance with the Technical Specifications.

3. This license amendment is effective as of the date of issuance, to be implemented within 30 days of issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

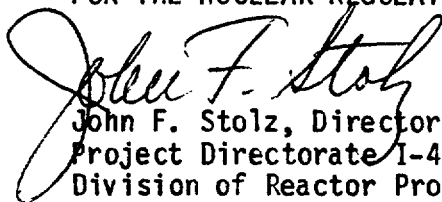

John F. Stolz, Director
Project Directorate I-4
Division of Reactor Projects - I/II
Office of Nuclear Reactor Regulation

Attachment:
Changes to the Technical
Specifications

Date of Issuance: February 2, 1990

ATTACHMENT TO LICENSE AMENDMENT NO. 136

PROVISIONAL OPERATING LICENSE NO. DPR-16

DOCKET NO. 50-219

Replace the following pages of the Appendix A Technical Specifications with the enclosed pages as indicated. The revised pages are identified by amendment number and contain vertical lines indicating the areas of change.

<u>Remove</u>	<u>Insert</u>
3.7-1	3.7-1
3.7-2	3.7-2
3.7-3	3.7-3

3.7 AUXILIARY ELECTRICAL POWER

Applicability: Applies to the operating status of the auxiliary electrical power supply.

Objective: To assure the operability of the auxiliary electrical power supply.

Specification: A. The reactor shall not be made critical unless all of the following requirements are satisfied:

1. The following buses or panels energized.
 - a. 4160 volt buses 1C and 1D in the turbine building switchgear room.
 - b. 460 volt buses 1A2, 1B2, 1A21, 1B21 vital MCC 1A2 and 1B2 in the reactor building switchgear room; 1A3 and 1B3 at the intake structure; 1A21A, 1B21A, 1A21B, and 1B21B and vital MCC 1AB2 on 23'6" elevation in the reactor building; 1A24 and 1B24 at the stack.
 - c. 208/120 volt panels 3, 4, 4A, 4B, 4C and VACP-1 in the reactor building switchgear room.
 - d. 120 volt protection panel 1 and 2 in the cable room.
 - e. 125 volt DC distribution centers C and B, and panel D, Panel DC-F, isolation valve motor control center DC-1 and 125V DC motor control center DC-2.
 - f. 24 volt D.C. power panels A and B in the cable room.
 2. One 230 KV line is fully operational and switch gear and both startup transformers are energized to carry power to the station 4160 volt AC buses and carry power to or away from the plant.
 3. An additional source of power consisting of one of the following is in service connected to feed the appropriate plant 4160 V bus or buses:
 - a. A second 230 KV line fully operational.
 - b. One 34.5 KV line fully operational.
 4. Station batteries B and C and an associated battery changer are operable. Switchgear control power for 4160 volt bus 1D and 460 volt buses 1B2 and 1B3 are provided by battery B. Switchgear control power for 4160 volt bus 1C and 460 volt buses 1A2 and 1A3 are provided by battery C.
 5. Bus tie breakers ED and EC are in the open position.
- B. The reactor shall be placed in the cold shutdown position if the availability of power falls below that required by Specification A above, except that
1. The reactor may remain in operation for a period

not to exceed 7 days in any 30 day period if a startup transformer is out of service. None of the engineered safety feature equipment fed by the remaining transformer may be out of service.

2. The reactor may remain in operation for a period not to exceed 7 days if 125 VDC Motor Control Center DC-2 is out of service, provided the requirements of Specification 3.8 are met.

C. Standby Diesel Generators

1. The reactor shall not be made critical unless both diesel generators are operable and capable of feeding their designated 4160 volt buses.
2. If one diesel generator becomes inoperable during power operation, repairs shall be initiated immediately and the other diesel shall be operated at least one hour every 24 hours at greater than 20% rated power until repairs are completed. The reactor may remain in operation for a period not to exceed 7 days in any 30-day period if a diesel generator is out of service. During the repair period none of the engineered safety features normally fed by the operational diesel generator may be out of service or the reactor shall be placed in the cold shutdown condition.
3. If both diesel generators become inoperable during power operation, the reactor shall be placed in the cold shutdown condition.
4. For the diesel generators to be considered operable there shall be a minimum of 14,000 gallons of diesel fuel in the standby diesel generator fuel tank.

Bases: The general objective is to assure an adequate supply of power with at least one active and one standby source of power available for operation of equipment required for a safe plant shutdown, to maintain the plant in a safe shutdown condition and to operate the required engineered safety feature equipment following an accident.

AC power for shutdown and operation of engineered safety feature equipment can be provided by any of four active (two 230 KV and two 34.5 KV lines) and either of two standby (two diesel generators) sources of power. Normally all six sources are available. However, to provide for maintenance and repair of equipment and still have redundancy of power sources the requirement of one active and one standby source of power was established. The plant's main generator is not given credit as a source since it is not available during shutdown.

The plant 125V DC System consists of three batteries and associated distribution system. Batteries B and C are designated as the safety related subsystems while battery A is designated as a non-safety related subsystem. Safety related loads are supplied by batteries B and C, each with two associated full capacity chargers. One charger on each battery is in service at all times with the second charger available in the event of charger failure. These chargers are active sources and supply the normal 125V DC requirements with the batteries and standby sources. (1)

In applying the minimum requirement of one active and one standby source of AC power, since both 230 KV lines are on the same set of towers, either one or both 230 KV lines are considered as a single active source.

The probability analysis in Appendix "L" of the FDSAR was based on one diesel and shows that even with only one diesel the probability of requiring engineered safety features at the same time as the second diesel fails is quite small. This analysis used information on peaking diesels when synchronization was required which is not the case for Oyster Creek. Also the daily test of the second diesel when one is temporarily out of service tends to improve the reliability as does the fact that synchronization is not required.

As indicated in Amendment 18 to the Licensing Application, there are numerous sources of diesel fuel which can be obtained within 6 to 12 hours and the heating boiler fuel in a 75,000 gallon tank on the site could also be used. As indicated in Amendment 32 of the Licensing Application and including the Security System loads, the load requirement for the loss of offsite power would require 12,410 gallons for a three day supply. For the case of loss of offsite power plus loss-of-coolant plus bus failure 9790 gallons would be required for a three day supply. In the case of loss of offsite power plus loss-of-coolant with both diesel generators starting the load requirements (all equipment operating) shown there would not be three days' supply. However, not all of this load is required for three days and, after evaluation of the conditions, loads not required on the diesel will be curtailed. It is reasonable to expect that within 8 hours conditions can be evaluated and the following loads curtailed:

1. One Core Spray Pump
2. One Core Spray Booster Pump
3. One Control Rod Drive Pump
4. One Containment Spray Pump
5. One Emergency Service Water Pump

With these pieces of equipment taken off at 8 hours after the incident it would require a total consumption of 12,840 gallons for a three day supply. Therefore, a minimum technical specification requirement of 14,000 gallons of diesel fuel in the standby diesel generator fuel tank will exceed the engineered safety features operational requirement after an accident by approximately 9%.

References:

- (1) Letter, Ivan R. Finfrock, Jr. to the Director of Nuclear Reactor Regulation dated April 14, 1978.



UNITED STATES
NUCLEAR REGULATORY COMMISSION
WASHINGTON, D. C. 20555

SAFETY EVALUATION BY THE OFFICE OF NUCLEAR REACTOR REGULATION

RELATED TO AMENDMENT NO. 136

TO PROVISIONAL OPERATING LICENSE NO. DPR-16

GPU NUCLEAR CORPORATION AND
JERSEY CENTRAL POWER & LIGHT COMPANY

OYSTER CREEK NUCLEAR GENERATING STATION

DOCKET NO. 50-219

1.0 INTRODUCTION

In a letter dated December 4, 1989, GPU Nuclear Corporation (GPUN), the licensee for Oyster Creek Nuclear Generating Station, proposed to revise Technical Specification (TS) 3.7.A to clarify operability requirements for batteries B and C and, in addition specify switchgear control power requirements associated with each battery. The bases for Section 3.7 would also be clarified with respect to the 125 VDC System.

In the process of reviewing the existing OCNGS Technical Specifications, GPUN has identified the need to modify Section 3.7 as it relates to the 125 VDC System station batteries. As addressed in LER 89-020, the DC control power selector switch for 460 VAC bus 1B2 had been improperly aligned to non-safety related battery A. The purpose of TSCR No. 182 is to clearly specify the operability requirements for batteries B and C and, in addition specify the switchgear control power requirements associated with each battery.

2.0 EVALUATION

The licensee has modified Technical Specification 3.7.A.4 to indicate that batteries B and C and an associated battery charger must be operable prior to the reactor becoming critical. The proposed change does not alter the intent of the existing specification, but rather references the term "operable" which is defined in the Technical Specifications and provides clear guidance to plant personnel. Specification 3.7.A.4 has also been modified, in order to provide clear guidance to plant personnel, to include a statement concerning the source of DC control power for relevant bus switchgear addressed in Specification 3.7.A.1. Neither proposed change alters the operability requirements or the manner in which the systems are operated. The bases has also been clarified with respect to the 125 VDC System.

The staff has reviewed the information provided by the licensee and has determined that the proposed changes clarify the operability requirements with respect to the 125 VDC System. Therefore, we conclude that the changes are acceptable.

3.0 ENVIRONMENTAL CONSIDERATION

This amendment changes a requirement with respect to the installation or use of a facility component located within the restricted area as defined in 10 CFR Part 20. We have determined that the amendment involves no significant increase in the amounts, and no significant change in the types, of any effluents that may be released offsite, and that there is no significant increase in individual or cumulative occupational radiation exposure. The staff has previously issued a proposed finding that this amendment involves no significant hazards consideration and there has been no public comment on such finding. Accordingly, the amendment meets the eligibility criteria for categorical exclusion set forth in 10 CFR 51.22(c)(9). Pursuant to 10 CFR 51.22(b), no environmental impact statement or environmental assessment need be prepared in connection with the issuance of this amendment.

4.0 CONCLUSION

The staff has concluded, based on the considerations discussed above, that (1) there is reasonable assurance that the health and safety of the public will not be endangered by operation in the proposed manner, and (2) such activities will be conducted in compliance with the Commission's regulations, and (3) the issuance of the amendment will not be inimical to the common defense and security nor to the health and safety of the public.

Dated: February 2, 1990

Principal Contributor: A. W. Dromerick