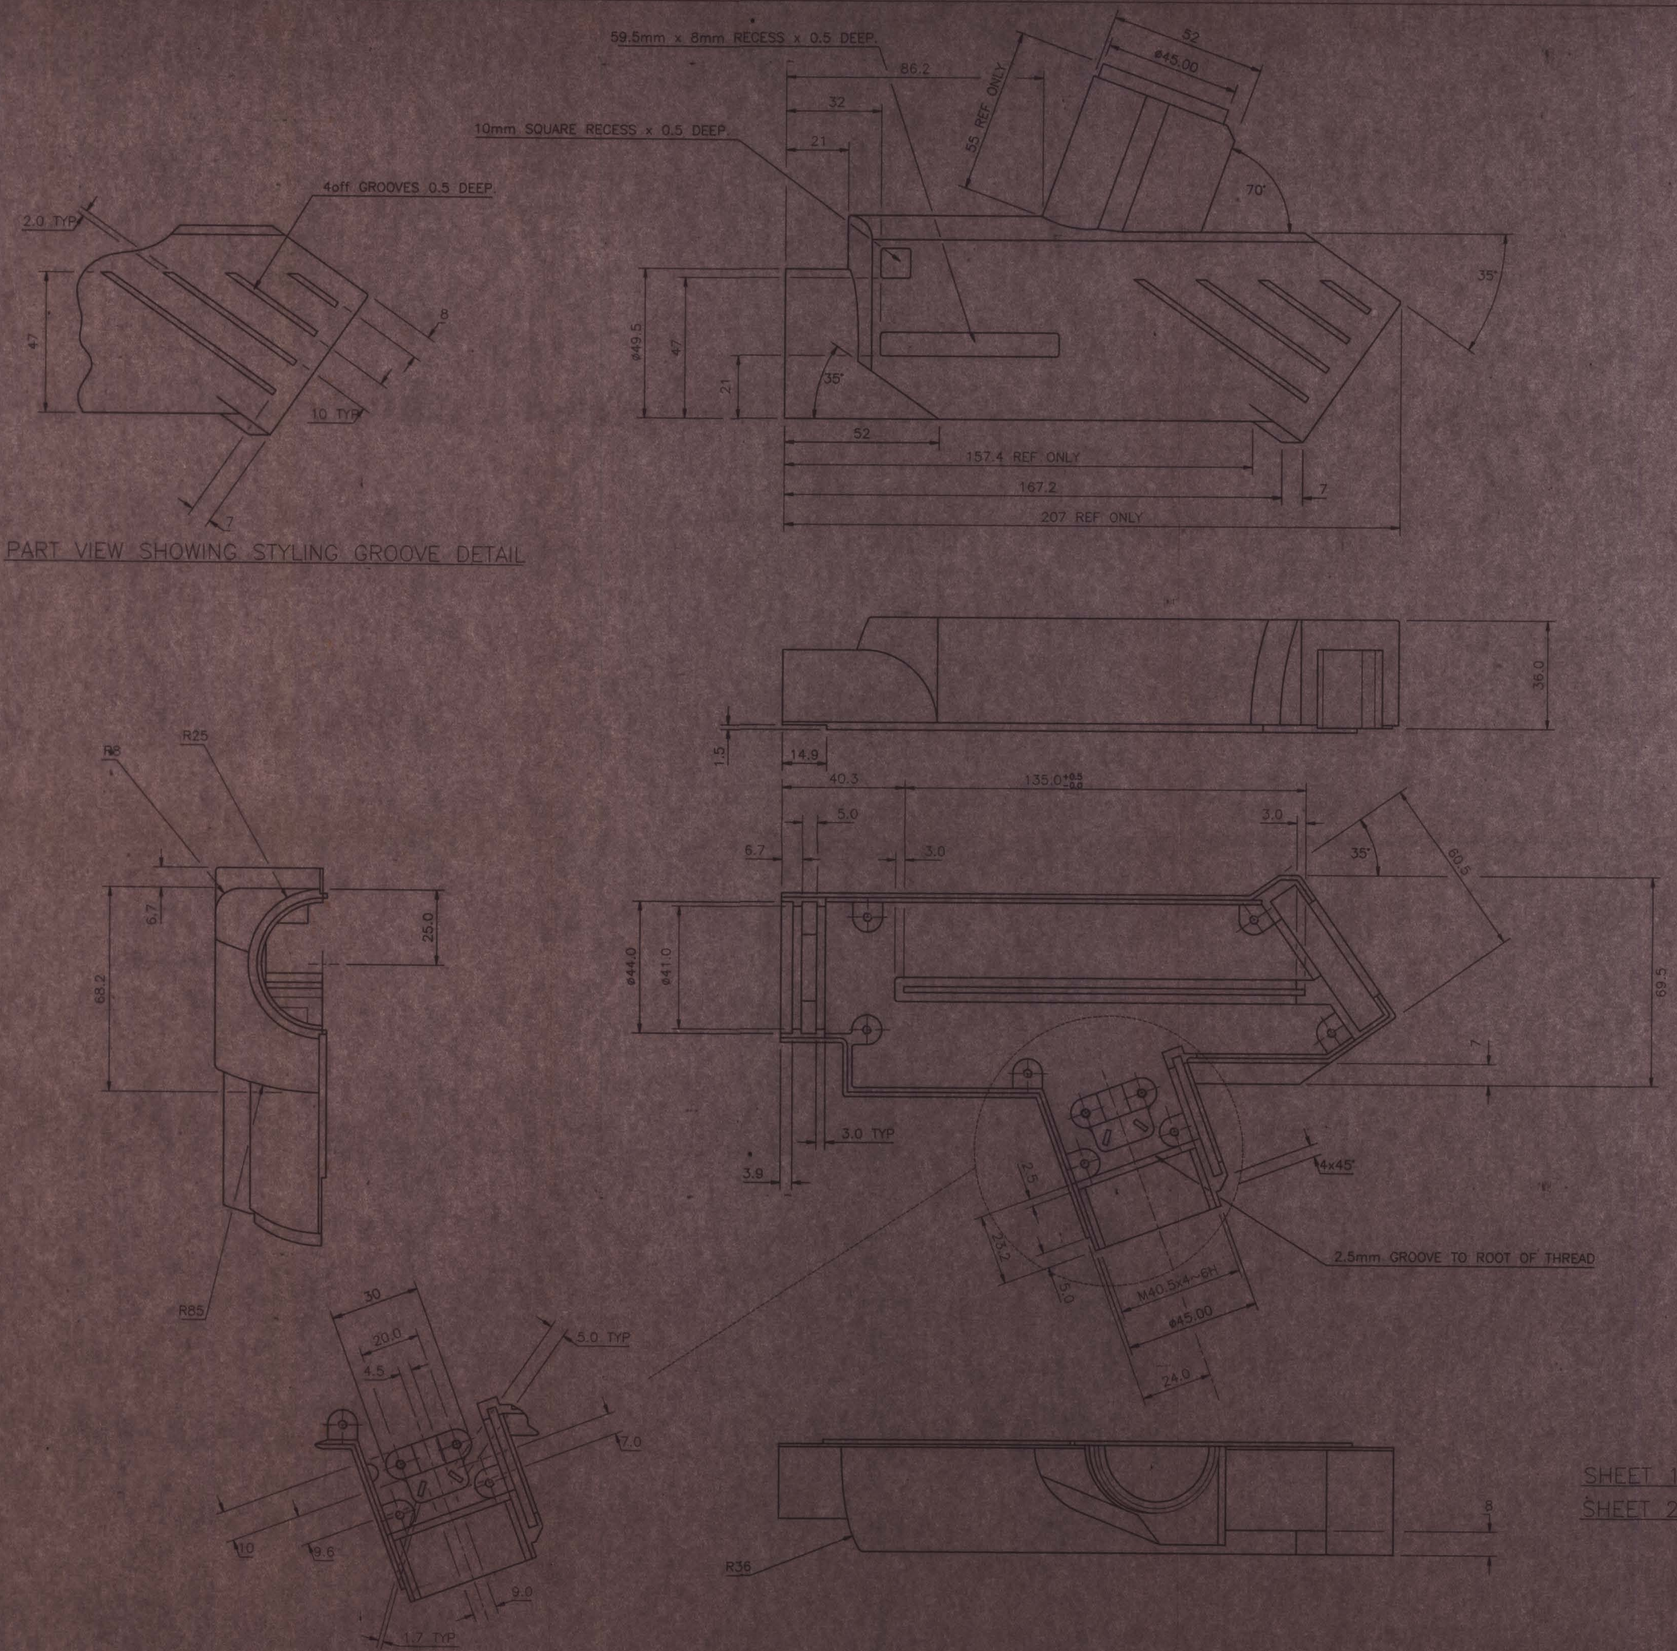

NOTES

1: 'A'~HOLES~9off M3x 0.5~6H BRASS INSERTS TO GIVE A THREAD DEPTH OF 8mm MINIMUM.

2: ALL RADIUS TO BE 1mm, UNLESS OTHERWISE STATED.

3: ALL INSERTS TO BE PROTECTED BEFORE PAINTING.

4: SPRAY INSIDE OF MOULDING WITH ELECTROMAGNETIC SHIELD COATING J2904 AVAILABLE FROM TRIMITE.

5: SCREW THIS HALF TO 200010 AND MASK THE AREA AROUND THE SWITCH PANEL AS SHOWN IN DETAIL 'A' (SEE SHEET 2).

6: SPRAY THE OUTSIDE OF THE 2 MOULDINGS USING TRIMITE 671, MIDDLE GRAPHITE TO BS.381~C. (TRIMITE AE251)

7: FINISH TO BE LIGHT SPATTER TEXTURE.

8: OVERSPRAY IS ACCEPTABLE INSIDE THE HAND GUN AS SHOWN IN DETAIL 'A'.

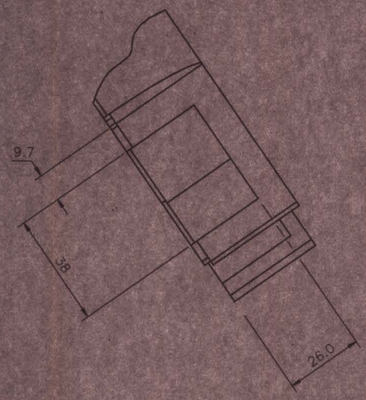

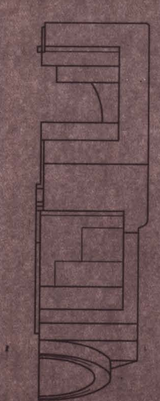

SHEET 1 OF 2

SHEET 2 OF 2 SHOWS SECTION VIEWS AND FURTHER DETAIL

ISSUE	A	B	C	1	2	3	4				SK200066
CH.No.	-	-	-	-	1409	1489	1425				
DATE	8/9/92	16/9/92	4/11/93	8/7/94	18/12/95	26/1/96	9/4/96				

CONFORMS TO BS308 — DIMS. N mm — DO NOT SCALE PRINT — REMOVE ALL BURRS & SHARP EDGES

TOLERANCES UNLESS OTHERWISE STATED: WHOLE NUMBERS ±0.4; 1 DECIMAL PLACE= ±0.2; 2 DECIMAL PLACES= ±0.1; SCREW THREADS MED. FIT ANGLES ±30'

CHKD. — SCALE 1 : 1 — MATL. ME600 RIGID POLYURETHANE

DRN. R. SINCLAIR — DATE 19\8\92 — FINISH SEE NOTES 3 & 4 — TITLE R.H.MOULDING

AICambridge Ltd — LONDON ROAD, PAMPISFORD, CAMBRIDGE, CB2 4EF. TEL: (0223) 834420 FAX: (0223) 835050 — DRG.No. 200011 — A1

THIS DRG.MUST NOT BE LOANED OR COPIED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION OF AI CAMBRIDGE LTD

D-4