



R. A. JONES  
Vice President

Duke Power  
29672 / Oconee Nuclear Site  
7800 Rochester Highway  
Seneca, SC 29672

864 885 3158  
864 885 3564 fax

May 17, 2004

U. S. Nuclear Regulatory Commission  
Washington, D. C. 20555

Attention: Document Control Desk

Subject: Oconee Nuclear Station  
Docket Numbers 50-269, 270, and 287  
Technical Specification Bases (TSB) Change

Please see attached revisions to Tech Spec Bases 3.6.5,  
Reactor Building Spray and Cooling Systems, which were  
implemented on May 10, 2004.

Attachment 1 contains the new TSB pages and Attachment 2  
contains the marked up version of the Bases pages.

If any additional information is needed, please contact  
Graham Davenport at 864-885-3044.

Very truly yours,



R. A. Jones, Vice President  
Oconee Nuclear Site

4001

U. S. Nuclear Regulatory Commission

May 17, 2004

Page 2

cc: Mr. L. N. Olshan  
Office of Nuclear Reactor Regulation  
U. S. Nuclear Regulatory Commission  
Washington, D. C. 20555

Mr. L. A. Reyes, Regional Administrator  
U. S. Nuclear Regulatory Commission - Region II  
Atlanta Federal Center  
61 Forsyth St., SW, Suite 23T85  
Atlanta, Georgia 30303

Mel Shannon  
Senior Resident Inspector  
Oconee Nuclear Station

Mr. Henry Porter Director  
Division of Radioactive Waste Management  
Bureau of Land and Waste Management  
Department of Health & Environmental Control  
2600 Bull Street  
Columbia, SC 29201

Attachment 1

## B 3.6 CONTAINMENT SYSTEMS

### B 3.6.5 Reactor Building Spray and Cooling Systems

#### BASES

---

#### BACKGROUND

The Reactor Building Spray and Reactor Building Cooling systems provide containment atmosphere cooling to limit post accident pressure and temperature in containment to less than the design values. Reduction of containment pressure and the iodine removal capability of the spray reduces the release of fission product radioactivity from containment to the environment, in the event of an accident, to within limits. The Reactor Building Spray and Reactor Building Cooling systems are designed to meet ONS Design Criteria (Ref. 1).

The Reactor Building Cooling System and Reactor Building Spray System are Engineered Safeguards (ES) systems. They are designed to ensure that the heat removal capability required during the post accident period can be attained. The Reactor Building Spray System and Reactor Building Cooling System provide containment heat removal operation. The Reactor Building Spray System and Reactor Building Cooling System provide methods to limit and maintain post accident conditions to less than the containment design values.

#### Reactor Building Spray System

The Reactor Building Spray System consists of two separate trains of equal capacity, each capable of meeting the design basis. Each train includes a reactor building spray pump, spray headers, nozzles, valves, piping and a flow indicator. Each train is powered from a separate ES bus. The borated water storage tank (BWST) supplies borated water to the Reactor Building Spray System during the injection phase of operation. In the recirculation mode of operation, Reactor Building Spray System pump suction is manually transferred to the reactor building sump.

**BASES**

---

**BACKGROUND**      Reactor Building Spray System (continued)

The Reactor Building Spray System provides a spray of relatively cold borated water into the upper regions of containment to reduce the containment pressure and temperature and to reduce the concentration of fission products in the containment atmosphere during an accident. In the recirculation mode of operation, heat is removed from the reactor building sump water by the decay heat removal coolers. Each train of the Reactor Building Spray System provides adequate spray coverage to meet the system design requirements for containment heat removal.

The Reactor Building Spray System is actuated automatically by a containment High-High pressure signal. An automatic actuation opens the Reactor Building Spray System pump discharge valves and starts the two Reactor Building Spray System pumps.

Reactor Building Cooling System

The Reactor Building Cooling System consists of three reactor building cooling trains. Each cooling train is equipped with cooling coils, and an axial vane flow fan driven by a two speed electric motor.

During normal operation, two reactor building cooling trains with two fans operating at high speed, serve to cool the containment atmosphere. Low speed cooling fan operation is available during periods of lower containment heat load. The third unit is on standby. For Units 1, 2, and 3, upon receipt of an emergency signal, the operating cooling fans running at high speed will automatically trip, then restart in low speed after a 3 minute delay, and the idle unit is energized in low speed after a 3 minute delay. For Units 1 and 2 only, the operating cooling fan(s) running at low speed will also automatically trip upon receipt of an emergency signal, and then restart in low speed after a 3 minute delay. The fans are operated at the lower speed during accident conditions to prevent motor overload from the higher density atmosphere.

---

**APPLICABLE SAFETY ANALYSES**      The Reactor Building Spray System and Reactor Building Cooling System reduce the temperature and pressure following an accident. The limiting accidents considered are the loss of coolant accident (LOCA) and the steam line break. The postulated accidents are analyzed, with regard to containment ES systems, assuming the loss of one ES bus. This is the worst-case single active failure, resulting in one train of the Reactor Building Spray System and one train of the Reactor Building Cooling System being inoperable.

**BASES**

---

**APPLICABLE  
SAFETY ANALYSES  
(continued)**

The analysis and evaluation show that, under the worst-case scenario (LOCA with worst-case single active failure), the highest peak containment pressure is 58.9 psig. The analysis shows that the peak containment temperature is 285°F. Both results are less than the design values. The analyses and evaluations assume a power level of 2619 MWt, one reactor building spray train and two reactor building cooling trains operating, and initial (pre-accident) conditions of 110°F and 16.2 psia. The analyses also assume a delayed initiation to provide conservative peak calculated containment pressure and temperature responses.

The Reactor Building Spray System total delay time of approximately 100 seconds includes Keowee Hydro Unit startup (for loss of offsite power), reactor building spray pump startup, and spray line filling (Ref. 2).

Reactor building cooling train performance for post accident conditions is given in Reference 2. The result of the analysis is that any combination of two trains can provide 100% of the required cooling capacity during the post accident condition. The train post accident cooling capacity under varying containment ambient conditions is also shown in Reference 2.

For Unit 2, the Reactor Building Cooling System total delay time of 78 seconds includes signal delay, KHU startup (for loss of offsite power), low pressure service water pump startup and low pressure service water valve stroke times. For Units 1 and 3, a Reactor Building Cooling System total delay time of 3 minutes includes KHU startup (for loss of offsite power) and allows all ES equipment to start before the Reactor Building Cooling Unit on the associated train is started. This improves voltages at the 600V and 208V levels for starting loads (Ref. 2).

The Reactor Building Spray System and the Reactor Building Cooling System satisfy Criterion 3 of 10 CFR 50.36 (Ref. 3).

---

**LCO**

During an accident, a minimum of two reactor building cooling trains and one reactor building spray train are required to maintain the containment pressure and temperature following a LOCA. Additionally, one reactor building spray train is required to remove iodine from the containment atmosphere and maintain concentrations below those assumed in the safety analysis. To ensure that these requirements are met, two reactor building spray trains and three reactor building cooling trains must be OPERABLE in MODES 1 and 2. In MODES 3 or 4, one reactor building spray train and two reactor building cooling trains are required to be OPERABLE. The LCO is provided with a note that clarifies this requirement. Therefore, in the event of an accident, the minimum requirements are met, assuming the worst-case single active failure occurs.

---

**BASES**

---

**LCO**  
(continued)

Each reactor building spray train shall include a spray pump, spray headers, nozzles, valves, piping, instruments, and controls to ensure an OPERABLE flow path capable of taking suction from the BWST (via the LPI System) upon an Engineered Safeguards Protective System signal and manually transferring suction to the reactor building sump. The OPERABILITY of RBS train flow instrumentation is not required for OPERABILITY of the corresponding RBS train because system resistance hydraulically maintains adequate NPSH to the RBS pumps and manual throttling of RBS flow is not required. However, TS 3.3.8, Required Action F.1 requires the affected RBS train to be declared inoperable when the RBS flow instrument is inoperable. A license amendment is being processed to eliminate this requirement. During an event, LPI train flow must be monitored and controlled to support the RBS train pumps to ensure that the NPSH requirements for the RBS pumps are not exceeded. If the flow instrumentation or the capability to control the flow in a LPI train is unavailable then the associated RBS train's OPERABILITY is affected until such time as the LPI train is restored or the associated LPI pump is placed in a secured state to prevent actuation during an event.

Each reactor building cooling train shall include cooling coils, fusible dropout plates, an axial vane flow fan, instruments, valves, and controls to ensure an OPERABLE flow path. Valve LPSW-108 shall be locked open to support system OPERABILITY.

---

**APPLICABILITY**

In MODES 1, 2, 3, and 4, an accident could cause a release of radioactive material to containment and an increase in containment pressure and temperature, requiring the operation of the reactor building spray trains and reactor building cooling trains.

In MODES 5 and 6, the probability and consequences of these events are reduced due to the pressure and temperature limitations of these MODES. Thus, the Reactor Building Spray System and the Reactor Building Cooling System are not required to be OPERABLE in MODES 5 and 6.

---

**ACTIONS**

A.1

With one reactor building spray train inoperable in MODE 1 or 2, the inoperable reactor building spray train must be restored to OPERABLE status within 7 days. In this Condition, the remaining OPERABLE spray and cooling trains are adequate to perform the iodine removal and containment cooling functions. The 7 day Completion Time takes into account the redundant heat removal capability afforded by the OPERABLE

**BASES**

---

**ACTIONS**

**A.1** (continued)

reactor building spray train, reasonable time for repairs, and the low probability of an accident occurring during this period.

The 14 day portion of the Completion Time for Required Action A.1 is based upon engineering judgment. It takes into account the low probability of coincident entry into two Conditions in this LCO coupled with the low probability of an accident occurring during this time. Refer to Section 1.3, Completion Times, for a more detailed discussion of the purpose of the "from discovery of failure to meet the LCO" portion of the Completion Time.

**B.1**

With one of the reactor building cooling trains inoperable in MODE 1 or 2, the inoperable reactor building cooling train must be restored to OPERABLE status within 7 days. The components in this degraded condition provide iodine removal capabilities and are capable of providing at least 100% of the heat removal needs after an accident. The 7 day Completion Time was developed taking into account the redundant heat removal capabilities afforded by combinations of the Reactor Building Spray System and Reactor Building Cooling System and the low probability of an accident occurring during this period.

The 14 day portion of the Completion Time for Required Action B.1 is based upon engineering judgment. It takes into account the low probability of coincident entry into two Conditions in this LCO coupled with the low probability of an accident occurring during this time. Refer to Section 1.3 for a more detailed discussion of the purpose of the "from discovery of failure to meet the LCO" portion of the Completion Time.

**C.1**

With one reactor building spray train and one reactor building cooling train inoperable in MODE 1 or 2, at least one of the inoperable trains must be restored to OPERABLE status within 24 hours. In this Condition, the remaining OPERABLE spray and cooling trains are adequate to provide iodine removal capabilities and are capable of providing at least 100% of the heat removal needs after an accident. The 24 hour Completion Time takes into account the heat removal capability afforded by the remaining OPERABLE spray train and cooling trains, reasonable time for repairs, and the low probability of an accident occurring during this period.

**BASES**

---

**ACTIONS**  
(continued)

D.1

If the Required Action and associated Completion Time of Condition A, B or C are not met, the unit must be brought to a MODE in which the LCO, as modified by the Note, does not apply. To achieve this status, the unit must be brought to at least MODE 3 within 12 hours. The allowed Completion Time is reasonable, based on operating experience, to reach the required unit conditions from full power conditions in an orderly manner and without challenging unit systems.

E.1

With one of the required reactor building cooling trains inoperable in MODE 3 or 4, the required reactor building cooling train must be restored to OPERABLE status within 24 hours.

The 24 hour Completion Time is reasonable based on engineering judgement taking into account the iodine and heat removal capabilities of the remaining required train of reactor building spray and cooling.

F.1

With one required reactor building spray train inoperable in MODE 3 or 4, the required reactor building spray train must be restored to OPERABLE status within 24 hours. The 24 hour Completion Time is reasonable based on engineering judgement taking into account the heat removal capabilities of the remaining required trains of reactor building cooling.

G.1

If the Required Actions and associated Completion Times of Condition E or F of this LCO are not met, the unit must be brought to a MODE in which the LCO does not apply. To achieve this status, the unit must be brought to MODE 5 within 36 hours. The allowed Completion Times are reasonable, based on operating experience, to reach the required unit conditions from full power conditions in an orderly manner and without challenging unit systems.

H.1

With two reactor building spray trains, two reactor building cooling trains or any combination of three or more reactor building spray and reactor

**BASES**

---

**ACTIONS**

H.1 (continued)

building cooling trains inoperable in MODE 1 or 2, the unit is in a condition outside the accident analysis. Therefore, LCO 3.0.3 must be entered immediately.

With any combination of two or more required reactor building spray and reactor building cooling trains inoperable in MODE 3 or 4, the unit is in a condition outside the accident analysis. Therefore, LCO 3.0.3 must be entered immediately.

---

**SURVEILLANCE  
REQUIREMENTS**

SR 3.6.5.1

Verifying the correct alignment for manual and non-automatic power operated valves in the reactor building spray flow path provides assurance that the proper flow paths will exist for Reactor Building Spray System operation. This SR does not apply to valves that are locked, sealed, or otherwise secured in position, since these were verified to be in the correct position prior to locking, sealing, or securing. Similarly, this SR does not apply to automatic valves since automatic valves actuate to their required position upon an accident signal. This SR also does not apply to valves that cannot be inadvertently misaligned, such as check valves. This SR does not require any testing or valve manipulation. Rather, it involves verification, through a system walkdown, that those valves outside containment and capable of potentially being mispositioned are in the correct position.

SR 3.6.5.2

Operating each required reactor building cooling train fan unit for  $\geq 15$  minutes ensures that all trains are OPERABLE and that all associated controls are functioning properly. It also ensures that blockage, fan or motor failure, or excessive vibration can be detected for corrective action. The 31 day Frequency was developed considering the known reliability of the fan units and controls, the three train redundancy available, and the low probability of a significant degradation of the reactor building cooling trains occurring between surveillances and has been shown to be acceptable through operating experience.

SR 3.6.5.3

Verifying that each required Reactor Building Spray pump's developed head at the flow test point is greater than or equal to the required

**BASES**

---

**SURVEILLANCE  
REQUIREMENTS**

SR 3.6.5.3 (continued)

developed head ensures that spray pump performance has not degraded during the cycle. Flow and differential pressure are normal tests of centrifugal pump performance required by Section XI of the ASME Code (Ref. 4). Since the Reactor Building Spray System pumps cannot be tested with flow through the spray headers, they are tested on recirculation flow. This test confirms one point on the pump design curve and is indicative of overall performance. Such inservice tests confirm component OPERABILITY, trend performance, and may detect incipient failures by indicating abnormal performance. The Frequency of this SR is in accordance with the Inservice Testing Program.

SR 3.6.5.4

Verifying the containment heat removal capability provides assurance that the containment heat removal systems are capable of maintaining containment temperature below design limits following an accident. This test verifies the heat removal capability of the Low Pressure Injection (LPI) Coolers and Reactor Building Cooling Units. The 18 month Frequency was developed considering the known reliability of the low pressure service water, reactor building spray and reactor building cooling systems and other testing performed at shorter intervals that is intended to identify the possible loss of heat removal capability.

SR 3.6.5.5 and SR 3.6.5.6

These SRs require verification that each automatic reactor building spray valve actuates to its correct position and that each reactor building spray pump starts upon receipt of an actual or simulated actuation signal. The test will be considered satisfactory if visual observation and control board indication verifies that all components have responded to the actuation signal properly; the appropriate pump breakers have closed, and all valves have completed their travel. This SR is not required for valves that are locked, sealed, or otherwise secured in position under administrative controls. The 18 month Frequency is based on the need to perform these Surveillances under the conditions that apply during a unit outage and the potential for an unplanned transient if the Surveillances were performed with the reactor at power. Operating experience has shown that these components usually pass the Surveillances when performed at the 18 month Frequency. Therefore, the Frequency was concluded to be acceptable from a reliability standpoint.

**BASES**

---

**SURVEILLANCE  
REQUIREMENTS**  
(continued)

**SR 3.6.5.7**

This SR requires verification that each required reactor building cooling train actuates upon receipt of an actual or simulated actuation signal. The test will be considered satisfactory if control board indication verifies that all components have responded to the actuation signal properly, the appropriate valves have completed their travel, and fans are running at half speed. The 18 month Frequency is based on engineering judgment and has been shown to be acceptable through operating experience. See SR 3.6.5.5 and SR 3.6.5.6, above, for further discussion of the basis for the 18 month Frequency.

**SR 3.6.5.8**

With the reactor building spray header isolated and drained of any solution, station compressed air is introduced into the spray headers to verify the availability of the headers and spray nozzles. Performance of this Surveillance demonstrates that each spray nozzle is unobstructed and provides assurance that spray coverage of the containment during an accident is not degraded. Due to the passive nature of the design of the nozzles, a test at 10 year intervals is considered adequate to detect obstruction of the spray nozzles.

---

**REFERENCES**

1. UFSAR, Section 3.1.
  2. UFSAR, Section 6.2.
  3. 10 CFR 50.36.
  4. ASME, Boiler and Pressure Vessel Code, Section XI.
-

Attachment 2

**BASES**


**BACKGROUND**      Reactor Building Spray System (continued)

The Reactor Building Spray System provides a spray of relatively cold borated water into the upper regions of containment to reduce the containment pressure and temperature and to reduce the concentration of fission products in the containment atmosphere during an accident. In the recirculation mode of operation, heat is removed from the reactor building sump water by the decay heat removal coolers. Each train of the Reactor Building Spray System provides adequate spray coverage to meet the system design requirements for containment heat removal.

The Reactor Building Spray System is actuated automatically by a containment High-High pressure signal. An automatic actuation opens the Reactor Building Spray System pump discharge valves and starts the two Reactor Building Spray System pumps.

Reactor Building Cooling System

The Reactor Building Cooling System consists of three reactor building cooling trains. Each cooling train is equipped with cooling coils, and an axial vane flow fan driven by a two speed electric motor.

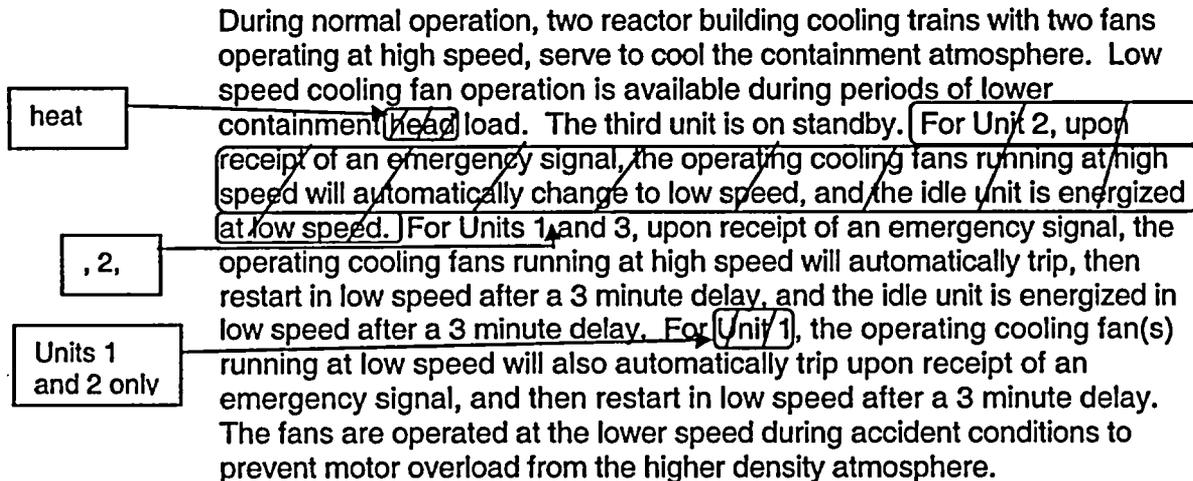

**APPLICABLE SAFETY ANALYSES**

The Reactor Building Spray System and Reactor Building Cooling System reduce the temperature and pressure following an accident. The limiting accidents considered are the loss of coolant accident (LOCA) and the steam line break. The postulated accidents are analyzed, with regard to containment ES systems, assuming the loss of one ES bus. This is the worst-case single active failure, resulting in one train of the Reactor Building Spray System and one train of the Reactor Building Cooling System being inoperable.