

2 pgs

BETH 016

TWX INCOMING

RECEIVED DOCKET NO. 70-820

1964 JUN 30 PM 3 22

THIS IS UNITED NUCLEAR CALLING JUNE 30, 1964
U.S. ATOMIC ENERGY COMM.
REGULATORY
MAIL SECTION

File copy

U.S. ATOMIC ENERGY COMM.
TWX UNIT

1964 JUN 30 PM 1 47


MR. DONALD A. NUSSBAUMER, CHIEF

SOURCE & SPECIAL NUCLEAR MATERIALS BRANCH

DIVISION OF LICENSING & REGULATION

UNITED STATES ATOMIC ENERGY COMMISSION

WASHINGTON 25, D. C.

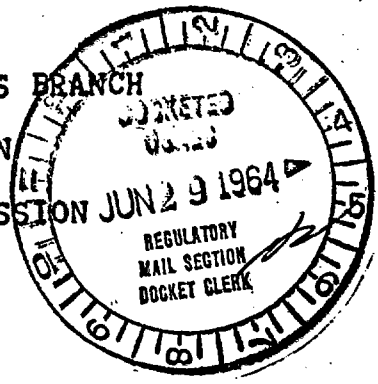

RE AMENDMENT I TO SPECIAL NUCLEAR MATERIAL LICENSE NO. SNM-777

IN CLARIFICATION OF MY WIRE OF JUNE 25, 1964, THIS AMENDMENT IS SUBMITTED TO PROVIDE AN ALTERNATE SHIPPING CONTAINER TO THE ONE APPROVED IN SNM-777, 702.2 BE PERMIT 1483 FOR SHIPPING WATER INSOLUBLE URANIUM COMPOUNDS UP TO FULLY ENRICHED URANIUM CONTAINING A MAXIMUM BULK DENSITY OF 3.2 GRAMS URANIUM PER CUBIC CENTIMETER.

THE PROPOSED ALTERNATE CONTAINER WILL BE AS SHOWN ON PAGE 40 OF SNM-368, BUT AS MODIFIED BY MY LETTER TO YOU OF MAY 13, 1964, EXCEPT THAT NO WOODEN END PLUGS WILL BE PROVIDED. THE MULTIPLICATION FACTOR OF A BARE INFINITE CYLINDER LESS THAN FIVE INCHES IN DIAMETER IS 0.58. A SAFE SOLID ANGLE IS 3.2 STERADIANS /FIGURE 6, K-1019, FIFTH REVISION/.

THE SOLID ANGLES FOR ONE, TWO AND THREE TIERS WILL BE CONSIDERED SINCE THE ALTERNATE CONTAINER MAY BE STACKED.

3509
B-218

THE SOLID ANGLES SUBTENDED AT THE CENTRAL CONTAINER OF A
PLANAR HEXAGONAL CLOSE PACKED ARRAY OF TWENTY CONTAINERS IS 3.035
STERADIANS.

ARRAY OF SIXTEEN CONTAINERS IS 3.147 STERADIANS.

THE SOLID ANGLE SUBTENDED AT THE CENTRAL CONTAINER OF A THREE TIERED
HEXAGONAL CLOSE PLACED ARRAY OF EIGHTEEN CONTAINERS IS 2.793 STERDIANS.

THEREFORE, UP TO TWENTY /20/ CONTAINERS MAY BE SHIPPED IN ONE, TWO OR
THREE TIERS /MORE THAN THREE TIERS WILL NOT FIT INTO A CONVENTIONAL
VEHICLE/ WITH THE SOLID ANGLE IN ALL CASES LESS THAN THE 3.2 STERADIANS
ALLOWED.

HERBERT S. KALISH
COMMERICAL FUEL MANAGER
UNITED NUCLEAR CORPORATION
NEW HAVEN, CONNECTICUT
TIME 1-45 PM

RECEIVED
1964 JUN 30 PM 3 22
U. S. ATOMIC ENERGY COMM.
REGULATORY
MAIL SECTION

CORRECTION FIFTH PARG. PLS INSERT

THE SOLID ANGLE SUBTENDED AT THE CENTRAL CONTAINER OF A TWO THXX
TIERED HEXAGONAL CLOSE PACKED ARRAY OF SIXTEEN CONTAINERS IS 3.147
STERADIANS.

1964 JUN 30 PM 2 40

END PLS ACK

RECEIVED
HEADQUARTERS
MAIL SERVICE SECTION

9
TWX INCOMING

3509