

CNWRA A center of excellence in earth sciences and engineering

A Division of Southwest Research Institute™
6220 Culebra Road • San Antonio, Texas, U.S.A. 78228-5166
(210) 522-5160 • Fax (210) 522-5155

July 30, 2001
Contract No. NRC-02-97-009
Account No. 20.01402.762

U.S. Nuclear Regulatory Commission
ATTN: Mr. James Firth
Office of Nuclear Material Safety and Safeguards
Division of Waste Management
Environmental and Performance Assessment Branch
Mail Stop 7C-18
Washington, DC 20555

Subject: Transmittal of the revised Software Requirements Description for the TPA Code Graphical User Interface (Version 1.0 β)

Dear Mr. Firth:

Attached herewith is the revised software requirements description (SRD) for the TPA Code Graphical User Interface (AI 01402.762.130). This SRD incorporates changes you had suggested via e-mail, on July 27, 2001, for the acceptance. If you have any questions regarding the content of the revised SRD please contact Dr. Sitakanta Mohanty at (210) 522-5185.

Sincerely,



Gordon W. Wittmeyer, Ph.D.
Manager, Performance Assessment

GWW/cw

cc:	J. Linehan	T. Essig	W. Patrick	C. Walker
	D. DeMarco	B. Reamer	CNWRA Directors	
	B. Meehan	S. Wastler	CNWRA Element Managers	
	E. Whitt	T. McCartin	T. Nagy (SwRI Contracts)	
	J. Greeves	D. Esh	P. Maldonaldo	
	J. Piccone	R. Codell	S. Mohanty	



Washington Office • Twinbrook Metro Plaza #210
12300 Twinbrook Parkway • Rockville, Maryland 20852-1606

**SOFTWARE REQUIREMENTS DESCRIPTION (SRD)
FOR THE TOTAL-SYSTEM PERFORMANCE
ASSESSMENT CODE GRAPHICAL USER INTERFACE
(VERSION 1.0β)**

Prepared by

**Sitakanta Mohanty
Christopher Walker**

**Center for Nuclear Waste Regulatory Analyses
San Antonio, Texas**

July 2001

APPROVED:

*Michael A. G. for
G. Wittmeyer*

**Gordon W. Wittmeyer, Manager
Performance Assessment**

7/30/01

Date

CONTENTS

Section		Page
1.0	BACKGROUND	1
2.0	SOFTWARE FUNCTION	1
3.0	TECHNICAL BASIS: PHYSICAL AND MATHEMATICAL MODEL	2
3.1	Software Description	2
3.2	Mathematical Model	5
4.0	COMPUTATIONAL APPROACH	6
5.0	REFERENCES	6

1.0 BACKGROUND

The U.S. Nuclear Regulatory Commission (NRC) and the Center for Nuclear Regulatory Analyses (CNWRA) have been developing their performance assessment tools to review license application (LA) for a proposed repository at Yucca Mountain (YM), Nevada. If the U.S. Department of Energy (DOE) submits an LA, the NRC will conduct a risk-informed review. The objective of risk-informing the review is to emphasize those aspects of the repository system and DOE's analyses that are most important to the protection of public safety and the environment.

NRC will use PA tools (Total-system Performance Assessment (TPA) computer code (Mohanty et al., 2000) and sensitivity analysis methods (Mohanty et al., 1999; Jarzempa et al., 1999) for conducting risk-informed and performance-based LA reviews. This is achieved partly by analyzing quantitative information used in performance assessment including parameter values, parameter uncertainties, parameter correlation, and parameter assumptions.

The TPA is a technically complex integrated multidisciplinary computer code for estimating long-term repository system behavior and provides a structure for examining couplings between phenomena that might not be adequately evaluated, within the limits of a single technical discipline. Integration of multiple disciplines has resulted in a code that has more than 930 input parameters and numerous input files representing spatial and temporal data variation as well as data uncertainty. The current approach for modifying input parameters requires the user to edit a very large file, which is very tedious, time consuming, and possibly error-prone. Additionally, for those who are not intimately familiar with the way the TPA code utilizes the input parameters, understanding the structure of input data is a challenge.

The purpose of this project is to develop a graphical user interface (GUI)-based preprocessor, which will allow a user to prepare input data for the TPA code with relative ease and in a short time period compared to the current approach. The GUI will provide transparency through logical groupings of the input parameters that will allow better understanding of the data used in the TPA code in two ways. First, parameters may be grouped by a particular subarea, or a repository component, such as the waste package, or a process, such as thermal reflux. Second, other group associations will enable the user to see if the changes in one parameter will affect other parameters to maintain consistency. For example, if a new subarea is added the user will be prompted to add all relevant parameters pertaining to the new subarea. This will assist users that may not be familiar with all of the disciplines represented in the complete list of parameters and their associated uncertainties and correlations. Overall, the pre-processor will increase flexibility in data entry and user interaction in preparing the input file for the TPA code.

A well developed pre-processor could help enhance staff utilization of the code, reduce data input errors, and decrease learning time for preparing a data set for the TPA code. The preprocessor will also help track the rationale of the user for changing input parameters from the base case supplied with the code.

2.0 SOFTWARE FUNCTION

The following is a list of functions proposed for the GUI interface.

- The preprocessor will allow the user to review default input data used in the TPA code in an intuitive manner.
- The preprocessor will display uncertain data using the specified range or the distribution function.

- The software will check the data provided by the user to ensure data consistency. That is, the pre-processor will have several error checks that will supplement error checks already in the TPA code. For example, checks for sub-area UTM coordinates will be performed to ensure that the subarea is within the confines of the repository.
- The pre-processor will default to the basecase parameters. The user may modify the basecase file or a previously saved TPA input file until the user decides to create a new file. The revised parameter set can be saved at any time.
- The user can select a distribution type from a list of distribution functions.
- The user can change the parameter range by entering new data and distribution function type by selecting from a list on a special screen. This special screen will graphically display the data using the selected distribution function and the specified data range.
- The software will create a *tpa.inp* file using the new set of data elements. Data and time stamp will indicate that the file is newly created.
- Input integration will be emphasized. If a parameter that has dependent parameters is changed, the user will be prompted for changes to related parameters. For example, if a nuclide is added or removed from the basecase data set, then several other variables need to be added or removed. A “reset” option with limited functionality will enable the user to recover the original default value.
- Addition of features will be prioritized to match the budget and staff/contractor availability. For instance the specification of subareas could be changed to allow the user to drag the lines with the mouse or the graphing of distribution types could be improved.

3.0 TECHNICAL BASIS: PHYSICAL AND MATHEMATICAL MODEL

3.1 Software Description

The object-oriented approach will classify the TPA data set (consisting of data elements) into a series of logical sections, each containing a number of variables. These sections are each logically linked to a module in the TPA code. The data elements in these sections will be grouped together logically. Each of these logical groupings will be considered a module in the preprocessor.

The GUI will use a hierarchical tree approach. In this approach, the global parameters and main modules will be specified first. The complexity of the data set will be revealed as the user goes to lower and lower levels of the hierarchy. As shown in Figure 1, the parameters in the ASHPLUMO module are grouped into a few broad categories such as volcanic event, air properties, wind data, fuel particles, ash characteristics, and so on. As the user goes to the lowest level of the branch and clicks on a leaf, the special GUI page (Figure 2) will be available for data entry. Figure 1 also shows two text boxes to display parameter description and rationale for the choice of data. The user can enter revised rationale or provide rationale for changing a parameter or distribution type (see Figure 2).

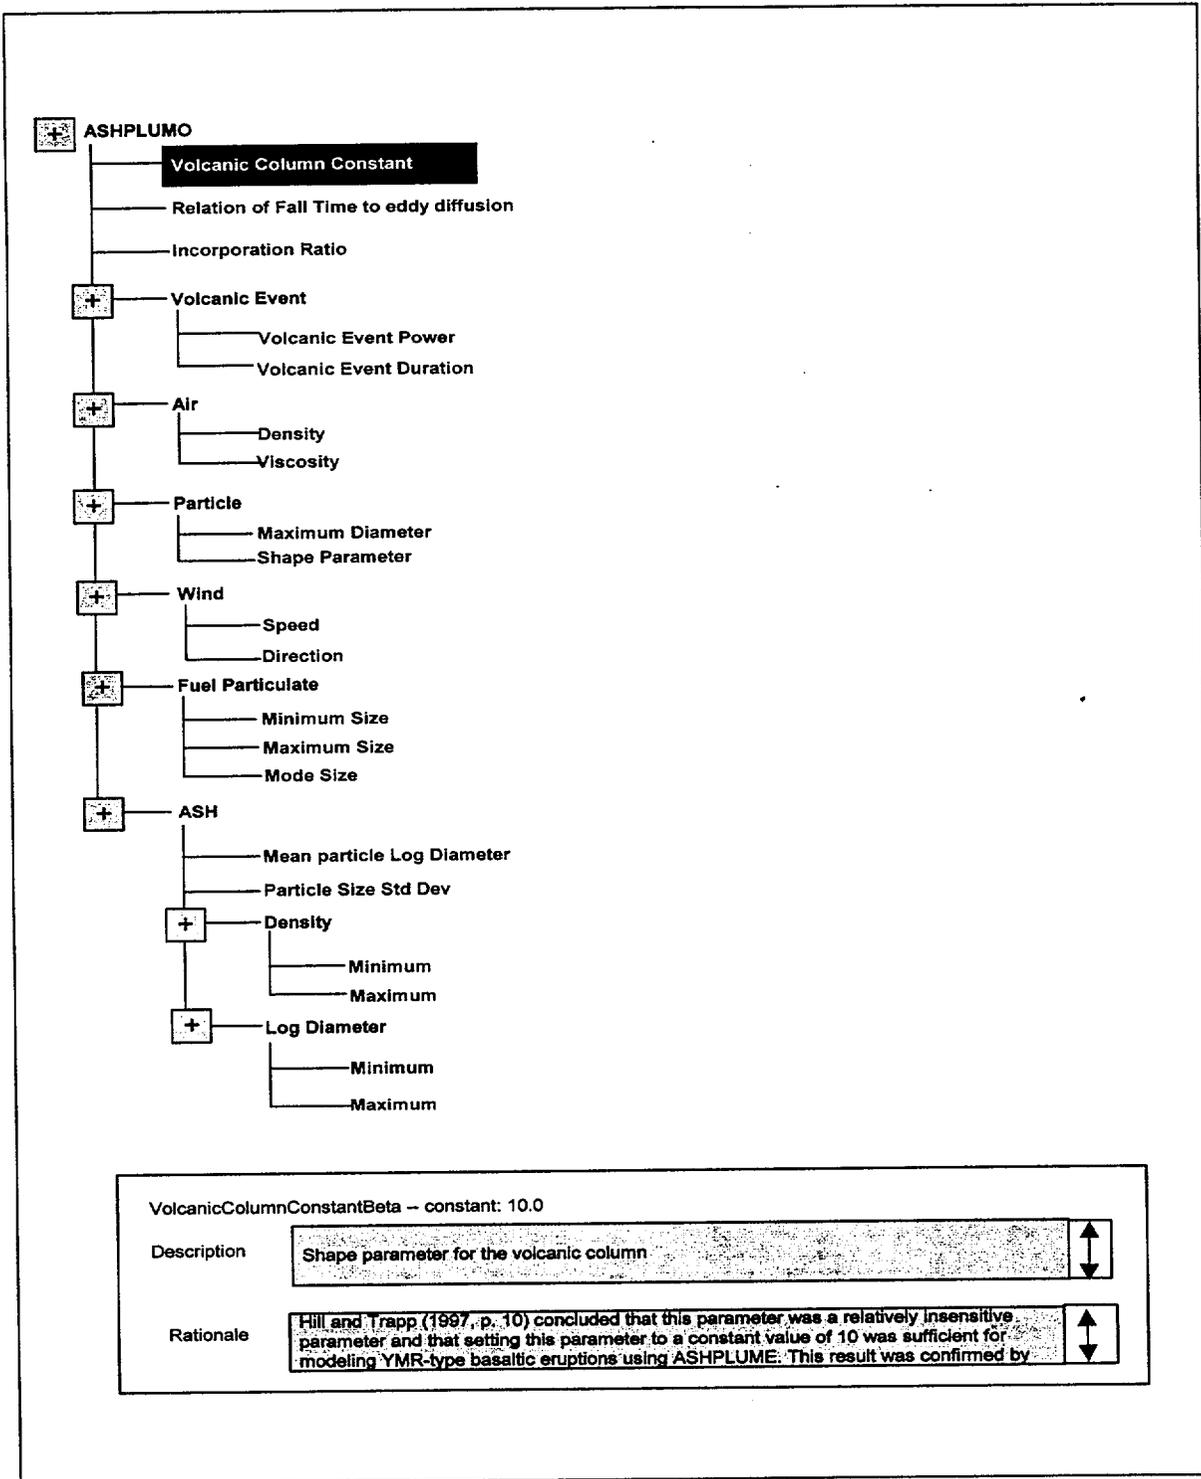


Figure 1. Proposed design for graphically displaying parameters in a Total-system Performance Assessment code module. Double clicking on a parameter name will bring up a screen that allows users to modify that variable.

TimeOfNextFaultingEventInRegionOfInterest[yr]

Distribution Type A, B; Lambda
 User must specify recurrence rate Lambda, upper and lower limits A and B; A < B

Rationale Based on PSHA data, U. S. Geological Survey (1996)

A:

B:

Lambda

Time of next faulting event (years from present)

Figure 2. An example GUI page where TPA input parameters (distribution function, data range) can be revised and rationale for the revision can be documented.

The software will make use of any previously defined base-case *tpa.inp* files that exist on the user's computer. If the user has a previously created *tpa.inp* file that needs to be modified, the software will open that file, read in the data elements, display them to the screen, allow the user to modify the data elements, and write them back to the same file or a new file depending on the user's choice.

The software will group like-items together. For example, all distribution parameters for the EBS Release module can be grouped and displayed together. Additionally, data elements can be viewed in logical groupings. For example, all parameters for subarea 1 can be viewed together.

The software will provide the user the ability to add, remove, or modify subareas and radionuclide chains by prompting the user to modify the necessary parameters associated with addition of a subarea or radionuclide. Note that Java is platform-independent, implying that the software can run under Sun OS, Solaris, and/or windows operating systems.

Hardware and Software Requirements

This software will be written as a standalone application that will be independent of the installed operating system. Any machine that contains a Sun-Java runtime environment will be able to execute this application successfully.

Graphics Requirements

The preprocessor will be designed for a 17" VGA Color monitor with a minimum of 1024x768 resolution. The software will be able to run on different monitor sizes and with different resolutions but this will require the user to manually adjust screen sizes to view the screens properly. Monitors other than VGA or SVGA may not display the screens properly.

Graphing will be done utilizing the Java graphing objects. No specialized software or hardware is needed.

3.2 Mathematical Model

Only a limited mathematical model will be used in the preprocessor development. Mathematics will be primarily limited to equations presented in the appendix B and appendix D of the TPA 4.0 User's Guide (Mohanty et al., 2000). An example area where mathematical formulation will be required, is the graphical creation of the subarea coordinate system. The user will input the subarea data in the form of four Universal Transverse Mercator (UTM) coordinate pairs, which form the four vertices of the quadrilateral. The visual representations of these subareas will be displayed on a graphical plane and will be calculated using basic geometrical calculations as shown below.

- SubArea, Line would be written to the screen as DrawTheLine ((X_1 , Y_1), (X_2 , Y_2)).
- Consider the following set of (X, Y) coordinates that define the quadrilateral for Subarea 1 that would be written as follow:

```
Subarea 1
547514.88,4079310.61
548069.20,4079136.50
547847.30,4077816.20
```

547370.95,4077922.04
547514.88,4079310.61

- The coordinate pairs define the lines that bound the quadrilateral for Subarea 1. To draw the first line of this subarea that would extend from coordinate (547514.88,4079310.61) to coordinate (548069.2, 4079136.5), the code would execute the command

DrawTheLine((547514.88,4079310.61), (548069.20, 4079136.50)).

Mathematical formulation will also be used for displaying the distribution function selected by the user. On the special GUI screen, the user will select a probability distribution function from the predefined list, choose a set of related variables, and enter values. The probability density function will be computed using supplied mathematical formulae and displayed with the specified range and other related values.

4.0 COMPUTATIONAL APPROACH

None.

5.0 REFERENCES

Jarzemba, M.S., R.B. Codell, L. Deere, J.R. Firth, C. Lui, S. Mohanty, K. Poor, J. Weldy, and V. Colten-Bradley. "NRC Sensitivity and Uncertainty Analyses for a Proposed HLW Repository at Yucca Mountain, Nevada, Using TPA 3.1. Volume II: Results and Conclusions." NUREG-1668. Volume 2. Washington, DC: U.S. Nuclear Regulatory Commission. 1999.

Mohanty, S. McCartin T, and Esh, D. "TPA Version 4.0 Code Module Descriptions and User's Guide." San Antonio, TX: Center for Nuclear Waste Regulatory Analyses. 2000.

Mohanty, S., R. Codell, R.W. Rice, J. Weldy, Y. Lu, R.M. Byrne, T.J. McCartin, M.S. Jarzemba, and G.W. Wittmeyer. "System-Level Repository Sensitivity Analyses Using TPA Version 3.2 Code." CNWRA 99-002. San Antonio, TX: Center for Nuclear Waste Regulatory Analyses. 1999.