

**MATERIALS LICENSE**

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 36, 39, 40, and 70, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s). This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

PC 03120

315372

Licensee

- 1. Vigo Coal Company, Inc.
- 2. 528 Main Street, Suite 202  
Evansville, IN 47708

In accordance with the letter dated **March 14, 2006**, and the facsimile **May 19, 2006**,

3. License number 13-32559-01 is amended in its entirety to read as follows:

4. Expiration date April 30, 2015

5. Docket No. 030-36884  
Reference No.

6. Byproduct, source, and/or special nuclear material

A. Californium-252

7. Chemical and/or physical form


A. Sealed sources registered either with NRC under 10 CFR 22.210 or with an Agreement State and incorporated in a compatible packaging as described in Section 183 of the Atomic Energy Act of 1954, as amended.

8. Maximum amount that licensee may possess at any one time under this license

A. **No single source to exceed 13.5 millicuries. Total activity 13.5 millicuries.**

9. Authorized use:

A. For use in a SABIA Model XC-Series-25 source holder, in a materials analyzer, for elemental composition measurements of coal traveling on a conveyor belt system.

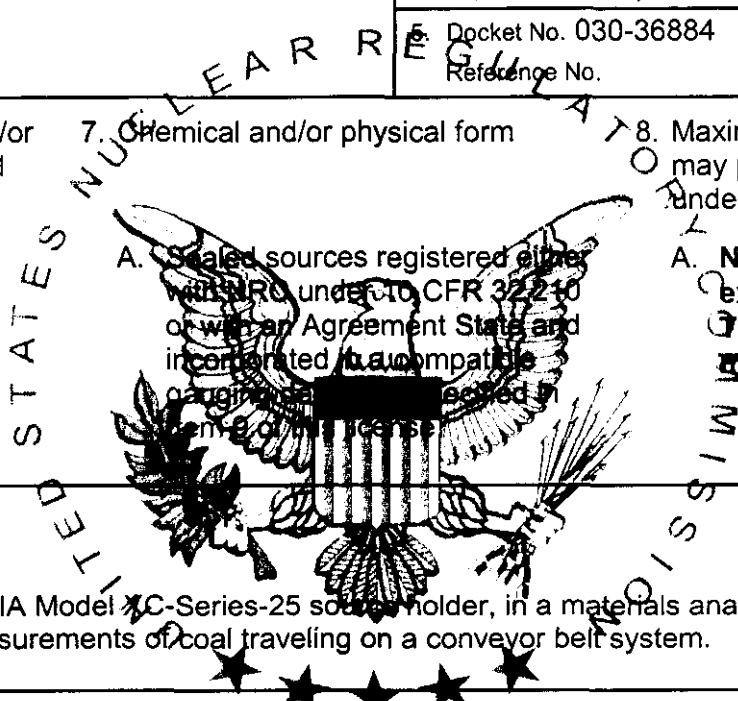

CONDITIONS

- 10. Licensed material may be used only at the licensee's facilities located at Cypress Creek Mine, 3700 New Harmony Road, Boonville, Indiana.
- 11. Licensed material shall be used by, or under the supervision of individuals who have received the training described in the application dated February 14, 2005. The licensee shall maintain records of individuals designated as users for 3 years following the last use of licensed material by the individual.
- 12. A. The Radiation Safety Officer (RSO) for this license is **Donald Shemonic**.
- B. Before assuming the duties and responsibilities as RSO for this license, future RSOs shall have successfully completed one of the training courses described in Criteria in Section 8.7.1 of NUREG-1556, Volume 4, dated October 1998.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License Number  
13-32559-01

Docket or Reference Number  
030-36884

Amendment No. 1

13. A. Sealed sources shall be tested for leakage and/or contamination at intervals not to exceed the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State.
- B. Notwithstanding Paragraph A of this condition, sealed sources designed to primarily emit alpha particles shall be tested for leakage and/or contamination at intervals not to exceed 3 months.
- C. In the absence of a certificate from a transferor indicating that a leak test has been made within the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State prior to the transfer, a sealed source received from another person shall not be put into use until tested and the test results received.
- D. Sealed sources need not be tested if they contain only hydrogen-3; or they contain only a radioactive gas; or the half-life of the isotope is 30 days or less; or they contain not more than 100 microcuries of beta and/or gamma emitting material or not more than 10 microcuries of alpha emitting material.
- E. Sealed sources need not be tested if they are in storage and are not being used. However, when they are removed from storage for use or transferred to another person, and have not been tested within the required leak test interval, they shall be tested before use or transfer. No sealed source shall be stored for a period of more than 3 months without being tested for leakage and/or contamination.
- F. The leak test shall be capable of detecting the presence of 0.005 microcurie (185 becquerels) of radioactive material on the test sample. If the test reveals the presence of 0.005 microcurie (185 becquerels) or more of removable contamination, a report shall be filed with the U.S. Nuclear Regulatory Commission in accordance with 10 CFR 30.50(b)(2), and the source shall be removed immediately from service and decontaminated, repaired, or disposed of in accordance with Commission regulations.
- G. Tests for leakage and/or contamination, limited to leak test sample collection shall be performed by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services. The licensee is not authorized to perform the analysis. Analysis of leak test samples must be performed by persons specifically licensed by the Commission or an Agreement State to perform such services.
- H. Records of leak test results shall be kept in units of microcuries and shall be maintained for 3 years.
14. Sealed sources containing licensed material shall not be opened or sources removed from source holders by the licensee, except as specifically authorized.
15. The licensee shall conduct a physical inventory every 6 months, or at other intervals approved by the U.S. Nuclear Regulatory Commission, to account for all sealed sources and/or devices received and possessed under the license. Records of inventories shall be maintained for 5 years from the date of each inventory, and shall include the radionuclides, quantities, manufacturer's name and model numbers, and the date of the inventory.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License Number  
13-32559-01

Docket or Reference Number  
030-36884

Amendment No. 1

16. A. Each gauge shall be tested for the proper operation of the on-off mechanism (shutter) and indicator, if any, at intervals not to exceed 6 months or at such longer intervals as specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission pursuant to 10 CFR 32.210 or the equivalent regulations of an Agreement State.
- B. Notwithstanding the periodic on-off mechanism (shutter) and indicator test, the requirement does not apply to gauges that are stored, not being used, and have the shutter lock mechanism in a locked position. The gauges exempted from this periodic test shall be tested before use.
17. The following services shall not be performed by the licensee: installation, initial radiation surveys, relocation, removal from service, dismantling, alignment, replacement, disposal of the sealed source and non-routine maintenance or repair of components related to the radiological safety of the gauge (i.e., the sealed source, the source holder, source drive mechanism, on-off mechanism (shutter), shutter control, shielding). These services shall be performed only by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
18. A. The licensee may maintain, repair, or replace device components that are not related to the radiological safety of the device containing byproduct material and that do not result in the potential for any portion of the body to come into contact with the primary beam or in increased radiation levels in accessible areas.
- B. The licensee may not maintain, repair, or replace any of the following device components: the sealed source, the source holder, source drive mechanism, on-off mechanism (shutter), shutter control, or shielding, or any other component related to the radiological safety of the device, except as provided otherwise by specific conditions of the license.
19. Prior to initial use and after installation, relocation, dismantling, alignment, or any other activity involving the source or removal of the shielding, the licensee shall assure that a radiological survey is performed to determine radiation levels in accessible areas around, above, and below the gauge with the shutter open. This survey shall be performed only by persons authorized to perform such services by the U.S. Nuclear Regulatory Commission or an Agreement State.
20. The licensee shall operate each device containing licensed material within the manufacturer's specified temperature and environmental limits such that the shielding and shutter mechanism of the source holder are not compromised.
21. The licensee shall assure that the shutter mechanism of each device is locked in the closed position during periods when a portion of an individual's body may be subject to the direct radiation beam. The licensee shall review and modify, as appropriate, its "lock-out" procedures whenever a new device is obtained to incorporate the device manufacturer's recommendations.
22. Except for maintaining labeling as required by 10 CFR Part 20, or 71, the licensee shall obtain authorization from the U.S. Nuclear Regulatory Commission before making any changes in the sealed source, device or source-device combination that would alter the description or specifications as indicated in the respective certificate of registration issued either by the Commission pursuant to 10 CFR 32.210 or by an Agreement State.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**License Number  
13-32559-01Docket or Reference Number  
030-36884

Amendment No. 1

23. The licensee is authorized to transport licensed material in accordance with the provisions of 10 CFR Part 71, "Packaging and Transportation of Radioactive Material."
24. Except as specifically provided otherwise in this license, the licensee shall conduct its program in accordance with the statements, representations, and procedures contained in the documents, including any enclosures, listed below. The U.S. Nuclear Regulatory Commission's regulations shall govern unless the statements, representations, and procedures in the licensee's application and correspondence are more restrictive than the regulations.
- A. Application dated February 14, 2005.



FOR THE U.S. NUCLEAR REGULATORY COMMISSION

Date MAY 25 2006

By

William P. Reichhold  
Materials Licensing Branch  
Region III