

TABLE OF CONTENTS

---

3.6	CONTAINMENT SYSTEMS (continued)	
3.6.4	Containment Pressure .....	3.6-16
3.6.5	Containment Air Temperature .....	3.6-17
3.6.6	Containment Spray and Cooling Systems .....	3.6-18
3.6.7	Recirculation Fluid pH Control (RFPC) System.....	3.6-21
3.6.8	Hydrogen Recombiners .....	3.6-22
3.7	PLANT SYSTEMS .....	3.7-1
3.7.1	Main Steam Safety Valves (MSSVs) .....	3.7-1
3.7.2	Main Steam Isolation Valves (MSIVs) .....	3.7-5
3.7.3	MFIVs and MFRVs and MFRV Bypass Valves.....	3.7-8
3.7.4	Atmospheric Steam Dump Valves (ASDs) .....	3.7-11
3.7.5	Auxiliary Feedwater (AFW) System.....	3.7-14
3.7.6	Condensate Storage Tank (CST) .....	3.7-18
3.7.7	Component Cooling Water (CCW) System .....	3.7-20
3.7.8	Essential Service Water System (ESW) .....	3.7-22
3.7.9	Ultimate Heat Sink (UHS).....	3.7-24
3.7.10	Control Room Emergency Ventilation System (CREVS).....	3.7-26
3.7.11	Control Room Air Conditioning System (CRACS).....	3.7-29
3.7.12	Not Used.....	3.7-32
3.7.13	Emergency Exhaust System (EES).....	3.7-33
3.7.14	Not Used.....	3.7-36
3.7.15	Fuel Storage Pool Water Level.....	3.7-37
3.7.16	Fuel Storage Pool Boron Concentration .....	3.7-38
3.7.17	Spent Fuel Assembly Storage .....	3.7-40
3.7.18	Secondary Specific Activity.....	3.7-42
3.8	ELECTRICAL POWER SYSTEMS.....	3.8-1
3.8.1	AC Sources - Operating.....	3.8-1
3.8.2	AC Sources - Shutdown .....	3.8-16
3.8.3	Diesel Fuel Oil, Lube Oil, and Starting Air .....	3.8-19
3.8.4	DC Sources - Operating .....	3.8-22
3.8.5	DC Sources - Shutdown .....	3.8-25
3.8.6	Battery Cell Parameters.....	3.8-27
3.8.7	Inverters - Operating.....	3.8-31
3.8.8	Inverters - Shutdown.....	3.8-33
3.8.9	Distribution Systems - Operating .....	3.8-35
3.8.10	Distribution Systems - Shutdown.....	3.8-37

3.7 PLANT SYSTEMS

3.7.2 Main Steam Isolation Valves (MSIVs)

LCO 3.7.2 Four MSIVs and their associated actuator trains shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One MSIV actuator train inoperable.	A.1 Restore MSIV actuator train to OPERABLE status.	72 hours
B. Two MSIV actuator trains inoperable for different MSIVs when the inoperable actuator trains are <u>not</u> in the same separation group.	B.1 Restore one MSIV actuator train to OPERABLE status.	24 hours
C. Two MSIV actuator trains inoperable when the inoperable actuator trains <u>are</u> in the same separation group.	C.1 Restore one MSIV actuator train to OPERABLE status.	4 hours
D. Two actuator trains for one MSIV inoperable.	D.1 Declare the affected MSIV inoperable.	Immediately

(continued)

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>E. Three or more actuator trains inoperable.</p> <p><u>OR</u></p> <p>Required Action and associated Completion Time of Condition A, B, or C not met.</p>	<p>E.1 Declare each affected MSIV inoperable.</p>	<p>Immediately</p>
<p>F. One MSIV inoperable in MODE 1.</p>	<p>F.1 Restore MSIV to OPERABLE status.</p>	<p>8 hours</p>
<p>G. Required Action and associated Completion Time of Condition F not met.</p>	<p>G.1 Be in MODE 2.</p>	<p>6 hours</p>
<p>H. ----- NOTE ----- Separate Condition entry is allowed for each MSIV. -----</p> <p>One or more MSIVs inoperable in MODE 2 or 3.</p>	<p>H.1 Close MSIV.</p> <p><u>AND</u></p> <p>H.2 Verify MSIV is closed.</p>	<p>8 hours</p> <p>Once per 7 days</p>
<p>I. Required Action and associated Completion Time of Condition H not met.</p>	<p>I.1 Be in MODE 3.</p> <p><u>AND</u></p> <p>I.2 Be in MODE 4.</p>	<p>6 hours</p> <p>12 hours</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.7.2.1	<p>----- NOTE -----                      Only required to be performed in MODES 1 and 2.                      -----</p> <p>Verify isolation time of each MSIV is <math>\leq 5</math> seconds.</p>	In accordance with the Inservice Testing Program
SR 3.7.2.2	<p>----- NOTE -----                      Only required to be performed in MODES 1 and 2.                      -----</p> <p>Verify each MSIV actuates to the isolation position on an actual or simulated actuation signal.</p>	18 months

3.7 PLANT SYSTEMS

3.7.3 Main Feedwater Isolation Valves (MFIVs) and Main Feedwater Regulating Valves (MFRVs) and Main Feedwater Regulating Valve Bypass Valves (MFRVBVs)

LCO 3.7.3 Four MFIVs, four MFRVs, and four MFRVBVs shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3 except when:

- a. MFIV is closed and de-activated; or
- b. MFRV is closed and de-activated or closed and isolated by a closed manual valve; or
- c. MFRVBV is closed and de-activated, or closed and isolated by a closed manual valve, or isolated by two closed manual valves.

ACTIONS

----- NOTE -----  
Separate Condition entry is allowed for each valve.  
-----

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One or more MFIVs inoperable.	A.1 Close MFIV.	72 hours
	<u>AND</u> A.2 Verify MFIV is closed.	Once per 7 days
B. One or more MFRVs inoperable.	B.1 Close or isolate MFRV.	72 hours
	<u>AND</u> B.2 Verify MFRV is closed or isolated.	Once per 7 days
C. One or more MFRVBVs inoperable.	C.1 Close or isolate bypass valve.	72 hours
	<u>AND</u> C.2 Verify bypass valve is closed or isolated.	Once per 7 days

(continued)

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
D. Two valves in the same flow path inoperable.	D.1 Isolate affected flow path.	8 hours
E. Required Action and associated Completion Time not met.	E.1 Be in MODE 3.	6 hours
	<u>AND</u> E.2 Be in MODE 4.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.7.3.1</p> <p style="text-align: center;">----- NOTE -----</p> <p style="text-align: center;">Only required to be performed in MODES 1 and 2.</p> <hr/> <p>Verify the closure time of each MFRV and MFRVBV is <math>\leq 15</math> seconds.</p>	<p>In accordance with the Inservice Testing Program</p>
<p>SR 3.7.3.2</p> <p style="text-align: center;">----- NOTE -----</p> <p style="text-align: center;">For the MFRVs and MFRVBVs, only required to be performed in MODES 1 and 2.</p> <hr/> <p>Verify each MFIV, MFRV and MFRVBV actuates to the isolation position on an actual or simulated actuation signal.</p>	<p>18 months</p>
<p>SR 3.7.3.3</p> <p>Verify the closure time of each MFIV is within the limits of Figure 3.7.3-1.</p>	<p>In accordance with the Inservice Testing Program</p>

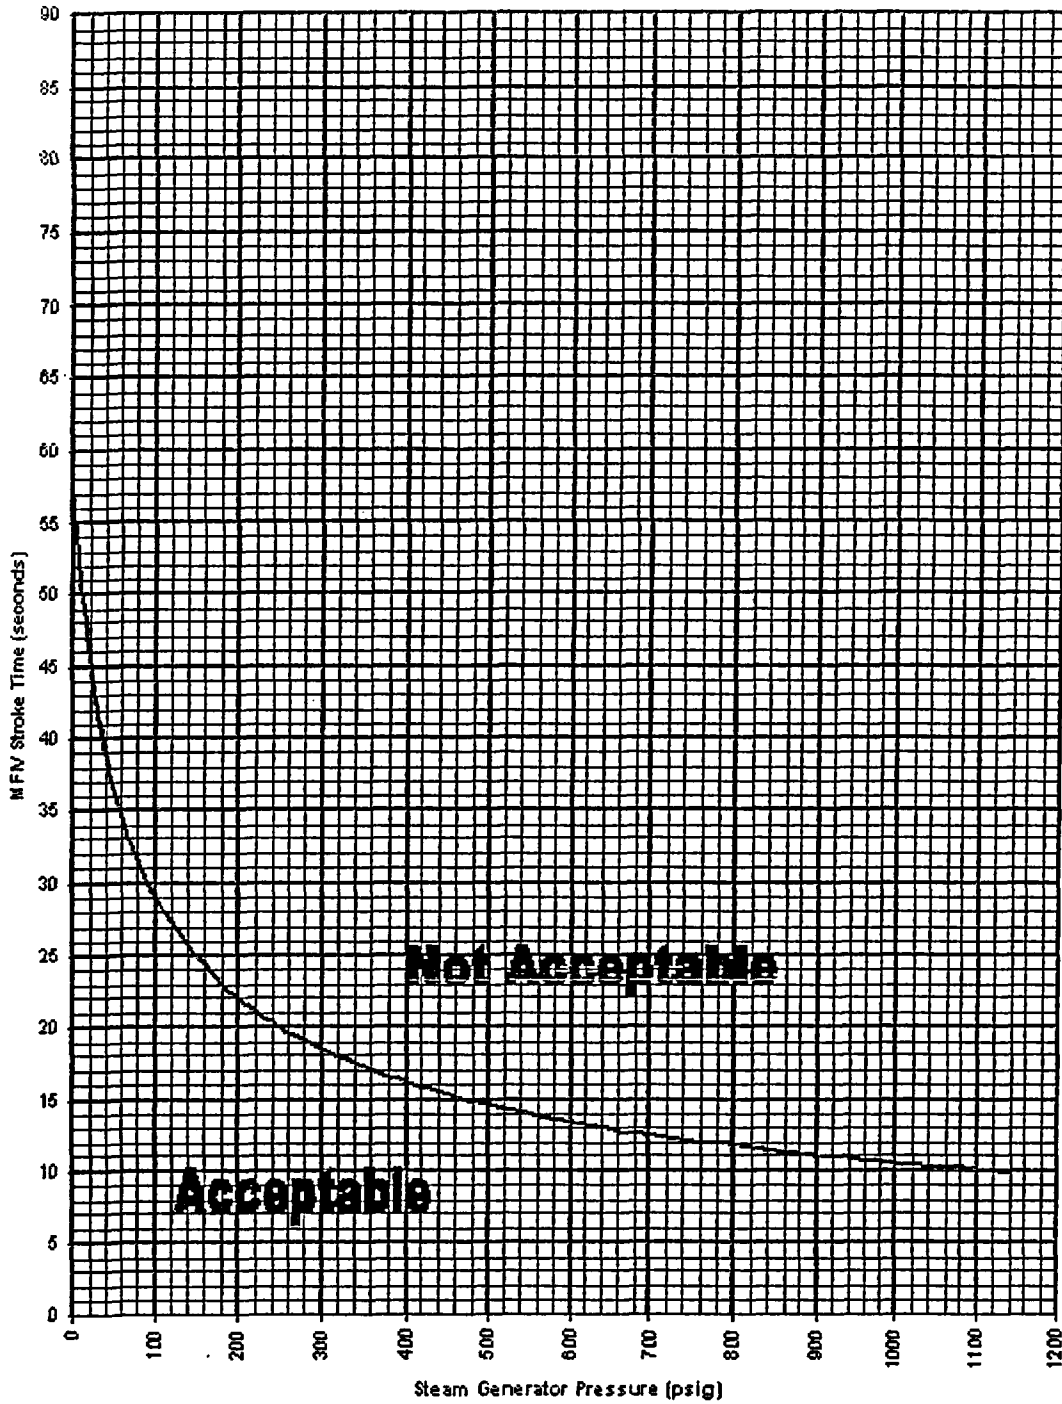


Figure 3.7.3-1 (page 1 of 1)  
MFIV Stroke Time Limit vs Steam Generator Pressure

3.7 PLANT SYSTEMS

3.7.4 Atmospheric Steam Dump Valves (ASDs)

LCO 3.7.4 Four ASD lines shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One required ASD line inoperable for reasons other than excessive ASD seat leakage.	A.1 Restore required ASD line to OPERABLE status.	7 days
B. Two required ASD lines inoperable for reasons other than excessive ASD seat leakage.	B.1 Restore all but one required ASD line to OPERABLE status.	72 hours
C. Three or more required ASD lines inoperable for reasons other than excessive ASD seat leakage.	C.1 Restore all but two required ASD lines to OPERABLE status.	24 hours

(continued)



ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
D. With one or more of the required ASD(s) inoperable because of excessive seat leakage.	D.1 Initiate action to close the Associated manual isolation valve(s).	Immediately  30 days
	<u>AND</u> D.2 Restore ASD(s) to OPERABLE status.	
E. Required Action and associated Completion Time not met.	E.1 Be in MODE 3.	6 hours
	<u>AND</u> E.2 Be in MODE 4.	12 hours

**SURVEILLANCE REQUIREMENTS**

SURVEILLANCE		FREQUENCY
SR 3.7.4.1	<p>----- NOTE -----  Only required to be performed in MODES 1 and 2.  -----  Verify one complete cycle of each ASD.</p>	In accordance with the Inservice Testing Program
SR 3.7.4.2	Verify one complete cycle of each ASD manual isolation valve.	In accordance with the Inservice Testing Program

3.7 PLANT SYSTEMS

3.7.5 Auxiliary Feedwater (AFW) System

LCO 3.7.5 Three AFW trains shall be OPERABLE.

APPLICABILITY: MODES 1, 2, and 3.

ACTIONS

----- NOTE -----  
LCO 3.0.4.b is not applicable when entering MODE 1.  
-----

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One steam supply to turbine driven AFW pump inoperable.	A.1 Restore steam supply to OPERABLE status.	7 days <u>AND</u> 10 days from discovery of failure to meet the LCO
B. One ESW supply to turbine driven AFW pump inoperable.	B.1 Restore ESW supply to OPERABLE status.	72 hours <u>AND</u> 10 days from discovery of failure to meet the LCO

(continued)

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>C. One AFW train inoperable for reasons other than Condition A or B.</p>	<p>C.1 Restore AFW train to OPERABLE status.</p>	<p>72 hours*</p> <p><u>AND</u></p> <p>10 days from discovery of failure to meet the LCO</p>
<p>D. Required Action and associated Completion Time for Condition A, B or C not met.</p> <p><u>OR</u></p> <p>Two AFW trains inoperable.</p>	<p>D.1 Be in MODE 3.</p> <p><u>AND</u></p> <p>D.2 Be in MODE 4.</p>	<p>6 hours</p> <p>12 hours</p>
<p>E. Three AFW trains inoperable.</p>	<p>E.1</p> <p>----- NOTE -----</p> <p>LCO 3.0.3 and all other LCO Required Actions requiring MODE changes are suspended until one AFW train is restored to OPERABLE status.</p> <p>-----</p> <p>Initiate action to restore one AFW train to OPERABLE status.</p>	<p>Immediately</p>

\*With the exception that the Completion Time associated with the Condition C entry on 2/3/04 for the turbine driven auxiliary feedwater pump has been extended on a one-time only basis to 144 hours. At the time a formal cause of the inoperability is determined, Condition D will be entered immediately.

**SURVEILLANCE REQUIREMENTS**

SURVEILLANCE		FREQUENCY
SR 3.7.5.1	<p>----- NOTE -----</p> <p>Only required to be performed for the AFW flow control valves when the system is placed in automatic control or when THERMAL POWER is &gt; 10% RTP.</p> <p>-----</p> <p>Verify each AFW manual, power operated, and automatic valve in each water flow path, and in both steam supply flow paths to the steam turbine driven pump, that is not locked, sealed, or otherwise secured in position, is in the correct position.</p>	31 days
SR 3.7.5.2	<p>----- NOTE -----</p> <p>Not required to be performed for the turbine driven AFW pump until 24 hours after <math>\geq</math> 900 psig in the steam generator.</p> <p>-----</p> <p>Verify the developed head of each AFW pump at the flow test point is greater than or equal to the required developed head.</p>	In accordance with the Inservice Test Program
SR 3.7.5.3	<p>Verify each AFW automatic valve that is not locked, sealed, or otherwise secured in position, actuates to the correct position on an actual or simulated actuation signal.</p>	18 months

(continued)

SURVEILLANCE REQUIREMENTS (continued)

SURVEILLANCE	FREQUENCY
<p>SR 3.7.5.4 ----- NOTE -----            Not required to be performed for the turbine driven AFW pump until 24 hours after <math>\geq</math> 900 psig in the steam generator.            -----            Verify each AFW pump starts automatically on an actual or simulated actuation signal.</p>	<p>18 months</p>
<p>SR 3.7.5.5      Verify proper alignment of the required AFW flow paths by verifying flow from the condensate storage tank to each steam generator.</p>	<p>Prior to entering MODE 2 whenever unit has been in MODE 5 or 6 for &gt; 30 days</p>

3.7 PLANT SYSTEMS

3.7.6 Condensate Storage Tank (CST)

LCO 3.7.6 The CST contained water volume shall be  $\geq 281,000$  gal

APPLICABILITY: MODES 1, 2, and 3.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. CST contained water volume not within limit.	A.1 Verify by administrative means OPERABILITY of backup water supply.	4 hours
	<u>AND</u>	<u>AND</u>
	A.2 Restore CST contained water volume to within limit.	Once per 12 hours thereafter
		7 days
B. Required Action and associated Completion Time not met.	B.1 Be in MODE 3.	6 hours
	<u>AND</u>	
	B.2 Be in MODE 4.	12 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.7.6.1	Verify the CST contained water volume is $\geq 281,000$ gal.	12 hours



3.7 PLANT SYSTEMS

3.7.7 Component Cooling Water (CCW) System

LCO 3.7.7 Two CCW trains shall be OPERABLE.

APPLICABILITY: MODES 1, 2, 3, and 4.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One CCW train inoperable.	A.1 ----- NOTE ----- Enter applicable Conditions and Required Actions of LCO 3.4.6, "RCS Loops – MODE 4," for residual heat removal loops made inoperable by CCW. ----- Restore CCW train to OPERABLE status.	72 hours
B. Required Action and associated Completion Time of Condition A not met.	B.1 Be in MODE 3. <u>AND</u> B.2 Be in MODE 5.	6 hours  36 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.7.7.1</p> <p>----- NOTE ----- Isolation of CCW flow to individual components does not render the CCW System inoperable.</p> <p>-----</p> <p>Verify each CCW manual, power operated, and automatic valve in the flow path servicing safety related equipment, that is not locked, sealed, or otherwise secured in position, is in the correct position.</p>	<p>31 days</p>
<p>SR 3.7.7.2</p> <p>Verify each CCW automatic valve in the flow path that is not locked, sealed, or otherwise secured in position, actuates to the correct position on an actual or simulated actuation signal.</p>	<p>18 months</p>
<p>SR 3.7.7.3</p> <p>Verify each CCW pump starts automatically on an actual or simulated actuation signal.</p>	<p>18 months</p>

3.7 PLANT SYSTEMS

3.7.8 Essential Service Water System (ESW)

LCO 3.7.8 Two ESW trains shall be OPERABLE.

APPLICABILITY: MODES 1, 2, 3, and 4.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>A. One ESW train inoperable.</p>	<p>A.1</p> <p>----- NOTE -----</p> <ol style="list-style-type: none"> <li>1. Enter applicable Conditions and Required Actions of LCO 3.8.1, "AC Sources-Operating," for emergency diesel generator made inoperable by ESW.</li> <li>2. Enter applicable Conditions and Required Actions of LCO 3.4.6, "RCS Loops - MODE 4," for residual heat removal loops made inoperable by ESW.</li> </ol> <p>-----</p> <p>Restore ESW train to OPERABLE status.</p>	<p>72 hours</p>

(continued)

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
B. Required Action and associated Completion Time of Condition A not met.	B.1 Be in MODE 3.	6 hours
	<u>AND</u>	
	B.2 Be in MODE 5.	36 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
<p>SR 3.7.8.1 ----- NOTE ----- Isolation of ESW flow to individual components does not render the ESW inoperable.</p> <p>Verify each ESW manual, power operated, and automatic valve in the flow path servicing safety related equipment, that is not locked, sealed, or otherwise secured in position, is in the correct position.</p>	31 days
<p>SR 3.7.8.2 Verify each ESW automatic valve in the flow path that is not locked, sealed, or otherwise secured in position, actuates to the correct position on an actual or simulated actuation signal.</p>	18 months
<p>SR 3.7.8.3 Verify each ESW pump starts automatically on an actual or simulated actuation signal.</p>	18 months

3.7 PLANT SYSTEMS

3.7.9 Ultimate Heat Sink (UHS)

LCO 3.7.9            The UHS shall be OPERABLE.

APPLICABILITY:    MODES 1, 2, 3, and 4.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One cooling tower train inoperable.	A.1        Restore cooling tower train to OPERABLE status.	72 hours
B. Required Action and associated Completion Time of Condition A not met.  <u>OR</u>  UHS inoperable for reasons other than Condition A.	B.1        Be in MODE 3.  <u>AND</u>  B.2        Be in MODE 5.	6 hours    36 hours

**SURVEILLANCE REQUIREMENTS**

SURVEILLANCE		FREQUENCY
SR 3.7.9.1	Verify water level of UHS is $\geq$ 831.25 ft mean sea level.	24 hours
SR 3.7.9.2	Verify average water temperature of UHS is $\leq$ 90°F.	24 hours
SR 3.7.9.3	Operate each cooling tower fan for $\geq$ 15 minutes in both the fast and slow speed.	31 days

3.7 PLANT SYSTEMS

3.7.10 Control Room Emergency Ventilation System (CREVS)

LCO 3.7.10 Two CREVS trains shall be OPERABLE.

----- NOTE -----  
The control room boundary may be opened intermittently under administrative control.  
-----

APPLICABILITY: MODES 1, 2, 3, 4, 5, and 6,  
During movement of irradiated fuel assemblies.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One CREVS train inoperable.	A.1 Restore CREVS train to OPERABLE status.	7 days
B. Two CREVS trains inoperable due to inoperable control room boundary in MODES 1, 2, 3, and 4.	B.1 Restore control room boundary to OPERABLE status.	24 hours
C. Required Action and associated Completion Time of Condition A or B not met in MODE 1, 2, 3, or 4.	C.1 Be in MODE 3.	6 hours
	<u>AND</u> C.2 Be in MODE 5.	36 hours

(continued)

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>D. Required Action and associated Completion Time of Condition A not met in MODE 5 or 6, or during movement of irradiated fuel assemblies.</p>	<p>D.1.1 Place OPERABLE CREVS train in CRVIS mode.</p>	<p>Immediately</p>
	<p><u>AND</u></p>	
	<p>D.1.2 Verify OPERABLE CREVS train is capable of being powered by an emergency power source.</p>	<p>Immediately</p>
	<p><u>OR</u></p>	
<p>E. Two CREVS trains inoperable in MODE 5 or 6, or during movement of irradiated fuel assemblies.</p>	<p>D.2.1 Suspend CORE ALTERATIONS.</p>	<p>Immediately</p>
	<p><u>AND</u></p>	
<p>F. Two CREVS trains inoperable in MODE 1, 2, 3, or 4 for reasons other than Condition B.</p>	<p>D.2.2 Suspend movement of irradiated fuel assemblies.</p>	<p>Immediately</p>
	<p><u>AND</u></p>	
<p>E.1 Suspend CORE ALTERATIONS.</p>	<p>E.2 Suspend movement of irradiated fuel assemblies.</p>	<p>Immediately</p>
<p>F.1 Enter LCO 3.0.3.</p>		<p>Immediately</p>



**SURVEILLANCE REQUIREMENTS**

SURVEILLANCE		FREQUENCY
SR 3.7.10.1	Operate each CREVS train pressurization filter unit for $\geq 10$ continuous hours with the heaters operating and each CREVS train filtration filter unit for $\geq 15$ minutes.	31 days
SR 3.7.10.2	Perform required CREVS filter testing in accordance with the Ventilation Filter Testing Program (VFTP).	In accordance with VFTP
SR 3.7.10.3	Verify each CREVS train actuates on an actual or simulated actuation signal.	18 months
SR 3.7.10.4	Verify one CREVS train can maintain a positive pressure of $\geq 0.125$ inches water gauge, relative to the outside atmosphere during the CRVIS mode of operation.	18 months on a STAGGERED TEST BASIS

3.7 PLANT SYSTEMS

3.7.11 Control Room Air Conditioning System (CRACS)

LCO 3.7.11 Two CRACS trains shall be OPERABLE.

APPLICABILITY: MODES 1, 2, 3, 4, 5, and 6,  
During movement of irradiated fuel assemblies.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One CRACS train inoperable.	A.1 Restore CRACS train to OPERABLE status.	30 days
B. Required Action and associated Completion Time of Condition A not met in MODE 1, 2, 3, or 4.	B.1 Be in MODE 3.	6 hours
	<u>AND</u> B.2 B.2Be in MODE 5.	36 hours

(continued)

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>C. Required Action and associated Completion Time of Condition A not met in MODE 5 or 6, or during movement of irradiated fuel assemblies.</p>	<p>C.1.1 Place OPERABLE CRACS train in operation.</p>	<p>Immediately</p>
	<p><u>AND</u></p>	
	<p>C.1.2 Verify OPERABLE CRACS train is capable of being powered by an emergency power source.</p>	<p>Immediately</p>
	<p><u>OR</u></p>	
	<p>C.2.1 Suspend CORE ALTERATIONS.</p> <p><u>AND</u></p> <p>C.2.2 Suspend movement of irradiated fuel assemblies.</p>	<p>Immediately</p> <p>Immediately</p>
<p>D. Two CRACS trains inoperable in MODE 5 or 6, or during movement of irradiated fuel assemblies.</p>	<p>D.1 Suspend CORE ALTERATIONS.</p>	<p>Immediately</p>
	<p><u>AND</u></p> <p>D.2 Suspend movement of irradiated fuel assemblies.</p>	<p>Immediately</p>
<p>E. Two CRACS trains inoperable in MODE 1, 2, 3, or 4.</p>	<p>E.1 Enter LCO 3.0.3.</p>	<p>Immediately</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.7.11.1	Verify each CRACS train has the capability to remove the assumed heat load.	18 months

3.7 PLANT SYSTEMS

3.7.12 Not Used.

3.7 PLANT SYSTEMS

3.7.13 Emergency Exhaust System (EES)

LCO 3.7.13 Two EES trains shall be OPERABLE.

----- NOTE -----  
 The auxiliary or fuel building boundary may be opened intermittently under administrative control.  
 -----

APPLICABILITY: MODES 1, 2, 3, and 4,  
 During movement of irradiated fuel assemblies in the fuel building.

----- NOTE -----  
 The SIS mode of operation is required only in MODES 1, 2, 3 and 4. The FBVIS mode of operation is required only during movement of irradiated fuel assemblies in the fuel building.  
 -----

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. One EES train inoperable in MODE 1, 2, 3, or 4.	A.1 Restore EES train to OPERABLE status.	7 days
B. Two EES trains inoperable due to inoperable auxiliary building boundary in MODE 1, 2, 3 or 4.	B.1 Restore auxiliary building boundary to OPERABLE status.	24 hours
		(continued)

ACTIONS (continued)

CONDITION	REQUIRED ACTION	COMPLETION TIME
<p>C. Required Action and associated Completion Time of Condition A or B not met in MODE 1, 2, 3, or 4.</p> <p><u>OR</u></p> <p>Two EES trains inoperable in MODE 1, 2, 3, or 4 for reasons other than Condition B.</p>	<p>C.1 Be in MODE 3.</p> <p><u>AND</u></p> <p>C.2 Be in MODE 5:</p>	<p>6 hours</p> <p>36 hours</p>
<p>D. One EES train inoperable during movement of irradiated fuel assemblies in the fuel building.</p>	<p>D.1 Place OPERABLE EES train in the FBVIS mode.</p> <p><u>OR</u></p> <p>D.2 Suspend movement of irradiated fuel assemblies in the fuel building.</p>	<p>Immediately</p> <p>Immediately</p>
<p>E. Two EES trains inoperable during movement of irradiated fuel assemblies in the fuel building.</p>	<p>E.1 Suspend movement of irradiated fuel assemblies in the fuel building.</p>	<p>Immediately</p>

**SURVEILLANCE REQUIREMENTS**

<b>SURVEILLANCE</b>		<b>FREQUENCY</b>
SR 3.7.13.1	Operate each EES train for $\geq 10$ continuous hours with the heaters operating.	31 days
SR 3.7.13.2	Perform required EES filter testing in accordance with the Ventilation Filter Testing Program (VFTP).	In accordance with the VFTP
SR 3.7.13.3	Verify each EES train actuates on an actual or simulated actuation signal.	18 months
SR 3.7.13.4	Verify one EES train can maintain a negative pressure $\geq 0.25$ inches water gauge with respect to atmospheric pressure in the auxiliary building during the SIS mode of operation.	18 months on a STAGGERED TEST BASIS
SR 3.7.13.5	Verify one EES train can maintain a negative pressure $\geq 0.25$ inches water gauge with respect to atmospheric pressure in the fuel building during the FBVIS mode of operation.	18 months on a STAGGERED TEST BASIS



3.7 PLANT SYSTEMS

3.7.14 Not Used.

3.7 PLANT SYSTEMS

3.7.15 Fuel Storage Pool Water Level

LCO 3.7.15            The fuel storage pool water level shall be  $\geq$  23 ft over the top of the storage racks.

APPLICABILITY:    During movement of irradiated fuel assemblies in the fuel storage pool.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Fuel storage pool water level not within limit.	<p>A.1            ----- NOTE ----- LCO 3.0.3 is not applicable. -----</p> <p>Suspend movement of irradiated fuel assemblies in the fuel storage pool.</p>	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.7.15.1      Verify the fuel storage pool water level is $\geq$ 23 ft above the storage racks.	7 days

3.7 PLANT SYSTEMS

3.7.16 Fuel Storage Pool Boron Concentration

LCO 3.7.16 The fuel storage pool boron concentration shall be  $\geq 2165$  ppm.

APPLICABILITY: When fuel assemblies are stored in the fuel storage pool and a fuel storage pool verification has not been performed since the last movement of fuel assemblies in the fuel storage pool.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME	
<p>A. Fuel storage pool boron concentration not within limit.</p>	<p>----- NOTE ----- LCO 3.0.3 is not applicable. -----</p>		
	<p>A.1 Suspend movement of fuel assemblies in the fuel storage pool.</p>		<p>Immediately</p>
	<p><u>AND</u></p> <p>A.2.1 Initiate action to restore fuel storage pool boron concentration to within limit.</p>		<p>Immediately</p>
	<p><u>OR</u></p> <p>A.2.2 Verify by administrative means that a non-Region 1 fuel storage pool verification has been performed since the last movement of fuel assemblies in the fuel storage pool.</p>		<p>Immediately</p>

SURVEILLANCE REQUIREMENTS

SURVEILLANCE		FREQUENCY
SR 3.7.16.1	Verify the fuel storage pool boron concentration is within limit.	7 days

3.7 PLANT SYSTEMS

3.7.17 Spent Fuel Assembly Storage

LCO 3.7.17      The combination of initial enrichment and burnup of each spent fuel assembly stored in Region 2 or 3 shall be within the Acceptable Domain of Figure 3.7.17-1 or in accordance with Specification 4.3.1.1.

APPLICABILITY:    Whenever any fuel assembly is stored in the fuel storage pool.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Requirements of the LCO not met.	<p>A.1</p> <p>----- NOTE ----- LCO 3.0.3 is not applicable. -----</p> <p>Initiate action to move the noncomplying fuel assembly to Region 1.</p>	Immediately

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.7.17.1      Verify by administrative means the initial enrichment and burnup of the fuel assembly is in accordance with Figure 3.7.17-1 or Specification 4.3.1.1.	Prior to storing the fuel assembly in Region 2 or 3




Figure 3.7.17-1 (page 1 of 1)  
MINIMUM REQUIRED FUEL ASSEMBLY BURNUP AS A FUNCTION OF  
INITIAL ENRICHMENT TO PERMIT STORAGE IN REGIONS 2 AND 3

3.7 PLANT SYSTEMS

3.7.18 Secondary Specific Activity

LCO 3.7.18            The specific activity of the secondary coolant shall be  $\leq 0.10 \mu\text{Ci/gm}$   
DOSE EQUIVALENT I-131.

APPLICABILITY:    MODES 1, 2, 3, and 4.

ACTIONS

CONDITION	REQUIRED ACTION	COMPLETION TIME
A. Specific activity not within limit.	A.1        Be in MODE 3.	6 hours
	<u>AND</u> A.2        Be in MODE 5.	36 hours

SURVEILLANCE REQUIREMENTS

SURVEILLANCE	FREQUENCY
SR 3.7.18.1        Verify the specific activity of the secondary coolant is $\leq 0.10 \text{ Ci/gm}$ DOSE EQUIVALENT I-131.	31 days