

VIRGINIA ELECTRIC AND POWER COMPANY
RICHMOND, VIRGINIA 23261

November 16, 2006

U. S. Nuclear Regulatory Commission
Attention: Document Control Desk
Washington, D. C. 20555-0001

Serial No. 06-999
NLOS/vlh
Docket No. 50-281
License No. DPR-37

VIRGINIA ELECTRIC AND POWER COMPANY (DOMINION)
SURRY POWER STATION UNIT 2
CYCLE 21 CORE OPERATING LIMITS REPORT

Pursuant to Surry Technical Specification 6.2.C, enclosed is a copy of Dominion's Core Operating Limits Report (COLR) for Surry Unit 2 Cycle 21 Pattern KB, Revision 0.

If you have any questions or require additional information, please contact Mr. Gary Miller at (804) 273-2771.

Very truly yours,



C. L. Funderburk, Director
Nuclear Licensing and Operations Support
Dominion Resources Services, Inc. for
Virginia Electric and Power Company

Enclosure

Commitment Summary: There are no new commitments as a result of this letter.

cc: U. S. Nuclear Regulatory Commission
Region II
Sam Nunn Atlanta Federal Center
61 Forsyth Street, S. W.
Suite 23T85
Atlanta, GA 30303-8931

Mr. Siva P. Lingam
U. S. Nuclear Regulatory Commission
One White Flint North
11555 Rockville Pike
Rockville, MD 20852-2738

Mr. Leonard N. Olshan
U. S. Nuclear Regulatory Commission
One White Flint North
11555 Rockville Pike
Rockville, MD 20852-2738

Mr. N. P. Garrett
NRC Senior Resident Inspector
Surry Power Station

CORE OPERATING LIMITS REPORT
Surry 2 Cycle 21 Pattern KB
Revision 0

September 2006

1.0 INTRODUCTION

This Core Operating Limits Report (COLR) for Surry Unit 2 Cycle 21 has been prepared in accordance with the requirements of Technical Specification 6.2.C.

The Technical Specifications affected by this report are:

TS 3.1.E and TS 5.3.A.6.b - Moderator Temperature Coefficient
TS 3.12.A.2 and TS 3.12.A.3 - Control Bank Insertion Limits
TS 3.12.B.1 and TS 3.12.B.2 - Power Distribution Limits

2.0 REFERENCES

1. VEP-FRD-42, Rev. 2.1-A, "Reload Nuclear Design Methodology," August 2003

(Methodology for TS 3.1.E and TS 5.3.A.6.b - Moderator Temperature Coefficient; TS 3.12.A.2 and 3.12.A.3 - Control Bank Insertion Limit; TS 3.12.B.1 and TS 3.12.B.2 - Heat Flux Hot Channel Factor and Nuclear Enthalpy Rise Hot Channel Factor)
- 2a. WCAP-9220-P-A, Rev. 1, "Westinghouse ECCS Evaluation Model - 1981 Version," February 1982 (W Proprietary)

(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Heat Flux Hot Channel Factor)
- 2b. WCAP-9561-P-A, ADD. 3, Rev. 1, "BART A-1: A Computer Code for the Best Estimate Analysis of Reflood Transients-Special Report: Thimble Modeling in W ECCS Evaluation Model," July 1986 (W Proprietary)

(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Heat Flux Hot Channel Factor)
- 2c. WCAP-10266-P-A, Rev. 2, "The 1981 Version of the Westinghouse ECCS Evaluation Model Using the BASH Code," March 1987 (W Proprietary)

(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Heat Flux Hot Channel Factor)
- 2d. WCAP-10054-P-A, "Westinghouse Small Break ECCS Evaluation Model Using the NOTRUMP Code," August 1985 (W Proprietary)
(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Heat Flux Hot Channel Factor)
- 2e. WCAP-10079-P-A, "NOTRUMP, A Nodal Transient Small Break and General Network Code," August 1985 (W Proprietary)

(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Heat Flux Hot Channel Factor)
- 2f. WCAP-12610, "VANTAGE+ Fuel Assembly Report," June 1990 (Westinghouse Proprietary)

(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Heat Flux Hot Channel Factor)

3a. VEP-NE-2-A, "Statistical DNBR Evaluation Methodology," June 1987

(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Nuclear Enthalpy Rise Hot Channel Factor)

3b. VEP-NE-3-A, "Qualification of the WRB-1 CHF Correlation in the Virginia Power COBRA Code," July 1990

(Methodology for TS 3.12.B.1 and TS 3.12.B.2 - Nuclear Enthalpy Rise Hot Channel Factor)

3.0 OPERATING LIMITS

The cycle-specific parameter limits for the specifications listed in section 1.0 are presented in the following subsections. These limits have been developed using the NRC-approved methodologies specified in Technical Specification 6.2.C.

3.1 Moderator Temperature Coefficient (TS 3.1.E and TS 5.3.A.6.b)

3.1.1 The Moderator Temperature Coefficient (MTC) limits are:

+6.0 pcm/°F at less than 50 percent of RATED POWER, or

+6.0 pcm/°F at 50 percent of RATED POWER and linearly decreasing to 0 pcm/°F at RATED POWER

3.2 Control Bank Insertion Limits (TS 3.12.A.2)

3.2.1 The control rod banks shall be limited in physical insertion as shown in Figure A-1.

3.2.2 The rod insertion limit for the A and B control banks is the fully withdrawn position as shown on Figure A-1.

3.3 Heat Flux Hot Channel Factor-FQ(z) (TS 3.12.B.1)

$$FQ(z) \leq \frac{CFQ}{P} K(z) \text{ for } P > 0.5$$

$$FQ(z) \leq \frac{CFQ}{0.5} K(z) \text{ for } P \leq 0.5$$

$$\text{where : } P = \frac{\text{Thermal Power}}{\text{Rated Power}}$$

3.3.1 $CFQ = 2.32$

3.3.2 $K(z)$ is provided in Figure A-2.

3.4 Nuclear Enthalpy Rise Hot Channel Factor-FΔH(N) (TS 3.12.B.1)

$$F\Delta H(N) \leq CFDH \times \{1 + PFDH(1 - P)\}$$

$$\text{where : } P = \frac{\text{Thermal Power}}{\text{Rated Power}}$$

3.4.1 $CFDH = 1.56$ for Surry Improved Fuel (SIF)

3.4.2 $PFDH = 0.3$

Figure A-1

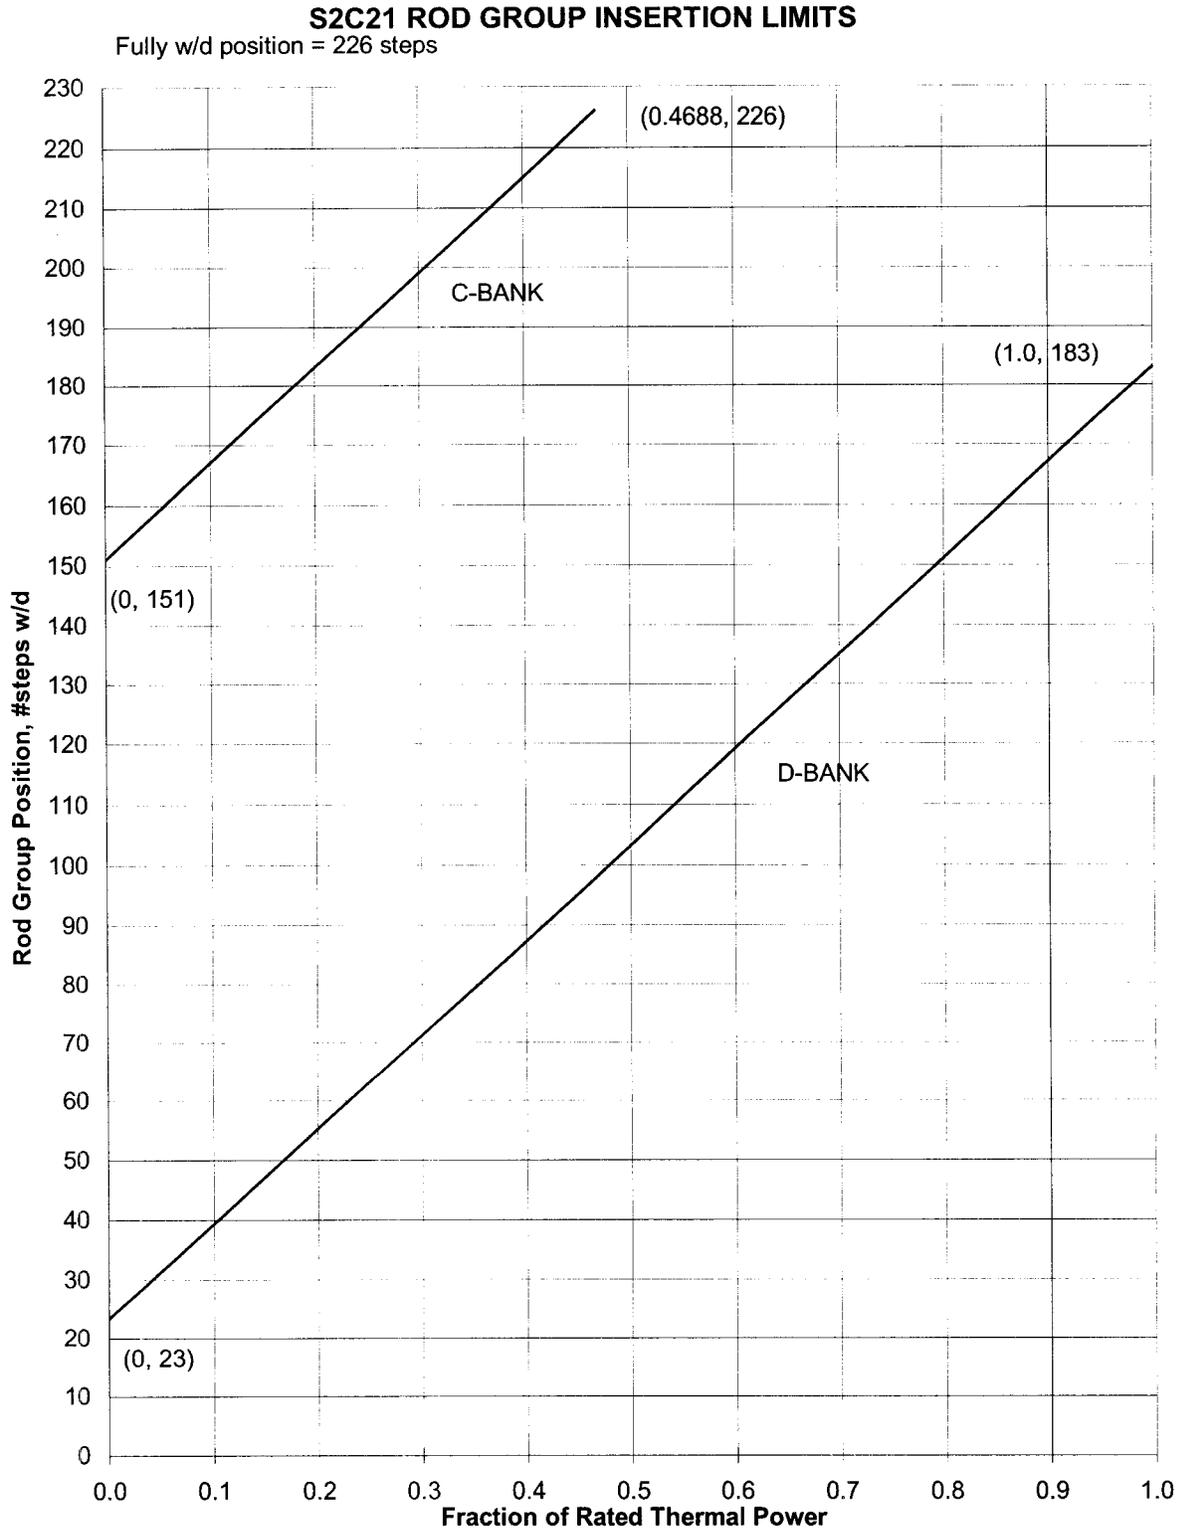


Figure A-2

