

July 8, 1994

Docket No. 50-461

Mr. Richard F. Phares  
Director - Licensing  
Clinton Power Station  
P. O. Box 678  
Mail Code V920  
Clinton, Illinois 61727

Dear Mr. Phares:

DISTRIBUTION

Docket File  
NRC & Local PDRs  
PDIII-3 r/f  
JRoe  
JZwolinski  
JHannon  
MRushbrook  
DPickett  
DHagan  
JHopkins  
JStrosnider  
GHill (2)  
EGreenman, RIII  
CGrimes  
ACRS (10)  
OPA  
OC/LFDCBB  
BClayton, RIII  
OGC  
PO'Connor  
EBaker  
CMcCracken

SUBJECT: ISSUANCE OF AMENDMENT NO. 90 TO FACILITY OPERATING LICENSE NO.  
NPF-62 - CLINTON POWER STATION, UNIT 1 (TAC NO. M89687)

The U. S. Nuclear Regulatory Commission (Commission) has issued the enclosed Amendment No. 90 to Facility Operating License No. NPF-62 for the Clinton Power Station, Unit No. 1. The amendment is in response to your application dated June 20, 1994 (U-602303).

The amendment, issued pursuant to 10 CFR 50.91(a)(6), changes Technical Specification 3/4.4.3.1, "Reactor Coolant System Leakage - Leakage Detection Systems," to permit continued plant operation with inoperable drywell floor drain sump flow rate monitoring instrumentation. Continued plant operation is permitted until the first time the plant is required to be brought to COLD SHUTDOWN after July 10, 1994.

A copy of the Safety Evaluation is also enclosed. The Notice of Issuance will be included in the Commission's next biweekly Federal Register notice.

Sincerely,

Original signed by  
Robert M. Pulsifer for  
Douglas V. Pickett, Senior Project Manager  
Project Directorate III-3  
Division of Reactor Projects III/IV  
Office of Nuclear Reactor Regulation

Enclosures:

1. Amendment No. 90 to NPF-62
2. Safety Evaluation

cc w/enclosures:  
see next page

LA:PD33:DRPW  
MRushbrook  
6/28/94

PM:PD33:DRPW  
DPickett/dy  
6/24/94

D:PD33:DRPW  
JHannon  
7/1/94

#5 SFA  
BC:SPLB  
CMcCracken  
6/27/94

OGC-QWPN  
JHannon  
7/15/94

BC:EMCB RJE for JJS  
JStrosnider  
6/24/94

AD:ADIII  
JZwolinski  
7/15/94

DOCUMENT NAME: TAC89687.AMD

120073

NRC FILE CENTER COPY

9407130308 940708  
PDR ADDCK 05000461  
PDR

DP01  
JL

Mr. Richard F. Phares  
Illinois Power Company

Clinton Power Station  
Unit No. 1

cc:

Mr. John Cook  
Vice President  
Clinton Power Station  
Post Office Box 678  
Clinton, Illinois 61727

Illinois Department  
of Nuclear Safety  
Office of Nuclear Facility Safety  
1035 Outer Park Drive  
Springfield, Illinois 62704

Mr. J. A. Miller  
Manager Nuclear Station  
Engineering Department  
Clinton Power Station  
Post Office Box 678  
Clinton, Illinois 61727

Resident Inspector  
U.S. Nuclear Regulatory Commission  
RR#3, Box 229 A  
Clinton, Illinois 61727

Mr. R. T. Hill  
Licensing Services Manager  
General Electric Company  
175 Curtner Avenue, M/C 481  
San Jose, California 95125

Regional Administrator, Region III  
801 Warrenville Road  
Lisle, Illinois 60532-4351

Chairman of DeWitt County  
c/o County Clerk's Office  
DeWitt County Courthouse  
Clinton, Illinois 61727

Mr. Robert Neumann  
Office of Public Counsel  
State of Illinois Center  
100 W. Randolph, Suite 11-300  
Chicago, Illinois 60601

Mr. J. W. Blattner  
Project Manager  
Sargent & Lundy Engineers  
55 East Monroe Street  
Chicago, Illinois 60603



UNITED STATES  
NUCLEAR REGULATORY COMMISSION  
WASHINGTON, D.C. 20555-0001

ILLINOIS POWER COMPANY, ET AL.

DOCKET NO. 50-461

CLINTON POWER STATION, UNIT NO. 1

AMENDMENT TO FACILITY OPERATING LICENSE

Amendment No. 90  
License No. NPF-62

1. The Nuclear Regulatory Commission (the Commission) has found that:
  - A. The application for amendment by Illinois Power Company\* (IP), and Soyland Power Cooperative, Inc. (the licensees) dated June 20, 1994, complies with the standards and requirements of the Atomic Energy Act of 1954, as amended (the Act), and the Commission's rules and regulations set forth in 10 CFR Chapter I;
  - B. The facility will operate in conformity with the application, the provisions of the Act, and the rules and regulations of the Commission;
  - C. There is reasonable assurance (i) that the activities authorized by this amendment can be conducted without endangering the health and safety of the public, and (ii) that such activities will be conducted in compliance with the Commission's regulations;
  - D. The issuance of this amendment will not be inimical to the common defense and security or to the health and safety of the public; and
  - E. The issuance of this amendment is in accordance with 10 CFR Part 51 of the Commission's regulations and all applicable requirements have been satisfied.
2. Accordingly, the license is amended by changes to the Technical Specifications as indicated in the attachment to this license amendment, and paragraph 2.C.(2) of Facility Operating License No. NPF-62 is hereby amended to read as follows:

---


\*Illinois Power Company is authorized to act as agent for Soyland Power Cooperative, Inc. and has exclusive responsibility and control over the physical construction, operation and maintenance of the facility.

(2) Technical Specifications and Environmental Protection Plan

The Technical Specifications contained in Appendix A and the Environmental Protection Plan contained in Appendix B, as revised through Amendment No. 90, are hereby incorporated into this license. Illinois Power Company shall operate the facility in accordance with the Technical Specifications and the Environmental Protection Plan.

3. This license amendment is effective as of its date of issuance.

FOR THE NUCLEAR REGULATORY COMMISSION

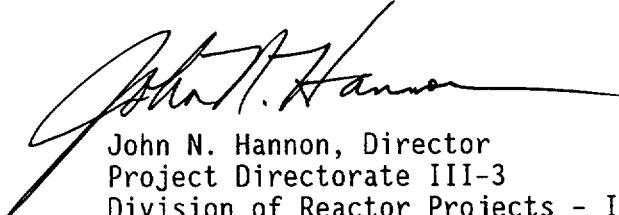

John N. Hannon

John N. Hannon, Director  
Project Directorate III-3  
Division of Reactor Projects - III/IV  
Office of Nuclear Reactor Regulation

Attachment:  
Changes to the Technical  
Specifications

Date of Issuance: July 8, 1994

ATTACHMENT TO LICENSE AMENDMENT NO. 90

FACILITY OPERATING LICENSE NO. NPF-62

DOCKET NO. 50-461

Replace the following page of the Appendix "A" Technical Specifications with the attached page. The revised page is identified by amendment number and contains vertical lines indicating the area of change. The corresponding overleaf page, indicated by an asterisk, is provided to maintain document completeness.

Remove Pages

3/4 4-12

3/4 4-12a\*

Insert Pages

3/4 4-12

3/4 4-12a\*

## REACTOR COOLANT SYSTEM

### 3/4.4.3 REACTOR COOLANT SYSTEM LEAKAGE

#### LEAKAGE DETECTION SYSTEMS

##### LIMITING CONDITION FOR OPERATION

3.4.3.1 The following reactor coolant system leakage detection systems shall be OPERABLE:

- a. The drywell atmosphere particulate radioactivity monitoring system,
- b. The drywell sump flow monitoring system, and
- c. Either the drywell atmosphere gaseous radioactivity monitoring system or the drywell air coolers condensate flow rate monitoring system.

APPLICABILITY: OPERATIONAL CONDITIONS 1, 2, and 3.

#### ACTION:

With only two of the above required leakage detection systems OPERABLE,

- a. operation may continue for up to 30 days when the drywell atmosphere particulate radioactivity monitoring system is inoperable provided grab samples of the drywell atmosphere are obtained and analyzed at least once per 24 hours.
- b. operations may continue:
  1. with the drywell equipment drain sump flow monitoring subsystem inoperable provided the drywell equipment drain sump flow rate is monitored and determined by alternate means at least once per 12 hours,
  2. for up to 30 days\* with the drywell floor drain sump flow monitoring subsystem inoperable provided the drywell floor drain sump flow rate is monitored and determined by alternate means at least once per 8 hours,
- c. operation may continue for up to 30 days when the drywell atmosphere gaseous radioactivity monitoring system and the drywell air coolers condensate flow rate monitoring system are inoperable provided grab samples of the drywell atmosphere are obtained and analyzed at least once per 24 hours.

Otherwise, be in at least HOT SHUTDOWN within the next 12 hours and in COLD SHUTDOWN within the following 24 hours.

\*Operation may continue after July 10, 1994, until the next COLD SHUTDOWN, provided the drywell floor drain sump flow rate is monitored and determined by alternate means at least once per 8 hours. Additionally, the drywell atmosphere particulate and gaseous radioactivity monitoring systems may be periodically taken out-of-service to perform scheduled preventive maintenance, surveillances and testing without entering the shutdown requirements of the ACTION statement.

## REACTOR COOLANT SYSTEM

### 3/4.4.3 REACTOR COOLANT SYSTEM LEAKAGE

#### LEAKAGE DETECTION SYSTEMS

#### SURVEILLANCE REQUIREMENTS

4.4.3.1 The reactor coolant system leakage detection systems shall be demonstrated OPERABLE by:

- a. Drywell atmosphere particulate and gaseous monitoring systems-performance of a CHANNEL CHECK at least once per 12 hours, a CHANNEL FUNCTIONAL TEST at least once per 31 days and a CHANNEL CALIBRATION at least once per 18 months.
- b. Drywell sump flow monitoring system-performance of a CHANNEL FUNCTIONAL TEST at least once per 31 days and a CHANNEL CALIBRATION TEST at least once per 18 months.
- c. Drywell air cooler condensate flow rate monitoring system performance of a CHANNEL FUNCTIONAL TEST at least once per 31 days and a CHANNEL CALIBRATION at least once per 18 months.
- d. Flow testing the drywell floor drain sump inlet piping for blockage at least once every 18 months during shutdown.



UNITED STATES  
NUCLEAR REGULATORY COMMISSION  
WASHINGTON, D.C. 20555-0001

SAFETY EVALUATION BY THE OFFICE OF NUCLEAR REACTOR REGULATION

RELATED TO AMENDMENT NO. 90 TO FACILITY OPERATING LICENSE NO. NPF-62

ILLINOIS POWER COMPANY, ET AL.

CLINTON POWER STATION, UNIT NO. 1

DOCKET NO. 50-461

**1.0 INTRODUCTION**

Technical Specification 3/4.4.3.1, "Reactor Coolant System Leakage - Leakage Detection Systems," requires that selected systems capable of monitoring and determining reactor coolant system leakage remain operable. Reactor coolant leakage is collected and classified as either identified or unidentified leakage. The Clinton Power Station has two drywell sump monitoring systems. The drywell equipment drain sump monitors identified leakage whereas the drywell floor drain sump monitors unidentified leakage.

Reactor coolant system leakage that falls on the drywell floors is channeled through the floor drains and enters the drywell floor drain sump. Prior to entering the floor drain sump, water passes through the drywell floor drain sump flow monitoring instrumentation where the instantaneous flow rates and total integrated flow are measured. The flow monitoring instrumentation consists of a V-notch weir box containing a capacitance probe. Water level in the weir box is directly proportional to the flow. Thus, flow through the V-notch is equal to the sump inlet flow rate. The capacitance probe is calibrated to correspond to the incoming flow rate and provides a continuous control room indication of the unidentified reactor coolant system leakage rate. An alarm is generated when the technical specification limit of 5 gpm of unidentified leakage occurs. The V-notch weir box instrumentation meets the accuracy and sensitivity requirements of Regulatory Guide 1.45 for drywell floor drain sump flow monitoring.

Once water enters the drywell floor drain sump, a system of pumps, pump-out timers, cycle counters and level switches monitors and records unidentified reactor coolant system leakage. Sump pump performance is monitored to provide control room indication if excessive leakage occurs. The sump pumps automatically start and stop at pre-determined levels. Pump running time is monitored and provides an alarm if run times exceed a given value which would be indicative of excessive leakage. In addition, the time between automatic pump startup between cycles is monitored. Frequent cycling of the sump pumps would also be indicative of excessive leakage thus generating an alarm. Finally, a high-high sump level alarm would be generated indicative that sump pump operation was not maintaining proper level. By knowing the sump volume, pump curve, pump running time, and the cycling time between automatic pump startup and shutdown, an alternative means can be used to verify overall leakage into the sump.

Technical specifications limit the amount of unidentified reactor coolant system leakage to a total of 5 gpm. Technical specifications also limit any increase of unidentified leakage to 2 gpm within any 24-hour period. This latter value is in accordance with NRC Generic Letter 88-01, "NRC Position on Intergranular Stress Corrosion Cracking in BWR Austenitic Stainless Steel Piping," since an abrupt increase in unidentified leakage rate could be indicative of a leak before break in stainless steel piping.

In early February of 1994, control room operators observed fluctuating leakage rates sensed by the V-notch weir box measuring unidentified reactor coolant system leakage. Using the alternative means described above to verify the unidentified leakage rate, control room operators were able to verify that actual leakage increases had not occurred. Subsequently on February 13, 1994, the drywell floor drain sump flow monitoring instrumentation was declared inoperable. Technical Specification 3/4.4.3.1 permits continued plant operation for 30 days provided an alternative means is used to monitor and determine unidentified leakage rates once every 8 hours, and the remaining leakage detection systems are operable (i.e., the drywell atmosphere particulate monitor and either the drywell atmosphere gaseous monitor or the drywell air cooler condensate flow rate monitoring system).

Efforts by the licensee to restore the drywell floor drain sump monitoring instrumentation were unsuccessful. The instrument loop was recalibrated and equipment external to the drywell was verified to be operating properly. In addition, the licensee attempted to "backflush" the V-notch weir box by temporarily suspending sump pump operation to permit water to back up and dislodge any foreign material that may be blocking the V-notch. Having exhausted all efforts to trouble-shoot from outside the drywell, the remaining alternative was to make a drywell entry to make a physical examination of the V-notch weir box and the capacitance probe. However, the location of the V-notch weir box is within the biological shield wall and directly below the reactor vessel. Due to high radiation and temperature concerns, a plant shutdown would be required to permit personnel entry.

By letter dated February 25, 1994, Illinois Power Company requested an emergency technical specification change pursuant to 10 CFR 50.91(a)(5). The change would permit continued plant operation with the inoperable drywell floor drain sump monitoring instrumentation provided an alternate means was being used to monitor, and determine unidentified reactor coolant leakage rates, once every 8 hours. Operation in this mode was requested until the first time the plant was brought to cold shutdown. On March 14, 1994, the staff issued License Amendment No. 89 for the Clinton Power Station authorizing continued plant operation as requested by the licensee.

On April 16, 1994, the licensee brought the facility to cold shutdown conditions to perform unrelated plant maintenance. As part of this outage, the weir box was inspected. The capacitance probe was found to have been coated with an unidentified material and the instrumentation was found to be out of calibration. The root cause was thus identified as instrumentation failure. Additionally, corrosion was observed between the weir box lid and walls resulting in excessive resistance between these surfaces. In an effort

to improve the capacitive geometry of the probe with that of the weir, a positive mechanical ground between the lid and the wall was provided. Prior to bringing the facility back on line, the probe was replaced and the system was recalibrated. The instrumentation was then declared operable.

In May 1994, control room operators again began to observe inconsistent indications from the drywell floor drain sump instrumentation. Based on the divergence between the sump instrumentation and the calculated flowrate derived from the drywell floor drain sump pump run times, the instrumentation was declared inoperable on June 10, 1994. Similar to the events of February 1994, the facility has entered a 30-day shutdown LCO, external troubleshooting has not restored operability to the instrumentation and the licensee has concluded that a drywell entry will be necessary to initiate repairs.

By letter dated June 20, 1994, the licensee submitted an emergency license amendment request authorizing continued plant operation with inoperable drywell floor drain sump monitoring instrumentation. Similar to the February 25, 1994 request, the proposed amendment would permit continued plant operation until the first time the plant is required to be brought to cold shutdown.

## 2.0 EVALUATION

Technical Specification 3/4.4.3.1 requires that multiple reactor coolant system leakage detection systems remain operable. Item 3.4.3.1.a requires operation of a drywell atmosphere particulate radioactivity monitoring system. This would provide early indication of fission product release. Item 3.4.3.1.b requires the drywell sump flow monitoring system to remain operable. The drywell sump flow monitoring system consists of both the drywell floor drain sump flow monitoring instrumentation previously discussed and the physically identical drywell equipment drain sump flow monitoring instrumentation used to monitor identified reactor coolant system leakage. Finally, item 3.4.3.1.c requires operation of either the drywell atmosphere gaseous radioactivity monitoring system or the drywell air coolers condensate flow rate monitoring system. These latter items would provide early indication of fission gas release or abnormal steam conditions in the drywell.

The licensee proposes to monitor and determine the unidentified reactor coolant system leakage rate using an alternate means once every 8 hours as currently required in the technical specification action statement. The alternate means would be through verification of sump pump performance and confirming that the integrated sump pump flow rates would not exceed technical specification limits. Current plant conditions are showing that the sump pumps are cycling approximately once every six and a half hours. The pump run times of approximatley three minutes correspond to a calculated unidentified leakage rate of 0.4 gallons per minute.

The licensee states that the accident analysis is unaffected by the proposed changes. The design basis accident involving leakage into the drywell is a guillotine break of the recirculation system suction piping. Safety systems accident mitigation is automatically initiated in response to high drywell

pressure or low reactor vessel water level. Regarding small break loss-of-coolant accidents, the Updated Safety Analysis Report Section 7.7.1.24.1 states that no credit is taken in the safety analysis for operation of or operator reliance upon the leakage detection monitoring instrumentation associated with the drywell sump. As previously discussed, control room operators will monitor and determine unidentified reactor coolant system leakage once every 8 hours. In addition, alternate indications via the drywell particulate radioactivity monitoring system, and either the drywell atmosphere gaseous radioactivity monitoring system or the drywell air coolers condensate flow rate monitoring system would be available to inform control room operators of abnormal conditions. The staff concurs that an adequate alternative means exists to monitor and determine unidentified reactor coolant system leakage.

The V-notch weir box is located in a keyway beneath the reactor vessel. Not only would this represent a high radiation level during plant operations, but it is also a highly contaminated area. Personnel entering this area will need to wear respirators and double plastic anti-contamination suits. Compounding the difficulty in working under such conditions are the anticipated temperatures. Normal drywell ventilation systems are not particularly effective in this location. The licensee anticipates that the temperatures in this region during hot shutdown conditions would approach 140 °F. Personnel entering under these conditions would be required to wear ice packs, would need to be monitored for heat stress, and would be limited to approximately 20 minute stay times. Cooling the plant to cold shutdown would result in primary coolant system temperatures of less than 200 °F. While the licensee did not provide any quantitative assessment on the amount of additional cooling that cold shutdown conditions would provide to the drywell region, the staff agrees that conditions would be more tolerable to personnel entry. Viewed from a personnel safety aspect, the licensee considers cold shutdown a more appropriate entry condition. The staff concurs with the licensee that repairs should not be required until the first time that the facility is brought to cold shutdown.

The licensee proposes to modify the current footnote on Technical Specification page 3/4 4-12 to read:

"Operation may continue after July 10, 1994, until the next COLD SHUTDOWN, provided the drywell floor drain sump flow rate is monitored and determined by alternate means at least once per 8 hours. Additionally, the drywell atmosphere particulate and gaseous radioactivity monitoring systems may be periodically taken out-of-service to perform scheduled preventive maintenance, surveillances and testing without entering the shutdown requirements of the ACTION statement."

The licensee has made this proposal to avoid periodic entries into the 12-hour shutdown statement of Technical Specification 3.4.3.1. Technical Specification 3.4.3.1 states that if more than one of the reactor coolant system leakage detection systems is inoperable, the facility must be brought to hot shutdown within 12 hours. However, as discussed in the licensee's

Letter dated June 20, 1994, both radiation monitors are periodically removed from service. The particulate monitor needs to be taken out of service, approximately once every other week to change the filter paper. In addition, both the particulate and gaseous monitors are taken out of service monthly for channel functional testing. While each of these activities typically requires less than an hour to perform, they would result in the facility being placed in an immediate shutdown condition. The staff does not believe that entering a plant shutdown to perform routine surveillances and testing would be consistent with the safety significance. This is supported by the technical specification action statement which permits continued plant operation for 30 days with any one of these components inoperable.

The staff has reviewed the licensee's proposal for this technical specification change. Considering the alternate means of monitoring and determining unidentified reactor coolant system leakage available to the licensee, the relatively low safety significance of operating in this condition, and the desire to avoid any unnecessary plant shutdown and resultant risks, the staff finds the licensee's proposal acceptable.

### 3.0 EXIGENT CIRCUMSTANCES

The Commission's regulation, 10 CFR 50.91, contain provisions for issuance of amendments when the usual 30-day public notice period cannot be met. One type of special exception is an exigency. An exigency is a case where the staff and licensee need to act promptly and the staff has determined that the amendment involves no significant hazards considerations.

Under such circumstances, the Commission notifies the public in one of two ways: by issuing a Federal Register notice providing an opportunity for hearing and allowing at least two weeks for prior public comments, or by issuing a press release discussing the proposed changes, using the local media. In this case the Commission used the first approach.

The licensee declared the drywell floor drain sump monitoring instrumentation inoperable on June 10, 1994. With the remaining reactor coolant system leakage detection systems operable, Technical Specification 3.4.3.1 permits 30 days of continuous plant operation provided the drywell floor drain sump flow rate is monitored and determined by alternative means at least once every 8 hours.

All efforts by the licensee to restore the drywell sump inlet flow monitoring instrumentation to operable status have been unsuccessful. The instrument loop has been recalibrated and equipment external to the drywell has been verified to be operating properly. The only option remaining for the licensee is to enter the drywell in order to examine the V-notch weir box and associated capacitance probe. However, the V-notch weir box is located in a keyway beneath the reactor vessel and inside the biological shield wall. Due to the high radiation and temperatures in this location, a plant shutdown would be required before personnel would be able to reach the instrumentation.

The staff does not consider loss of this instrumentation, by itself, to be safety significant. The 30-day action statement found in the technical specifications further supports this view. While the control room will not be capable of continuously monitoring unidentified leakage flow rates, the alternative means performed at least once every 8 hours should be sufficient to provide ample warning of any unanticipated crack in primary system piping.

The licensee submitted the request for amendment on June 20, 1994. It was noticed in the Federal Register on June 22, 1994 (59 FR 32247), at which time the staff proposed a no significant hazards consideration determination. In its letter of June 20, 1994, the licensee requested that the amendment be issued promptly. The licensee stated that such action would be necessary to preclude an unnecessary plant transient and related plant risk associated with a plant shutdown. Due to time constraints, sufficient time was not available to permit the customary 30-day public notice in advance of this action.

Accordingly, pursuant to 10 CFR 50.91(a)(6), the Commission has determined that an exigent situation exists in that failure to act in a timely way will result in a plant shutdown. Further, the Commission has determined that the exigent situation is not due to the failure of the licensee to act in a timely manner.

There were no public comments in response to the notice published in the Federal Register.

#### 4.0 FINAL NO SIGNIFICANT HAZARDS CONSIDERATION DETERMINATION

The Commission's regulations in 10 CFR 50.92 state that the Commission may make a final determination that a license amendment involves no significant hazards considerations if operation of the facility in accordance with the amendment would not (1) involve a significant increase in the probability or consequences of an accident previously evaluated; or (2) create the possibility of a new or different kind of accident from any accident previously evaluated; or (3) involve a significant reduction in a margin of safety.

This amendment has been evaluated against the standards in 10 CFR 50.92. The Commission has made a final determination that the amendment does not involve a significant hazards consideration because:

Operation of the facility in accordance with the proposed amendment will not involve a significant increase in the probability or consequences of an accident previously evaluated. The proposed change would permit continued plant operation with inoperable drywell floor drain sump monitoring instrumentation. This instrumentation does not provide any accident mitigation function nor is it relied on for operator action. The instrumentation is only one of several means of providing indication to control room operators of unidentified reactor coolant system leakage rates.

Control room operators will monitor and determine unidentified reactor coolant system leakage rates using an alternative means of monitoring the drywell floor drains sump pumps. By monitoring sump pump operating times, frequency of pump cycling, and level switches, operators will verify that unidentified reactor coolant system leakage rates remain within acceptable levels. In addition, the availability of particulate and gaseous radioactivity monitors and observation of the condensate discharge line flow rates from the drywell air coolers, will provide operators with indirect indication of any unanticipated increase in unidentified leakage.

Permitting continued plant operation until the first COLD SHUTDOWN after July 10, 1994, will avoid an unnecessary plant shutdown and resultant risk. Since the instrumentation is only used to provide indication and no credit is taken in the safety analysis for operation of or operator reliance on this instrumentation, the staff concludes that the proposed change will not involve a significant increase in the probability or consequences of any accident previously evaluated.

Operation of the facility in accordance with the proposed amendment will not create the possibility of a new or different kind of accident from any accident previously evaluated. The proposed change does not involve a change in the operation of the plant, nor does it introduce any new failure modes. This instrumentation does not provide any accident mitigation function nor is it relied on for operator action. Control room operators will use alternate means to periodically verify unidentified reactor coolant system leakage rates and will possess indirect means of observing increases in leakage rates via the particulate and gaseous monitors and observation of the condensate discharge line flow rates from the drywell air coolers. Therefore, the staff concludes that the proposed change does not create the possibility of a new or different kind of accident from any accident previously evaluated.

Operation of the facility in accordance with the amendment will not involve a significant reduction in a margin of safety. The margin of safety associated with this proposed change relates to the limits on unidentified reactor coolant system leakage. As discussed in the Bases for Technical Specification 3/4.4.3.2, the allowable leakage rates from the reactor coolant system have been based on the predicted and experimentally observed behavior of cracks in pipes. The evidence obtained from experiments suggests that for leakage somewhat greater than that specified for the unidentified leakage limits, the probability is small that the imperfection or crack associated with such leakage would grow rapidly.

The V-notch weir box normally provides continuous control room indication of the unidentified leakage rate of the reactor coolant system. With this instrumentation inoperable, the licensee has proposed to monitor and determine the leakage rate through an alternative means once every 8 hours. Since the probability of a small imperfection or crack to grow rapidly is small, verification of leakage once every 8 hours should be sufficient.

NRC Generic Letter 88-01, "NRC Position on Intergranular Stress Corrosion Cracking in BWR Austenitic Stainless Steel Piping," implemented more stringent limits of unidentified leakage. The generic letter imposed a limit of a 2 gpm increase in any 24-hour period since an abrupt increase could be indicative of a crack in service sensitive austenitic stainless steel piping. The proposed change does not alter any previously set limits on unidentified leakage.

Based upon the above considerations, the staff concludes that the amendment meets the three criteria of 10 CFR 50.92. Therefore, the staff has made a final determination that the proposed amendment does not involve a significant hazards consideration.

#### **5.0 STATE CONSULTATION**

In accordance with the Commission's regulations, the Illinois State official was notified of the proposed issuance of the amendment. The State official had no comments.

#### **6.0 ENVIRONMENTAL CONSIDERATION**

This amendment changes a requirement with respect to installation or use of a facility component located within the restricted area as defined in 10 CFR Part 20. The NRC staff has determined that the amendment involves no significant increase in the amounts, and no significant change in the types, of any effluents that may be released offsite, and that there is no significant increase in individual or cumulative occupational radiation exposure. The staff has made a final determination that this amendment involves no significant hazards consideration. Accordingly, the amendment meets the eligibility criteria for categorical exclusion set forth in 10 CFR 51.22(c)(9). Pursuant to 10 CFR 51.22(b), no environmental impact statement or environmental assessment need be prepared in connection with the issuance of the amendment.

#### **7.0 CONCLUSION**

The Commission has concluded, based on the considerations discussed above, that because the requested changes do not involve a significant increase in the probability or consequences of an accident previously evaluated, do not create the possibility of an accident of a type different from any evaluated previously, and do not involve a significant reduction in a margin of safety, the amendment does not involve a significant hazards consideration that: (1) there is reasonable assurance that the health and safety of the public will not be endangered by operation in the proposed manner, (2) such activities will be conducted in compliance with the Commission's regulations, and (3) the issuance of the amendment will not be inimical to the common defense and security or to the health and safety of the public.

Principal Contributor: Douglas V. Pickett

Date: July 8, 1994