



Entergy Nuclear Northeast
Entergy Nuclear Operations, Inc.
440 Hamilton Avenue
White Plains, NY 10601-1813
Tel 914 272 3500

May 8, 2002
JPN-02-011

U.S. Nuclear Regulatory Commission
ATTN: Document Control Desk
Mail Stop O-P1-17
Washington, DC 20555-0001

Subject: James A. FitzPatrick Nuclear Power Plant
Docket No. 50-333
License No. DPR-59
Relief Request RR-29 for
Third 10-Year Inservice Inspection Interval Program Plan


Reference: 1. USNRC letter, W. H. Bateman to M. Bratton, PDI Chairman, dated January 15, 2002, regarding "Weld Overlay Performance Demonstration Administered by PDI as an Alternative for Generic Letter 88-01 Recommendations"

Dear Sir:

This letter submits a request for relief (Attachment 1) to use the Performance Demonstration Initiative (PDI) Program in lieu of the 1995 Edition, 1996 Addenda of ASME Section XI, Appendix VIII, Supplement 11 requirements for examination of Class 1 piping welds at the James A. FitzPatrick Nuclear Power Plant (JAF). This request for relief is submitted pursuant to 10 CFR 50.55a(a)(3)(i) because the proposed alternatives would provide an acceptable level of quality and safety, as evaluated and determined by the USNRC staff (Reference 1). Approval for this relief request is needed by August 30, 2002 for implementation during the upcoming Refueling Outage R015.

There are no new commitments made by this letter. If you have any questions, please contact Ms. Charlene Faison at 914-272-3378.

Very truly yours,

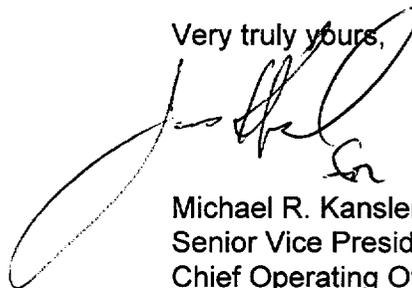

Michael R. Kansler
Senior Vice President and
Chief Operating Officer

Attachment: 1. James A. FitzPatrick Third Inspection Interval Relief Request No. 29

cc: next page

A047

cc: Regional Administrator, Region I
U.S. Nuclear Regulatory Commission
475 Allendale Road
King of Prussia, PA 19406

Resident Inspector's Office
James A. FitzPatrick
U.S. Nuclear Regulatory Commission
P.O. Box 136
Lycoming, NY 13093

Mr. Guy S. Vissing, Project Manager
Project Directorate I
Division of Licensing Project Management
U.S. Nuclear Regulatory Commission
Mail Stop 8C2
Washington, DC 20555

Attachment 1 to JPN-02-011

**JAMES A. FITZPATRICK
THIRD INSPECTION INTERVAL
RELIEF REQUEST NO. 29**

A: ARTICLE IDENTIFICATION / COMPONENT IDENTIFICATION:

Class 1, Pressure Retaining Welds in Piping, subject to Appendix VIII, Supplement 11, examination.

B: CODE REQUIREMENTS

The Code requirements for which relief is requested are all contained within Appendix VIII, Supplement 11. For example, paragraph 1.1(d)(1), requires that all base metal flaws be cracks. Paragraph 1.1(e)(1) requires that at least 20% but less than 40% of the flaws shall be oriented within ± 20 deg. of the pipe axial direction. Paragraph 1.1(e)(1) also requires that the rules of IWA-3300 shall be used to determine whether closely spaced flaws should be treated as single or multiple flaws. Paragraph 1.1(e)(2)(a)(1) requires that a base grading unit shall include at least 3 in. of the length of the overlaid weld. Paragraph 1.1(e)(2)(b)(1) requires that an overlay grading unit shall include the overlay material and the base metal-to-overlay interface of at least 6 sq. in. The overlay grading unit shall be rectangular, with minimum dimensions of 2 in. Paragraph 3.2(b) requires that all extensions of base metal cracking into the overlay material by at least 0.1 in. are reported as being intrusions into the overlay material.

C: RELIEF REQUESTED

Relief is requested to use the proposed Performance Demonstration Initiative (PDI) Program for implementation of Appendix VIII, Supplement 11 requirements.

D. BASIS FOR RELIEF

This relief is submitted pursuant to 10 CFR 50.55a(a)(3)(i) that the proposed alternatives would provide an acceptable level of quality and safety. Appendix VIII, Supp. 11, Paragraph 1.1(d)(1), requires that all base metal flaws be cracks. As illustrated below in Figure 1, implanting a crack requires excavation of the base material on at least one side of the flaw. While this may be satisfactory for ferritic materials, it does not produce a useable axial flaw in austenitic materials because the sound beam, which normally passes only through base material, must now travel through weld material on at least one side, producing an unrealistic flaw response. To resolve this issue, the PDI program revised this paragraph to allow use of alternative flaw mechanisms under controlled conditions. For example, alternative flaws shall be limited to when implantation of cracks precludes obtaining an effective ultrasonic response, flaws shall be semi-elliptical with a tip width of less than or equal to 0.002 inches, and at least 70 percent of the flaws in the detection and sizing test shall be cracks and the remainder shall be alternative flaws.

Attachment 1 to JPN-02-011

**JAMES A. FITZPATRICK
THIRD INSPECTION INTERVAL
RELIEF REQUEST NO. 29**

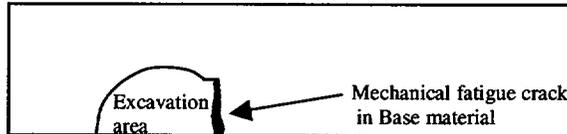


Figure 1

Relief is requested to allow closer spacing of flaws provided they didn't interfere with detection or discrimination. The existing specimens used to date for qualification to the Tri-party (NRC/BWROG/EPRI) agreement have a flaw population density greater than allowed by the current Code requirements. These samples have been used successfully for all previous qualifications under the Tri-party agreement program. To facilitate their use and provide continuity from the Tri-party agreement program to Supplement 11, the PDI Program has merged the Tri-party test specimens into their weld overlay program. For example: the requirement for using IWA-3300 for proximity flaw evaluation in paragraph 1.1(e)(1) was excluded, instead indications will be sized based on their individual merits; paragraph 1.1(d)(1) includes the statement that intentional overlay fabrication flaws shall not interfere with ultrasonic detection or characterization of the base metal flaws; paragraph 1.1(e)(2)(a)(1) was modified to require that a base metal grading unit include at least 1 in. of the length of the overlaid weld, rather than 3 inches; paragraph 1.1(e)(2)(a)(3) was modified to require sufficient unflawed overlaid weld and base metal to exist on all sides of the grading unit to preclude interfering reflections from adjacent flaws, rather than the 1 inch requirement of Supplement 11; paragraph 1.1(e)(2)(b)(1) was modified to define an overlay fabrication grading unit as including the overlay material and the base metal-to-overlay interface for a length of at least 1 in, rather than the 6 sq. in. requirement of Supplement 11; and paragraph 1.1(e)(2)(b)(2) states that overlay fabrication grading units designed to be unflawed shall be separated by unflawed overlay material and unflawed base metal-to-overlay interface for at least 1 in. at both ends, rather than around its entire perimeter.

Additionally, the requirement for axially oriented overlay fabrication flaws in paragraph 1.1(e)(1) was excluded from the PDI Program as an improbable scenario. Weld overlays are typically applied using automated gas tungsten arc welding techniques with the filler metal being applied in a circumferential direction. Because resultant fabrication induced discontinuities would also be expected to have major dimensions oriented in the circumferential direction axial overlay fabrication flaws are unrealistic.

The requirement in paragraph 3.2(b) for reporting all extensions of cracking into the overlay is omitted from the PDI Program because it is redundant to the RMS calculations performed in paragraph 3.2(c) and it's presence adds confusion and ambiguity to depth sizing as required by paragraph 3.2(c). This also makes the weld overlay program consistent with the Supplement 2 depth sizing criteria.

Attachment 1 to JPN-02-011

**JAMES A. FITZPATRICK
THIRD INSPECTION INTERVAL
RELIEF REQUEST NO. 29**

PDI has submitted these changes as a Code Case and they have been approved, but the Code Case will not be published until later in 2002. A detailed comparison matrix (Attachment 1) between Supplement 11, the proposed ASME Section XI Code Case N-654, and the PDI Program is enclosed as supporting documentation. The first column identifies the current requirements in the 95 Edition and 96 Addenda of Supplement 11, while the second (middle) column identifies the changes made by the Code Case.

There are however some additional changes that were inadvertently omitted from the Code Case. The most important change is paragraph 1.1(a)(1) where the phrase "*and base metal on both sides*", was inadvertently included in the description of a base metal grading unit. The PDI program intentionally excludes this requirement because some of the qualification samples include flaws on both sides of the weld. To avoid confusion several instances of the term "cracks" or "cracking" were changed to the term "flaws" because of the use of alternative flaw mechanisms. Additionally, to avoid confusion, the overlay thickness tolerance contained in paragraph 1.1(b) last sentence, was reworded and the phrase "*and the remainder shall be alternative flaws*" was added to the next to last sentence in paragraph 1.1(d)(1). These changes are identified by **bold** print in the third column of the enclosure.

Also included as an attachment is a copy of the letter from the NRC to the PDI Chairman with their determination that PDI's performance demonstration program for weld overlays is an acceptable alternative to the performance demonstration recommendations of GL-88-01, "NRC Position on IGSCC (intergranular stress corrosion cracking) in BWR (Boiling Water Reactor) Austenitic Stainless Steel Piping".

E. ALTERNATIVE EXAMINATION

In lieu of the requirements of ASME Section XI, 1995 Edition, 1996 Addenda, Appendix VIII, Supplement 11, the PDI Program as described in Table 1, 3rd column of this request for relief shall be used.

F. IMPLEMENTATION SCHEDULE

The requirements as specified in this relief request will be incorporated into JAF Inspection Program for the duration of the 3rd Ten-Year Interval.

G. ATTACHMENT

Table 1, "Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements"

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
1.0 SPECIMEN REQUIREMENTS	CC N-654	PDI Program
Qualification test specimens shall meet the requirements listed herein, unless a set of specimens is designed to accommodate specific limitations stated in the scope of the examination procedure (e.g., pipe size, weld joint configuration, access limitations). The same specimens may be used to demonstrate both detection and sizing qualification.	No Change	No Change
1.1 General. The specimen set shall conform to the following requirements.	No Change	No Change
(a) Specimens shall have sufficient volume to minimize spurious reflections that may interfere with the interpretation process.	No Change	No Change
(b) The specimen set shall consist of at least three specimens having different nominal pipe diameters and overlay thicknesses. They shall include the minimum and maximum nominal pipe diameters for which the examination procedure is applicable. Pipe diameters within a range of 0.9 to 1.5 times a nominal diameter shall be considered equivalent. If the procedure is applicable to pipe diameters of 24 in. or larger, the specimen	No Change	(b) The specimen set shall consist of at least three specimens having different nominal pipe diameters and overlay thicknesses. They shall include the minimum and maximum nominal pipe diameters for which the examination procedure is applicable. Pipe diameters within a range of 0.9 to 1.5 times a nominal diameter shall be considered equivalent. If the procedure is applicable to pipe diameters of 24 in. or larger, the specimen

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
set must include at least one specimen 24 in. or larger but need not include the maximum diameter. The specimen set must include at least one specimen with overlay thickness within -0.1 in. to +0.25 in. of the maximum nominal overlay thickness for which the procedure is applicable.		set must include at least one specimen 24 in. or larger but need not include the maximum diameter. The specimen set shall include specimens with overlay thickness within +0.1 in. of the minimum nominal overlay thickness and within -0.25 in. of the maximum nominal overlay thickness for which the procedure is applicable.
(c) The surface condition of at least two specimens shall approximate the roughest surface condition for which the examination procedure is applicable.	No Change	No Change
(d) <i>Flaw Conditions</i>		PDI Program
(1) <i>Base metal flaws.</i> All flaws must be cracks in or near the butt weld heat-affected zone, open to the inside surface, and extending at least 75% through the base metal wall. Flaws may extend 100% through the base metal and into the overlay material; in this case, intentional overlay fabrication flaws shall not interfere with ultrasonic detection or characterization of the cracking. Specimens containing IGSCC shall be used when available.	(1) Base metal flaws. All flaws must be in or near the butt weld heat-affected zone, open to the inside surface, and extending at least 75% through the base metal wall. Intentional overlay fabrication flaws shall not interfere with ultrasonic detection or characterization of the cracking. Specimens containing IGSCC shall be used when available. At least 70 percent of the flaws in the detection and sizing tests shall be cracks. Alternative flaw mechanisms, if used, shall provide crack-	(1) Base metal flaws. All flaws must be in or near the butt weld heat-affected zone, open to the inside surface, and extending at least 75% through the base metal wall. Intentional overlay fabrication flaws shall not interfere with ultrasonic detection or characterization of the base metal flaws . Specimens containing IGSCC shall be used when available. At least 70 percent of the flaws in the detection and sizing tests shall be cracks and the remainder shall be alternative flaws . Alternative flaw

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
	like reflective characteristics and shall be limited by the following: (a) Flaws shall be limited to when implantation of cracks precludes obtaining a realistic ultrasonic response. (b) Flaws shall be semielliptical with a tip width of less than or equal to 0.002 inches.	mechanisms, if used, shall provide crack-like reflective characteristics and shall be limited by the following: (a) Flaws shall be limited to when implantation of cracks precludes obtaining an effective ultrasonic response. (b) Flaws shall be semielliptical with a tip width of less than or equal to 0.002 inches.
(2) <i>Overlay fabrication flaws.</i> At least 40% of the flaws shall be non-crack fabrication flaws (e.g., sidewall lack of fusion or laminar lack of bond) in the overlay or the pipe-to-overlay interface. At least 20% of the flaws shall be cracks. The balance of the flaws shall be of either type.	No Change	No Change
(e) <i>Detection Specimens</i>		PDI Program
(1) At least 20% but less than 40% of the flaws shall be oriented within ± 20 deg. of the pipe axial direction. The remainder shall be oriented circumferentially. Flaws shall not be open to any surface to which the candidate has physical or visual access. The rules of IWA-3300 shall be	(1) At least 20% but less than 40% of the base metal flaws shall be oriented within ± 20 deg. of the pipe axial direction. The remainder shall be oriented circumferentially. Flaws shall not be open to any surface to which the candidate has physical or visual access.	(1) At least 20% but less than 40% of the base metal flaws shall be oriented within ± 20 deg. of the pipe axial direction. The remainder shall be oriented circumferentially. Flaws shall not be open to any surface to which the candidate has physical or visual access.

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
used to determine whether closely spaced flaws should be treated as single or multiple flaws.		
(2) Specimens shall be divided into base and over-layer grading units. Each specimen shall contain one or both types of grading units.	(2) Specimens shall be divided into base metal and overlay fabrication grading units. Each specimen shall contain one or both types of grading units. Flaws shall not interfere with ultrasonic detection or characterization of other flaws.	(2) Specimens shall be divided into base metal and overlay fabrication grading units. Each specimen shall contain one or both types of grading units. Flaws shall not interfere with ultrasonic detection or characterization of other flaws.
(a)(1) A base grading unit shall include at least 3 in. of the length of the overlaid weld. The base grading unit includes the outer 25% of the overlaid weld and base metal on both sides. The base grading unit shall not include the inner 75% of the overlaid weld and base metal overlay material, or base metal-to-overlay interface.	(a)(1) A base metal grading unit shall include at least 1 in. of the length of the overlaid weld. The base metal grading unit includes the outer 25% of the overlaid weld and base metal on both sides. The base metal grading unit shall not include the inner 75% of the overlaid weld and base metal overlay material, or base metal-to-overlay interface.	(a)(1) A base metal grading unit shall include at least 1 in. of the length of the overlaid weld. The base metal grading unit includes the outer 25% of the overlaid weld. The base metal grading unit shall not include the inner 75% of the overlaid weld and base metal overlay material, or base metal-to-overlay interface.
(a)(2) When base metal cracking penetrates into the overlay material, the base grading unit shall include the overlay metal within 1 in. of the crack location. This portion of the overlay material shall not be used as part of any overlay grading unit.	(a)(2) When base metal cracking penetrates into the overlay material, the base metal grading unit shall not be used as part of any overlay fabrication grading unit.	(a)(2) When base metal flaws penetrate into the overlay material, the base metal grading unit shall not be used as part of any overlay fabrication grading unit.
(a)(3) When a base grading unit is designed to be unflawed, at least 1 in. of	(a)(3) Sufficient unflawed overlaid weld and base metal shall exist on all sides of	(a)(3) Sufficient unflawed overlaid weld and base metal shall exist on all sides of

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
unflawed overlaid weld and base metal shall exist on either side of the base grading unit. The segment of weld length used in one base grading unit shall not be used in another base grading unit. Base grading units need not be uniformly spaced around the specimen.	the grading unit to preclude interfering reflections from adjacent flaws.	the grading unit to preclude interfering reflections from adjacent flaws.
(b)(1) An overlay grading unit shall include the overlay material and the base metal-to-overlay interface of at least 6 sq. in. The overlay grading unit shall be rectangular, with minimum dimensions of 2 in.	(b)(1) An overlay fabrication grading unit shall include the overlay material and the base metal-to-overlay interface for a length of at least 1 in.	(b)(1) An overlay fabrication grading unit shall include the overlay material and the base metal-to-overlay interface for a length of at least 1 in.
(b)(2) An overlay grading unit designed to be unflawed shall be surrounded by unflawed overlay material and unflawed base metal-to-overlay interface for at least 1 in. around its entire perimeter. The specific area used in one overlay grading unit shall not be used in another overlay grading unit. Overlay grading units need not be spaced uniformly about the specimen.	(b)(2) Overlay fabrication grading units designed to be unflawed shall be separated by unflawed overlay material and unflawed base metal-to-overlay interface for at least 1 in. at both ends. Sufficient unflawed overlaid weld and base metal shall exist on both sides of the overlay fabrication grading unit to preclude interfering reflections from adjacent flaws. The specific area used in one overlay fabrication grading unit shall not be used in another overlay fabrication grading unit. Overlay fabrication grading units need not	(b)(2) Overlay fabrication grading units designed to be unflawed shall be separated by unflawed overlay material and unflawed base metal-to-overlay interface for at least 1 in. at both ends. Sufficient unflawed overlaid weld and base metal shall exist on both sides of the overlay fabrication grading unit to preclude interfering reflections from adjacent flaws. The specific area used in one overlay fabrication grading unit shall not be used in another overlay fabrication grading unit. Overlay fabrication grading units need not

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

<p>SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS</p>	<p>PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)</p>	<p>PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements</p>
<p>(b)(3) Detection sets shall be selected from Table VIII-S2-1. The minimum detection sample set is five flawed base grading units, ten unflawed base grading units, five flawed overlay grading units, and ten unflawed overlay grading units. For each type of grading unit, the set shall contain at least twice as many unflawed as flawed grading units.</p>	<p>be spaced uniformly about the specimen. (b)(3) Detection sets shall be selected from Table VIII-S2-1. The minimum detection sample set is five flawed base metal grading units, ten unflawed base metal grading units, five flawed overlay fabrication grading units, and ten unflawed overlay fabrication grading units. For each type of grading unit, the set shall contain at least twice as many unflawed as flawed grading units. For initial procedure qualification, detection sets shall include the equivalent of three personnel qualification sets. To qualify new values of essential variables, at least one personnel qualification set is required.</p>	<p>be spaced uniformly about the specimen. (b)(3) Detection sets shall be selected from Table VIII-S2-1. The minimum detection sample set is five flawed base metal grading units, ten unflawed base metal grading units, five flawed overlay fabrication grading units, and ten unflawed overlay fabrication grading units. For each type of grading unit, the set shall contain at least twice as many unflawed as flawed grading units. For initial procedure qualification, detection sets shall include the equivalent of three personnel qualification sets. To qualify new values of essential variables, at least one personnel qualification set is required.</p>
<p><i>(f) Sizing Specimen</i> (1) The minimum number of flaws shall be ten. At least 30% of the flaws shall be overlay fabrication flaws. At least 40% of the flaws shall be cracks open to the inside surface.</p>	<p>(1) The minimum number of flaws shall be ten. At least 30% of the flaws shall be overlay fabrication flaws. At least 40% of the flaws shall be cracks open to the inside surface. For initial procedure qualification, sizing sets shall include the equivalent of three personnel qualification sets. To qualify new values of essential variables,</p>	<p>PDI Program (1) The minimum number of flaws shall be ten. At least 30% of the flaws shall be overlay fabrication flaws. At least 40% of the flaws shall be open to the inside surface. For initial procedure qualification, sizing sets shall include the equivalent of three personnel qualification sets. To qualify new values of essential variables,</p>

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
	at least one personnel qualification set is required.	at least one personnel qualification set is required.
(2) At least 20% but less than 40% of the flaws shall be oriented axially. The remainder shall be oriented circumferentially. Flaws shall not be open to any surface to which the candidate has physical or visual access.	No Change	No Change
(3) Base metal cracking used for length sizing demonstrations shall be oriented circumferentially.	No Change	(3) Base metal flaws used for length sizing demonstrations shall be oriented circumferentially.
(4) Depth sizing specimen sets shall include at least two distinct locations where cracking in the base metal extends into the overlay material by at least 0.1 in. in the through-wall direction.	No Change	(4) Depth sizing specimen sets shall include at least two distinct locations where flaws in the base metal extend into the overlay material by at least 0.1 in. in the through-wall direction.

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
2.0 CONDUCT OF PERFORMANCE DEMONSTRATION	CC N-654	PDI Program
The specimen inside surface and identification shall be concealed from the candidate. All examinations shall be completed prior to grading the results and presenting the results to the candidate. Divulgence of particular specimen results or candidate viewing of unmasked specimens after the performance demonstration is prohibited.	The specimen inside surface and identification shall be concealed from the candidate. All examinations shall be completed prior to grading the results and presenting the results to the candidate. Divulgence of particular specimen results or candidate viewing of unmasked specimens after the performance demonstration is prohibited. The overlay fabrication flaw test and the base metal flaw test may be performed separately.	The specimen inside surface and identification shall be concealed from the candidate. All examinations shall be completed prior to grading the results and presenting the results to the candidate. Divulgence of particular specimen results or candidate viewing of unmasked specimens after the performance demonstration is prohibited. The overlay fabrication flaw test and the base metal flaw test may be performed separately.
2.1 Detection Test.		PDI Program
Flawed and unflawed grading units shall be randomly mixed. Although the boundaries of specific grading units shall not be revealed to the candidate, the candidate shall be made aware of the type or types of grading units (base or overlay) that are present for each specimen.	Flawed and unflawed grading units shall be randomly mixed. Although the boundaries of specific grading units shall not be revealed to the candidate, the candidate shall be made aware of the type or types of grading units (base metal or overlay fabrication) that are present for each specimen.	Flawed and unflawed grading units shall be randomly mixed. Although the boundaries of specific grading units shall not be revealed to the candidate, the candidate shall be made aware of the type or types of grading units (base metal or overlay fabrication) that are present for each specimen.
2.2 Length Sizing Test		PDI Program
(a) The length sizing test may be conducted separately or in conjunction with	No Change	

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
the detection test.		
(b) When the length sizing test is conducted in conjunction with the detection test and the detected flaws do not satisfy the requirements of 1.1(f), additional specimens shall be provided to the candidate. The regions containing a flaw to be sized shall be identified to the candidate. The candidate shall determine the length of the flaw in each region.	No Change	No Change
(c) For a separate length sizing test, the regions of each specimen containing a flaw to be sized shall be identified to the candidate. The candidate shall determine the length of the flaw in each region.	No Change	No Change
(d) For flaws in base grading units, the candidate shall estimate the length of that part of the flaw that is in the outer 25% of the base wall thickness.	(d) For flaws in base metal grading units, the candidate shall estimate the length of that part of the flaw that is in the outer 25% of the base metal wall thickness.	(d) For flaws in base metal grading units, the candidate shall estimate the length of that part of the flaw that is in the outer 25% of the base metal wall thickness.
2.3 Depth Sizing Test.		PDI Program
For the depth sizing test, 80% of the flaws shall be sized at a specific location on the surface of the specimen identified to the candidate. For the remaining flaws, the regions of each specimen containing a flaw to be sized shall be identified to the	The candidate shall determine the depth of the flaw in each region.	The candidate shall determine the depth of the flaw in each region.

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

<p>SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS</p>	<p>PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)</p>	<p>PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements</p>
<p>candidate. The candidate shall determine the maximum depth of the flaw in each region.</p>		

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
--	--	---

3.0 ACCEPTANCE CRITERIA		
3.1 Detection Acceptance Criteria.	CC N-654	PDI Program
Examination procedures, equipment, and personnel are qualified for detection when the results of the performance demonstration satisfy the acceptance criteria of Table VIII-S2-1 for both detection and false calls. The criteria shall be satisfied separately by the demonstration results for base grading units and for overlay grading units.	Examination procedures are qualified for detection when all flaws within the scope of the procedure are detected and the results of the performance demonstration satisfy the acceptance criteria of Table VIII-S2-1 for false calls. Examination equipment and personnel are qualified for detection when the results of the performance demonstration satisfy the acceptance criteria of Table VIII-S2-1 for both detection and false calls. The criteria shall be satisfied separately by the demonstration results for base metal grading units and for overlay fabrication grading units.	Examination procedures are qualified for detection when all flaws within the scope of the procedure are detected and the results of the performance demonstration satisfy the acceptance criteria of Table VIII-S2-1 for false calls. Examination equipment and personnel are qualified for detection when the results of the performance demonstration satisfy the acceptance criteria of Table VIII-S2-1 for both detection and false calls. The criteria shall be satisfied separately by the demonstration results for base metal grading units and for overlay fabrication grading units.
3.2 Sizing Acceptance Criteria.	No Change	PDI Program
Examination procedures, equipment, and personnel are qualified for sizing when the results of the performance demonstration satisfy the following criteria.	No Change	No Change
(a) The RMS error of the flaw length measurements, as compared to the true flaw lengths, is less than or equal to 0.75 inch. The length of base metal cracking is	No Change	(a) The RMS error of the flaw length measurements, as compared to the true flaw lengths, is less than or equal to 0.75 inch. The length of base metal flaws is

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
measured at the 75% through-base-metal position.		measured at the 75% through-base-metal position.

Table 1 – Proposed Alternatives to 95/96 ASME Section XI, App. VIII, Supp. 11 Requirements

SUPPLEMENT 11 – QUALIFICATION REQUIREMENTS FOR FULL STRUCTURAL OVERLAID WROUGHT AUSTENITIC PIPING WELDS	PROPOSED CODE CASE N-654 Extracted from: http://www.boilercode.org/PDF/bc00-756R.pdf (Provided for Information Only)	PDI PROGRAM: The Proposed Alternative to Supplement 11 Requirements
(b) All extensions of base metal cracking into the overlay material by at least 0.1 in. are reported as being intrusions into the overlay material.	This requirement is omitted.	This requirement is omitted.
(c) The RMS error of the flaw depth measurements, as compared to the true flaw depths, is less than or equal to 0.125 in.	(b) The RMS error of the flaw depth measurements, as compared to the true flaw depths, is less than or equal to 0.125 in.	(b) The RMS error of the flaw depth measurements, as compared to the true flaw depths, is less than or equal to 0.125 in.