

MATERIALS LICENSE

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 36, 39, 40, and 70, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s). This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

<p style="text-align: center;">Licensee</p> <p>1. Department of Justice Federal Bureau of Investigation FBI Laboratory</p> <p>2. 2501 Investigation Parkway Quantico, Virginia 22135</p>	<p>In accordance with the letter dated October 31, 2008,</p> <p>3. License number 45-23722-02 is amended in its entirety to read as follows:</p>	
	<p>4. Expiration date February 29, 2016</p>	
	<p>5. Docket No. 03036423 Reference No.</p>	
<p>6. Byproduct, source, and/or special nuclear material</p> <p>A. Cesium 137</p> <p>B. Americium 241</p> <p>C. Californium 252</p> <p>D. Cobalt 60</p> <p>E. Strontium 90</p>	<p>7. Chemical and/or physical form</p> <p>A. Sealed Sources (Industrial Reactor Lab Series 2; 3M Models 4P6E and 4F6S; Isotope Products Lab Models 193 and 225; Amersham CDC.800 Series; J. L. Shepherd & Associates Model 6810; and New England Nuclear/DuPont Merck Models NER-570 series and NER-580 series)</p> <p>B. Sealed Sources (Amersham Model AMC.D2)</p> <p>C. Sealed Sources (Amersham Model CVN.CYn series)</p> <p>D. Sealed Sources (AEA Technology/ QSA Model CKC.P4)</p> <p>E. Sealed Sources (AEA Technology / QSA Model SIC.LC1)</p>	<p>8. Maximum amount that licensee may possess at any one time under this license</p> <p>A. 330 millicuries</p> <p>B. 1 millicurie</p> <p>C. 1 microgram</p> <p>D. 5 millicuries</p> <p>E. 2 millicuries</p>

**MATERIALS LICENSE
SUPPLEMENTARY SHEET
CORRECTED COPY**

License Number
45-23722-02

Docket or Reference Number
03036423

Amendment No. 03

9. Authorized use:

- A. For use in a J. L. Shepherd Portable Calibrator Models 10 and 10A.
B. through E. For analysis of samples for training purposes, instrument checks and calibrations.

CONDITIONS

10. Licensed material may be used or stored at the licensee's facilities located at the Forensic Science Research and Training Center, FBI Academy, Quantico, Virginia; FBI Laboratory, 2501 Investigation Parkway, Quantico, Virginia; and at temporary job sites of the licensee anywhere in the United States.
11. Licensed material shall be used by, or under the supervision of, Leslie M. McCauley, Travis Callaway, Michael Gavelek and John Kaysak.
12. The Radiation Safety Officer for this license is Leslie M. McCauley.
13. In addition to the possession limits in Item 8, the licensee shall further restrict the possession of licensed material to quantities below the minimum limit specified in 10 CFR **30.35(d)** for establishing decommissioning financial assurance.
14. The licensee shall not use licensed material in or on human beings except as provided otherwise by specific condition of this license.
- A. Sealed sources shall be tested for leakage and/or contamination at intervals not to exceed six months or at the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or under equivalent regulations of an Agreement State.
- B. Notwithstanding Paragraph A of this Condition, sealed sources designed to primarily emit alpha particles shall be tested for leakage and/or contamination at intervals not to exceed 3 months.
- C. In the absence of a certificate from a transferor indicating that a leak test has been made within the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or under equivalent regulations of an Agreement State, prior to the transfer, a sealed source received from another person shall not be put into use until tested and the test results received.
- D. Sealed sources need not be tested if they contain only hydrogen-3; or they contain only a radioactive gas; or the half-life of the isotope is 30 days or less; or they contain not more than 100 microcuries of beta- and/or gamma-emitting material or not more than 10 microcuries of alpha-emitting material.

**MATERIALS LICENSE
SUPPLEMENTARY SHEET
CORRECTED COPY**

License Number
45-23722-02

Docket or Reference Number
03036423

Amendment No. 03

- E. Sealed sources need not be tested if they are in storage and are not being used; however, when they are removed from storage for use or transferred to another person and have not been tested within the required leak test interval, they shall be tested before use or transfer. No sealed source shall be stored for a period of more than 10 years without being tested for leakage and/or contamination.
- F. The leak test shall be capable of detecting the presence of 0.005 microcurie (185 becquerels) of radioactive material on the test sample. If the test reveals the presence of 0.005 microcurie (185 becquerels) or more of removable contamination, a report shall be filed with the U.S. Nuclear Regulatory Commission in accordance with 10 CFR 30.50(c)(2), and the source shall be removed immediately from service and decontaminated, repaired, or disposed of in accordance with Commission regulations.
- G. Tests for leakage and/or contamination, limited to leak test sample collection, shall be performed by the licensee or by other persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services. The licensee is not authorized to perform the analysis; analysis of leak test samples must be performed by persons specifically licensed by U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
- H. Records of leak test results shall be kept in units of microcuries and shall be maintained for 5 years.
15. Sealed sources or detector cells containing licensed material shall not be opened or sources removed from source holders by the licensee.
16. The licensee shall conduct a physical inventory every six months, or at other intervals approved by the U.S. Nuclear Regulatory Commission, to account for all sources and/or devices received and possessed under the license. Records of inventories shall be maintained for 5 years from the date of each inventory and shall include the radionuclides, quantities, manufacturer's name and model numbers, and the date of the inventory.
17. The licensee is authorized to hold byproduct material with a physical half-life of less than or equal to 120 days for decay-in-storage before disposal without regard to its radioactivity if the licensee:
- A. Monitors byproduct material at the surface before disposal and determines that its radioactivity cannot be distinguished from the background radiation level with an appropriate radiation detection survey meter set on its most sensitive scale and with no interposed shielding; and
 - B. Removes or obliterates all radiation labels, except for radiation labels on materials that are within containers and that will be managed as biomedical waste after they have been released from the licensee; and


**MATERIALS LICENSE
SUPPLEMENTARY SHEET
CORRECTED COPY**

License Number
45-23722-02

Docket or Reference Number
03036423

Amendment No. 03

- C. Maintains records of the disposal of licensed materials for 3 years. The record must include the date of disposal, the survey instrument used, the background radiation level, the radiation level measured at the surface of each waste container, and the name of the individual who performed the disposal.
18. The licensee is authorized to transport licensed material in accordance with the provisions of 10 CFR Part 71, "Packaging and Transportation of Radioactive Material."
19. Except as specifically provided otherwise in this license, the licensee shall conduct its program in accordance with the statements, representations, and procedures contained in the documents, including any enclosures, listed below. The U.S. Nuclear Regulatory Commission's regulations shall govern unless the statements, representations, and procedures in the licensee's application
- A. Application dated September 15, 2005 (ML052800417)
 - B. Letter dated January 27, 2006 (ML060340427)
 - C. Letter dated October 31, 2008 (ML083170805)

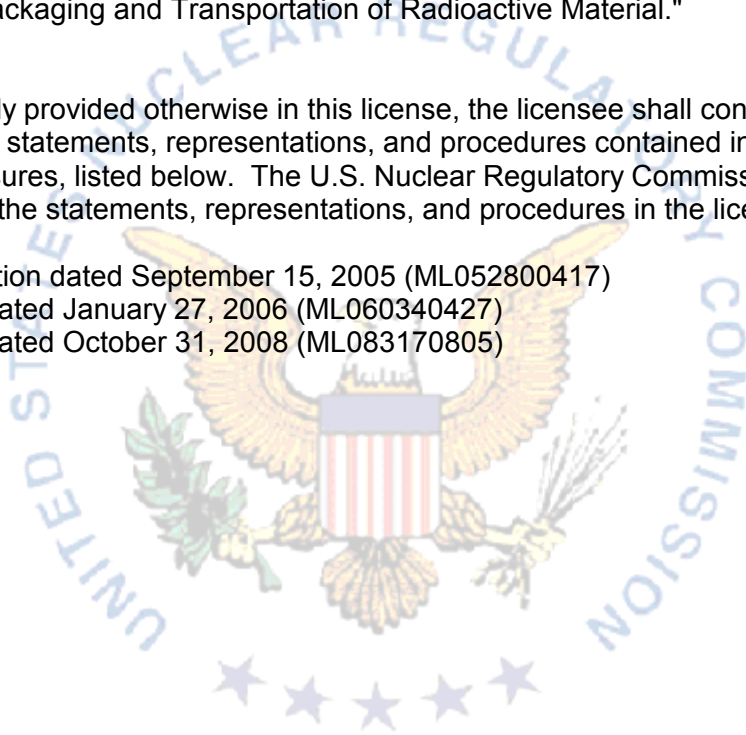

For the U.S. Nuclear Regulatory Commission

Date December 9, 2008

By **Original signed by Thomas K. Thompson**

Thomas K. Thompson
Commercial and R&D Branch
Division of Nuclear Materials Safety
Region I
King of Prussia, Pennsylvania 19406