

Bellefonte Nuclear Plant Units 3 & 4

COL Application

Part 11

Enclosures

Revision 1



Quality Assurance Program Description

Title: TVA Bellefonte Units 3 and 4 Quality Assurance Program Description

Process/Program Owner: **John C. Fornicola**

	Version Number	Effective Date
NEI 06-14A	Revision 1	

Revision Summary:

Initial issue

1	Cover Page	Title correction
	QAPD Cover	QAPD title change
	I.1	Text revision: clarify QAPD applies to activities after receipt of COL
	I.1	Remove 'Siting' from Scope/Applicability Table
	II.1	Provides additional details of the generic managerial organization for operations and to include the Chief Operating Officer, BLN Plant Management, Nuclear Oversight and Assistance, and Nuclear Licensing
	II.2.7	Changes which managerial function requests independent review function
	II.6 Bullet (j)	Remove extra bracket
	II.10.1 3 rd Bullet	Remove bracketed text and replace with exception to NQA-1-1994 Supplement 10 S-1: inspectors report to the quality control management while performing those functions.
	II.11	Remove brackets and applicable text
	II.13.2	Add commitment to compliance with NQA-1-1994, Basic Requirement, Supplement 13S-1, Subparts 2.2 and 3.2, Appendix 2.I with clarifications and exceptions.

Revision Summary (continued)

1

III.2	State Regulatory Guide 1.15 not applicable due to lack of requirement for AC Power for SR functions
IV	Update Revisions of Regulatory Guides 1.26, 1.29, and include 1.37, Rev. 1,
Appendix A	Include Organizational Charts

Prepared By / Date:

Signature on File / _____
Manager, Corporate Nuclear Assurance

Reviewed By / Date:

Approved By / Date:

Signature on File / _____
General Manager, Nuclear Assurance
(Manager, Quality Assurance)

Signature on File / _____
Executive Vice President and
Chief Nuclear Officer

TENNESSEE VALLEY AUTHORITY

POLICY STATEMENT

The Tennessee Valley Authority (TVA) shall design, procure, construct and operate nuclear plants in a manner that will ensure the health and safety of the public and workers. These activities shall be performed in compliance with the requirements of the Code of Federal Regulations (CFR), the applicable Nuclear Regulatory Commission (NRC) Facility Operating Licenses, and applicable laws and regulations of the state and local governments.

The TVA Nuclear Generation Development and Construction (NGDC) Quality Assurance Program (QAP) is the Quality Assurance Program Description (QAPD) provided in this document and the associated implementing documents. Together they provide for control of TVA activities that affect the quality of safety-related nuclear plant structures, systems, and components and includes all planned and systematic activities necessary to provide adequate confidence that such structures, systems, and components will perform satisfactorily in service. The QAPD may also be applied to certain equipment and activities that are not safety-related, but support safe plant operations, or where other NRC guidance establishes program requirements.

The QAPD is the top-level policy document that establishes the manner in which quality is to be achieved and presents TVA's overall philosophy regarding achievement and assurance of quality. Implementing documents assign more detailed responsibilities and requirements and define the organizational interfaces involved in conducting activities within the scope of the QAP. Compliance with the QAPD and implementing documents is mandatory for personnel directly or indirectly associated with implementation of the TVA QAP.

Signed: Signature on File
Tom D. Kilgore
President and Chief Executive Officer
TVA

Date:

TABLE OF CONTENTS

POLICY STATEMENT	4
PART I INTRODUCTION	7
SECTION 1 GENERAL	7
1.1 Scope/Applicability	7
PART II QAPD DETAILS	8
SECTION 1 ORGANIZATION	8
1.1 Chief Executive Officer (CEO)	8
1.2 Chief Operating Officer (COO)	9
1.3 Nuclear Generation Development and Construction (NGDC)	9
1.3.1 BLN Engineering, Procurement, and Construction	9
1.3.2 Project Licensing	9
1.4 Administrative Services	9
1.5 Chief Nuclear Officer (CNO)	9
1.5.1 Nuclear Support (NS)	10
1.5.2 Engineering and Projects	10
1.5.3 Nuclear Oversight and Assistance	10
1.5.4 BLN Plant Management	11
1.5.5 Nuclear Licensing	11
1.6 Authority to Stop Work	11
1.7 Quality Assurance Organizational Independence	11
1.8 NQA-1-1994 Commitment	11
SECTION 2 QUALITY ASSURANCE PROGRAM	12
2.1 Responsibilities	13
2.2 Delegation of Work	13
2.3 COL Identification of Site Specific Safety-Related Design Basis Activities	13
2.4 Periodic Review of the Quality Assurance Program	14
2.5 Issuance and Revision to Quality Assurance Program	14
2.6 Personnel Qualifications	14
2.7 Independent Review	15
2.8 NQA-1-1994 Commitment / Exceptions	17
SECTION 3 DESIGN CONTROL	19
3.1 Design Verification	19
3.2 Design Records	20
3.3 Computer Application and Digital Equipment Software	20
3.4 Setpoint Control	20
3.5 NQA-1-1994 Commitment	21
SECTION 4 PROCUREMENT DOCUMENT CONTROL	22
4.1 NQA-1-1994 Commitment	22
SECTION 5 INSTRUCTIONS, PROCEDURES, AND DRAWINGS	24
5.1 Procedure Adherence	24
5.2 Procedure Content	24
5.3 NQA-1-1994 Commitment	24
SECTION 6 DOCUMENT CONTROL	25
6.1 Review and Approval of Documents	25
6.2 Changes to Documents	26
6.3 NQA-1-1994 Commitment	26
SECTION 7 CONTROL OF PURCHASED MATERIAL, EQUIPMENT, AND SERVICES	27
7.1 Acceptance of Item or Service	27
7.2 NQA-1-1994 Commitment	28
SECTION 8 IDENTIFICATION AND CONTROL OF MATERIALS, PARTS, AND COMPONENTS	30
8.1 NQA-1-1994 Commitment	30

SECTION 9	CONTROL OF SPECIAL PROCESSES	31
9.1	NQA-1-1994 Commitment	31
SECTION 10	INSPECTION	32
10.1	NQA-1-1994 Commitment / Exceptions	33
SECTION 11	TEST CONTROL	34
11.1	NQA-1-1994 Commitment	34
11.2	NQA-1-1994 Commitment for Computer Program Testing	34
SECTION 12	CONTROL OF MEASURING AND TEST EQUIPMENT	35
12.1	NQA-1-1994 Commitment / Exceptions	35
SECTION 13	HANDLING, STORAGE, AND SHIPPING	36
13.1	Housekeeping	36
13.2	NQA-1-1994 Commitment / Exceptions	36
SECTION 14	INSPECTION, TEST, AND OPERATING STATUS	38
14.1	NQA-1-1994 Commitment	38
SECTION 15	NONCONFORMING MATERIALS, PARTS, OR COMPONENTS	39
15.1	Reporting Program	39
15.2	NQA-1-1994 Commitment	39
SECTION 16	CORRECTIVE ACTION	40
16.1	Reporting Program	40
16.2	NQA-1-1994 Commitment	40
SECTION 17	QUALITY ASSURANCE RECORDS	41
17.1	Record Retention	41
17.2	Electronic Records	41
17.3	NQA-1-1994 Commitment / Exceptions	41
SECTION 18	AUDITS	42
18.1	Performance of Audits	42
18.2	NQA-1-1994 Commitment	44
PART III	NON-SAFETY-RELATED SSC QUALITY CONTROL	45
SECTION 1	Non-safety Related SSCs - Significant Contributors to Plant Safety	45
1.1	Organization	45
1.2	QA Program	45
1.3	Design Control	45
1.4	Procurement Document Control	45
1.5	Instructions, Procedures, and Drawings	45
1.6	Document Control	46
1.7	Control of Purchased Items and Services	46
1.8	Identification and Control of Purchased Items	46
1.9	Control of Special Processes	46
1.10	Inspection	46
1.11	Test Control	47
1.12	Control of Measuring and Test Equipment (M&TE)	47
1.13	Handling, Storage, and Shipping	47
1.14	Inspection, Test, and Operating Status	47
1.15	Control of Nonconforming Items	47
1.16	Corrective Action	47
1.17	Records	47
1.18	Audits	47
SECTION 2	Non-safety-Related SSCs Credited for Regulatory Events	48
PART IV	REGULATORY COMMITMENTS	49
	NRC Regulatory Guides and Quality Assurance Standards	49
	Regulatory Guides:	49
	Standards:	49
APPENDIX 1	TVA QAPD FUNCTIONAL ORGANIZATIONAL CHART	50

PART I INTRODUCTION

SECTION 1 GENERAL

The Tennessee Valley Authority (TVA) Quality Assurance Program Description (QAPD) is the top-level policy document that establishes the quality assurance policy and assigns major functional responsibilities for construction/pre-operation and operations activities conducted by or for TVA. The QAPD describes the methods and establishes QAPD and administrative control requirements that meet 10 CFR 50, Appendix B and 10 CFR 52. The QAPD is based on the requirements of ASME NQA-1-1994, "Quality Assurance Requirements for Nuclear Facility Applications," Parts I and II, as specified in this document.

The QAPD is defined by the NRC approved regulatory document that describes the Quality Assurance Program (QAP) elements, along with the associated implementing documents. Procedures and instructions that control Nuclear Generation Development and Construction (NGDC) activities will be developed prior to commencement of those activities. Policies establish high level responsibilities and authority for carrying out important administrative functions which are outside the scope of the QAPD. Procedures establish practices for certain activities which are common to all TVA organizations performing those activities such that the activity is controlled and carried out in a manner that meets QAPD requirements. Site or organization specific procedures establish detailed implementation requirements and methods, and may be used to implement Policies or be unique to particular functions or work activities.

1.1 Scope/Applicability

This QAPD applies only to Bellefonte Units 3 & 4 Combined Operating License (COL) construction/pre-operation and operations activities affecting the quality and performance of safety-related structures, systems, and components, including, but not limited to:

Designing	Handling	Startup	Erecting	Modifying
Constructing	Testing	Operating	Installing	Inspecting
Procuring	Pre-operational activities	Maintaining	Repairing	Refueling
Fabricating	(including ITAAC)	Receiving	Training	Shipping
Cleaning	Licensing	Storing	Decommissioning	

Safety-related systems, structures, and components, under the control of the QAPD, are identified by design documents. The technical aspects of these items are considered when determining program applicability, including, as appropriate, the item's design safety function. The QAPD may be applied to certain activities where regulations other than 10 CFR 50 and 10 CFR 52 establish QAPD requirements for activities within their scope.

The policy of TVA is to assure a high degree of availability and reliability of its nuclear plants while ensuring the health and safety of its workers and the public. To this end, selected elements of the QAPD are also applied to certain equipment and activities that are not safety-related, but support safe, economic, and reliable plant operations, or where other NRC guidance establishes quality assurance requirements. Implementing documents establish program element applicability.

PART II QAPD DETAILS

SECTION 1 ORGANIZATION

This section describes the TVA organizational structure, functional responsibilities, levels of authority and interfaces for establishing, executing, and verifying QAPD implementation. The organizational structure includes offsite and on-site functions for Bellefonte (BLN). Implementing documents assign more specific responsibilities and duties, and define the organizational interfaces involved in conducting activities and duties within the scope of this QAPD. Management gives careful consideration to the timing, extent and effects of organizational structure changes.

TVA management is responsible to size the Quality Assurance organization commensurate with the duties and responsibilities assigned.

The Chief Nuclear Officer (CNO) has the overall responsibility for the establishment, implementation, and administration of TVA's QAPD and the evaluation of its effectiveness. In addition, the CNO is responsible for the safe, reliable, and efficient operation of TVA nuclear plants, including BLN beginning at fuel load.

The Nuclear Generation Development and Construction (NGDC) organization is responsible for new nuclear plant licensing, engineering, procurement, construction, startup and operations development activities up to the beginning of fuel load.

CNO and NGDC responsibilities are administered through their management staffs, such as shown in APPENDIX A.

Design, engineering and environmental services are provided to NGDC through agreements and/or contracts that identify the engineer, procurement and constructor contractors for the units. These agreements and contracts will extend the quality assurance requirements described in this document to applicable contractors and subcontractors.

The following sections describe the reporting relationships, functional responsibilities and authorities for organizations implementing and supporting this QAPD. The CNO and NGDC organizations are described herein.

More detailed organization charts for various departments/locations are contained in Chapter 13 of the BLN 3&4 Final Safety Analysis Report which describes organizational positions and specific functions and responsibilities. Inclusion of APPENDIX A as a high level functional organization for implementation of the QAPD provides sufficient information to assure QA requirements are identified and implemented.

1.1 Chief Executive Officer (CEO)

The CEO is responsible for the design, construction and operation of TVA's nuclear plants. The CEO is also responsible for the technical and administrative support activities provided by TVA and contractors. The CEO, through the Chief Operating Officer (COO), directs the CNO and the executive responsible for Nuclear Generation Development and Construction (NGDC). The CEO

also directs the executive responsible for Administrative Services. The CEO reports to the TVA Board of Directors with respect to all matters.

1.2 Chief Operating Officer (COO)

As delegated from the CEO, the COO is responsible the design, construction and operations of TVA's nuclear plants. The COO directs the CNO and the executive responsible for NGDC.

1.3 Nuclear Generation Development and Construction (NGDC)

The executive responsible for the NGDC organization reports to the COO and is responsible for new nuclear plant licensing, engineering, procurement, construction, startup and operational development activities and is responsible for the implementation of this QAPD for NGDC activities. The NGDC executive also directs the planning and development of the NGDC staff and organization resources. The NGDC executive is also responsible for establishing and managing the development of new nuclear generation.

1.3.1 BLN Engineering, Procurement, and Construction

The executive responsible for the BLN engineering, procurement, and construction reports to the executive responsible for NGDC and is responsible for the overall implementation of quality assurance requirements for engineering, procurement, construction, and pre-operational and startup testing for BLN up to fuel load.

1.3.2 Project Licensing

The manager responsible for Project Licensing is responsible for licensing activities and reports to the executive responsible for NGDC up to fuel load. Licensing continuity is assured by transition of the licensing function to the BLN Plant Management through organization, staff, knowledge, records, reports, process, procedures, commitments, and interfaces. The CNO and NGDC agree to the details of when and how to effect this transition at such time as needed.

1.4 Administrative Services

The executive responsible for Administrative Services reports to the CEO and is responsible for managing the overall Administrative Services organization including assuring that Supply Chain Management and Information Technology, including contracts and procurement support NGDC activities in accordance with the QAPD.

1.5 Chief Nuclear Officer (CNO)

The CNO reports to the COO and is the executive responsible for the safe, reliable, and efficient operation of TVA nuclear plants. The CNO directs operations through site executives, both for the operating plants and for NGDC pre-operational support as needed. The CNO assures implementation of this QAPD though the manager responsible for Quality Assurance by oversight and implementation planning for this QAPD.

Prior to preoperational testing, the BLN Plant Management executive, with support from Nuclear Support, Engineering and Projects, Performance Improvement, and Quality Assurance establish the processes and organization of managers, supervisors, and staff needed to perform required

operation functions to support NGDC and perform safe plant operation.

1.5.1 Nuclear Support (NS)

The executive responsible for nuclear support reports to the CNO and is responsible for ensuring that the QA requirements established by this QAPD are either included or referenced (as appropriate) in programs and areas of responsibility such as nuclear outage management, security, operational programs, maintenance and modifications.

1.5.2 Engineering and Projects

The executive responsible for engineering and projects reports to the CNO and is responsible for ensuring that the QA requirements established by this QAPD are either included or referenced (as appropriate) in programs and areas of responsibility such as corporate engineering, plant reliability, inspection services, computer engineering, project management, fuel supply and disposal, and nuclear fuel, as well as independent technical reviews, such as system performance monitoring as required by the Maintenance Rule, technical operability evaluations, technical specification changes that affect the design basis, review of FSAR changes that affect the design basis, and self assessments to ensure maintenance of design basis and adequacy of technical programs.

1.5.3 Nuclear Oversight and Assistance

The manager responsible for Nuclear Oversight and Assistance reports to the CNO and provides oversight and management for quality assurance, nuclear training, and special assistance. While the managers of Quality Assurance and Training functionally report to the manager for Nuclear Oversight and Assistance, they retain direct accessibility to the CNO for matters of safety and quality.

Quality Assurance

The manager responsible for quality assurance reports to the manager of Nuclear Oversight and Assistance and has direct access to the CNO and NGDC for matters affecting safety and quality. He has responsibility for independent planning and for performing activities to verify the development and effective implementation of this QAPD. The quality assurance organization assures that quality assurance requirements are identified and implemented for safety-related activities as prescribed in this QAPD, including but not limited to licensing, engineering, procurement, construction, operations, document control, problem identification and reporting activities. The Quality Assurance organization is responsible for independently planning and performing activities to verify the development and effective implementation of the NRC-approved Nuclear Quality Assurance Plan (NQA Plan) for existing nuclear plants as well.

The manager responsible for quality assurance has direct lines of communication to the executive responsible for NGDC and the CNO and is responsible for developing and maintaining this QAPD and the NQA Plan for existing plant operations, evaluating compliance to the programs and managing the QA organization resources.

Project Quality Assurance

The Quality Assurance Project Manager (QAPM) reports to the manager responsible for quality

assurance and has direct lines of communication to the site executive responsible for BLN engineering, procurement, and construction, and is responsible for the development and verification of implementation of this QAPD. The QAPM is responsible for assuring compliance with regulatory requirements and procedures through audits and technical reviews; for monitoring organization processes to ensure conformance to commitments and licensing document requirements; and for ensuring that vendors providing quality services, parts and materials are meeting the requirements of 10 CFR 50, Appendix B through Nuclear Procurement Issues Committee (NUPIC) or TVA vendor audits. The QAPM has sufficient independence from other NGDC priorities to bring forward issues affecting safety and quality and makes judgments regarding quality in all areas of NGDC activities. The QAPM may make recommendations to NGDC management regarding improving the quality of work processes. If the QAPM disagrees with any action taken relative to QAPD implementation and is unable to obtain resolution, the QAPM shall inform the manager responsible for quality assurance and, if necessary, bring the matter to the attention of the executive responsible for NGDC, who determines the final disposition.

1.5.4 BLN Plant Management

The executive responsible for BLN Plant Management reports to the CNO and is responsible for safe operations and operational support for NGDC (as needed), ensuring that quality assurance requirements are met. This executive is responsible for nuclear operations, maintenance, training, site engineering and technical support, modifications, and outage management. This executive is also responsible for fire protection, the technical review process and the Plant Operations Review Committee.

1.5.5 Nuclear Licensing

The manager responsible for licensing reports to the CNO and is responsible for maintaining the interface between TVA and NRC for licensing activities and managing the Nuclear Safety Review Board, which is the offsite committee that provides senior level oversight of TVA's nuclear program with respect to nuclear safety.

1.6 Authority to Stop Work

Quality assurance and inspection personnel have the authority, and the responsibility, to stop work in progress which is not being done in accordance with approved procedures or where safety or SSC integrity may be jeopardized. This extends to off-site work performed by suppliers furnishing safety-related materials and services to TVA.

1.7 Quality Assurance Organizational Independence

For the NGDC, independence shall be maintained between the organization or organizations performing the checking (quality assurance and quality control) functions and the organizations performing the functions. This provision is not applicable to design review/verification.

1.8 NQA-1-1994 Commitment

In establishing its organizational structure, TVA commits to compliance with NQA-1-1994, Basic Requirement 1 and Supplement 1S-1.

SECTION 2 QUALITY ASSURANCE PROGRAM

TVA has established the necessary measures and governing procedures to implement the Quality Assurance Program (QAP) as described in this QAPD. TVA is committed to implementing the QAP in all aspects of work that are important to the safety of the nuclear plants as described and to the extent delineated in this QAPD. Further, TVA ensures through the systematic process described herein that its suppliers of safety-related equipment or services meet the applicable requirements of 10 CFR 50, Appendix B. This QAPD also applies to certain non-safety-related structures, systems, components and activities to a degree consistent with their importance to safety. Senior management is regularly apprised of audit results evaluating the adequacy of implementation of the QAPD through the audit functions described in the Audit Section of this QAPD.

The objective of the QAPD is to assure that TVA nuclear generating plants are designed constructed and operated in accordance with governing regulations and license requirements. The program is based on the requirements of ASME NQA-1-1994, "Quality Assurance Requirements for Nuclear Facility Applications," as further described in this document. The QAPD applies to those non-safety-related activities that involve the functions of safety-related structures, systems, and components (SSCs) associated with the design, licensing, construction and operation of new nuclear power plants as described in the COL Final Safety Analysis Report. A list or system identifying SSCs and activities to which this program applies is maintained at the appropriate facility. The Design Certification Document is used as the basis for this list. Cost and scheduling functions do not prevent proper implementation of the QAPD.

Specific program controls are applied to non-safety related SSCs, for which 10CFR50, Appendix B is not applicable, that are significant contributors to plant safety. The specific program controls consistent with applicable sections of the QAPD are applied to those items in a selected manner, targeted at those characteristics or critical attributes that render the SSC a significant contributor to plant safety.

Delegated responsibilities may be performed under a supplier's or principal contractor's QAPD, provided that the supplier or principle contractor has been approved as a supplier in accordance with the QAPD. Periodic audits and assessments of supplier QA programs are performed to assure compliance with the supplier's or principle contractor's QAPD and implementing procedures. In addition, routine interfaces with project personnel assure that quality expectations are met.

New nuclear plant construction will be the responsibility of TVA's NGDC organization. Detailed engineering specifications and construction procedures will be developed to implement the QAPD and contractor QA programs prior to commencement of COL activities. Examples of Limited Work Authorization (LWA) activities that could impact safety-related SSCs would include impacts of construction to existing facilities and for construction of new plants, the design interface between non-safety-related and safety-related SSCs and the placement of seismically designed backfill.

In general, the program requirements specified herein are detailed in implementing procedures that are either TVA implementing procedures, or supplier implementing procedures governed by a supplier quality program.

A grace period of 90 days may be applied to provisions that are required to be performed on a periodic basis unless otherwise noted. Annual evaluations and audits that must be performed on a triennial basis are examples where the 90 day general period could be applied. The grace period does not allow the "clock" for a particular activity to be reset forward. The "clock" for an activity is reset backwards by performing the activity early. Audits schedules are based on the month in which the audit starts.

2.1 Responsibilities

Personnel who work directly or indirectly for TVA are responsible for the achievement of acceptable quality in the work covered by this QAPD. This includes those activities delineated in Part I, Section 1.1 of this QAPD. TVA personnel performing verification activities are responsible for verifying the achievement of acceptable quality. Activities governed by the QAPD are performed as directed by documented instructions, procedures and drawings that are of a detail appropriate for the activity's complexity and effect on safety. Instructions, procedures and drawings specify quantitative or qualitative acceptance criteria as applicable or appropriate for the activity, and verification is against these criteria. Provisions are established to designate or identify the proper documents to be used in an activity, and to ascertain that such documents are being used. The QAPM is responsible to verify that processes and procedures comply with QAPD and other applicable requirements, that such processes or procedures are implemented, and that management appropriately ensures compliance.

2.2 Delegation of Work

TVA retains and exercises the responsibility for the scope and implementation of an effective QAPD. Positions identified in the Organization Section of this QAPD may delegate all or part of the activities of planning, establishing, and implementing the program for which they are responsible to others, but retain the responsibility for the program's effectiveness. Decisions affecting safety are made at the level appropriate for its nature and effect, and with any necessary technical advice or review.

2.3 COL Identification of Site Specific Safety-Related Design Basis Activities

The development of the TVA COL application will involve site testing, data collection and calculations that may create or bound safety-related design basis data. Site testing and data collection of information pertaining to the physical characteristics of the site that have the potential to affect safety-related design will be considered safety-related. In addition, calculations and other engineering data that bounds or characterizes the site will be classified as safety-related. A more detailed discussion of QA program coverage during the pre-COL design and construction phase activities is provided in Chapter 17.1 of the FSAR.

2.4 Periodic Review of the Quality Assurance Program

Management of those organizations implementing the QA program or portions thereof, assess the adequacy of that part of the program for which they are responsible and assure its effective implementation at least once each year or at least once during the life of the activity, which ever is shorter. However, the period for assessing QA programs during the operations phase may be extended to once every two years.

2.5 Issuance and Revision to Quality Assurance Program

Administrative control of the QAPD will be in accordance with 10 CFR 50.55(f) and 10 CFR 50.54(a), as appropriate. Changes to the QAPD are evaluated by the NGDC QAPM to ensure that such changes do not degrade previously approved quality assurance controls specified in the QAPD. This document shall be revised as appropriate to incorporate additional QA commitments that may be established during the COL application development process. New revisions to the document will be reviewed, at a minimum, by the manager responsible for Quality Assurance and approved by the CNO.

Regulations require that the Final Safety Analysis Report (FSAR) include, among other things, the managerial and administrative controls to be used to assure safe operation, including a discussion of how the applicable requirements of Appendix B will be satisfied. In order to comply with this requirement, the FSAR references this QAPD and, as a result, the requirements of 10 CFR 50.54(a), are satisfied by and apply to the QAPD.

2.6 Personnel Qualifications

Personnel assigned to implement elements of the QAPD shall be capable of performing their assigned tasks. To this end TVA establishes and maintains formal indoctrination and training programs for personnel performing, verifying, or managing activities within the scope of the QAPD to assure that suitable proficiency is achieved and maintained. Plant and support staff minimum qualification requirements are as delineated in each site's Technical Specifications. Other qualification requirements may be established but will not reduce those required by Technical Specifications. Sufficient managerial depth is provided to cover absences of incumbents. When required by code, regulation, or standard, specific qualification and selection of personnel is conducted in accordance with those requirements as established in the applicable TVA procedures. Indoctrination includes the administrative and technical objectives, requirements of the applicable codes and standards, and the QAPD elements to be employed. Training for positions identified in 10 CFR 50.120 is accomplished according to programs accredited by the National Nuclear Accrediting Board of the National Academy of Nuclear Training that implement a systematic approach to training. Records of personnel training and qualification are maintained.

The minimum qualifications of the manager responsible for Quality Assurance and the NGDC QAPM are that each holds an engineering or related science degree and has a minimum of four year or related experience (3 of the 4 years must include 2 years of nuclear power plant experience and 1 year of supervisory or management experience. One year of experience performing quality verification activities. Special requirements shall include management and supervisory skills and experience or training in leadership, interpersonal communication,

management responsibilities, motivation of personnel, problem analysis and decision making, and administrative policies and procedures. Individuals who do not possess these formal education and minimum experience requirements should not be eliminated automatically when other factors provide sufficient demonstration of their abilities. These other factors are evaluated on a cases-by-case basis and approved and documented by senior management.

The minimum qualifications of the individuals responsible for planning, implementing and maintaining the programs for the QAPD are that each has a high school diploma or equivalent and has a minimum of one year of related experience. Individuals who do not possess these formal education and minimum experience requirements should not be eliminated automatically when other factors provide sufficient demonstration of their abilities. These other factors are evaluated on a case-by-case basis and approved and documented by senior management.

2.7 Independent Review

Activities occurring during the operational phase shall be independently reviewed on a periodic basis. The independent review program shall be functional prior to initial core loading. The independent review function performs the following:

- a. Reviews proposed changes to the facility as described in the safety analysis report (SAR). The Independent Review Committee (IRC) also verifies that changes do not adversely affect safety and if a technical specification change or NRC review is required.
- b. Reviews proposed tests and experiments not described in the SAR. Changes to proposed tests and experiments not described in the SAR that do require a technical specification change must be reviewed by the IRC prior to NRC submittal and implementation.
- c. Reviews proposed technical specification changes and license amendments relating to nuclear safety prior to NRC submittal and implementation, except in those cases where the change is identical to a previously approved change.
- d. Reviews violations, deviations, and reportable events that are required to be reported to the NRC in writing within 24 hours. This review includes the results of investigations and recommendations resulting from such investigations to prevent or reduce the probability of recurrence of the event.
- e. Reviews any matter related to nuclear safety that is requested by the CNO, BLN Plant Management executive, or any IRC member.
- f. Reviews corrective actions for significant conditions adverse to quality.
- g. Reviews the adequacy of the audit program every 24 months.

Independent Review Committee

1. An independent review committee is assigned independent review responsibilities.
2. The independent review committee reports to a management level above the plant manager.
3. The independent review committee is composed of no less than 5 persons, no more than a minority of members are from the on-site operating organization.

For example, at least 3 of the 5 members must be from off-site if there are 5 members on the committee. A minimum of the chairman or alternative chairman and 2 members must be present for all meetings.

4. During the period of initial operation, meetings are conducted no less frequently than once per calendar quarter. Afterwards meetings are conducted no less than twice a year.
5. Results of the meeting are documented and be recorded.
6. Consultants and contractors are used for the review of complex problems beyond the expertise of the off site/on site independent review committee.
7. Persons on the independent review committee are qualified as follows:
 - a. Supervisor or Chairman of the Independent Review Committee
 - Education: baccalaureate in engineering or related science
 - Minimum experience: 6 years combined managerial and technical support

b. Independent Review Committee members

Education: Baccalaureate in engineering or related science for those independent review personnel who are required to review problems in

- nuclear power plant operations,
- nuclear engineering,
- chemistry and radiochemistry,
- metallurgy,
- nondestructive testing,
- instrumentation and control,
- radiological safety,
- mechanical engineering, and electrical engineering.

High school diploma for those independent review personnel who are required to review problems in administrative control and quality assurance practices, training, and emergency plans and related procedures and equipment.

Minimum experience: 5 years experience in their own area of responsibility (nuclear power plant operations, nuclear engineering, chemistry and radiochemistry, metallurgy, nondestructive testing, instrumentation and control, radiological safety, mechanical engineering, and electrical engineering, administrative control and quality assurance practices, training, and emergency plans and related procedures and equipment)

2.8 NQA-1-1994 Commitment / Exceptions

- In establishing qualification and training programs, TVA commits to compliance with NQA-1-1994, Basic Requirement 2 and Supplements 2S-1, 2S-2, 2S-3 and 2S-4, with the following clarifications and exceptions:
 - NQA-1-1994, Supplement 2S-1
 - Supplement 2S-1 will include use of the guidance provided in Appendix 2A-1 the same as if it were part of the Supplement. The following two alternatives may be applied to the implementation of this Supplement and Appendix:
 - (1) In lieu of being certified as Level I, II, or III in accordance with NQA-1-1994, personnel performing independent quality verification inspections, examinations, measurements, or tests of material, products, or activities will be required to possess qualifications equal to or better than those required for performing the task being verified; and the verification is within the skills of these personnel and/or is addressed by procedures. These individuals will not be responsible for the planning of quality verification inspections and tests (i.e., establishing hold points and acceptance criteria in procedures, and determining who will be responsible for performing the inspections), evaluating inspection training programs, nor certifying inspection personnel.
 - (2) A qualified engineer may be used to plan inspections, evaluate the capabilities of an inspector, or evaluate the training program for inspectors. For the purpose of these functions, a qualified engineer is one who has a baccalaureate in engineering in a discipline related to the inspection activity (such as electrical, mechanical, civil) and has a minimum of five years engineering work experience with at least two years of this experience related to nuclear facilities.
 - NQA-1-1994, Supplement 2S-2

- In lieu of Supplement 2S-2, for qualification of nondestructive examination personnel, TVA will follow the applicable standard cited in the version(s) of Section III and Section XI of the ASME Boiler and Pressure Vessel Code approved by the NRC for use at TVA sites.

NQA-1-1994, Supplement 2S-3

- The requirement that prospective Lead Auditors have participated in a minimum of five (5) audits in the previous three (3) years is replaced by the following, "The prospective lead auditor shall demonstrate his/her ability to properly implement the audit process, as implemented by TVA, to effectively lead an audit team, and to effectively organize and report results, including participation in at least one nuclear audit within the year preceding the date of qualification."

SECTION 3 DESIGN CONTROL

TVA has established and implements a process to control the design, design changes and temporary modifications (e.g. temporary bypass lines, electrical jumpers and lifted wires, and temporary setpoints) of items that are subject to the provisions of this QAPD. The design process includes provisions to control design inputs, outputs, changes, interfaces, records and organizational interfaces within TVA and with suppliers. These provisions assure that design inputs (such as design bases and the performance, regulatory, quality, and quality verification requirements) are correctly translated into design outputs (such as analyses, specifications, drawings, procedures, and instructions) so that the final design output can be related to the design input in sufficient detail to permit verification. Design change processes and the division of responsibilities for design-related activities are detailed in TVA and supplier procedures. The design control program includes interface controls necessary to control the development, verification, approval, release, status, distribution and revision of design inputs and outputs. Design changes and disposition of nonconforming items as "use as is" or "repair" are reviewed and approved by the TVA design organization or by other organizations so authorized by TVA.

Design documents are reviewed by individuals knowledgeable in QA to ensure the documents contain the necessary QA requirements.

3.1 Design Verification

TVA design processes provide for design verification to ensure that items and activities subject to the provisions of this QAPD are suitable for their intended application, consistent with their effect on safety. Design changes are subjected to these controls, which include verification measures commensurate with those applied to original plant design.

Design verifications are performed by competent individuals or groups other than those who performed the original design but who may be from the same organization. The verifier shall not have taken part in the selection of design inputs, the selection of design considerations, or the selection of a singular design approach, as applicable. This verification may be performed by the originator's supervisor provided the supervisor did not specify a singular design approach, rule out certain design considerations, and did not establish the design inputs used in the design, or if the supervisor is the only individual in the organization competent to perform the verification. If the verification is performed by the originator's supervisor, the justification of the need is documented and approved in advance by management.

The extent of the design verification required is a function of the importance to safety of the item under consideration, the complexity of the design, the degree of standardization, the state-of-the-art, and the similarity with previously proven designs. This includes design inputs, design outputs and design changes. Design verification procedures are established and implemented to assure that an appropriate verification method is used, the appropriate design parameters to be verified are chosen, the acceptance criteria are identified, and the verification is satisfactorily accomplished and documented. Verification methods may include, but are not limited to, design reviews, alternative calculations and qualification testing. Testing used to verify the acceptability of a specific design feature demonstrates acceptable performance under conditions that simulate the most adverse design conditions expected for item's intended use.

TVA normally completes design verification activities before the design outputs are used by other organizations for design work, and before they are used to support other activities such as procurement, manufacture or construction. When such timing cannot be achieved, the design verification is completed before relying on the item to perform its intended design or safety function.

3.2 Design Records

TVA maintains records sufficient to provide evidence that the design was properly accomplished. These records include the final design output and any revisions thereto, as well as record of the important design steps (e.g., calculations, analyses and computer programs) and the sources of input that support the final output.

Plant design drawings reflect the properly reviewed and approved configuration of the plant.

3.3 Computer Application and Digital Equipment Software

The QAPD shall govern the development, procurement, testing, maintenance, and use of computer application and digital equipment software when used in safety-related applications and designated non-safety-related applications. TVA and suppliers shall be responsible for developing, approving, and issuing procedures, as necessary, to control the use of such computer application and digital equipment software. The procedures shall require that the application software be assigned a proper quality classification and that the associated quality requirements be consistent with this classification. Each application software and revision thereto shall be documented and approved by authorized personnel. This QAPD shall also be applicable to the administrative functions associated with the maintenance and security of computer hardware where such functions are considered essential in order to comply with other QAPD requirements such as QA records.

3.4 Setpoint Control

Instrument and equipment setpoints that could affect nuclear safety shall be controlled in accordance with written instructions. As a minimum, these procedures shall:

- (1) Identify responsibilities and processes for reviewing, approving, and revising setpoints and setpoint changes originally supplied by the NSSS supplier, the A/E, and the plant's technical staff.
- (2) Ensure that setpoints and setpoint changes are consistent with design and accident analysis requirements and assumptions.
- (3) Provide for documentation of setpoints, including those determined operationally.
- (4) Provide for access to necessary setpoint information for personnel who write or revise plant procedures, operate or maintain plant equipment, develop or revise design documents, or develop or revise accident analyses.

3.5 NQA-1-1994 Commitment

In establishing its program for design control and verification, TVA commits to compliance with NQA-1-1994, Basic Requirement 3, and Supplement 3S-1, the subsurface investigations requirements contained in Subpart 2.20 and the standards for computer software contained in Subpart 2.7.

SECTION 4 PROCUREMENT DOCUMENT CONTROL

TVA has established the necessary measures and governing procedures to assure that purchased items and services are subject to appropriate quality and technical requirements. Procurement document changes shall be subject to the same degree of control as utilized in the preparation of the original documents. These controls include provisions such that:

- Where original technical or quality assurance requirements cannot be determined, an engineering evaluation is conducted and documented by qualified staff to establish appropriate requirements and controls to assure that interfaces, interchangeability, safety, fit and function, as applicable, are not adversely affected or contrary to applicable regulatory requirements.

- Applicable technical, regulatory, administrative, quality and reporting requirements (such as specifications, codes, standards, tests, inspections, special processes, and 10 CFR 21) are invoked for procurement of items and services. 10 CFR 21 requirements for posting, evaluating and reporting will be followed and imposed on suppliers when applicable. Applicable design bases and other requirements necessary to assure adequate quality shall be included or referenced in documents for procurement of items and services. To the extent necessary, procurement documents shall require suppliers to have a documented QA program that is determined to meet the applicable requirements of 10 CFR 50, Appendix B, as appropriate to the circumstances of procurements (or the supplier may work under the licensees approved QA program).

Reviews of procurement documents shall be performed by personnel who have access to pertinent information and who have an adequate understanding of the requirements and intent of the procurement documents.

4.1 NQA-1-1994 Commitment

In establishing controls for procurement, TVA commits to compliance with NQA-1-1994, Basic Requirement 4 and Supplement 4S-1, with the following clarifications and exceptions:

- NQA-1-1994, Supplement 4S-1
 - Section 2.3 of this Supplement 4S-1 includes a requirement that procurement documents require suppliers to have a documented QAP that implements NQA-1-1994, Part 1. In lieu of this requirement, TVA may require suppliers to have a documented supplier QAP that is determined to meet the applicable requirements of 10 CFR 50, Appendix B, as appropriate to the circumstances of the procurement.

 - With regard to service performed by a supplier, TVA procurement documents may allow the supplier to work under the TVA QAP, including implementing procedures, in lieu of the supplier having its own QAP.

 - Section 3 of this supplement 4S-1 requires procurement documents to be reviewed prior to bid or award of contract. The quality assurance review of

procurement documents is satisfied through review of the applicable procurement specification, including the technical and quality procurement requirements, prior to bid or award of contract. Procurement document changes (e.g., scope, technical or quality requirements) will also receive the quality assurance review.

Procurement documents for Commercial Grade Items that will be procured by TVA for use as safety-related items shall contain technical and quality requirements such that the procured item can be appropriately dedicated.

SECTION 5 INSTRUCTIONS, PROCEDURES, AND DRAWINGS

TVA has established the necessary measures and governing procedures to ensure that activities affecting quality are prescribed by and performed in accordance with instructions, procedures or drawings of a type appropriate to the circumstances and which, where applicable, include quantitative or qualitative acceptance criteria to implement the QAPD as described in the QAPD. Such documents are prepared and controlled according to Part II, Section 6 of this QAPD. In addition, means are provided for dissemination to the staff of instructions of both general and continuing applicability, as well as those of short-term applicability. Provisions are included for reviewing, updating, and canceling such procedures.

5.1 Procedure Adherence

The TVA policy is that procedures are followed, and the requirements for use of procedures have been established in administrative procedures. Where procedures cannot be followed as written, provisions are established for making changes in accordance with Part II, Section 6 of this QAPD. Requirements are established to identify the manner in which procedures are to be implemented, including identification of those tasks that require (1) the written procedure to be present and followed step-by-step while the task is being performed, (2) the user to have committed the procedure steps to memory, (3) verification of completion of significant steps, by initials or signatures or use of check-off lists. Procedures that are required to be present and referred to directly are those developed for extensive or complex jobs where reliance on memory cannot be trusted, tasks that are infrequently performed, and tasks where steps must be performed in a specified sequence.

In cases of emergency, personnel are authorized to depart from approved procedures when necessary to prevent injury to personnel or damage to the plant. Such departures are recorded describing the prevailing conditions and reasons for the action taken.

5.2 Procedure Content

The established measures address the applicable content of procedures as described in the introduction to Part II of NQA-1-1994. In addition, procedures governing tests, inspections, operational activities and maintenance will include as applicable, initial conditions and prerequisites for the performance of the activity.

5.3 NQA-1-1994 Commitment

In establishing procedural controls, TVA commits to compliance with NQA-1-1994, Basic Requirement 5.

SECTION 6 DOCUMENT CONTROL

TVA has established the necessary measures and governing procedures to control the preparation of, issuance of, and changes to documents that specify quality requirements or prescribe how activities affecting quality, including organizational interfaces, are controlled to assure that correct documents are being employed. The control system (including electronic systems used to make documents available) shall be documented and shall provide for (a) through (f) below:

- (a) identification of documents to be controlled and their specified distribution;
- (b) a method to identify the correct document (including revision) to be used and control of superseded documents;
- (c) identification of assignment of responsibility for preparing, reviewing, approving, and issuing documents;
- (d) review of documents for adequacy, completeness, and correctness prior to approval and issuance.
- (e) a method for providing feedback from users to continually improve procedures and work instructions.
- (f) coordinating and controlling interface documents and procedures.

The types of documents to be controlled include:

- (a) drawings such as design, construction, installation, and as-built drawings;
- (b) engineering calculations
- (c) design specifications
- (d) purchase orders and related documents
- (e) vendor-supplied documents
- (f) audit, surveillance, and quality verification/inspection procedures
- (g) inspection and test reports
- (h) instructions and procedures for activities covered by this QAPD including design, construction, installation, operating (including normal and emergency operations), maintenance, calibration, and routine testing
- (i) technical specifications
- (j) nonconformance reports and corrective action reports.

During the operational phase, where temporary procedures are used, they shall include a designation of the period of time during which it is acceptable to use them.

6.1 Review and Approval of Documents

Documents shall be reviewed for adequacy by qualified persons other than the preparer. During the construction phase, procedures for design, construction, and installation shall also be

reviewed by the organization responsible for quality verification to ensure quality assurance measures have been appropriately applied. The documented review signifies concurrence.

During the operations phase, documents affecting the configuration or operation of the station as described in the SAR shall be screened to identify those that require review by the IRC prior to implementation as described in Section 2 of this QAPD.

To ensure effective and accurate procedures during the operational phase, applicable procedures shall be reviewed, and updated as necessary, based on the following conditions:

- (a) following any modification to a system;
- (b) following an unusual incident, such as an accident, significant operator error, or equipment malfunction;
- (c) when procedure discrepancies are found;
- (d) prior to use if not used in the previous two years;
- (e) QA audits are conducted in accordance with Section 18.1 of this QAPD.

Prior to issuance or use, documents including revisions thereto, shall be approved by the designated authority. A listing of all controlled documents identifying the current approved revision, or date, is maintained so personnel can readily determine the appropriate document for use.

6.2 Changes to Documents

Changes to documents, other than those defined in implementing procedures as minor changes, shall be reviewed and approved by the same organizations that performed the original review and approval unless other organizations are specifically designated. The reviewing organization shall have access to pertinent background data or information upon which to base their approval. Where temporary procedure changes are necessary during the operations phase, changes that clearly do not change the intent of the approved procedure may be implemented provided they are approved by two members of the staff knowledgeable in the areas affected by the procedures. Minor changes to documents, such as inconsequential editorial corrections, do not require that the revised documents receive the same review and approval as the original documents. To avoid a possible omission of a required review, the type of minor changes that do not require such a review and approval and the persons who can authorize such a classification shall be clearly delineated in implementing procedures.

6.3 NQA-1-1994 Commitment

In establishing provisions for document control, TVA commits to compliance with NQA-1-1994, Basic Requirement 6 and Supplement 6S-1.

SECTION 7 CONTROL OF PURCHASED MATERIAL, EQUIPMENT, AND SERVICES

TVA has established the necessary measures and governing procedures to control the procurement of items and services to assure conformance with specified requirements. Such control shall provide for the following as appropriate: source evaluation and selection, evaluation of objective evidence of quality furnished by the supplier, source inspection, audit, and examination of items or services.

7.1 Acceptance of Item or Service

TVA establishes and implements measures to assess the quality of purchased items and services, whether purchased directly or through contractors, at intervals and to a depth consistent with the item's or service's importance to safety, complexity, quantity and the frequency of procurement. Verification actions include testing, as appropriate, during design, fabrication and construction activities. Verifications occur at the appropriate phases of the procurement process, including, as necessary, verification of activities of suppliers below the first tier.

Measures to assure the quality of purchased items and services include the following, as applicable:

- Items are inspected, identified, and stored to protect against damage, deterioration, or misuse.
- Prospective suppliers of safety-related items and services are evaluated to assure that only qualified suppliers are used. Qualified suppliers are audited on a triennial basis. In addition, if a subsequent contract or a contract modification significantly enlarges the scope of or changes the methods or controls for activities performed by the same supplier, an audit of the modified requirements is conducted, thus starting a new triennial period. TVA may utilize audits conducted by outside organizations for supplier qualification provided that the scope and adequacy of the audits meet TVA requirements. Documented annual evaluations are performed for qualified suppliers to assure they continue to provide acceptable products and services. Industry programs, such as those applied by ASME, Nuclear Procurement Issues Committee (NUPIC), or other established utility groups, are used as input or the basis for supplier qualification whenever appropriate. The results of the reviews are promptly considered for effect on a supplier's continued qualification and adjustments made as necessary (including corrective actions, adjustments of supplier audit plans, and input to third party auditing entities, as warranted). In addition, results are reviewed periodically to determine if, as a whole, they constitute a significant condition adverse to quality requiring additional action.
- Provisions are made for accepting purchased items and services, such as source verification, receipt inspection, pre- and post-installation tests, certificates of conformance, and document reviews (including Certified Material Test Report/Certificate). Acceptance actions/documents should be established by the Purchaser with appropriate input from the Supplier and be completed to ensure that procurement, inspection, and test requirements, as applicable, have been satisfied before relying on the item to perform its intended safety function.

- Controls are imposed for the selection, determination of suitability for intended use (critical characteristics), evaluation, receipt and acceptance of commercial-grade services or items to assure they will perform satisfactorily in service in safety-related applications.
- If there is insufficient evidence of implementation of a QA program, the initial evaluation is of the existence of a QA program addressing the scope of services to be provided. The initial audit is performed after the supplier has completed sufficient work to demonstrate that its organization is implementing a QA program.

7.2 NQA-1-1994 Commitment

In establishing procurement verification controls, TVA commits to compliance with NQA-1-1994, Basic Requirement 7 and Supplement 7S-1, with the following clarifications and exceptions:

- NQA-1-1994, Supplement 7S-1
 - TVA considers that other 10 CFR 50 licensees, Authorized Nuclear Inspection Agencies, National Institute of Standards and Technology, or other State and Federal agencies which may provide items or services to TVA plants are not required to be evaluated or audited.
 - When purchasing commercial grade calibration services from a calibration laboratory, procurement source evaluation and selection measures need not be performed provided each of the following conditions are met:
 - (1) The purchase documents impose any additional technical and administrative requirements, as necessary, to comply with the TVA QA program and technical provisions. At a minimum, the purchase document shall require that the calibration certificate/report include identification of the laboratory equipment/standard used.
 - (2) The purchase documents require reporting as-found calibration data when calibrated items are found to be out-of-tolerance.
 - (3) A documented review of the supplier's accreditation shall be performed and shall include a verification of each of the following:
 - The calibration laboratory holds a domestic accreditation by the National Voluntary Laboratory Accreditation Program (NVLAP) or by the American Association for Laboratory Accreditation (A2LA) as recognized by NVLAP through the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA).
 - The accreditation is based on ANS/ISO/IEC 17025.

- The published scope of accreditation for the calibration laboratory covers the necessary measurement parameters, ranges, and uncertainties.

For Section 8.1, TVA considers documents that may be stored in approved electronic media under TVA or vendor control and not physically located on the plant site but which are accessible from the respective nuclear facility site as meeting the NQA-1 requirement for documents to be available at the site. Following completion of the construction period, sufficient as-built documentation will be turned over to TVA to support operations. The TVA records management system will provide for timely retrieval of necessary records.

In lieu of the requirements of Section 10, Commercial Grade Items, controls for commercial grade items and services are established in TVA documents using 10 CFR 21 and the guidance of EPRI NP-5652 as discussed in Generic Letter 89-02 and Generic Letter 91-05.

For commercial grade items, special quality verification requirements are established and described in TVA documents to provide the necessary assurance an item will perform satisfactorily in service. The TVA documents address determining the critical characteristics that ensure an item is suitable for its intended use, technical evaluation of the item, receipt requirements, and quality evaluation of the item.

TVA will also use other appropriate approved regulatory means and controls to support TVA commercial grade dedication activities. One example of this is NRC Regulatory Issue Summary 2002-22. TVA will assume 10 CFR 21 reporting responsibility for all items that TVA dedicates as safety-related.

SECTION 8 IDENTIFICATION AND CONTROL OF MATERIALS, PARTS, AND COMPONENTS

TVA has established the necessary measures and governing procedures to identify and control items to prevent the use of incorrect or defective items. This includes controls for consumable materials and items with limited shelf life. The identification of items is maintained throughout fabrication, erection, installation and use so that the item can be traced to its documentation, consistent with the item's effect on safety. Identification locations and methods are selected so as not to affect the function or quality of the item.

8.1 NQA-1-1994 Commitment

In establishing provisions for identification and control of items, TVA commits to compliance with NQA-1-1994, Basic Requirement 8 and Supplement 8S-1.

SECTION 9 CONTROL OF SPECIAL PROCESSES

TVA has established the necessary measures and governing procedures to assure that special processes that require interim process controls to assure quality, such as welding, heat treating, and nondestructive examination, are controlled. These provisions include assuring that special processes are accomplished by qualified personnel using qualified procedures and equipment. Personnel are qualified and special processes are performed in accordance with applicable codes, standards, specifications, criteria or other specially established requirements. Special processes are those where the results are highly dependent on the control of the process or the skill of the operator, or both, and for which the specified quality cannot be fully and readily determined by inspection or test of the final product.

9.1 NQA-1-1994 Commitment

In establishing measures for the control of special processes, TVA commits to compliance with NQA-1-1994, Basic Requirement 9 and Supplement 9S-1.

SECTION 10 INSPECTION

TVA has established the necessary measures and governing procedures to implement inspections that assure items, services and activities affecting safety meet established requirements and conform to applicable documented specifications, instructions, procedures, and design documents. Inspection may also be applied to items, services and activities affecting plant reliability and integrity. Types of inspections may include those verifications related to procurement, such as source, in-process, final, and receipt inspection, as well as construction, installation, and operations activities. Inspections are carried out by properly qualified persons independent of those who performed or directly supervised the work. Inspection results shall be documented.

Inspection Program

The inspection program establishes inspections (including surveillance of processes), as necessary to verify quality: (1) at the source of supplied items or services, (2) in-process during fabrication at a Supplier's facility or at a Company facility, (3) for final acceptance of fabricated and/or installed items during construction, (4) upon receipt of items for a facility, as well as (5) during maintenance, modification, in-service, and operating activities.

The inspection program establishes requirements for planning inspections, such as the group or discipline responsible for performing the inspection, where inspection hold points are to be applied, determining applicable acceptance criteria, the frequency of inspection to be applied, and identification of special tools needed to perform the inspection. Inspection planning is performed by personnel qualified in the discipline related to the inspection and include qualified inspectors or engineers. Inspection plans are based on, as a minimum, the importance of the item to the safety of the facility, the complexity of the item, technical requirements to be met, and design specifications. Where significant changes in inspection activities for the facilities are to occur, management responsible for the inspection programs evaluate the resource and planning requirements to ensure effective implementation of the inspection program.

Inspection program documents establish requirements for performing the planned inspections, and documenting required inspection information such as: reject, acceptance, and re-inspection results and the person(s) performing the inspection.

Inspection results are documented by the inspector, reviewed by authorized personnel qualified to evaluate the technical adequacy of the inspection results, and controlled by instructions, procedures, and drawings.

Inspector Qualification

TVA has established qualification programs for personnel performing quality inspections. The qualification program requirements are described in Section 2 of this QAPD. These qualification programs are applied to individuals performing quality inspections regardless of the functional group where they are assigned.

10.1 NQA-1-1994 Commitment / Exceptions

In establishing inspection requirements, TVA commits to compliance with NQA-1-1994, Basic Requirement 10, Supplement 10S-1 and Subpart 2.4, with the clarification that follows below. In addition, TVA commits to compliance with the requirements of Subparts 2.5 and 2.8 for establishing appropriate inspection requirements.

- Subpart 2.4 commits TVA to IEEE 336-1985. IEEE 336-1985 refers to IEEE 498-1985. Both IEEE 336 -1985 and IEEE 498-1985 use the definition of "Safety Systems Equipment" from IEEE 603-1980. TVA commits to the definition of Safety Systems Equipment in IEEE 603- 1980, but does not commit to the balance of that standard. This definition is only applicable to equipment in the context of Subpart 2.4.
- An additional exception to Subpart 2.4 is contained in Section 12 of this QAPD.
- Where inspections at the operating facility are performed by persons within the same organization (e.g. Maintenance group), TVA takes exception to the requirements of NQA-1-1994, Supplement 10S-1, Section 3.1; the inspectors report to the quality control management while performing those inspections.

SECTION 11 TEST CONTROL

TVA has established the necessary measures and governing procedures to demonstrate that items subject to the provisions of this QAPD will perform satisfactorily in service, that the plant can be operated safely and as designed, and that the coordinated operation of the plant as a whole is satisfactory. These programs include criteria for determining when testing is required, such as proof tests before installation, pre-operational tests, post-maintenance tests, post-modification tests, in-service tests, and operational tests (such as surveillance tests required by Plant Technical Specifications), to demonstrate that performance of plant systems is in accordance with design. Programs also include provisions for establishing and adjusting test schedules and maintaining status for periodic or recurring tests. Tests are performed according to applicable procedures that include, consistent with the effect on safety, (1) instructions and prerequisites to perform the test, (2) use of proper test equipment, (3) acceptance criteria, and (4) mandatory verification points as necessary to confirm satisfactory test completion. Test results are documented and evaluated by the organization performing the test and reviewed by a responsible authority to assure that the test requirements have been satisfied. If acceptance criteria are not met, re-testing is performed as needed to confirm acceptability following correction of the system or equipment deficiencies that caused the failure.

The initial start-up test program is planned and scheduled to permit safe fuel loading and start-up; to increase power in safe increments; and to perform major testing at specified power levels. If tests require the variation of operating parameters outside of their normal range, the limits within which such variation is permitted will be prescribed. The scope of the testing demonstrates, insofar as practicable, that the plant is capable of withstanding the design transients and accidents. For new facility construction, the suitability of facility operating procedures is checked to the maximum extent possible during the pre-operational and initial start-up test programs.

The tests are performed and results documented in accordance with applicable technical and regulatory requirements including those described in the Technical Specifications and SAR. The test programs ensure appropriate retention of test data in accordance with the records requirements of this QAPD. The personnel performing or evaluating tests are qualified in accordance with the requirements established in Section 2 of this QAPD.

11.1 NQA-1-1994 Commitment

In establishing provisions for testing, TVA commits to compliance with NQA-1-1994, Basic Requirement 11 and Supplement 11S-1.

11.2 NQA-1-1994 Commitment for Computer Program Testing

TVA establishes and implements provisions to assure that computer software used in applications affecting safety is prepared, documented, verified and tested, and used such that the expected output is obtained and configuration control maintained. To this end TVA commits to compliance with the requirements of NQA-1-1994, Supplement 11S-2 and Subpart 2.7 to establish the appropriate provisions.

SECTION 12 CONTROL OF MEASURING AND TEST EQUIPMENT

TVA has established the necessary measures and governing procedures to control the calibration, maintenance, and use of measuring and test equipment (M&TE) that provides information important to safe plant operation. The provisions of such procedures cover equipment such as indicating and actuating instruments and gages, tools, reference and transfer standards, and nondestructive examination equipment. The suppliers of commercial-grade calibration services shall be controlled as described in Section 7 of this QAPD.

Installed Instrument and Control Devices

For the operations phase of the facilities, the TVA has established and implements procedures for the calibration and adjustment of instrument and control devices installed in the facility. The calibration and adjustment of these devices is accomplished through the facility maintenance programs to ensure the facility is operated within design and technical requirements. Appropriate documentation will be maintained for these devices to indicate the control status, when the next calibration is due, and identify any limitations on use of the device.

12.1 NQA-1-1994 Commitment / Exceptions

In establishing provisions for control of measuring and test equipment, TVA commits to compliance with NQA-1-1994, Basic Requirement 12 and Supplement 12S-1 with the following clarification and exception:

- The out of calibration conditions described in paragraph 3.2 of Supplement 12S-1 refers to when the M&TE is found out of the required accuracy limits (i.e. out of tolerance) during calibration.
- Measuring and test equipment are not required to be marked with the calibration status where it is impossible or impractical due to equipment size or configuration (such as the label will interfere with operation of the device) provided the required information is maintained in suitable documentation traceable to the device. This exception also applies to the calibration labeling requirement stated in NQA-1-1994, Subpart 2.4, Section 7.2.1 (ANSI/IEEE Std. 336-1985).

SECTION 13 HANDLING, STORAGE, AND SHIPPING

TVA has established the necessary measures and governing procedures to control the handling, storage, packaging, shipping, cleaning, and preservation of items to prevent inadvertent damage or loss, and to minimize deterioration. These provisions include specific procedures, when required to maintain acceptable quality of the items important to the safe operations of the plant. Items are appropriately marked and labeled during packaging, shipping, handling and storage to identify, maintain, and preserve the item's integrity and indicate the need for special controls. Special controls (such as containers, shock absorbers, accelerometers, inert gas atmospheres, specific moisture content levels and temperature levels) are provided when required to maintain acceptable quality.

Special or additional handling, storage, shipping, cleaning and preservation requirements are identified and implemented as specified in procurement documents and applicable procedures. Where special requirements are specified, the items and containers (where used) are suitably marked.

Special handling tools and equipment shall be used and controlled as necessary to ensure safe and adequate handling. Special handling tools and equipment shall be inspected and tested at specified time intervals and in accordance with procedures to verify that the tools and equipment are adequately maintained.

Operators of special handling and lifting equipment shall be experienced or trained in the use the equipment. During the operational phase, TVA establishes and implements controls over hoisting, rigging and transport activities to the extent necessary to protect the integrity of the items involved, as well as potentially affected nearby structures and components. Where required, TVA complies with applicable hoisting, rigging and transportation regulations and codes.

13.1 Housekeeping

Housekeeping practices are established to account for conditions or environments that could affect the quality of structures, systems and components within the plant. This includes control of cleanness of facilities and materials, fire prevention and protection, disposal of combustible material and debris, control of access to work areas, protection of equipment, radioactive contamination control and storage of solid radioactive waste. Housekeeping practices help assure that only proper materials, equipment, processes and procedures are used and that the quality of items is not degraded. Necessary procedures or work instructions, such as for electrical bus and control center cleaning, cleaning of control consoles, and radioactive decontamination are developed and used.

13.2 NQA-1-1994 Commitment / Exceptions

In establishing provisions for handling, storage and shipping, TVA commits to compliance with NQA-1-1994, Basic Requirement 13 and Supplement 13S-1. TVA also commits, during the construction and pre-operational phase of the plant, to compliance with the requirements of NQA-1-1994, Subpart 2.1, Subpart 2.2, and Subpart 3.2, Appendix 2.I, with the clarifications and exceptions shown below:

NQA-1-1994, Subpart 2.2

- Subpart 2.2, section 6.6, "Storage Records:" This section requires written records be prepared containing information on personnel access. As an alternative to this requirement, TVA documents establish controls for storage areas that describe those authorized to access areas and the requirements for recording access of personnel. However, these records of access are not considered quality records and will be retained in accordance with the administrative controls of the applicable plant.
- Subpart 2.2, section 7.1 refers to Subpart 2.15 for requirements related to handling of items. The scope of Subpart 2.15 includes hoisting, rigging and transporting of items for nuclear power plants during construction.

NQA-1-1994, Subpart 3.2

- Subpart 3.2, Appendix 2.1: Only section 3 precautions, which address the use of alkaline cleaning compounds and chelating agents that will be used in conjunction with the cleaning activities under Subpart 2.1, sections 8.2.2 and 8.2.3, are committed to in accordance with Regulatory Guide 1.37.

SECTION 14 INSPECTION, TEST, AND OPERATING STATUS

TVA has established the necessary measures and governing procedures to identify the inspection, test, and operating status of items and components subject to the provisions of this QAPD in order to maintain personnel and reactor safety and avoid inadvertent operation of equipment. Where necessary to preclude inadvertent bypassing of inspections or tests, or to preclude inadvertent operation, these measures require the inspection, test or operating status be verified before release, fabrication, receipt, installation, test or use. These measures also establish the necessary authorities and controls for the application and removal of status indicators or labels.

In addition, temporary design changes (temporary modifications), such as temporary bypass lines, electrical jumpers and lifted wires, and temporary trip-point settings, are controlled by procedures that include requirements for appropriate installation and removal, independent/concurrent verifications and status tracking.

The administrative procedures also describe the measures taken to control altering the sequence of required tests, inspections, and other operations. The review and approval for these actions is subject to the same control as taken during the original review and approval of tests, inspections, and other operations.

14.1 NQA-1-1994 Commitment

In establishing measures for control of inspection, test and operating status, TVA commits to compliance with NQA-1-1994, Basic Requirement 14.

SECTION 15 NONCONFORMING MATERIALS, PARTS, OR COMPONENTS

TVA has established the necessary measures and governing procedures to control items, including services, which do not conform to specified requirements to prevent inadvertent installation or use. Controls provide for identification, documentation, evaluation, segregation when practical, and disposition of nonconforming items, and for notification to affected organizations. Controls are provided to address conditional release of nonconforming items for use on an at risk basis prior to resolution and disposition of the nonconformance, including maintaining identification of the item and documenting the basis for such release. Conditional release of nonconforming items for installation requires the approval of the designated management. Nonconformances are corrected or resolved prior to depending on the item to perform its intended safety function. Nonconformances are evaluated for impact on operability of quality structures, systems, and components to assure that the final condition does not adversely affect safety, operation, or maintenance of the item or service. Nonconformances to design requirements dispositioned repair or use-as-is, shall be subject to design control measures commensurate with those applied to the original design. Nonconformance dispositions are reviewed for adequacy, analysis of quality trends, and reports provided to the designated management. Significant trends are reported to management in accordance with TVA procedures, regulatory requirements, and industry standards.

15.1 Reporting Program

TVA will establish the necessary measures and governing procedures that implement a reporting program which conforms to the requirements of 10 CFR 52, 10 CFR 50.55(e) and/or 10 CFR 21 during construction and 10 CFR 21 during operations.

15.2 NQA-1-1994 Commitment

In establishing measures for nonconforming materials, parts, or components, TVA commits to compliance with NQA-1-1994, Basic Requirement 15, and Supplement 15S-1.

SECTION 16 CORRECTIVE ACTION

TVA has established the necessary measures and governing procedures to promptly identify, control, document, classify and correct conditions adverse to quality. TVA procedures assure that corrective actions are documented and initiated following the determination of conditions adverse to quality in accordance with regulatory requirements and applicable quality standards. TVA procedures require personnel to identify known conditions adverse to quality. When complex issues arise where it cannot be readily determined if a condition adverse to quality exists, TVA documents establish the requirements for documentation and timely evaluation of the issue. Reports of conditions adverse to quality are analyzed to identify trends. Significant conditions adverse to quality and significant adverse trends are documented and reported to responsible management. In the case of a significant condition adverse to quality, the cause is determined and actions to preclude recurrence are taken.

In the case of suppliers working on safety-related activities, or other similar situations, the licensee may delegate specific responsibilities of the Corrective Action Program but the licensee maintains responsibility for the program's effectiveness.

16.1 Reporting Program

TVA has in-place the necessary measures and governing procedures that implement a program to identify, evaluate and report defects and non-compliances in accordance with 10 CFR 50.55(e) and/or 10 CFR Part 21, as applicable. Such a reporting program applies to safety-related activities and services performed by TVA and/or TVA suppliers / sub-suppliers providing input to the COL application development.

16.2 NQA-1-1994 Commitment

In establishing provisions for corrective action, TVA commits to compliance with NQA-1-1994, Basic Requirement 16.

SECTION 17 QUALITY ASSURANCE RECORDS

TVA shall establish the necessary measures and governing procedures to ensure that sufficient records of items and activities affecting quality are developed, reviewed, approved, issued, used, and revised to reflect completed work. The provisions of such procedures establish the scope of the records retention program for TVA and include requirements for records administration, including receipt, preservation, retention, storage, safekeeping, retrieval, access controls, user privileges, and final disposition.

17.1 Record Retention

Measures are required to be established that ensure that sufficient records of completed items and activities affecting quality are appropriately stored. Such records and their retention times are defined in appropriate procedures. In all cases where state, local, or other agencies have more restrictive requirements for record retention, those requirements will be met.

17.2 Electronic Records

When using electronic records storage and retrieval systems, TVA complies with NRC guidance Generic Letter 88-18, "Plant Record Storage on Optical Disks." TVA WILL manage the storage of QA Records in electronic media consistent with the intent of RIS 2000-18 and associated NIRMA Guidelines TG 11-1998, TG15-1998, TG16-1998, and TG21-1998.

17.3 NQA-1-1994 Commitment / Exceptions

In establishing provisions for records, TVA commits to compliance with NQA-1-1994, Basic Requirement 17 and Supplement 17S-1, with the following clarifications and exceptions:

- NQA-1-1994, Supplement 17S-1
 - Supplement 17S-1, section 4.2(b) requires records to be firmly attached in binders or placed in folders or envelopes for storage in steel file cabinets or on shelving in containers. For hard-copy records maintained by TVA, the records are suitably stored in steel file cabinets or on shelving in containers, except that methods other than binders, folders or envelopes may be used to organize the records for storage.

SECTION 18 AUDITS

TVA has established the necessary measures and governing procedures to implement audits to verify that activities covered by this QAPD are performed in conformance with the requirements established. The audit programs are themselves reviewed for effectiveness as a part of the overall audit process.

18.1 Performance of Audits

Internal audits of selected aspects of licensing, design, construction phase and operating activities are performed with a frequency commensurate with safety significance and in a manner which assures that audits of safety-related activities are completed. During the early portions of NGDC activities, audits will focus on areas including, but not limited to, site investigation, procurement, and corrective action. Functional areas of an organization's QA program for auditing include at a minimum verification of compliance and effectiveness of implementation of internal rules, procedures (e.g., operating, design, procurement, maintenance, modification, refueling, surveillance, test, security, radiation control procedures, and the emergency plan), Technical Specifications, regulations and license conditions, programs for training, retraining, qualification and performance of operating staff, corrective actions, and observation of performance of operating, refueling, maintenance and modification activities, including associated record keeping. The audits are scheduled on a formal preplanned audit schedule. The audit system is reviewed periodically and revised as necessary to assure coverage commensurate with current and planned activities. Additional audits may be performed as deemed necessary by management. The scope of the audit is determined by the quality status and safety importance of the activities being performed. These audits are conducted by trained personnel not having direct responsibilities in the area being audited and in accordance with preplanned and approved audit plans or checklists, under the direction of a qualified lead auditor and the cognizance of the QAPM.

TVA is responsible for conducting periodic internal and external audits. Internal audits are conducted to determine the adequacy of programs and procedures (by representative sampling), and to determine if they are meaningful and comply with the overall QAPD. External audits determine the adequacy of supplier and contractor quality assurance program.

The results of each audit are reported in writing to the responsible executive responsible for the NGDC or designee, as appropriate. Additional internal distribution is made to other concerned management levels in accordance with approved procedures.

Management responds to all audit findings and initiates corrective action where indicated. Where corrective action measures are indicated, documented follow-up of applicable areas through inspections, review, re-audits, or other appropriate means is conducted to verify implementation of assigned corrective action.

Internal Audits

a. Internal audits of organization and facility activities, conducted prior to placing the facility in operation, should be performed in such a manner as to assure that an audit of all applicable QA program elements is completed for each functional area at least once each year or at least once

during the life of the activity, whichever is shorter. Internal audits of activities, conducted after placing the facility in operation, should be performed in such a manner as to assure that an audit of all applicable QA program elements is completed for each functional area within a period of two years.

b. Internal audit frequencies of well established activities, conducted after placing the facility in operation, may be extended one year at a time beyond the above two-year interval based on the results of an annual evaluation of the applicable functional area and objective evidence that the functional area activities are being satisfactorily accomplished. The evaluation should include a detailed performance analysis of the functional area based upon applicable internal and external source data and due consideration of the impact of any function area changes in responsibility, resources or management. However, the internal audit frequency interval should not exceed a maximum of four years. If an adverse trend is identified in the applicable functional area, the extension of the internal audit frequency interval should be rescinded and an audit scheduled as soon as practicable.

During the operations phase audits are performed at a frequency commensurate with the safety significance of the activities and in such a manner to assure audits of all applicable QA program elements are completed within a period of two years. These audits will include, as a minimum, activities in the following areas:

- (1) The conformance of facility operation to provisions contained within the Technical Specifications and applicable license conditions including administrative controls.
- (2) The performance, training, and qualifications of the facility staff.
- (3) The performance of activities required by the QAPD to meet the criteria of 10 CFR 50, Appendix B.
- (4) The Fire Protection Program and implementing procedures. A fire protection equipment and program implementation inspection and audit utilizing either a qualified off-site licensed fire protection engineer or an outside qualified fire protection consultant.
- (5) Other activities and documents considered appropriate by the CNO.

Audits may also be used to meet the periodic review requirements of the code for the Security, Emergency Preparedness, and Radiological Protection programs within the provisions of the applicable code.

Internal audits include verification of compliance and effectiveness of the administrative controls established for implementing the requirements of this QAPD; regulations and license provisions; provisions for training, retraining, qualification, and performance of personnel performing activities covered by this QAPD; corrective actions taken following abnormal occurrences; and, observation of the performance of construction, fabrication, operating, refueling, maintenance and modification activities including associated record keeping.

c. Audits of suppliers of safety-related components and/or services are conducted as described in Section 7.1.

18.2 NQA-1-1994 Commitment

In establishing the independent audit program, TVA commits to compliance with NQA-1-1994, Basic Requirement 18 and Supplement 18S-1.

PART III NON-SAFETY-RELATED SSC QUALITY CONTROL

SECTION 1 Non-safety Related SSCs - Significant Contributors to Plant Safety

Specific program controls are applied to non-safety related SSCs, for which 10 CFR 50, Appendix B is not applicable, that are significant contributors to plant safety. The specific program controls consistent with applicable sections of the QAPD are applied to those items in a selected manner, targeted at those characteristics or critical attributes that render the SSC a significant contributor to plant safety.

The following clarify the applicability of the QA Program to the non-safety-related SSCs and related activities, including the identification of exceptions to the QA Program described in Part II, Sections 1 through 18 taken for non-safety-related SSCs.

1.1 Organization

The verification activities described in this part may be performed by the TVA line organization, the QA organization described in Part II is not required to perform these functions.

1.2 QA Program

TVA QA requirements for non-safety-related SSCs are contained in this QAPD and appropriate procedures. Suppliers of these SSCs or related services describe the quality controls applied in appropriate procedures, a new or separate QA program is not required.

1.3 Design Control

TVA shall establish design control measures to ensure that the contractually established design requirements are included in the design. These measures ensure that applicable design inputs are included or correctly translated into the design documents, and deviations from those requirements are controlled. Design verification is provided through the normal supervisory review of the designer's work.

1.4 Procurement Document Control

Procurement documents for items and services obtained by or for TVA shall include or reference documents describing applicable design bases, design requirements, and other requirements necessary to ensure component performance. The procurement documents are controlled to address deviations from the specified requirements.

1.5 Instructions, Procedures, and Drawings

TVA shall provide documents such as, but not limited to, written instructions, plant procedures, drawings, vendor technical manuals, and special instructions in work orders, to direct the performance of activities affecting quality. The method of instruction employed shall provide an appropriate degree of guidance to the personnel performing the activity to achieve acceptable functional performance of the SSC.

1.6 Document Control

TVA shall establish controls for the issuance and change of documents that specify quality requirements or prescribe activities affecting quality to ensure that correct documents are used. These controls include review and approval of documents, identification of the appropriate revision for use, and measures to preclude the use of superseded or obsolete documents.

1.7 Control of Purchased Items and Services

TVA shall establish measures, such as inspection of items or documents upon receipt or acceptance testing, to ensure that all purchased items and services conform to appropriate procurement documents.

1.8 Identification and Control of Purchased Items

TVA shall establish measures where necessary, to identify purchased items and preserve their functional performance capability. Storage controls take into account appropriate environmental, maintenance, or shelf life restrictions for the items.

1.9 Control of Special Processes

TVA shall establish process and procedure controls for special processes, including welding, heat treating, and nondestructive testing. These controls are based on applicable codes, standards, specifications, criteria, or other special requirements for the special process.

1.10 Inspection

TVA shall establish documented instructions to ensure necessary inspections are performed to verify conformance of an item or activity to specified requirements or to verify that activities are satisfactorily accomplished. These inspections may be performed by personnel in the line organization through the process that utilizes knowledgeable personnel to perform the verification function.

1.11 Test Control

TVA shall establish measures to identify required testing that demonstrates that equipment conforms to design requirements. These tests are performed in accordance with test instructions or procedures. The test results are recorded, and authorized individuals evaluate the results to ensure that test requirements are met.

1.12 Control of Measuring and Test Equipment (M&TE)

TVA shall establish measures to control M&TE use, and calibration and adjustment at specific intervals or prior to use.

1.13 Handling, Storage, and Shipping

TVA shall establish measures to control the handling, storage, cleaning, packaging, shipping, and preservation of items to prevent damage or loss and to minimize deterioration. These measures include appropriate marking or labels, and identification of any special storage or handling requirements.

1.14 Inspection, Test, and Operating Status

TVA shall establish measures to identify items that have satisfactorily passed required tests and inspections and to indicate the status of inspection, test, and operability as appropriate.

1.15 Control of Nonconforming Items

TVA shall establish measures to identify and control items that do not conform to specified requirements to prevent their inadvertent installation or use.

1.16 Corrective Action

TVA shall establish measures to ensure that failures, malfunctions, deficiencies, deviations, defective components, and nonconformances are properly identified, reported, and corrected.

1.17 Records

TVA shall establish measures to ensure records are prepared and maintained to furnish evidence that the above requirements for design, procurement, document control, inspection, and test activities have been met.

1.18 Audits

TVA shall establish measures for line management to periodically review and document the adequacy of the process and take any necessary corrective action, audits independent of line management are not required. Line management is

responsible for determining whether reviews conducted by line management or audits conducted by any organization independent of line management are appropriate. If performed, audits are conducted and documented to verify compliance with design and procurement documents, instructions, procedures, drawings, and inspection and test activities. Where the measures of this part (Part III) are implemented by the same programs, processes, or procedures as the comparable activities of Part II, the audits performed under the provisions of Part II may be used to satisfy the review requirements of this Section (Part III, Section 1.18).

SECTION 2 Non-safety-Related SSCs Credited for Regulatory Events

The following criteria applies to fire protection (10 CFR 50.48), anticipated transients without scram (ATWS) (10 CFR 50.62), the station blackout (SBO) (10 CFR 50.63) SSCs that are not safety related.

TVA shall implement quality requirements to the fire protection system in accordance with Regulatory Position 1.7, "Quality Assurance," in Regulatory Guide 1.189, "Fire Protection for Operating Nuclear Power Plants."

TVA shall implement the quality requirements to ATWS equipment in accordance with Generic Letter 85-06, "Quality Assurance Guidance for ATWS Equipment That Is Not Safety Related."

Regulatory Guide 1.155 is not applicable for the AP1000 design in accordance with certified design as shown in DCD Appendix 1A. Regulatory Guide 1.155 relates to the availability of safety related functions supported by AC power. Since AC power is not required to support the availability of safety-related functions, the guidance is not applicable.

PART IV REGULATORY COMMITMENTS

NRC Regulatory Guides and Quality Assurance Standards

This section identifies the NRC Regulatory Guides and the other quality assurance standards which have been selected to supplement and support the TVA QAPD. TVA commits to compliance with these standards to the extent described herein. Commitment to a particular Regulatory Guide or other QA standard does not constitute a commitment to the Regulatory Guides or QA standards that may be referenced therein.

Regulatory Guides:

Regulatory Guide 1.26, Revision 4, March 2007 - Quality Group Classifications and Standards for Water-, Steam-, and Radioactive-Waste-Containing Components of Nuclear Power Plants

Regulatory Guide 1.26 defines classification of systems and components.

TVA commits to the applicable regulatory position guidance provided in this regulatory guide for NGDC with the exception of Criteria C.1, C.1.a, C.1.b, and C.3. Refer to the Westinghouse AP1000 Design Control Document, Appendix 1A, or other plant design for a detailed discussion of these exceptions.

Regulatory Guide 1.29, Revision 4, March 2007 - Seismic Design Classification

Regulatory Guide 1.29 defines systems required to withstand a safe shutdown earthquake (SSE).

TVA commits to the applicable regulatory position guidance provided in this regulatory guide for NGDC with the exception of Criteria C.1.d, C.1.g, and C.1.n. Refer to the Westinghouse AP1000 Design Control Document, Appendix 1A, or other plant design 1A for a detailed discussion of these exceptions.

Regulatory Guide 1.37, Revision 1, March 2007 – Requirements for Cleaning of Fluid Systems and Associated Components of Water-Cooled Nuclear Power Plants

Regulatory Guide 1.37 provides guidance on specifying water quality and precautions related to the use of alkaline cleaning solutions and chelating agents.

TVA commits to the applicable regulatory position guidance provided in this regulatory guide for NGDC.

Standards:

ASME NQA-1-1994 Edition - Quality Assurance Requirements for Nuclear Facility Applications

TVA commits to NQA-1-1994, Parts I and II, as described in the foregoing sections of this document.


Nuclear Information and Records Management Association, Inc. (NIRMA) Technical Guides (TGs)

TVA commits to NIRMA TGs as described in Part II, Section 17 of this document.

APPENDIX 1 TVA QAPD FUNCTIONAL ORGANIZATIONAL CHART

APPENDIX A
 Page 1 of 2

TVA QAPD FUNCTIONAL ORGANIZATION

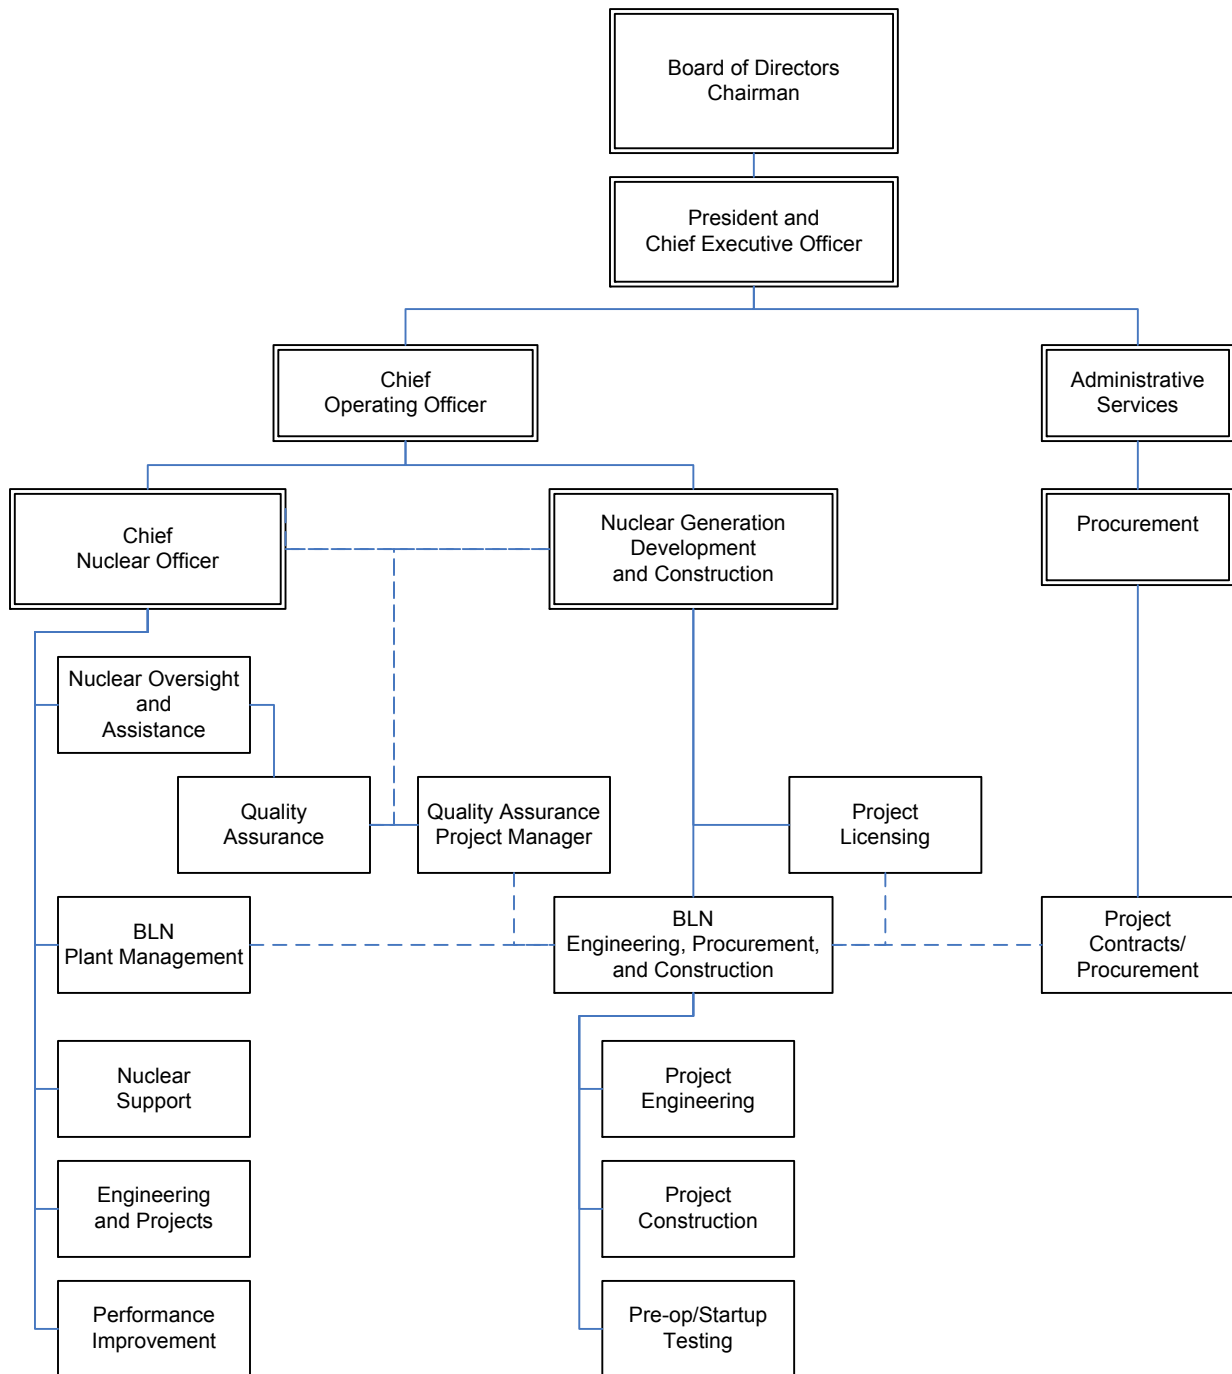

APPENDIX A
Page 2 of 2

TVA QAPD
FUNCTIONAL ORGANIZATION

