

# Flow Accelerated Corrosion Predictive Analysis Methodology

CHECWORKS  
Parameter

Allowable  
Input

Actual Values

Steam rate

Velocity

Steam quality

Op. Temperature

CONCLUSION: All values within parameters

# Flow Accelerated Corrosion

## Predictive Analysis Methodology

- FAC affects carbon steel components in steam cycle where process temperature exceeds 200° F
- North Anna and Surry use standardized programs to predict, detect, and monitor for FAC based on EPRI Guidelines
- EPRI CHECWORKS code is used to evaluate changes
- Conditions are bounded by CHECWORKS parameter ranges

## Flow Accelerated Corrosion Programatic Controls


- FAC wear rates based on predictive analysis and actual inspection results:
- Largest wear rate is ??? mils/year
- Largest wear rate found in ??????? system
- Inspection of susceptible lines will continue and compare predictions with inspection results

## Flow Accelerated Corrosion Conclusion

- North Anna and Surry have effective FAC program which monitors susceptible piping for degradation caused by FAC
- Inspection data is incorporated into the FAC program and thus the program is continuously fine tuned
- The FAC program will ensure that components susceptible to FAC will be managed during the period of extended operation



# Secondary Piping & Component Inspection AMA

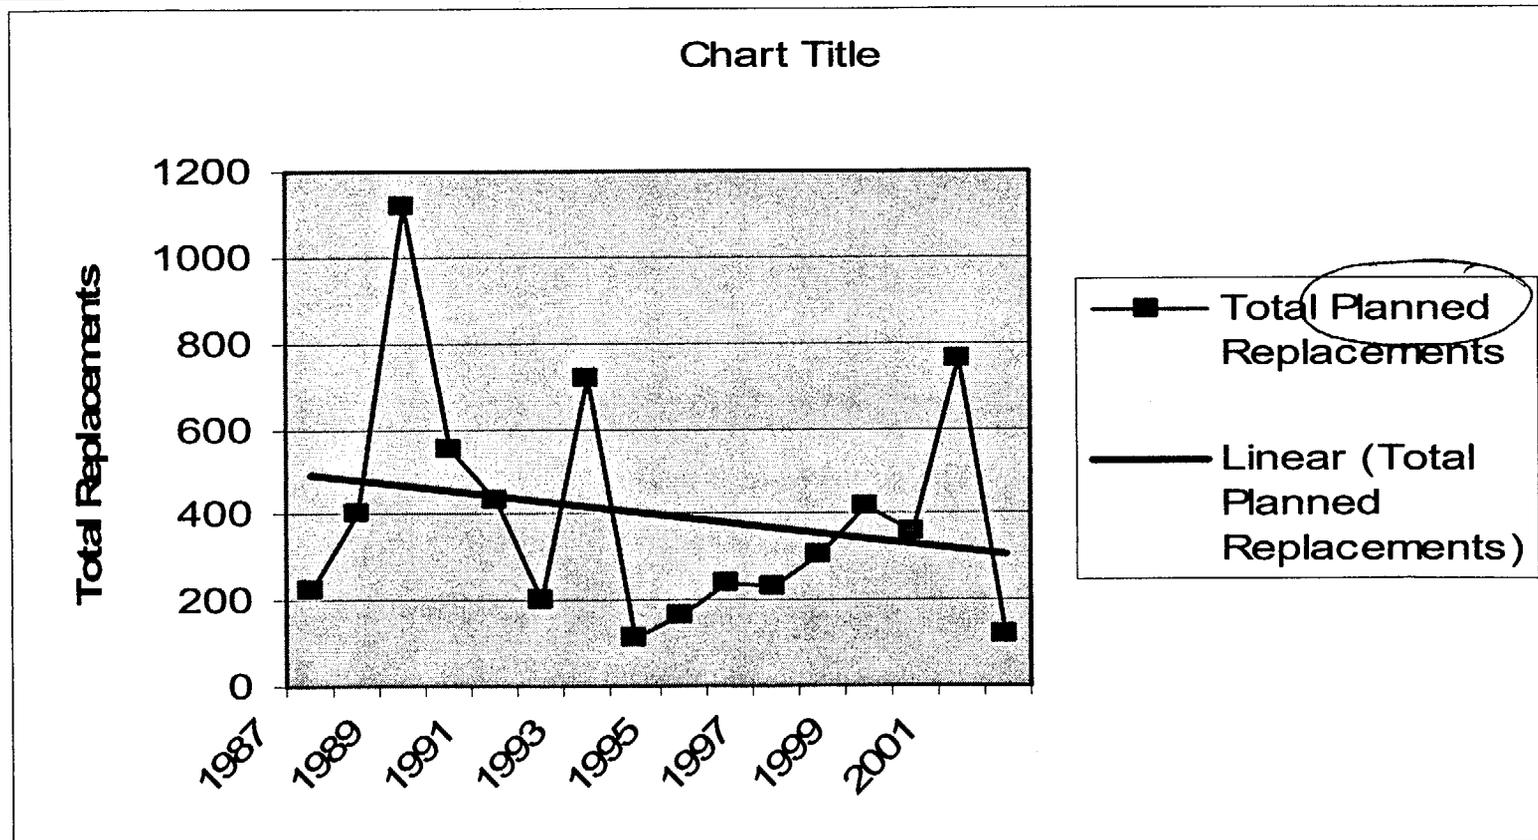

# Secondary Piping & Component Inspection AMA

