

U.S. NUCLEAR REGULATORY COMMISSION

MATERIALS LICENSE

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 36, 39, 40, and 70, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s). This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

Licensee 1. Health Physics Consultation 2. 637 Kingsborough Square Suite A Chesapeake, Virginia 23320	In accordance with the administrative amendment request dated January 23, 2009, 3. License number 45-19958-01 is amended in its entirety to read as follows: 4. Expiration date July 31, 2013 5. Docket No. 030-19600 Reference No.	
6. Byproduct, source, and/or special nuclear material A. Any byproduct material with atomic numbers 1 through 96 B. Any special nuclear material C. Cesium 137	7. Chemical and/or physical form A. Any B. Any C. Sealed Sources (AEA Technology Model 77302)	8. Maximum amount that licensee may possess at any one time under this license A. Not to exceed 10 millicuries per radionuclide and 100 millicuries total except as specified in Condition 20 B. Not to exceed 10 microcuries per radionuclide and 100 microcuries total except as specified in Condition 20 C. Not to exceed 200 millicuries per source
9. Authorized use: A. and B. For use in performing leak tests, sample analysis and instrument calibration as a commercial service for any person as defined in 10 CFR 30.4. C. For use in AEA Technology Model 773 beam calibrators for instrument calibration.		

CONDITIONS

10. Licensed material may be used or stored at the licensee's facilities located at 637 Kingsborough Square, Suite A, Chesapeake, Virginia and may be used at temporary job sites of the licensee anywhere in the Commonwealth of Virginia where the Commonwealth maintains jurisdiction for regulating the use of licensed material. Authorization for use of radioactive materials at job sites under exclusive Federal jurisdiction or in Agreement States shall be obtained from the appropriate regulatory agency.

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
45-19958-01Docket or Reference Number
030-19600

Amendment No. 10

11. Licensed material shall be used by, or under the supervision of, John W. Cure, III, Roy F. Heltzel, Jr., or Paul T. Sutcliffe.
12. The Radiation Safety Officer for this license is Roy F. Heltzel, Jr.
13. Sealed sources or detector cells containing licensed material shall not be opened or sources removed from source holders by the licensee.
14. The licensee shall not use licensed material in or on human beings.
15. The Licensee shall not acquire licensed material in a sealed source or device unless the source or device has been registered with the U.S. Nuclear regulatory Commission pursuant to 10 CFR 32.210 or equivalent regulations of an Agreement State.
16.
 - A. Sealed sources shall be tested for leakage and/or contamination at intervals not to exceed six months or at the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or under equivalent regulations of an Agreement State.
 - B. Notwithstanding Paragraph A of this Condition, sealed sources designed to primarily emit alpha particles shall be tested for leakage and/or contamination at intervals not to exceed 3 months.
 - C. In the absence of a certificate from a transferor indicating that a leak test has been made within the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or under equivalent regulations of an Agreement State, prior to the transfer, a sealed source received from another person shall not be put into use until tested and the test results received.
 - D. Sealed sources need not be tested if they contain only hydrogen-3; or they contain only a radioactive gas; or the half-life of the isotope is 30 days or less; or they contain not more than 100 microcuries of beta- and/or gamma-emitting material or not more than 10 microcuries of alpha-emitting material.
 - E. Sealed sources need not be tested if they are in storage and are not being used; however, when they are removed from storage for use or transferred to another person and have not been tested within the required leak test interval, they shall be tested before use or transfer. No sealed source shall be stored for a period of more than 10 years without being tested for leakage and/or contamination.
 - F. The leak test shall be capable of detecting the presence of 0.005 microcurie (185 becquerels) of radioactive material on the test sample. If the test reveals the presence of 0.005 microcurie (185 becquerels) or more of removable contamination, a report shall be filed with the U.S. Nuclear Regulatory Commission in accordance with 10 CFR 30.50(c)(2), and the source shall be removed immediately from service and decontaminated, repaired, or disposed of in accordance with Commission regulations.

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
45-19958-01Docket or Reference Number
030-19600

Amendment No. 10


- G. Tests for leakage and/or contamination, including leak test sample collection and analysis, shall be performed by the licensee or by other persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
- H. Records of leak test results shall be kept in units of microcuries and shall be maintained for 5 years.
17. The licensee shall conduct a physical inventory every six months, or at other intervals approved by the U.S. Nuclear Regulatory Commission, to account for all sources and/or devices received and possessed under the license. Records of inventories shall be maintained for 5 years from the date of each inventory and shall include the radionuclides, quantities, manufacturer's name and model numbers, and the date of the inventory.
18. The licensee is authorized to hold byproduct material with a physical half-life of less than or equal to 120 days for decay-in-storage before disposal without regard to its radioactivity if the licensee:
- A. Monitors byproduct material at the surface before disposal and determines that its radioactivity cannot be distinguished from the background radiation level with an appropriate radiation detection survey meter set on its most sensitive scale and with no interposed shielding; and
 - B. Removes or obliterates all radiation labels, except for radiation labels on materials that are within containers and that will be managed as biomedical waste after they have been released from the licensee; and
 - C. Maintains records of the disposal of licensed materials for 3 years. The record must include the date of disposal, the survey instrument used, the background radiation level, the radiation level measured at the surface of each waste container, and the name of the individual who performed the disposal.
19. In addition to the possession limits in Item 8, the licensee shall further restrict the possession of licensed material to quantities below the minimum limit specified in 10 CFR 30.35(d), 40.36(b), and 70.25(d) for establishing decommissioning financial assurance.
20. The licensee is authorized to transport licensed material in accordance with the provisions of 10 CFR Part 71, "Packaging and Transportation of Radioactive Material."

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
45-19958-01Docket or Reference Number
030-19600

Amendment No. 10

21. Except as specifically provided otherwise in this license, the licensee shall conduct its program in accordance with the statements, representations, and procedures contained in the documents, including any enclosures, listed below. The U.S. Nuclear Regulatory Commission's regulations shall govern unless the statements, representations, and procedures in the licensee's application and correspondence are more restrictive than the regulations.

- A. Application dated January 26, 2003 (ML030290222)
B. Letter dated January 7, 2004 (ML040130413)

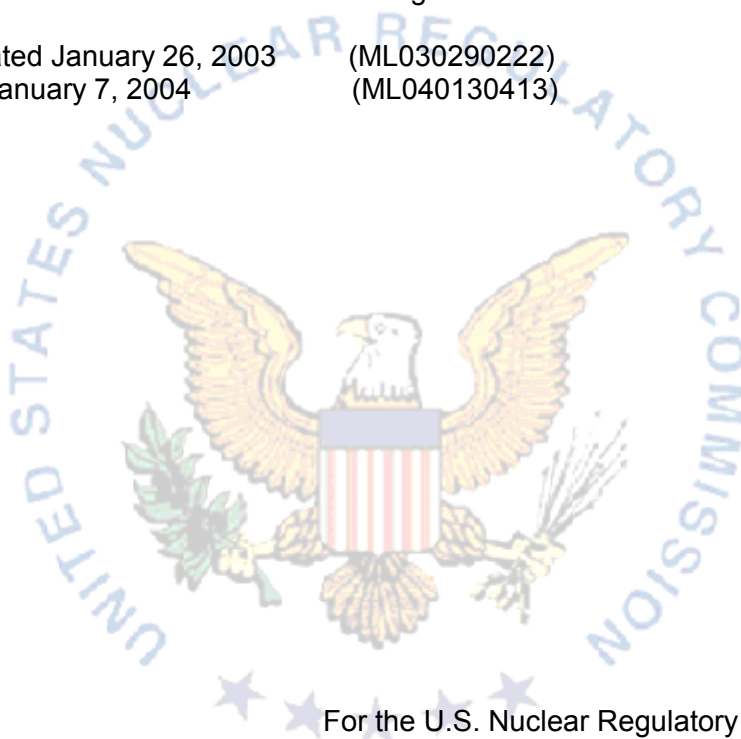

For the U.S. Nuclear Regulatory Commission

Date March 31, 2009

By

Original signed by Kathy Modes

Kathy Modes
Decommissioning Branch
Division of Nuclear Materials Safety
Region I
King of Prussia, Pennsylvania 19406