



NUCLEAR ENERGY INSTITUTE

Adrian P. Heymer
SENIOR DIRECTOR
NEW PLANT DEPLOYMENT
NUCLEAR GENERATION DIVISION

August 17, 2007

Mr. Nilesh C. Chokshi
Deputy Director
Division of Site and Environmental Review
Office of New Reactors
U.S. Nuclear Regulatory Commission
Washington, DC 20555-0001

Subject: Response to NRC Questions and Revised Industry White Paper "*Testing of Dynamic Soil Properties for Nuclear Power Plant COL Applications*"

Project Number: 689

Dear Mr. Chokshi:

Enclosed is the industry's response to the staff's questions regarding dynamic soils testing for new nuclear power plants. Also, a revised white paper on testing of dynamic soil properties is enclosed. This paper has been updated to reflect the presentation the industry provided at the May 31st meeting with the NRC. The industry believes that these documents describe an acceptable method to prioritize dynamic soils testing for COL applications.

If you have any questions on this letter or its enclosures, please contact Leslie Kass at (202) 739-8115; lck@nei.org.

Sincerely,

A handwritten signature in black ink, appearing to read "A. P. Heymer".

Adrian P. Heymer

Enclosures

c: Mr. Goutam Bagchi, NRC
Dr. Andrew J. Murphy, NRC
NRC Document Control Desk

D-15

Responses to NRC Staff Questions regarding Industry's Draft White Paper on Dynamic Soil Testing

1) Define a soil site quantitatively in terms of soil dynamic properties (e.g., shear wave velocity and/or shear wave velocity gradient) to make it clear what kind of soil/rock needs to have RC/TS testing. Furthermore, the paper needs to define hard rock, firm rock, competent rock and deep soil which were referred in the paper frequently with respect to the same criteria.

Response: The presentation given by industry on May 31 and the revised White Paper, no longer make a distinction between the number of tests required for soil sites or rock sites, consequently the definition of hard rock, firm rock, competent rock and deep soil is no longer germane to the question of how many dynamic soil tests are required to characterize a site.

2) What criteria will be used to determine the initial number of testing samples?

Response: The number of RCTS tests required to adequately characterize the dynamic properties of soils for a particular site is recognized to be site-specific. A presentation of the specific subsurface investigation and supporting laboratory analysis program will be made as a part of Chapter 2.5 of the COLA for each site.

3) Elaborate on what randomization processes will be used to demonstrate that limited initial sample testing will cover the variation when more sample testing results are available, or if a bounding analysis is used, the choices of the appropriate margin or bounding factor.

Response: The randomization and/or bounding techniques used to develop the number of tests required for a specific site will be presented as part of the narrative of subchapter 2.5.4.7 of the COLA for each site.

4) What measures will be taken to incorporate the final results? If the final testing results prove that initial testing results did not provide sufficient safety margins for site-specific soil dynamic properties, explain the potential impact on relevant calculations that are based on limited sample testing.

Response: An adequate number of dynamic testing of samples will be prioritized such that representative results are obtained for each stratum prior to the submission of the COLA. This prioritization process, which will be described in each COLA submittal, will be designed so as to minimize the probability that subsequent test results will dramatically change the results of dynamic modeling.

5) If possible, include a case study using limited soil sample testing to characterize the soil dynamic properties.

Response: Since the first COLA applications will be made in October, these applications will provide case studies upon which the results of subsequent filings can be judged.

White Paper

**Testing of Dynamic Soil Properties
for
Nuclear Power Plant COL Applications**

Prepared For

NUCLEAR ENERGY INSTITUTE

Revised: August 6, 2007

**Prepared by:
N. Guy Winebrenner, PE**

**MACTEC Engineering and Consulting, Inc.
3301 Atlantic Avenue
Raleigh, NC**

TABLE OF CONTENTS

1.0	Purpose.....	2
2.0	Introduction and Background	2
3.0	COL Application Requirements	2
4.0	Determination of Dynamic Properties	3
4.1	Laboratory Methods.....	4
4.2	Field Methods	6
4.3	Published Generic Curves.....	6
5.0	Site Characteristics	7
5.1	Rock Sites	7
5.2	Soil Sites	7
6.0	Conclusions.....	8
7.0	References.....	9

List of Figures

Figure 1	Example Graphs of Shear Modulus and Damping Ratio versus Strain (from EPRI, 1993).....	4
Figure 2	Schematic Drawing of Resonant Column/ Torsional Shear Apparatus (from Ni, 1987)	5

WHITE PAPER

TESTING OF DYNAMIC SOIL PROPERTIES FOR NUCLEAR POWER PLANT COL APPLICATIONS

EXECUTIVE SUMMARY

Several companies have notified the NRC of their intention to file COL applications. An important element of the COL application is the characterization of the dynamic properties of soils that will surround, underlie and support the Seismic Category I structures, systems and components (SSC) of the power plant. These dynamic properties are important inputs to SAR sections 2.5 on geology, seismology, and geotechnical and 3.7 seismic analysis and design.

Not all sites are equal with respect to the need for laboratory testing of the dynamic properties of soils. Hard rock sites, where all Category I and II structures are founded directly on competent rock (or material of similar dynamic characteristics), may not require any dynamic laboratory testing at all. On the other hand, a deep soil site with particularly heterogeneous soils may require twice as many dynamic tests as a more homogeneous soil site. The geological characteristics of the site should dictate the number of dynamic soil samples required to adequately profile the dynamic properties of soils as they might impact the safety aspects of the site.

This paper proposes a protocol for the testing of the dynamic properties of soils that will accommodate multiple COL projects in view of the limited available testing capacity, while providing sufficient dynamic property information for each site to enable the COL application to be accepted for review by the NRC. The remaining set of Resonant Column/Torsional Shear (RCTS) testing would be identified in the COL submittal and this remaining test information will be provided as supplemental information to the COL application.

WHITE PAPER

TESTING OF DYNAMIC SOIL PROPERTIES FOR NUCLEAR POWER PLANT COL APPLICATIONS

1.0 PURPOSE

This document provides a review of the requirements regulatory guidance regarding the determination of dynamic properties of soils at the COL site. It then evaluates field, laboratory and comparative methods to determine these key properties for use in dynamic analysis. Finally, it proposes a means to prioritize among sites so that laboratory testing is performed on those samples that are of the greatest importance in characterizing the impact of dynamic activity upon nuclear safety-related structures, systems and components (SSC) at the sites.

2.0 INTRODUCTION AND BACKGROUND

Currently the Nuclear Regulatory Commission (NRC) has received notice intent from several companies to file combined license applications for new nuclear power units. Field investigation and laboratory testing activities are currently underway for at least 13 of these sites. Approximately seven of these applications are slated to be filed with the NRC in the 4th Quarter of 2007. This unprecedented level of activity has resulted in a strain upon the utility, consulting, testing, quality assurance and regulatory resources involved in the new nuclear power plant planning process.

Although most of the tests required for the COL site characterization process can be performed by a significant number of commercial laboratories, certain tests are available from a very limited number of laboratory facilities. In particular, testing of soils for dynamic properties by the preferred Resonant Column/Torsional Shear testing methodology can currently be performed for COL projects by only two laboratories nationwide. This constraint has required applicants and their consultants to carefully evaluate the number of samples required for testing as well as to consider other methods to supplement the results from the laboratory tests to fully characterize the impact of dynamic soil characteristics on nuclear safety-related structures, systems and components (SSCs).

3.0 COL APPLICATION REQUIREMENTS

The NRC provides regulatory guidance to assist applicants in the development of COL applications to provide adequate information from which NRC staff can accurately assess the safety of the specified reactor design at the proposed site. Direction is given in Regulatory Guide (RG) 1.206 and RG 1.138 regarding the dynamic soil properties information to be presented as a part of the COL application.

- Chapter 2.5.4.7 of the Safety Analysis Report (SAR) (USNRC, 2007a) requires the applicant to:

Describe the response of soil and rock to dynamic loading, including the following information:

- (1) any investigations to determine the effects of prior earthquakes on the soils and rocks in the vicinity of the site, including evidence of liquefaction and sand cone formation
- (2) compressional and shear (P and S) wave velocity profiles, as determined from field seismic surveys (surface refraction and reflection and in-hole and cross-hole seismic explorations), including data and interpretation of the data
- (3) **results of dynamic tests in the laboratory on samples of the soil and rock (emphasis added)**

- Chapter 3.7.1.3 of the SAR requires the applicant to:
For each Seismic Category I structure, provide a description of the supporting media, including foundation embedment depth, depth of soil over bedrock, soil layering characteristics, dimensions of the structural foundation, total structural height, and **soil properties of each soil layer, such as shear wave velocity, shear modulus, soil material damping, and density.**
- Regulatory Guide 1.138 (USNRC, 2003) specifies that:
The dynamic testing program should include tests to determine the soil parameters **needed as input for reference analyses and soil structure interaction studies** as well as testing to **determine the dynamic strength characteristics** and liquefaction potential of soils.
- Regulatory Guide 1.138 further describes the required dynamic testing program as follows:
The basic parameters required as input for dynamic response analyses of soils include total mass density, relative density, Poisson's ratio, static soil strength, initial stress conditions, shear and compressional wave velocities, and the dynamic shear modulus and damping ratio. **The variation of strength, moduli, and damping with strain is also needed for such analyses.**

The context within which these data and these analyses are required specifically relates to the integrity of nuclear safety-related structures, systems and components (Seismic Category I and II), not the proposed plant in general.

4.0 DETERMINATION OF DYNAMIC PROPERTIES

Specific dynamic properties of soils, such as the shear modulus and damping ratio can be obtained directly through laboratory testing or indirectly through analysis of the results from field tests or from published Generic Curves. Multiple sources and methods can serve as an independent check to ensure that proper conclusions have been reached regarding these parameters.

4.1 Laboratory Methods

4.1.1 Resonant Column and Cyclic Triaxial Tests

RG 1.138 (USNRC, 2003) discusses the use of Cyclic Triaxial (CT) testing (ASTM D 3999) in combination with Resonant Column (RC) testing (ASTM D 4015) to determine the change in both Shear Modulus and the Damping Ratio with change in Strain. This is consistent with the recommendations made in the earlier (1978) version of this guide.

One disadvantage of the separate RC and CT test methodology is that the shear modulus and damping curves are developed from independent tests on two separate samples, rather than from the results of testing a single sample. When using two separate test systems and two discrete samples it may be difficult to achieve overlap between the results from the low-strain RC tests and the higher strain CT tests.

4.1.2 Resonant Column/Torsional Shear Test

Although not mentioned directly in RG 1.138, the combined Resonant Column / Torsional Shear (RCTS) test*, developed by the University of Texas at Austin is considered by many experts to be superior to the separate use of resonant column and cyclic triaxial tests to synthesize shear modulus reduction curves. This is the test methodology utilized in the 1993 study commissioned by EPRI to investigate methods for determining design basis ground motions (EPRI, 1993). The advantage of the RCTS methodology is that it can perform a sequential series of tests on the same specimen over a cyclic shearing range from about 10^{-4} % through 10^{-1} %. Examples of the results of this test are shown in Figure 1.

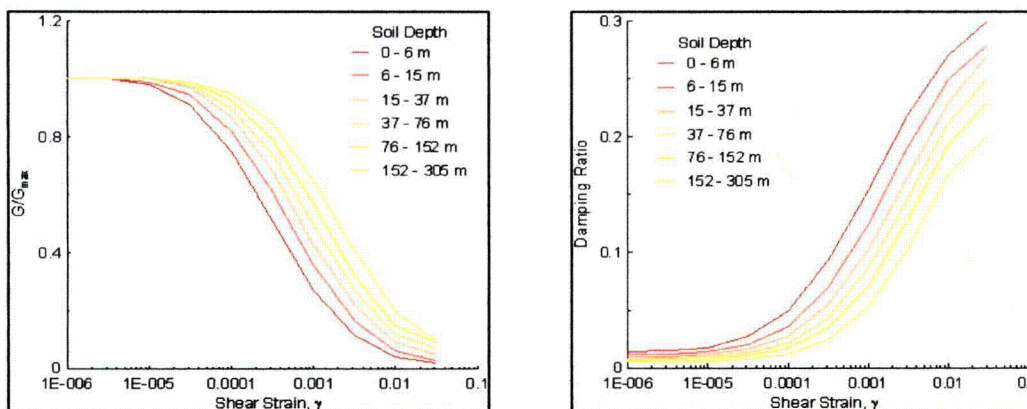


Figure 1 Example Graphs of Shear Modulus and Damping Ratio versus Strain (from EPRI, 1993)

The Standard Review Plan (USNRC 2007b) specifies that test procedures will be found adequate where:

* Where the word “test” or “tests” associated with the RCTS protocol is used in this paper, it is meant to designate the full complement of tests that are conducted on a particular sample, not a single test result.

In meeting the requirements of 10 CFR Parts 50 and 100, the description of properties of underlying materials is considered acceptable if **state-of-the-art methods** are used to determine the static and dynamic engineering properties of all foundation soils and rocks in the site area.

The RCTS test is being used by most of the COL applicants because it represents the current state-of-the-art and is assumed to provide more representative results for the critical shear modulus and damping ratio parameters.

The one drawback experienced with RCTS testing is the current lack of adequate testing capacity. Prior to 2007, this test apparatus could only be found at a few academic institutions, which generally had only a single apparatus each. The University of Texas at Austin had committed one of its three operational cells to COL testing, but the other two cells were already required to accommodate DOE programs and academic research. No commercial soils laboratory offered the combined RCTS test until late March 2007, when Fugro brought into production the first of four RCTS units it committed to the COL program. A second commercial lab has placed an order for three RCTS cells that are slated to be online by late June 2007. One utility has taken the initiative to commission the fabrication of two new RCTS cells to facilitate the required testing for its COL project. In addition to the limited number of test cells available, the complexity of this test protocol requires the expertise of specially trained technicians, which are also in limited availability.




Figure 2 Schematic Drawing of Resonant Column/Torsional Shear Apparatus (from Ni, 1987)

The University of Texas has licensed its design to a single test cell manufacturer in Houston, TX which can produce additional RCTS test cells in a minimum of six weeks, with an additional two weeks to calibrate and certify comparability of results with the UT cells. The complexity of the test apparatus (see Figure 2) is a major factor in both the cost of a new unit (approximately \$50,000) as well as the difficulty in achieving a Quality Assurance certification that is acceptable for nuclear safety-related testing (10 CFR 50 Appendix B).

A second factor, in addition to capacity, that is affecting the time schedule to obtain RCTS test results is the time it takes to complete a round of RCTS testing in order to produce the required Modulus Reduction and Damping Ratio curves. Experience to date has been approximately one week per each granular sample and up to two weeks for cohesive

samples (not including the time for analysis of test results and QA review). The combination of the long test duration with the limited number of available test cells has resulted in a potential inability to obtain results from all of the proposed RCTS tests prior to the planned filing dates for the first seven COL applications.

4.2 Field Methods

In situ measurement of shear wave velocity (V_s) can be accomplished by a variety of geophysical methods in prevalent use today. These include the results of crosshole testing, downhole, logging, suspension logging, seismic cone penetrometer (SCPT), and spectral analyses of surface waves (SASW). The low strain shear modulus can be calculated from V_s by the formula:

$$G_{\max} = V_s^2 * \rho$$

$$\rho = \gamma/g \text{ where } \gamma \text{ is the soil unit weight and } g \text{ is acceleration due to gravity}$$

Shear wave velocity data from these field geophysical tests are presented as they vary with depth. The values for V_s can be averaged over an appropriate interval (~5 feet) and utilized to calculate the G_{\max} for each soil interval.

4.3 Published Generic Curves

The technical literature includes studies dating back to the early 1970's (e.g. Seed and Idriss, 1970; Hardin and Drnevich, 1972) that present curves depicting the variance of Shear Modulus and Damping Ratio with shear strain for various types of soils. The pioneering work of Professor Seed and his colleagues (Seed et al, 1984) focuses on granular soils and the effect of confining pressure, while a later study (Sun, Golesorkhi and Seed, 1988) focuses on cohesive soils and the effect of plasticity index. Each of these studies provide the results of laboratory testing for a large variety of soil samples, along with classification of soil properties to enable the correlation of other soils to those tested.

Perhaps the best known of these studies is the five-volume study "Guidelines for Determining Design Basis Ground Motions" funded by EPRI (EPRI, 1993). This study provides well-developed documentation of both the field and laboratory methodology utilized to gather data and contains generic shear modulus reduction and damping ratio curves for dry sands, saturated sands and clays.

Professor Stewart of UCLA (Stewart et al, 2001) provides a table (Table 5.5) in which he cites criteria used by himself (Stewart and Baturay, 2001) and by Dr. Silva (Silva et al, 1999) to select modulus reduction and damping curves from among various published sources. Stewart indicates that, for most applications, the use of such published generic curves is the acceptable practice. The validity of this approach can be enhanced by the use of "bounding curves" as recommended by Constantino (Silva et al, 1996).

5.0 SITE CHARACTERISTICS

The geologic conditions underlying the site are a major factor in determining the extent of dynamic soils testing required to fully analyze the susceptibility of a nuclear power plant at a particular site to ground motion that could compromise the functionality of structures, systems or components that are designated Seismic Category I.

5.1 Rock Sites

More than half of the currently proposed sites for which new nuclear power plants are being proposed are underlain by shallow rock. At these sites, Category I structures are generally proposed to be founded directly upon competent rock. Structures other than Seismic Category I or Category II (those structures whose failure might compromise the integrity of a Category I SSC) might be founded directly upon native material (if determined to be acceptable) or engineered backfill or other types of foundations (piles or drilled shafts) might be employed.

Where fill material is required for side soil adjacent to Category I structures or as subfoundation material for Category II structures, this fill will be an engineered backfill, with specifications regarding gradation, lift thickness and in-place density of this material. In many cases, the existing weathered rock or soils will be excavated and replaced with fill material meeting specified gradation and soil classification requirements. Dynamic soil properties for this engineered backfill material may be determined from RCTS tests or taken from published generic curves such as those in EPRI, 1993.

5.2 Deep Soil Sites

Although more than half of the sites for which COL applications are slated to be filed in late 2007 are hard or firm rock sites, the majority of sites for which applications are planned in 2008 are deep soil sites. In these cases, the nuclear island and other Seismic Category I and II structures will be founded upon soil that may extend for several hundred feet or more before reaching competent bedrock. Adequate characterization of the dynamic properties of the underlying soil is essential to SSI and modeling of ground motion effects.

For a deep soil site, the number of dynamic testing samples required to adequately characterize the site is dependent upon both the horizontal and vertical homogeneity of the underlying soils. In general, more samples will be required along the vertical dimension to accurately profile the soil column than samples along the horizontal dimension. Some sites may have buried channels or other features that will require a greater number of samples along the horizontal dimension.

5.3 Site Investigation Programs

No two sites, whether rock or deep soil, present identical conditions regarding the ability to withstand static and dynamic loading upon the power plant structures. Consequently, a specific subsurface investigation plan must be prepared to address the particular features of the site. This plan will characterize the types of subsurface investigation techniques to be

used, the number, location and depth of borings or corings and the requisite number of both static and dynamic laboratory tests to adequately characterize the properties of materials underlying the site. Because of the unique nature of these investigations, there can no standard prescription for what constitutes an adequate number of samples for dynamic testing.

Although there is no exact formula to estimate the total number of RCTS tests to be performed, it is probable that, due to the large number of soil sites and the limited RCTS testing capacity, not all planned tests of dynamic soil properties will be able to be completed for every site prior to filing dates for the COL application. Consequently, a representative sample of tests may need to be conducted for each site, correlating the data gained from this testing with the results of field in situ testing and published generic curves. The remaining samples designated for dynamic soil testing can then be completed and these data filed as a supplement to the COL application. In the event that the follow-up testing raises issues that cannot be resolved with the information filed in the application, these issues will be thoroughly analyzed and the results presented to the NRC staff.

6.0 CONCLUSIONS

Based upon the requirements of the NRC for dynamic soil testing, the limited availability of RCTS test capacity and experienced technicians and the number of sites for which COLAs are proposed, Industry recommends that the following protocol be utilized:

To be submitted as part of the COLA filing:

- A detailed description of the Geotechnical Investigation, compliant with Reg Guides 1.132 and 1.138, to characterize the site will be provided in Subchapter 2.5.4.2;
- A description of the site-specific Sampling/Testing program developed to adequately characterize the dynamic properties of soils, in compliance with the requirements of Reg Guide 1.206 and NUREG 0800 specific to Subchapter 2.5.4.7, will be provided in Subchapter 2.5.4.7;
- The results of RCTS tests that were completed on representative samples prior to filing of the COLA will be included under Subchapter 2.5.4.7, along with a narrative explaining how these samples were chosen as representative and prioritized for testing;
- A description of the remaining samples selected for RCTS testing as well as a schedule for the completion of this testing and submission to the NRC in a supplemental filing will also be provided at the time of the COLA submission; and
- Subchapter 2.5.4.7 will include a comparison of the Shear Modulus and Damping Ratio from completed RCTS test data to the Generic Curves that were selected to represent dynamic properties of site soils as well as a narrative presenting the basis for selection of these curves and how the dynamic soil property values were selected for use in the dynamic analysis of safety-related SSC's.

To be submitted as a Supplemental Filing during the Docket Review Process:

- The test results from remaining RCTS tests completed after COLA submission;
- A revision of Subchapter 2.5.4.7, if necessary, to incorporate the results of the additional RCTS tests completed after the COLA docketing; and
- A narrative discussing the impact, if any, that the results of this additional dynamic testing has on the dynamic modeling results that were presented in the COLA filing. If this impact is significant, revisions of the models may be required.

7.0 REFERENCES

1. Constantino, Carl J. (1996). *Recommendations for Uncertainty Estimates in Shear Modulus Reduction and Hysteretic Damping Relationships*, Report to Brookhaven National Laboratory.
2. EPRI (1993). Electric Power Research Institute, "Guidelines for Determining Design Basis Ground Motions, Volume 1: Method and Guidelines for Estimating Earthquake Ground Motion in Eastern North America", EPRI TR-102293.
3. Hardin, B. O., and Drnevich, V. P. (1972), "Shear Modulus and Damping in Soils: Design Equations and Curves," *Journal of Soil Mechanics and Foundation Division*, ASCE, 98(SM7), pp. 667-692.
4. Ni, S-H. (1987, "Dynamic Properties of Sand Under True Triaxial Stress States from Resonant Column/Torsional Shear Tests," Ph.D Dissertation, The University of Texas at Austin, 421 pp.
5. Schnabel, P., Lysmer, J., and Seed, H.B. (1972). *SHAKE: A Computer Program for Earthquake Ground Response*. Earthquake Engineering Research Center Report No. UCB/EERC-72-12.
6. Seed, H.B., Idriss, I.M (1970).), *Soil Moduli and Damping Factors for Dynamic Response Analyses*, Earthquake Engineering Research Center Report No. UCB/EERC-70/10.
7. Seed, H.B., Wong, R.T., Idriss, I.M., Tokimatsu, K. (1984), "*Moduli and Damping Factors Dynamic Analyses of Cohesionless Soils*," Earthquake Engineering Research Center Report No. UCB/EERC-84/14.
8. Silva, W. J., and Lee, K. (1987), "*State-of-the-Art for Assessing Earthquake Hazards in the United States: WES RASCAL Code for Synthesizing Earthquake Ground Motions*," Miscellaneous Paper S-73-1, Report 24, U.S. Army Engineer Waterways Experiment Station, Vicksburg, MS.
9. Silva, W., N. Abrahamson, G. Toro, and C. Constantino (1996), "*Description and Validation of the Stochastic Ground Motion Model*," final report prepared for the

- Engineering Research and Applications Division, Department of Nuclear Energy, Brookhaven National Laboratory, Associated Universities, Inc., Upton, New York.
10. Silva, W.J., Li, S., Darragh, R., and Gregor, N. (1999), "*Surface Geology Based Strong Motion Amplification Factors for the San Francisco Bay and Los Angeles Areas*," Report to Pacific Earthquake Engineering Research Center.
 11. Stewart, Jonathan P.; Chiou, Shyh-Jeng; Bray, Jonathan D. (2001), "*Ground Motion Evaluation Procedures for Performance-Based Design*," Pacific Earthquake Engineering Research Center, PEER Report 2001/09.
 12. Stewart, J.P., and Baturay, M.B. (2001). "Uncertainties and Residuals in Ground Motion Estimates at Soil Sites," *Proc. 4th Int. Conf. Recent Advances in Geotech. Eqk. Engrg. Soil Dyn.*, San Diego, CA. Paper 3.14.
 13. Sun, Joseph I.; Golesorkhi, Ramin; Seed, H. Bolton (1988), "*Dynamic Moduli and Damping Ratios for Cohesive Soils*," Earthquake Engineering Research Center Report No. UCB/EERC-88/15.
 14. USNRC (2003), US Nuclear Regulatory Commission, *Laboratory Investigations of Soils and Rocks for Engineering Analysis and Design of Nuclear Power Plants*, Regulatory Guide 1.138 Rev 2.
 15. USNRC (2007a). US Nuclear Regulatory Commission, *Combined License Applications for Nuclear Power Plants (LWR Edition)*, Regulatory Guide 1.206 Rev 0.
 16. USNRC (2007b). US Nuclear Regulatory Commission, *Standard Review Plan*, NUREG-0800 Rev 3.