



**Freehold
Radiology
Group**

**Barry Friedenberg, MD
C. Stephen Keklak, MD
Jeffrey Chalal, MD
Howard Rosenstein, MD
Ann Hughes, MD
Stanley Rich, MD
Peter Mezzacappa, MD
Carlo Rondina, MD
Debra Loeb, MD
Kenneth Tomkovich, MD
Janet Spector, MD
Kenneth R. Romano, MD
Peter Kouveliotis, MD
Jeffrey Friedenberg, MD**

**Diplomates of the American
Board of Radiology**

**Freehold Radiology P.A.
Medical Arts Building
901 West Main Street
Freehold, New Jersey
Tel: 732/462-4844
Fax: 732/462-9482**

**Freehold Radiology
Northpoint
176 Route 9 North
Marlboro, New Jersey
Tel: 732/577-2750
Fax: 732/536-0805**

**Freehold MR Associates P.A.
691 West Main Street
Freehold, New Jersey
Tel: 732/462-3716
Fax: 732/308-1320**

**ACR Accreditations for
Mammography
Ultrasound
CT
MRI
PET/CT**

Br 2

June 3, 2009

Nuclear Regulatory Commission
Region 1
475 Allendale Road
King of Prussia, PA 19406

03035922

Re: License Number 29-30714-01

Dear Sir:

This letter is to inform you that we wish to terminate our Materials License at this time, as we have closed our Nuclear Medicine Department.

The following information is provided for your review.

1. Use of radiopharmaceuticals
 - Tc-99m last utilized on 5/29/09
 - I-131 last utilized on 4/1/09 (no waste generated)
 - Tl-201 last utilized in May 2007
 - In-111 last utilized in 2005
 - Ga-67 last utilized in October 2007
 - I-123 last utilized in May 2009 (no waste generated)
2. Sealed Sources

All sealed sources were returned to Cardinal Health for disposal. See attached documentation of receipt of the sources.
3. Waste Disposal

All waste was surveyed and disposed in accordance with 10CFR rules and regulations on June 2, 2009.

2009 JUN -8 AM 11:22

RECEIVED
REGION 1

143785

4. Final Contamination Survey

A final contamination survey of the treadmill area was performed on May 19, 2009, all other areas was conducted on June 3, 2009. All survey results were found to be less than or equal to background. All wipe test results were found to be less than 200 dpm. Documentation of these results are enclosed.

5. Records

Patient Studies


Images 2002 – 2009 will be maintained on site in the event patients request copies.

All other records (i.e: dose records, surveys, wipes, calibration records, camera qc, etc) will be maintained at a remote location in accordance with 10 CFR Part 20 rules and regulations.

Radiation Exposure Records will be maintained on site.

Please contact our Radiation Safety Officer, Stephen Keklak, MD at 732-462-4844 if you have any questions or require additional information.

Sincerely,

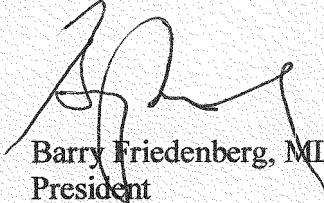

Barry Friedenberg, MD
President

Freehold Radiology Group

Freehold Radiology Group

Decommissioning Survey
Survey Meter

Ludlum Model 14C
SN: 180750
Calibrated: 2/6/2009
Wipe Counter
Captus-600 Well System
SN: 600082

Well Efficiency: Cobalt-57 87%

Date: 19-May-09

Location	Area Survey (mR/hr)	Wipe Test (dpm)
Background	0.02	287 cpm
Treadmill Room		
Treadmill Belt Spot 1	≤0.02	82
Treadmill Belt Spot 2	≤0.02	54
Treadmill Left Side	≤0.02	24
Treadmill Right Side	≤0.02	28
Treadmill Handle	≤0.02	14
Treadmill Body	≤0.02	18
Treadmill Patient's Belt	≤0.02	< bkgd
Monitor	≤0.02	40
Keyboard	≤0.02	30
Workstation Body	≤0.02	60

Date: 3-Jun-09

Location	Area Survey (mR/hr)	Wipe Test (dpm)
Background	0.02	265 cpm
Hot Lab		
Dose Calibrator	≤0.02	< bkgd
Lead Fort/L-block	≤0.02	52
Floor	≤0.02	< bkgd
Cabinets	≤0.02	< bkgd
Waste Area/Cans	≤0.02	16
Sink	≤0.02	12
Camera Room		
Camera/Collimators	≤0.02	48
Workstation	≤0.02	4
Floor	≤0.02	4
Injection Room		
Well/Probe	≤0.02	66
Injection Chair	≤0.02	73
Sharp Container Area	≤0.02	56
Injection Cart	≤0.02	< bkgd
Sink	≤0.02	18
Floor	≤0.02	50

Performed by: Lana Lantsman and Diana Stockdale



Cardinal Health
Nuclear Pharmacy Services
30 Murrat Hill Parkway Ste 400
East Rutherford, NJ 07073
201.460.1101 tel
201.460.1102 fax

www.cardinal.com

6/4/2009

**Freehold Radiology Group
901 West Main Street
Freehold, New Jersey 07728**

This letter confirms the return for disposal of the following sources:

**Co-57 Spot Marker # 1194-72-8
Co-57 Spot Marker # 1194-72-15
Co-57 Flood # 1202-187
Co-57 Vial # 1074-13-2
Cs-137 Vial # 788-87-20
Cs-137 Rod # 851-33**

The source was returned on 6/02/09 to Eckert & Ziegler, 1800 North Keystone Street, Burbank, CA 91504.

Wipe Test Result: 62

**Counter Efficiency: .899
Bkg cpm: 64
Net cpm: 0
Net μ Ci: 0**

Passed with < 0.005 uCi removable contamination.

Thank you for choosing Cardinal Health for your radiopharmaceutical needs.

Sincerely,

A handwritten signature in black ink, appearing to read "Candice D. Goodyear".

**Candice D. Goodyear
Radiation Safety Officer**

Freehold Radiology Group
 901 W. Main Street, Freehold, NJ
 Sealed Source Leak Test

Date Performed: 17-Dec-08

Leak Test Procedure:

Wipe Collected using: Instrumentation:	Wet swab Captintec Captus 600	Instrument Efficiency:		
		Standard Used Efficiency:	Co-57 93.0%	Cs-137 30.0%

Source Source Type:	Co-57 Vial	Cs-137 Vial	Co-57 Flood
Cal. Activity:	5.356 mCi	205 uCi	10 mCi
Cal. Date:	9/1/04	4/1/02	11/1/06
Serial No.:	1074-13-2	788-87-20	1202-187
Wipe Test Count:			
Background:	423 cpm	423 cpm	423 cpm
Cts - Bkgd	25 con	33 cpm	13 cpm
Removable Act.:			
dpm	27	110	14
uCi	1.22E-05	4.95E-05	6.31E-06


Acceptable Test - all values less than 0.005 uCi removable contamination.

Performed by:



Diana L. Stockdale, MS
 Certified Diagnostic Radiological Physicist

Reviewed by:

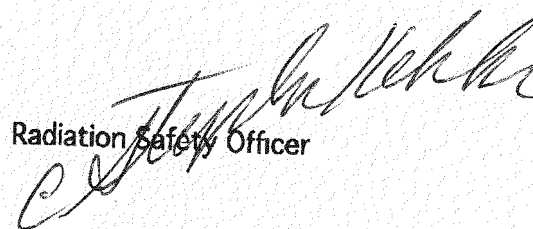

Radiation Safety Officer

FREEHOLD MR. ASSOCIATE
691 W. MAIN STREET
FREEHOLD, N.J. 07728

DNMS


**RETURN RECEIPT
REQUESTED**

*Nuclear Regulatory Commission
Region 1
475 Allendale Road
King of Prussia, PA*

19404



1000



19406

U.S. POSTAGE
PAID
FREEHOLD, NJ
07728
JUN 04, 09
AMOUNT


\$6.15

00090284-06

143785

PLACE STICKER AT TOP OF ENVELOPE TO THE RIGHT
OF THE RETURN ADDRESS. FOLD AT DOTTED LINE

CERTIFIED MAIL

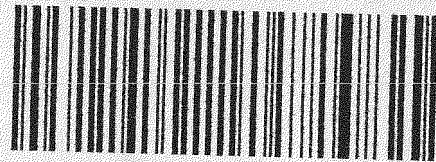

7001 1940 0002 3836 0383

This is to acknowledge the receipt of your letter/application dated

6/3/2009, and to inform you that the initial processing which includes an administrative review has been performed.

TERMINATION 29-30714-01
There were no administrative omissions. Your application was assigned to a technical reviewer. Please note that the technical review may identify additional omissions or require additional information.

Please provide to this office within 30 days of your receipt of this card

A copy of your action has been forwarded to our License Fee & Accounts Receivable Branch, who will contact you separately if there is a fee issue involved.

Your action has been assigned **Mail Control Number** 143785.
When calling to inquire about this action, please refer to this control number.
You may call us on (610) 337-5398, or 337-5260.

NRC FORM 532 (RI)
(6-96)

Sincerely,
Licensing Assistance Team Leader