



General Electric Company  
P.O. Box 780, Wilmington, NC 28402  
910 675-5000

July 1, 1998

Mr. Cass R. Chappell  
Package Certification Section  
U.S. Nuclear Regulatory Commission  
Washington, D.C. 20555-0001

Dear Mr. Chappell:

Subject: Revision to Application to Reinstate the Provision for Loose Fuel Rods to be Shipped in the RA-3 Packaging

- References:
- (1) NRC Certificate of Compliance (COC) USA/4986/AF  
Docket Number 71-4986
  - (2) COC 4986, Revision 35, 4/2/98
  - (3) RA-3 Package Application Submittals Dated 6/5/98 and 6/25/98

GE's Nuclear Energy Production facility in Wilmington, N.C. hereby submits the attached revised pages to the above referenced applications for Sections 7L and 8L, which are identical. These pages supplement the previous submittals.

Pages 1 and 22-27 replace those pages previously submitted in both the proprietary and non-proprietary versions. None of the information on these pages is proprietary.


Changes on the pages have been identified with an asterisk (\*) in the right hand margin and the revision date of 7/1/98 is shown on each page. Attachment 1 is an explanation of changes by page.

Ten (10) copies of this revised application are being provided for your use.

Please contact Rick Foleck on (910) 675-6299 or me on (910) 675-5950 if you have any questions or would like to discuss this matter further.

Sincerely,

GE NUCLEAR ENERGY

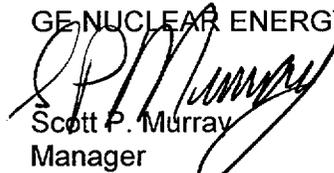

Scott P. Murray  
Manager  
Facility Licensing

/zb  
attachments

cc: SPM-98-021

*Chance LA* *Hr Encl*  
*4 0*

*91*  
*NT01*

9807090259 980701  
PDR ADOCK 07104986  
C PDR

Explanation of Changes by Page

Page 1	Changed the N value to 8 and the TI to 6.3.
Pages 22, 23, 24 and 25	Starting with case ra10 - s6, we renumbered the cases and provided additional information to describe optimal fuel rod pitch.
Page 26	Replotted Figure 5c and limited the maximum allowed to $2N = 16$ .
Page 27	Corrected reference from Criticality Index to Transportation Index and reflected the revised number of maximum packages per shipment.

## CRITICALITY SAFETY EVALUATION RA-3 FUEL BUNDLE CONTENTS

### 1. GENERAL DESCRIPTION

The RA-3 transport package consists of a wooden outer container surrounding a carbon steel inner container holding one or two fuel bundles. A fuel bundle may be either a nuclear fuel assembly or an accumulation of loose fuel rods. Loose fuel rods may be transported in accumulations of no more than 20 rods per bundle which may be held together by metal bands or other equivalent fasteners. Accumulations of more than 20 fuel rods per bundle must be shipped within 5 inch Schedule 40 304L stainless steel product containers as described in the following sections in this evaluation.

In this evaluation there is no requirement to fill the empty space in either the channel assembly or the product container, but quality requirements may dictate filling the empty space. It is important that anything used to fill the empty space is not a more effective moderator than water. The preferred method for filling the empty space is to use empty sealed rods.

The maximum pellet enrichment in loose rods covered by this evaluation is 5.00 wt % U-235. The RA-3 shipping container with loose rods is a Type A fissile package with the following restrictions:

Product container	not required	required	
Maximum number of fuel rods per bundle	20	> 20	
Allowable number of packages, N	infinite	8	*
Transport Index	0.0	6.3	*

Table 5. Results for array calculations (continued)

ra10-s4	Damaged package,	10 x 15 x 1	1.02236 ± 0.00177	
ra10-s4a	finite array,	8 x 12 x 1	0.99758 ± 0.00162	
ra10-s4b	full water reflection,	6 x 9 x 1	0.95600 ± 0.00164	
ra10-s4c	optimum moderation,	5 x 7 x 1	0.91137 ± 0.00162	
ra10-s4d	w/ product container,	4 x 8 x 1	0.90418 ± 0.00176	
ra10-s4e	fuel rod pitch 1.277 cm,	4 x 6 x 1	0.86651 ± 0.00161	
ra10-s4f	no. fuel rods 76	4 x 5 x 1	0.84094 ± 0.00199	
ra10-s5	Damaged package,	10 x 15 x 1	1.04891 ± 0.00155	
ra10-s5a	finite array,	8 x 12 x 1	1.02520 ± 0.00164	
ra10-s5b	full water reflection,	6 x 9 x 1	0.97702 ± 0.00157	
ra10-s5c	optimum moderation,	5 x 7 x 1	0.93548 ± 0.00159	
ra10-s5d	w/ product container,	4 x 8 x 1	0.93070 ± 0.00162	
ra10-s5e	fuel rod pitch 1.327 cm,	4 x 6 x 1	0.89639 ± 0.00182	
ra10-s5f	no. fuel rods 73	4 x 5 x 1	0.87062 ± 0.00199	
ra10-s6	Damaged package,	10 x 15 x 1	1.07766 ± 0.00193	*
ra10-s6a	finite array,	8 x 12 x 1	1.05544 ± 0.00230	*
ra10-s6b	full water reflection,	6 x 9 x 1	1.00542 ± 0.00213	*
ra10-s6c	optimum moderation,	5 x 7 x 1	0.96973 ± 0.00211	*
ra10-s6d	w/ product container,	4 x 8 x 1	0.95861 ± 0.00268	*
ra10-s6e	fuel rod pitch 1.477 cm,	4 x 6 x 1	0.92410 ± 0.00261	*
ra10-s6f	no. fuel rods 61	4 x 5 x 1	0.89870 ± 0.00211	*
ra10-s6g		4 x 4 x 1	0.81720 ± 0.00234	*
ra10-s7	Damaged package,	10 x 15 x 1	1.08508 ± 0.00147	*
ra10-s7a	finite array,	8 x 12 x 1	1.06262 ± 0.00146	*
ra10-s7b	full water reflection,	6 x 9 x 1	1.02191 ± 0.00167	*
ra10-s7c	optimum moderation,	5 x 7 x 1	0.98169 ± 0.00162	*
ra10-s7d	w/ product container,	4 x 8 x 1	0.96797 ± 0.00161	*
ra10-s7e	fuel rod pitch 1.577 cm,	4 x 6 x 1	0.93445 ± 0.00174	*
ra10-s7f	no. fuel rods 55	4 x 5 x 1	0.91320 ± 0.00159	*
ra10-s7g		4 x 4 x 1	0.86419 ± 0.00248	*

Table 5. Results for array calculations (continued)

ra10-s9d	Damaged package,	4 x 8 x 1	0.99276 ± 0.00156	*
ra10-s9e	finite array,	4 x 6 x 1	0.96207 ± 0.00165	*
ra10-s9f	full water reflection,	4 x 5 x 1	0.93751 ± 0.00168	*
ra10-s9g	optimum moderation, w/ product container, fuel rod pitch 1.650m, no. fuel rods 55	4 x 4 x 1	0.89227 ± 0.00243	*
ra10s10d	Damaged package,	4 x 8 x 1	0.94894 ± 0.00243	*
ra10s10e	finite array,	4 x 6 x 1	0.94468 ± 0.00242	*
ra10s10f	full water reflection,	4 x 5 x 1	0.92416 ± 0.00218	*
ra10s10g	optimum moderation, w/ product container, fuel rod pitch 1.700 cm, no. fuel rods 53	4 x 4 x 1	0.88831 ± 0.00255	*
ra10s11	Damaged package,	10 x 15 x 1	1.01056 ± 0.00202	*
ra10s11a	finite array,	8 x 12 x 1	0.99237 ± 0.00205	*
ra10s11b	full water reflection,	6 x 9 x 1	0.91668 ± 0.00192	*
ra10s11c	optimum moderation,	5 x 7 x 1	0.91459 ± 0.00213	*
ra10s11d	w/ product container,	4 x 8 x 1	0.90652 ± 0.00245	*
ra10s11e	fuel rod pitch 1.827 cm,	4 x 6 x 1	0.88407 ± 0.00229	*
ra10s11f	no. fuel rods 37	4 x 5 x 1	0.86219 ± 0.00214	*
ra10s11g		4 x 4 x 1	0.88659 ± 0.00228	*
ra10s12	Damaged package,	10 x 15 x 1	0.97282 ± 0.00225	*
ra10s12a	finite array,	8 x 12 x 1	0.95380 ± 0.00228	*
ra10s12b	full water reflection,	6 x 9 x 1	0.91668 ± 0.00192	*
ra10s12c	optimum moderation,	5 x 7 x 1	0.88515 ± 0.00225	*
ra10s12d	w/ product container,	4 x 8 x 1	0.87633 ± 0.00251	*
ra10s12e	fuel rod pitch 2.077 cm,	4 x 6 x 1	0.85097 ± 0.00253	*
ra10s12f	no. fuel rods 30	4 x 5 x 1	0.83855 ± 0.00223	*
ra10s12g		4 x 4 x 1	0.79650 ± 0.00212	*





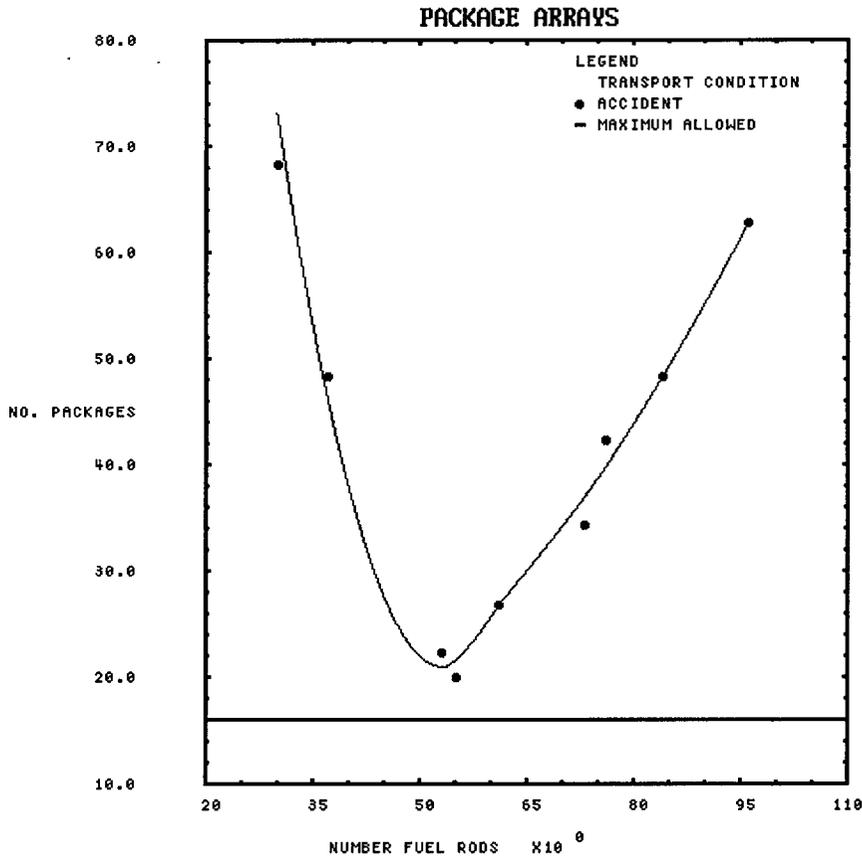


Figure 5c Maximum allowed number of damaged packages,  $2N$ , with product container contents

Each value for  $2N$  is plotted versus the number of fuel rods that corresponds to the value determined for a specific array size as shown in Figure 5b. This demonstrates that there is a maximum number of packages allowed for which the damaged array is subcritical independent of the number of fuel rods loaded in the product container. This maximum allowed value for  $2N$  shall be no less than 16 as shown in Figure 5c.

### **6.3 TRANSPORTATION INDEX**

The Transport Index (TI) for criticality control is determined by the number of packages that remain below the upper safety limit (USL). For normal conditions of transport, an infinite array of packages with either the rod bundle contents is subcritical. Therefore, the maximum allowed number of undamaged packages that may be in any arrangement is unlimited, and 5N is equal to infinity.

Under hypothetical accident conditions, an infinite number of packages with a bundle of 20 fuel rods loaded directly in the channel assembly is subcritical. Therefore, 2N is equal to infinity when the product container is not used. A maximum of only 16 damaged packages remain subcritical when the product container is used, and 2N is equal to 16 when the product container is used.

The transport index assigned to the RA-3 package with a rod bundle contents depends on the packaging used for the fuel rods. A TI = 0.0 may be assigned when the number of fuel rods is limited to 20 per side of the channel assembly for a total of 40 fuel rods per RA-3 package. However, a TI = 6.3 must be assigned when the product container is used, but there is no limit on the number of fuel rods loaded in the product container.