



July 2, 2009

Materials Licensing Branch U.S. Nuclear Regulatory Commission, Region III
2443 Warrenville Road, Suite 210
Lisle, IL 60532-4352

To Whom It May Concern:

This is to hereby confirm that Alfonzo Gatmaitan is now the CEO of Clarian Arnett Health, Inc. And Mr. Gatmaitan is authorized to make binding commitments and to sign official documents on behalf of Clarian Arnett Health, Inc.

Sincerely,

A handwritten signature in black ink, appearing to read "Rodney A. Dunseath", with a long horizontal flourish extending to the right.

Rodney A. Dunseath, D.O.
Radiation Safety Officer
Clarian Arnett Health
5165 McCarty Lane
Lafayette, IN 47905

RECEIVED JUL 2 7 2009

P.O. Box 5545
Lafayette, Indiana
47903-5545

765-448-8000 local
800-899-8448 toll-free

www.clarianarnett.com



On June 22, 2009, the Clarian Arnett Greenbush Clinic located at 2600 Greenbush Street, Lafayette, Indiana was decommissioned. The room was surveyed with a Ludlum Model 14C end window Geiger counter, serial number 253951, calibrated on 10/16/2008 and all areas were at background level. All sealed sources and nuclear medicine equipment had been removed from the room as well as waste and storage containers. Following are the wipe test results counted on a Ludlum Model 2200 scaler ratemeter, SN PR145366, with 80% efficiency:

Wipe Number	Gross Counts/Minute	Net Counts (-272 bkg)/ Minute	DPM (cts/0.8 efficiency)
1	268	0	0
2	291	19	23.75
3	259	0	0
4	262	0	0
5	272	0	0
6	261	0	0
7	268	0	0
8	300	28	35
9	297	25	31.25
10	254	0	0
11	262	0	0
12	304	32	40
13	281	9	11.25
14	270	0	0
15	256	0	0

All wipes resulted in no contamination and the room was cleared for unrestricted use. Please see the attached map for locations of wipes.

All monitoring and decommissioning was performed by Erin Bell, MHP of Medical Physics Consultants, Inc.





On December 4, 2008 the cardiology stress testing area at Lafayette Heart Institute located at 1116 North 16th Street, Lafayette, Indiana 47904 decommissioned. The room was surveyed with a Ludlum Model 14C end window Geiger counter, serial number 182928, calibrated on 8/18/08 and all areas were at background level. All sealed sources and nuclear medicine equipment had been removed from the room as well as waste and storage containers. Following are the wipe test results counted on a Ludlum Model 2200 scaler ratemeter, SN PR145366, with 80% efficiency:

Wipe Number	Gross Counts/Minute	Net Counts (-251 bkg)/ Minute	DPM (cts/0.8 efficiency)
1	254	3	3.75
2	271	20	25
3	280	29	36.25
4	254	3	3.75
5	254	3	3.75
6	278	27	33.75
7	299	48	60
8	277	26	32.5
9	276	25	31.25
10	256	5	6.25
11	248	0	0
12	266	15	18.75
13	300	49	61.25
14	274	23	28.75

All wipes resulted in no contamination and the room was cleared for unrestricted use. Please see the attached map for locations of wipes.

All monitoring and decommissioning was performed by Erin Bell, MHP of Medical Physics Consultants, Inc.

2309 Shelby Avenue
Ann Arbor, MI 48103
(734) 662-9224 Fax
(734) 662-3197



70 E. 91st Street, Suite 106
Indianapolis, IN 46240
(317) 581-1931 Fax
(317) 581-1911




4806 Mile High Drive
Salt Lake City, UT 84124
(801) 272-2952 Office & Fax




N7375 Crystal Ridge Drive
Beaver Dam, WI 53916
(920) 885-9872 Fax
(920) 885-9870

LHI-Cardiology Area Survey Map

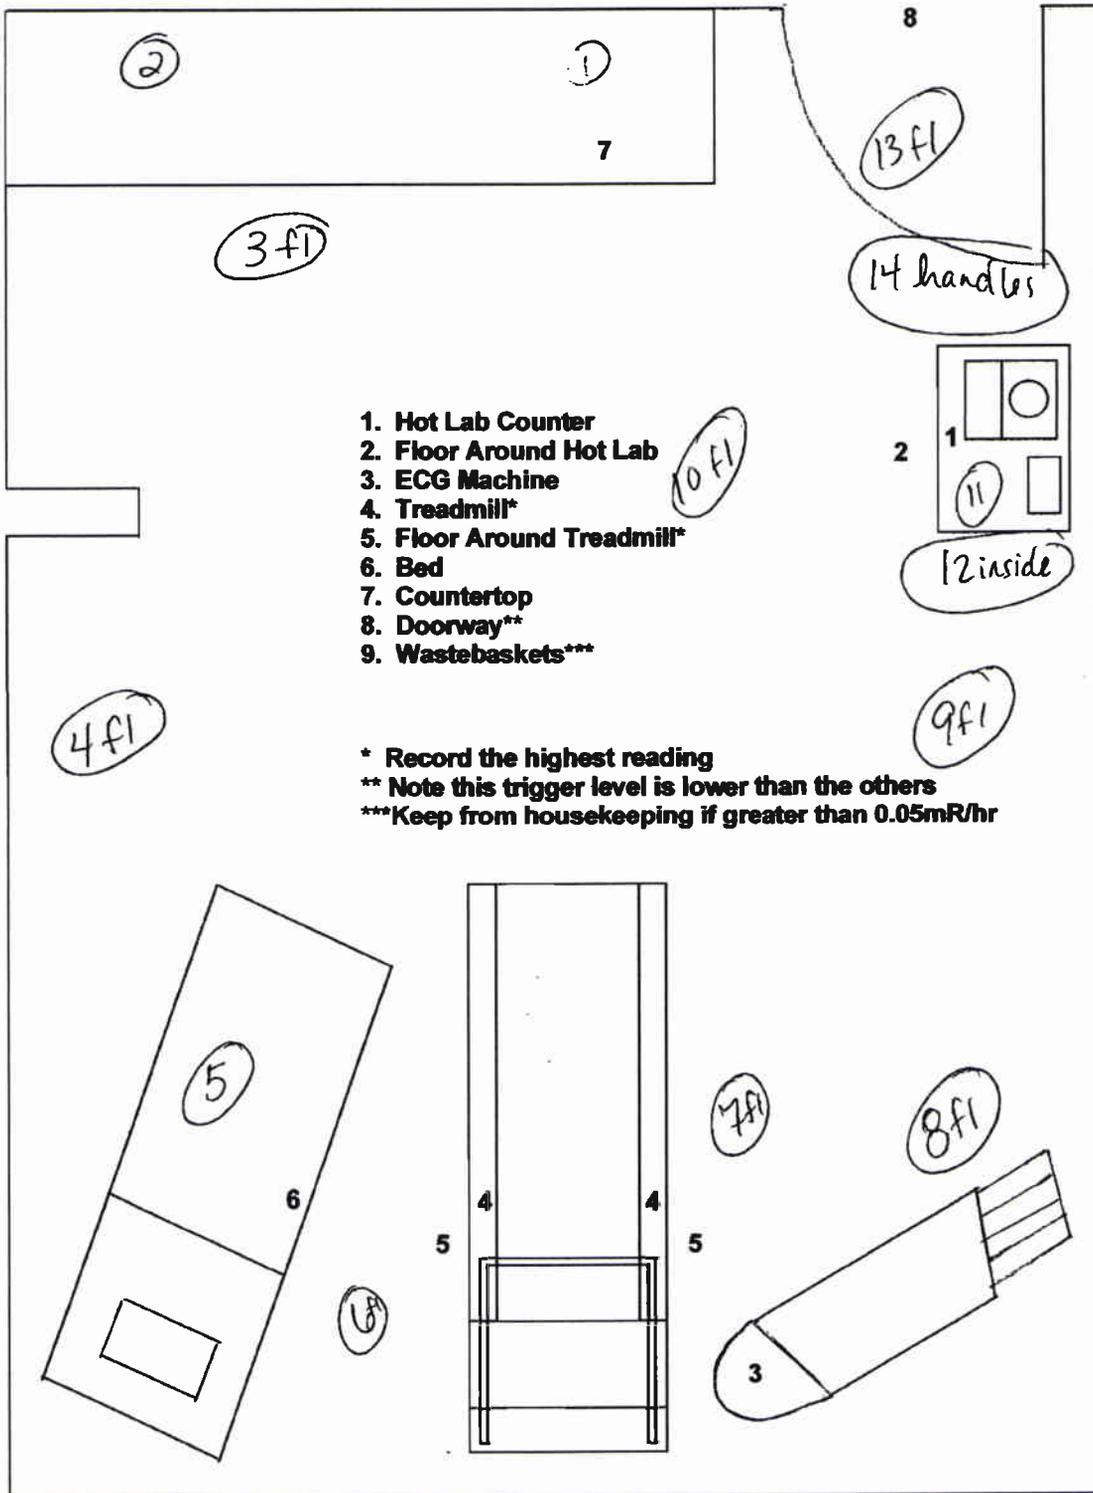

Clarian -
Arnett Clinic Greenbush
2600 Greenbush Street
Lafayette, Indiana

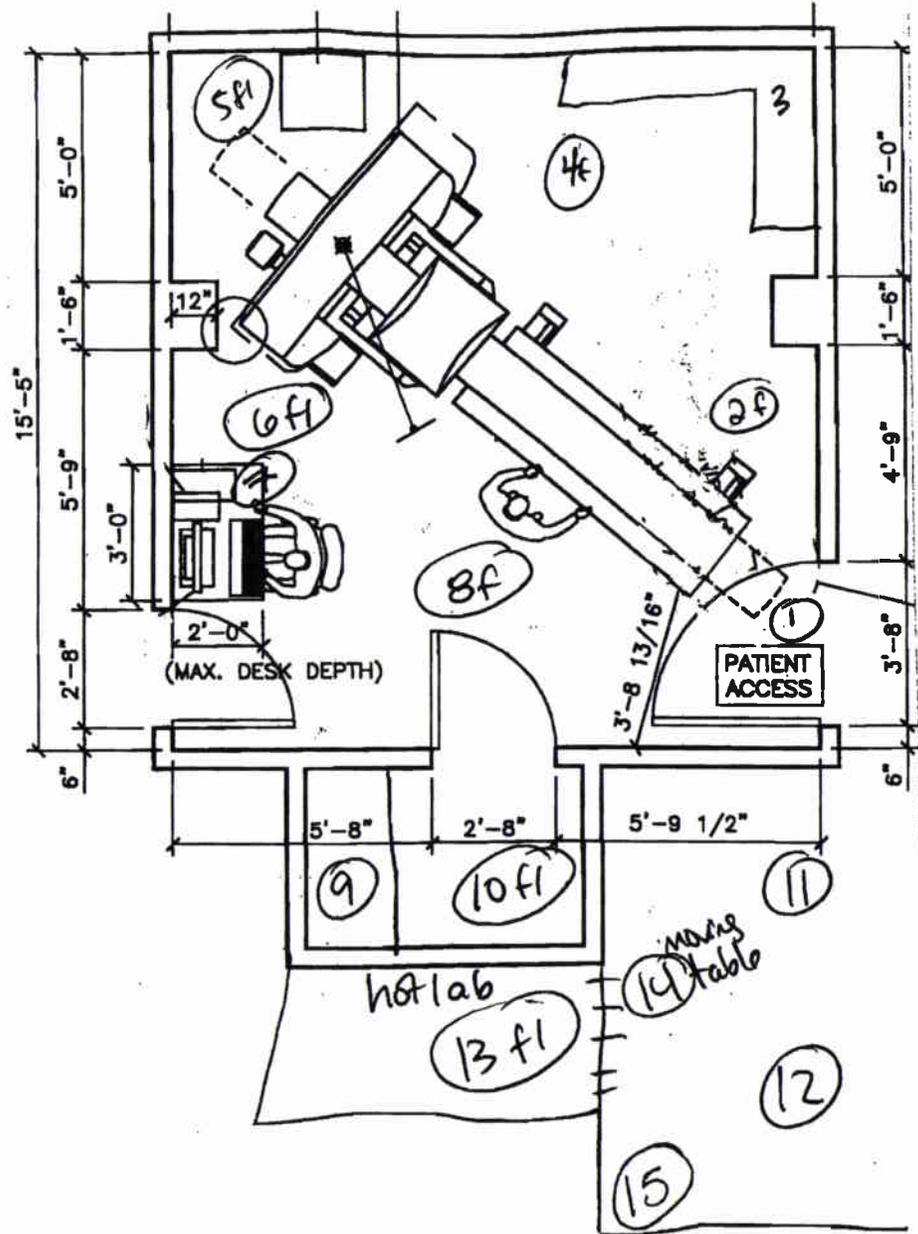

ECTURAL PLAN

1/4" = 1'


SCALE:



Clarian Arnett Health
Medical Group

P.O. Box 5545
Lafayette, Indiana 47903-5545

PRESORTED
FIRST CLASS



netpost

049J82049317

\$00.46₀

07/22/2009

Mailed From 47904
US POSTAGE

Materials Licensing Branch **TFMD RPT YPD 10FD**
U.S. Nuclear Regulatory Commission, Region III
2443 Warrenville Road, Suite 210
Lisle, IL 60532-4352

FILTA51 60532

