

RAS 5556

72-22-ISFSI — State Exhibit 100 — Rec'd 6/20/02

DOCKETED
USNRC



Manual on Estimating Soil Properties for Foundation
Design

2003 JAN 29 PM 3: 05

OFFICE OF THE SECRETARY
RULEMAKINGS AND
ADJUDICATIONS STAFF

EL-6800
Research Project 1493-6

Final Report, August 1990

Prepared by

CORNELL UNIVERSITY
Geotechnical Engineering Group
Hollister Hall
Ithaca, New York 14853-3501

Authors

F. H. Kulhawy
P. W. Mayne

Principal Investigator
F. H. Kulhawy

Prepared for

Electric Power Research Institute
3412 Hillview Avenue
Palo Alto, California 94304

EPRI Project Manager
V. J. Longo

Overhead Transmission Lines Program
Electrical Systems Division

State's
Exhibit 100

Template = SECY-028

SECY-02

NUCLEAR REGULATORY COMMISSION
 Official Exh. No. 100
 Docket No. 72-22
 In the matter of RTS
 IDENTIFIED
 RECEIVED
 Staff
 Applicant
 Intervenor
 Cont'g Off'r
 Contractor
 Other
 Reporter G. Bessa
 WITNESS Boyle
 DATE _____

clay can affect the N value greatly, as shown in Figure 4-51. Apparently, the penetration process causes temporary excess pore water stresses which reduce the effective stresses in the vicinity of the sampler, thereby resulting in an apparently lower N value.

However, for clays within a given geology, a reasonable correlation might be expected between s_u and N. Figure 4-52 indicates this behavior over a wide range of N values where the same drilling equipment, SPT procedure, and consistent reference strength (UU triaxial) were employed. For these data, the reported regression is given by:

$$s_u/p_a = 0.29 N^{0.72} \quad (4-60)$$

This equation tends to predict s_u/p_a on the high side of the relationships shown in Figure 4-50.

Correlations with CPT q_c Value

The theoretical relationship for the cone tip resistance in clay is given by:

$$q_c = N_k s_u + \sigma_{vo} \quad (4-61)$$

10 *10* *10*

in which q_c = cone tip resistance, σ_{vo} = total overburden stress, and N_k = cone bearing factor. The application of classical plasticity theory to this bearing capacity problem suggests N_k on the order of 9 for a general shear model. Cavity

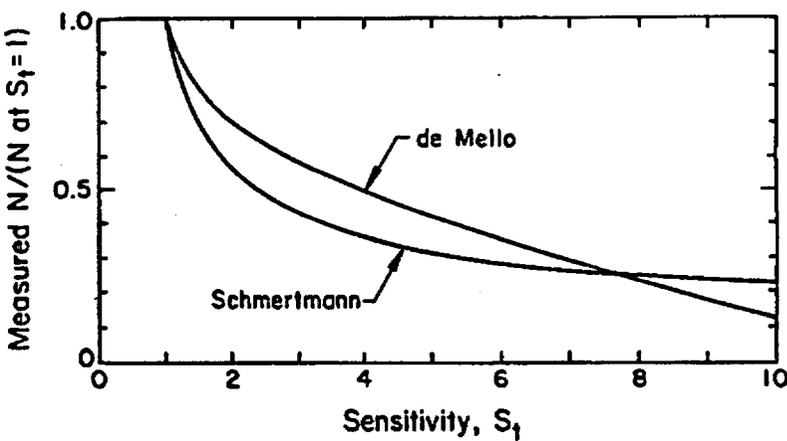


Figure 4-51. Apparent Decrease of N with Increasing Sensitivity

Source: Schmertmann (14), p. 66.

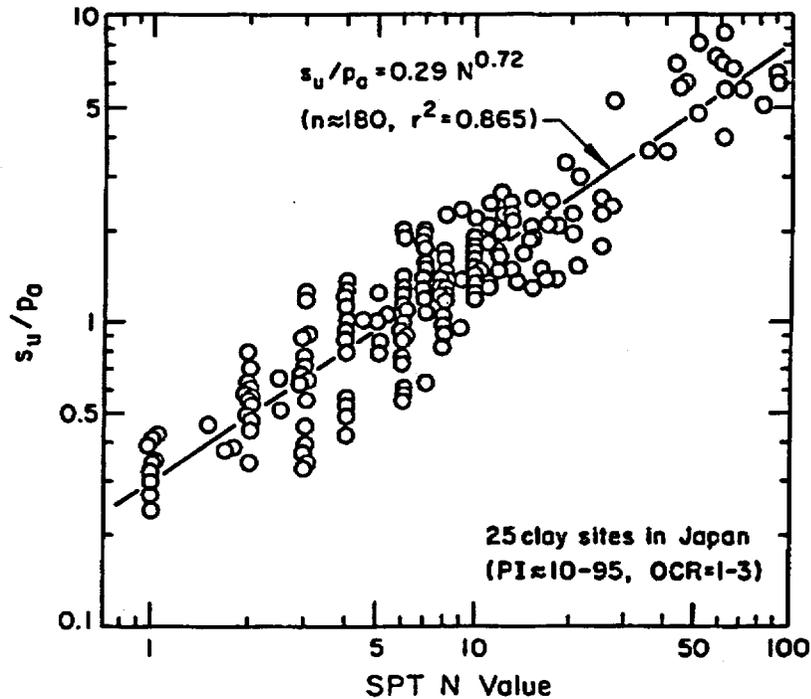


Figure 4-52. Relationship Between s_u and SPT N Value

Source: Hara, et al. (72), p. 9.

expansion theories give N_k increasing in the range of 7 to 13 for increasing values of rigidity index ($I_r = G/s_u$, with G - shear modulus). Steady penetration theory provides a narrow range for N_k between 14 and 18 for a wide range of I_r .

With the various uncertainties in choosing appropriate theoretical models, it is not surprising that N_k usually is determined empirically by calibrating CPT data with a known measured value of s_u . The range of values of N_k back-calculated from CPT data is presented in Figure 4-53. This wide range of N_k values must be scrutinized for several reasons: (1) inconsistent reference strengths, (2) mixing of different type cones (electric and mechanical), and (3) need for correction of q_c for pore water stress effects (Appendix B). These factors can change N_k dramatically.

The importance of correcting q_c for pore water stress effects has been discussed previously and is illustrated by Figure 4-54 for two piezocones with different area ratios. The corrected cone tip resistance (q_T) can be obtained only by use of piezocones with porous elements located behind the tip. Consequently, the large scatter observed in empirical determinations of N_k may result, in part, from use of

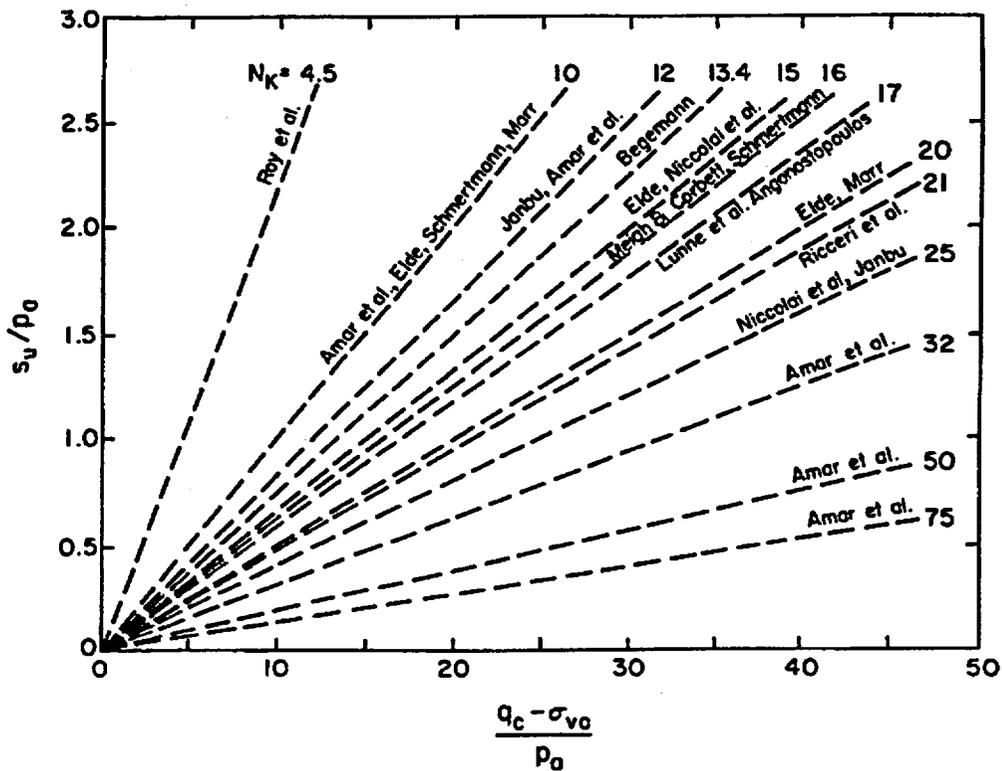


Figure 4-53. Reported Range of N_k Factors from CPT Data

Source: Djoenaidi (71), p. 5-83.

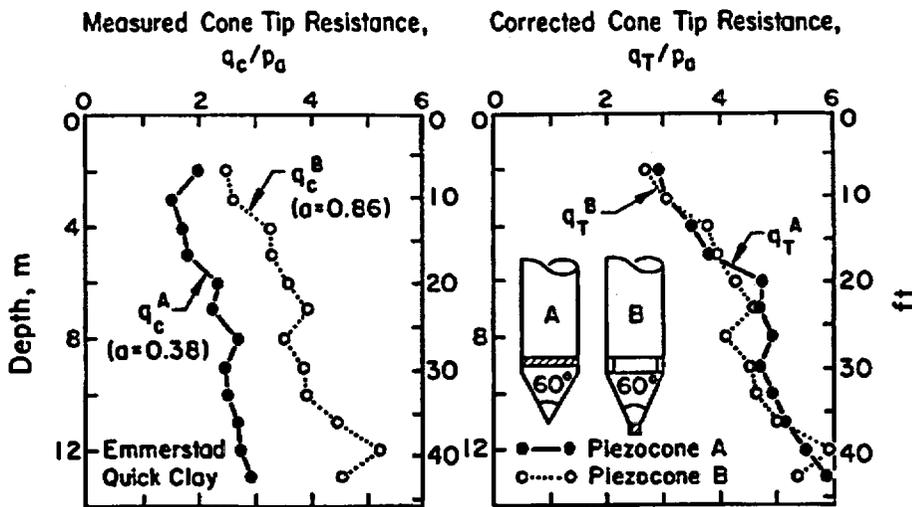


Figure 4-54. Effect of Pore Water Stress on Cone Tip Resistance

Source: Aas, et al. (67), p. 19.

an uncorrected q_c .

The value of N_k ideally should be determined experimentally by comparison with a consistent reference strength. Often, the field VST is used as the reference. In this regard, it is important to recall that the VST requires a correction for s_u in itself. Early correlations (e.g., Battaglio, et al., 73) for N_k using uncorrected VST data suggested a trend for N_k in terms of the plasticity index (PI). However, upon later re-analysis of the same data using the corrected VST strength [$\mu s_u(VST)$], N_k apparently was independent of PI.

Subsequent studies by Keaveny and Mitchell (74) and Konrad and Law (75) have demonstrated that Vesic's cavity expansion theory (76) provides a reasonable estimate for N_k , as given below:

$$N_k = 2.57 + 1.33 (\ln I_r + 1) \quad (4-62)$$

Keaveny and Mitchell suggest using CK_{0UC} triaxial compression tests to evaluate I_r , while Konrad and Law recommend using the self-boring pressuremeter test.

Recent theoretical developments (Houlsby and Teh, 77) suggest that more refined procedures for determining s_u from the CPT may be appropriate. However, these models currently require a number of parameters that are difficult to determine. Further testing in the future may allow convenient determination of these parameters and a better estimation of s_u .

Correlations with CPTU Results

The piezocone penetration test (CPTU) permits determination of s_u from the corrected cone tip resistance (q_T), as described previously, and also allows for a separate estimate of s_u from the pore water stress measurement. Research on this subject (e.g., Robertson, et al., 78) has suggested the following:

$$s_u = \Delta u / N_{\Delta u} \quad (4-63)$$

in which Δu = measured excess pore water stress ($u_m - u_0$) and $N_{\Delta u}$ = pore water stress ratio, which may be estimated from A_f and either the PI or rigidity index, as shown in Figure 4-55. Alternative recommendations by Konrad and Law (75) suggest a more complex relationship, including a number of parameters which are somewhat difficult to evaluate.