




**CONSTRUCTION ENTRANCE  
ANTI-TRACKING PAD**  
NTS

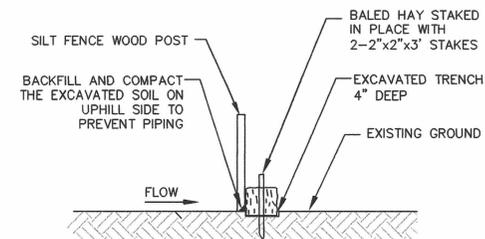


**ELEVATION**

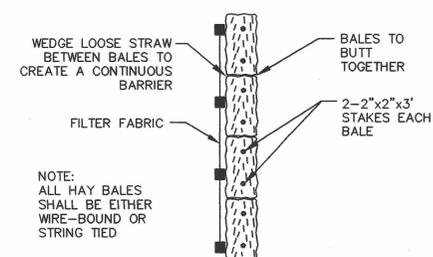

**PLAN**

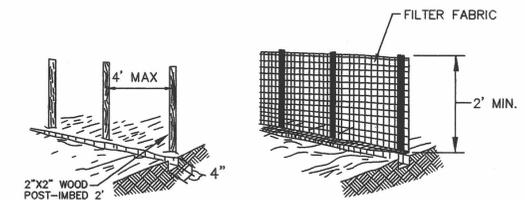

- NOTES:**
1. SET POSTS AND EXCAVATE A 4" X 4" TRENCH UPSLOPE ALONG THE LINE OF POSTS.
  2. STAPLE FILTER FABRIC TO THE POSTS AND EXTEND INTO TRENCH.
  3. BACKFILL AND COMPACT THE EXCAVATED SOIL INTO THE TRENCH.

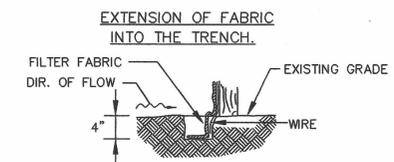

**TYPICAL SILT FENCE INSTALLATION**

**TEMPORARY SEDIMENT AND EROSION CONTROL BARRIER  
SILT FENCE BACKED BY HAY BALES**  
NTS

NO.	REVISIONS	DATE	APPROVAL
DATE: 08/20/09 CARL N. STOPPER PROFESSIONAL ENGINEER NJ PE #GE 37254			
SHIELDALLOY METALLURGICAL CORPORATION NEWFIELD, NEW JERSEY DECOMMISSIONING PLAN FOR THE SMC FACILITY REV. 1B			
STORAGE YARD ENGINEERED BARRIER <b>D-13X</b>			
<b>EROSION CONTROL DETAILS</b>			
DESIGN:	SWL	8/13/09	
DRAWN:	KDH	8/13/09	
CHECKED:	CNS	8/13/09	
SCALE:	NTS		
PROJECT:	105106-000000-000100		
DRAWING:			
<b>E-1</b>			

