

RAS 5614

72-22-ISFSI - State Exhibit 152 - Rec'd 4/10/02

## Chapter 17

# EMERGENCY EGRESS FROM AIRCRAFT

revised by Ron Peveto, M.D., M.P.H.


## INTRODUCTION

Emergency escape from aircraft has been of utmost importance to the United States Air Force since its inception. Regulations and policies to insure the safety and survival of crewmembers have been a major thrust of the entire safety program in the Air Force. The current sophisticated and advanced ejection seats with their increased performance capabilities attests to the goal of improving survivability of aircrews during escape from aircraft under adverse conditions throughout the flight envelope. Engineering sciences have made major contributions to individualizing the ejection seat operating mode to the specific circumstances of the ejection. Test personnel have rigorously demonstrated that these systems do work. Medical personnel have contributed to this effort by historically defining the limits within which the human can tolerate the forces of ejection. Air Force flight surgeons have an obligation to be knowledgeable about aircraft escape systems so that they might minimize the stresses placed on the body during an emergency escape. Proper aircrew briefings on escape procedures necessitates a clear understanding of their operation. Likewise, diagnosis and treatment of the unique injuries sustained in an ejection are best handled by a flight surgeon familiar with the escape forces. Perhaps the most important reason for understanding the entire escape process is the ability to provide system designers and accident investigators with feedback information concerning the use of escape equipment. The flight surgeon along with the life support officer become the experts on the mishap investigation board on the escape system in the aircraft. This chapter will cover the topics of interest in emergency egress.

## ESCAPE SYSTEMS

### Ejection Seat Operation

With the advent of high-performance aircraft, the development of aircraft ejection seats became necessary due to speeds that precluded safe manual bailout. Strong windblast prevented clearing the aircraft and excessive G- forces immobilized aircrew members thus prohibiting escape. The modern ejection seat having undergone a series of refinements since its inception in 1946 is today a highly automated system that requires the occupant to only initiate the firing mechanism to effect escape. Figure 1 is a photograph of an ACES II seat representing a modern high technology seat. Typically, the seat consists of a padded bucket, back, and headrest. The seat is mounted on rails which guide the seat on its initial trajectory. Most seats are propelled by rockets but the methods of restraint, seat separation, and chute deployment will vary according to the various types of ejection seats. Generally, escape is initiated by pulling a firing handle. In some seats a trigger within the handle then must be squeezed to initiate ejection. As the ejection seat travels up the rails, a leg restraint system activates. The development of rocket propulsion has produced the higher trajectory necessary to clear aircraft structures during high speed escape as well as escape during low speed and zero-zero (zero velocity and zero altitude) ejections. Seat stabilization gyros have been incorporated into recently developed ejection seats to cancel asymmetric forces producing rotation and tumbling (1).

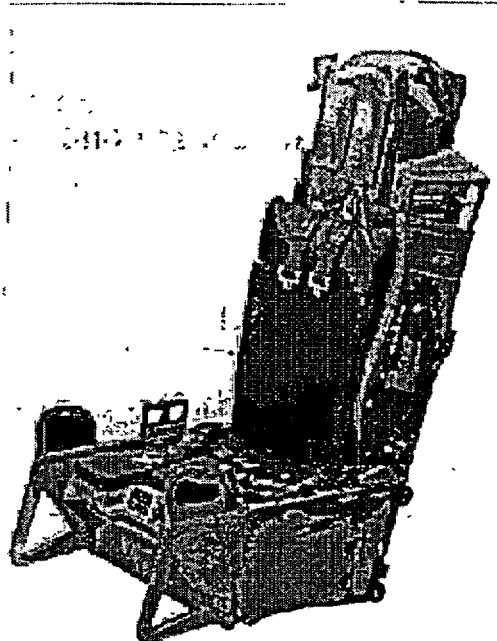

**Figure 17-1. Modern high technology ejection seat. (ACES II)**

### **Air Force Ejection Seats**

Air Force aircraft utilize a variety of ejection seats. Not all types will be discussed but three specific seats will be covered to illustrate the variety as well as the capabilities of various seats.

The ejection seat for the T-37 is an individually activated ballistic seat rather than the rocket-powered seat of most other jet aircraft. It thus provides a rapid escape from the aircraft but with a limited escape envelope. The emergency minimum ejection altitudes for a T-37 with no sink rate, level bank, and pitch are: (1) With an F1-B timer (1 sec chute): 200 feet altitude and 120 knots indicated air speed (KIAS). (2) With an F-1B zero delay lanyard connected: 100 feet altitude and 120 KIAS. The seat should work at air speeds as high as 425 KIAS.

The T-37 seat accommodates a back-type parachute and is provided with an inertial reel shoulder harness, an automatic opening lap belt, and a seat separator (butt snapper). It can be manually adjusted up and down and has an emergency disconnect unit in the lower right side. This unit contains the communication lead and oxygen hose with quick disconnect fittings. The seat has a canopy piercer on the top of the seat for through-the-canopy ejections. There are interconnected handgrips on either side of the seat. Within each handgrip is a trigger which is accessible only when the handgrips are in the full up position. Squeezing either trigger initiates canopy jettison and the seat fires 0.33 seconds later. After a 1-second delay, a seat initiator fires the HGU-12/A lap belt and the seat separator which provides an automatic and positive separation of the seat and the occupant. The lap belt lanyard (gold key) attached to the seat belt activates the parachute opening device, or pulls the D-handle via the zero-delay lanyard (2).

The T-38 ejection seat contains an ejection rocket catapult, a calf guard, two leg braces, a shoulder harness inertia reel, automatic lap belt release, a head rest, a seat separator system, a drogue chute, a drogue gun with five initiators, and a seat adjusting unit. The seat height can be adjusted by an electrically operated actuator via a toggle switch. The inertia reel can be locked by a control lever. When the strap is free to reel in or out, it will lock at a minimum of 2Gs and a maximum of 3Gs but

will return to free movement after relaxation of G forces. However, an excessive G load on the strap will lock the reel and it will remain locked until the crewmember resets the control lever. It also locks automatically during seat ejection.

The calf guard is hinge mounted and attaches to the bottom front of the seat and is held in a stowed position. During ejection it is pulled downward into position automatically. There is a hand grip and trigger on both sides of the seat, either of which will activate the initiator and fire the rocket catapult for seat ejection. Pulling either trigger first fires the canopy ejection initiator causing canopy jettison. The inertial reel locks automatically and the seat catapult is activated which ejects the seat from the aircraft. Approximately 0.2 seconds after catapult firing, the drogue gun fires to deploy the drogue chute to stabilize the seat trajectory. At 0.65 seconds after the seat leaves the floor of the aircraft, the seat separator system is activated and that releases the lap belt and forces the occupant away from the seat with the parachute. The parachute deploys shortly thereafter. With this system, successful ejection is possible with 50 knots airspeed on the ground. After parachute deployment, the survival kit will automatically deploy in approximately 4 seconds. If the survival kit is in the manual mode, it must be released manually with the handle on the right front center of the kit.

The weight of the pilot influences the performance of this system. Tests conducted with mannequins weighing as much as 247 pounds were successful with this system retaining its above 50 knots KIAS capability. Accelerative forces will vary according to the weight of the pilot, with pilots weighing in the 5th percentile experiencing 18-20 Gs and 95th percentile pilots experiencing 14-16 Gs. Maximum recommended airspeed for ejection is 500 KIAS (2).

The Martin-Baker seat was utilized in the F-4 and early A-10 aircraft. In 1967, as ejections from F-4s increased, it became apparent that a means to reduce spinal compression injuries caused by high onset rate of forces was needed. The Mark 5 seat was modified primarily through the addition of a rocket pack, lessening the ejection acceleration acting on the spine. It was designated the Mark 7 seat. Parachute deployment was aided by the use of a drogue chute. After the system had been in use for some time, failure of the F-4 forward canopy to jettison at high speeds indicated a need for additional force to insure positive jettison of the canopy. This was accomplished as well as incorporating three ejection sequences thus allowing the front seat to initiate dual ejection, aft seat initiated dual ejection, and aft seat single ejection (3).

The Advanced Concept Ejection Seat (ACES II) is currently used in the A-10, F-15, F-16, F-117A, B-1B, and B-2 aircraft and incorporates many of the advanced technology characteristics that have evolved in ejection seats. It has a zero-zero capability, deploying a useful chute with ejection on the ground at standstill. In low speed ejections, a gyro-controlled vernier rocket provides pitch stabilization. In high speed ejection conditions additional stabilization is provided by a drogue parachute. To achieve minimum-distance recovery in low-speed ejections, the *recovery parachute* is deployed as the seat leaves the cockpit. At high speeds, the *drogue parachute* is deployed immediately, quickly decelerating the seat and crewmember to a suitable speed for recovery parachute deployment. The use of multiple recovery modes permits the functions and timing of the recovery subsystem to be selected for each mode allowing optimum performance throughout the escape envelope. Table 1 summarizes the event-time sequence for the various modes of operation. Figure 2 displays graphically the mode envelopes. The recovery parachute and the drogue parachute subsystems are entirely independent. In the low-speed mode, **Mode 1**, deployment of the recovery parachute is initiated as the seat and the crewmember are emerging from the cockpit. Thus, the elapsed time from ejection initiation to parachute inflation is minimized for the critical low-speed, low-altitude ejection conditions. In the high-speed mode, **Mode 2**, the drogue parachute is needed to

slow the seat and occupant prior to recovery parachute deployment. The drogue is not severed until after the recovery parachute has been deployed. **Mode 3** is used for high altitude ejection allowing the seat to descend or decelerate into the Mode 2 parameters prior to Mode 2 recovery being initiated. Mode selection is performed by the recovery sequencer in conjunction with an environmental sensing subsystem which determines airspeed and altitude conditions independent from aircraft systems. Figures 3, 4, and 5 summarize the ejection sequence for each of the modes. Figure 6 depicts a functional breakdown of the various subsystems of the ACES II seat (4).

TYPICAL EVENT TIMING	TIME (SECONDS)			
	MODE 1	MODE 2 (A-10)	MODE 2 (F-15/F-16)	MODE 3
① ROCKET CATAPIRT FIRES	0.0	0.0	0.0	0.0
② DROGUE DEPLOYS	NA	0.17	0.17	0.17
③ STAPAC IGNITES	0.18	0.18	0.18	0.18
④ PARACHUTE DEPLOYS	0.20	0.97	1.17	-
⑤ DROGUE RELEASES FROM SEAT	NA	1.12	1.32	-
⑥ SEAT RELEASES FROM CREWMAN	0.45	1.22	1.42	-
⑦ PARACHUTE INFLATES	1.8	2.6	2.6	-
⑧ SURVIVAL EQUIPMENT DEPLOYS	5.5	6.1	6.2	-

\*SEQUENCE IS INTERRUPTED UNTIL SEAT CROSSES MODE 3 BOUNDARY, THEN DEPLOYS PARACHUTE AFTER 0.8 SECOND DELAY (A-10) OR 1.0-SECOND DELAY (F-15/F-16)

TABLE 17-1. EVENT-TIME SEQUENCE.

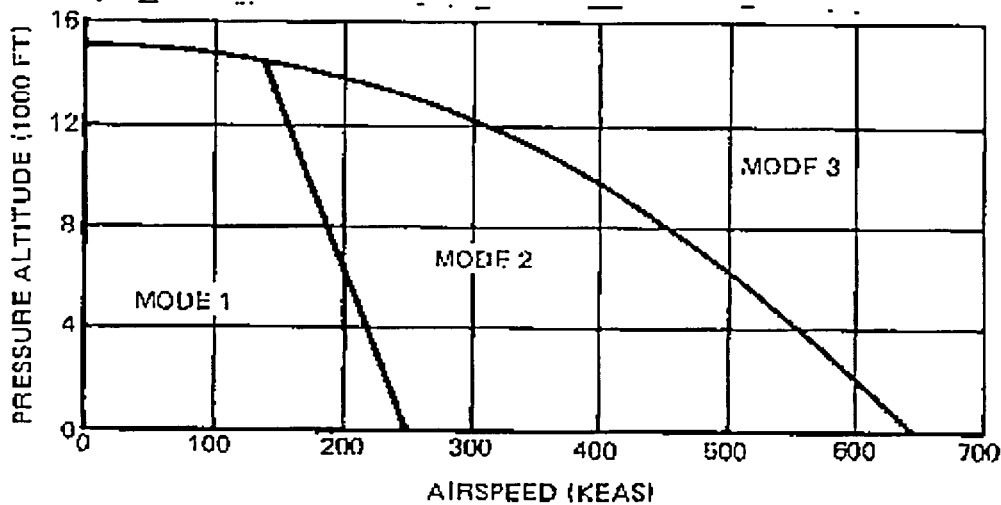


Figure 17-2. Mode envelopes.

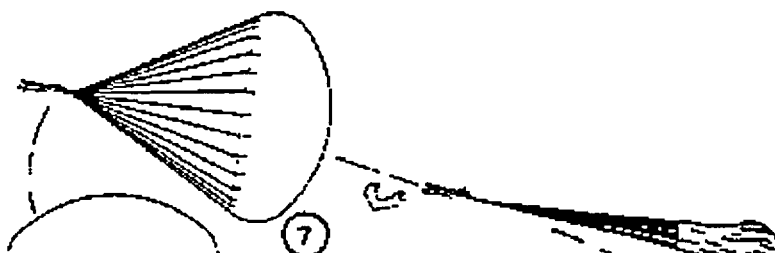




Figure 17-3. Mode 1 operation.


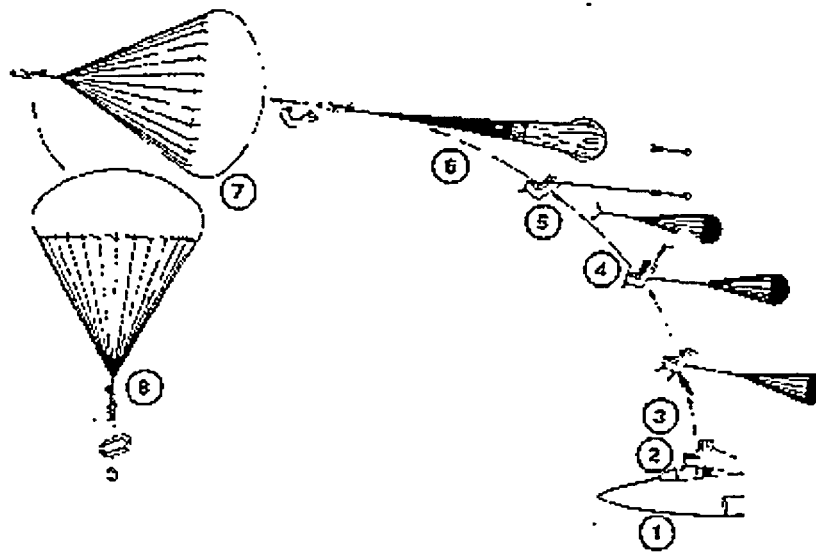


Figure 17-4. Mode 2 operation.

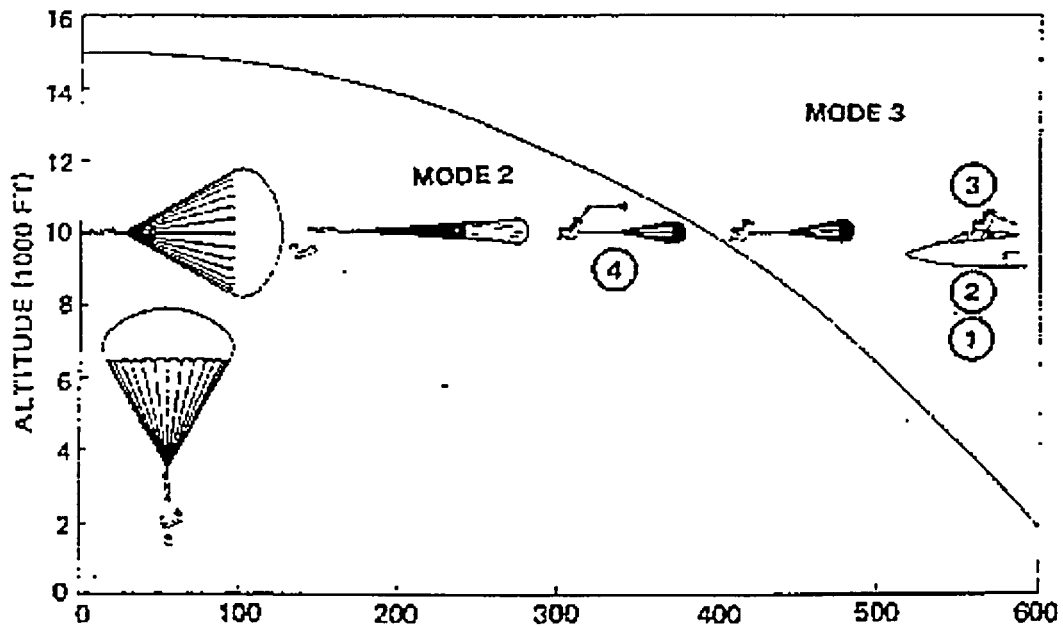

VELOCITY (KEAS)

Figure 17-5. Mode 3 operation.

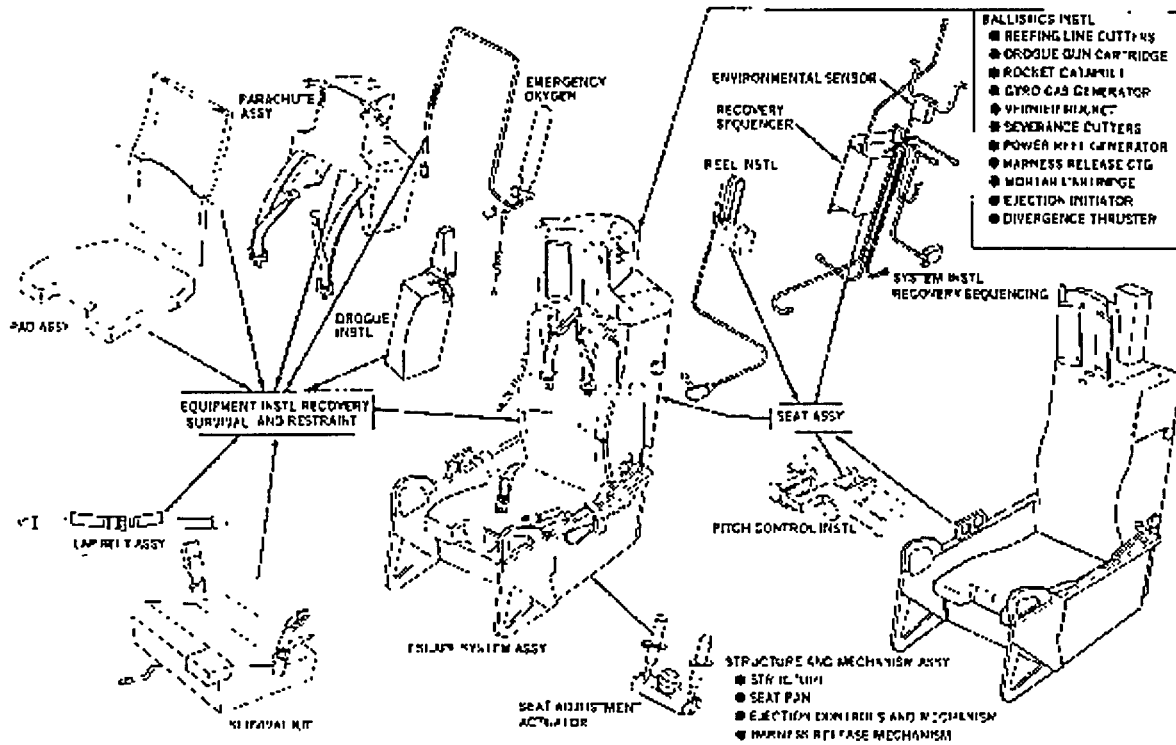


Figure 17-6. ACES II functional breakdown.

The above mentioned ejection seats are presented to illustrate types of seats. Flight surgeons should be familiar with the particular seat they are using including the individual subsystems and the sequencing events during ejection. Technical manuals are available to provide details of the various seats.

**EJECTION EVENTS**

**Pre-ejection**

The time interval from the initial need to leave the aircraft (e.g., aircraft damage, loss of controlled flight) until ejection is initiated is known as *pre-ejection*. During certain critical phases of flight, such as during takeoff and landing, this can be extremely short and not allow any preparation prior to ejection. However, in other situations, such as in-flight emergencies, this time may be sufficient for making changes to increase the probability of successful ejection. Speed can be reduced to lessen the effects of windblast and flailing. Harness straps can be tightened and body position can be adjusted to reduce injury from the forces encountered during ejection (3).

The delay in making the decision to eject has been stressed in flying safety programs since accident data has revealed that over one-third of the aircrew fatally injured during ejection experienced the emergency at altitudes adequate for a successful ejection. This delay has been related to human factors and educational attempts to discourage fatal delays have been included in safety training (2).

## Primary Acceleration

Ejection forces are primarily in the upward direction. The object is to attain the greatest possible velocity over a specified period of time. The force which causes the seat to move upward ranges between 12 and 20 Gs. The incidence of spinal injury appears to increase markedly if the peak acceleration exceeds 25 Gs and if the rate of onset is greater than 300 Gs per second. Many factors will determine the actual value that an ejection seat will produce. The propulsion device will be affected by temperature, the total weight of the occupant-seat assembly, the aircraft velocity and relative airspeed at the time of ejection, and the altitude of ejection. The accelerative forces will also be influenced by the complex mechanical behavior of the body in its relationship to the seat as well as how various body parts relate to each other. The body may be viewed as a fluid-filled body as it behaves in a dynamic fashion during the ejection sequence. Compression forces may be initially elastic but will often exceed the elastic limits and thus become "dynamic overshoots." These overshoots become important in addressing the injuries sustained during the ejection sequence. The line of seat thrust does not correspond to the long axis of the spine because the guide rails are tilted back at approximately 12 to 20 degrees. The net effect is to produce a vector of forward acceleration necessitating adequate shoulder restraint and protection of the head. The rocket propelled seats have extended the duration of upward thrust and allowed a reduction in the rate of onset of the force to the body as compared to ballistic seats. The result has been an associated reduction in the incidence of spinal injury (1).

## Forces of Windblast

After the initial +Gz acceleration of the seat going up the rails, and differential plus and minus Gz acceleration of "gradual" entry into the airstream, the occupant-seat combination is rapidly decelerated due to ram air force from windblast. This force is termed the *Q force* and varies with the density of the air and is proportional to the surface area of the occupant-seat combination. Q forces are related to indicated airspeed rather than true airspeed. These forces increase with the square of the velocity thus producing the recommendation that pilots should reduce airspeed and increase altitude prior to ejection (3). Q forces have been divided into those produced by *windblast*, resulting in injuries such as petechial and subconjunctival hemorrhage, and those injuries produced by *flailing* of the head and extremities. Flail injuries are the result of the differential deceleration of the extremities in relationship to the torso and seat. Flail injury occurs as a consequence of the extremities leaving their initial position, building up substantial acceleration, and then suddenly stopping. The sudden stop may produce a bone fracture, joint dislocation, or total disarticulation (1). Review of combat ejections in Southeast Asia revealed a strong correlation between high-speed ejection and flail injuries (3). Tumbling of the ejection seat and its occupant has been effectively reduced by use of stabilizer drogue chutes and gyro-controlled vernier rockets for positive pitch stabilization (4).

## Parachute Descent and Landing

This phase of the ejection sequence is critical to the outcome of the entire process of escape and yet 90 per cent of all non-fatal injuries associated with escape occur during landing. Although the techniques of landing by parachute are easily taught and simulated by jumps from training towers, the incidence of sprained or fractured ankles is estimated to be 50 per thousand descents (1). The correct procedures for parachute landing are taught aircrew during several phases of their training. Flight surgeons should become familiar with the proper procedures and use of equipment. Parachute opening shock can be severe if the drogue chute fails or the main parachute deploys prematurely.

High altitude escape is relatively rare, but if it occurs additional risk factors are present. Opening shock is increased due to increased velocities that increase terminal velocity to the point that damage to the parachute and injury to the crewmember usually results. Additional hazards include hypoxia and low temperatures. If the emergency oxygen supply in the emergency system malfunctions or the oxygen mask is lost during escape then hypoxia becomes a significant hazard. Protective flight clothing is usually adequate to prevent frostbite but the loss of gloves can impair usage of fingers required for subsequent survival activities (1).

High-speed escape close to the ground presents the most difficult of ejection sequences. The initial thrust must be adequate to clear the rapidly moving tail section. The windblast will be high and time delays will be necessarily short to minimize loss of altitude before the main parachute deploys. The rocket seat, at high-speed low altitude ejection, has a lengthened initial impulse, allowing more time for the subsystems to operate, and slowing the seat to a safer velocity (3).

**Pattern of Ejection Injuries**

The injuries occurring during emergency escape are unique and varied. The flight surgeon should be familiar with these unique injuries or they may go unnoticed. Table 2 is an overview of injuries that might be expected during an ejection sequence (3).

TIME	CAUSE	INJURY
Ejection	Ejection seat G forces	Spinal compression fracture
	Struck by seat or cockpit object	Extremity fracture
		Foot fractures
	Impact canopy structures	Severe lacerations
		Neck strains
		Spinal compression fractures
	Windblast	Petechial, retinal and conjunctival hemorrhages
	Helmet rotation	Neck strain
	Hail and rain	Contusions, Hemorrhages
	Flail (linear deceleration)	Fractures
		Dislocation/disarticulation of extremities
Accelerative and decelerative forces	Internal injuries to the body organs	
	Unconsciousness due to head injury	
	Subdural hematoma	
Parachute Deployment	Parachute-opening shock	Cervical fracture or strain
		Muscle sprains
		Cervical vertebrae dislocation
	Riser slap	Facial fractures
		Contusions
	Lacerations.	



Parachute Descent	High-altitude ejection	Frostbite
		Hypoxia
	High-speed rotation and/or Spinning	Severe pain and hemorrhages
		Descent through trees
Fractures		
Landing	Landing impact	Leg-ankle fracture
		Spinal fracture
	Parachute drag	Severe drag burns
		Fractures
	Descent in or near fireball	Burns
In-water parachute entanglement	Water in lungs and stomach	

**TABLE 17-2. EJECTION SEQUENCE AND INJURY PATTERNS**

Back injuries have been the major source of reported injuries during emergency egress from aircraft. The vertebral column is able to absorb large compressive loads applied parallel to the long axis of the column but dynamic loading produced at angles of 12 to 15 degrees to the long axis of the spine results in significant injuries. The greatest risk occurs between T10 and L2. Injuries at other levels are rare and usually related to forward flexion as a result of poor posture. The injuries are either anterior lip chip fractures or compression fractures of the vertebral body. Spinal cord involvement is rare. (1) In a 2-year period the United States Air Force reported that compression fracture was the leading type of injury sustained in 468 ejections (5). It is estimated that radiographic evidence of fracture can be found in 30 to 50 per cent of aircrew after ejection. Any degree of flexion in the posture of the seat occupant enhances the risk of spinal injury. Flight surgeons should make certain that all crewmembers receive radiographs of the spine post-ejection. In questionable cases or in cases of unexplained pain, bone scan procedures should be considered (1).

**FUTURE OF EJECTION SYSTEMS**

The ejection seat has evolved into a complicated system with subsystems. Seat improvement has improved the odds of survival, and expanded boundary limits for successful ejection. The ability of the seat to monitor environmental factors has allowed better control inputs, improving seat stability. The incidence of ejection injuries is reduced by employing a complex acceleration profile. The profile is impulsive and of high amplitude at the beginning and end of the acceleration period, while relatively smooth and of low amplitude during the interposed major time segment. Figure 7 demonstrates the success of these systems.

The next generation of escape systems will use controllable propulsion systems to provide safe ejection over the expanded aircraft flight performance envelopes of advanced aircraft. Continued research will only enhance the capability of future ejection systems. Current research efforts are being directed toward solving the problems associated with high speed and high altitude ejections.



Figure 17-7. Stability of ACES II seat demonstration.

## REFERENCES

1. Dhenin G, ed. Aviation medicine: health and clinical aspects. London: Tri-Med Books Limited, 1978.
2. Society of U.S. Air Force Flight Surgeons. Flight Surgeons Handbook of Life Support Equipment, 1 Oct 87.
3. U.S. Naval Flight Surgeon's Manual. Prepared by BioTechnology, Inc. Chief of Naval Operations and Bureau of Medicine and Surgery. Washington, D.C., 1978.
4. Advanced Concept Ejection Seat ACES II. Report MDC J4576 Revision D, March 1988.
5. Shannon RH: Operational aspects of forces on man during escape in the U.S. Air Force, 1 January 1968-31 December 1970. In AGARD Linear Acceleration of Impact Type, Jun 1971.

16

DOCKETED  
USNRC



2003 JAN 31 PM 1: 50

OFFICE OF THE SECRETARY  
RULEMAKINGS AND  
ADJUDICATIONS STAFF

**NUCLEAR REGULATORY COMMISSION**

Docket No. \_\_\_\_\_ Official Ed. No. 152  
 In the matter of PFS  
 Staff \_\_\_\_\_ IDENTIFIED   
 Applicant \_\_\_\_\_ RECEIVED \_\_\_\_\_  
 Intervenor  REJECT \_\_\_\_\_  
 Other \_\_\_\_\_ WITH \_\_\_\_\_  
 DATE 4-10-02  
 Clerk Susette M. Snider