PBMR Thermo Hydraulic Cycle and Thermal Design

Presented to the US DOE

7 August 2003

Johan Slabber

MPS Circuit Schematic Diagram

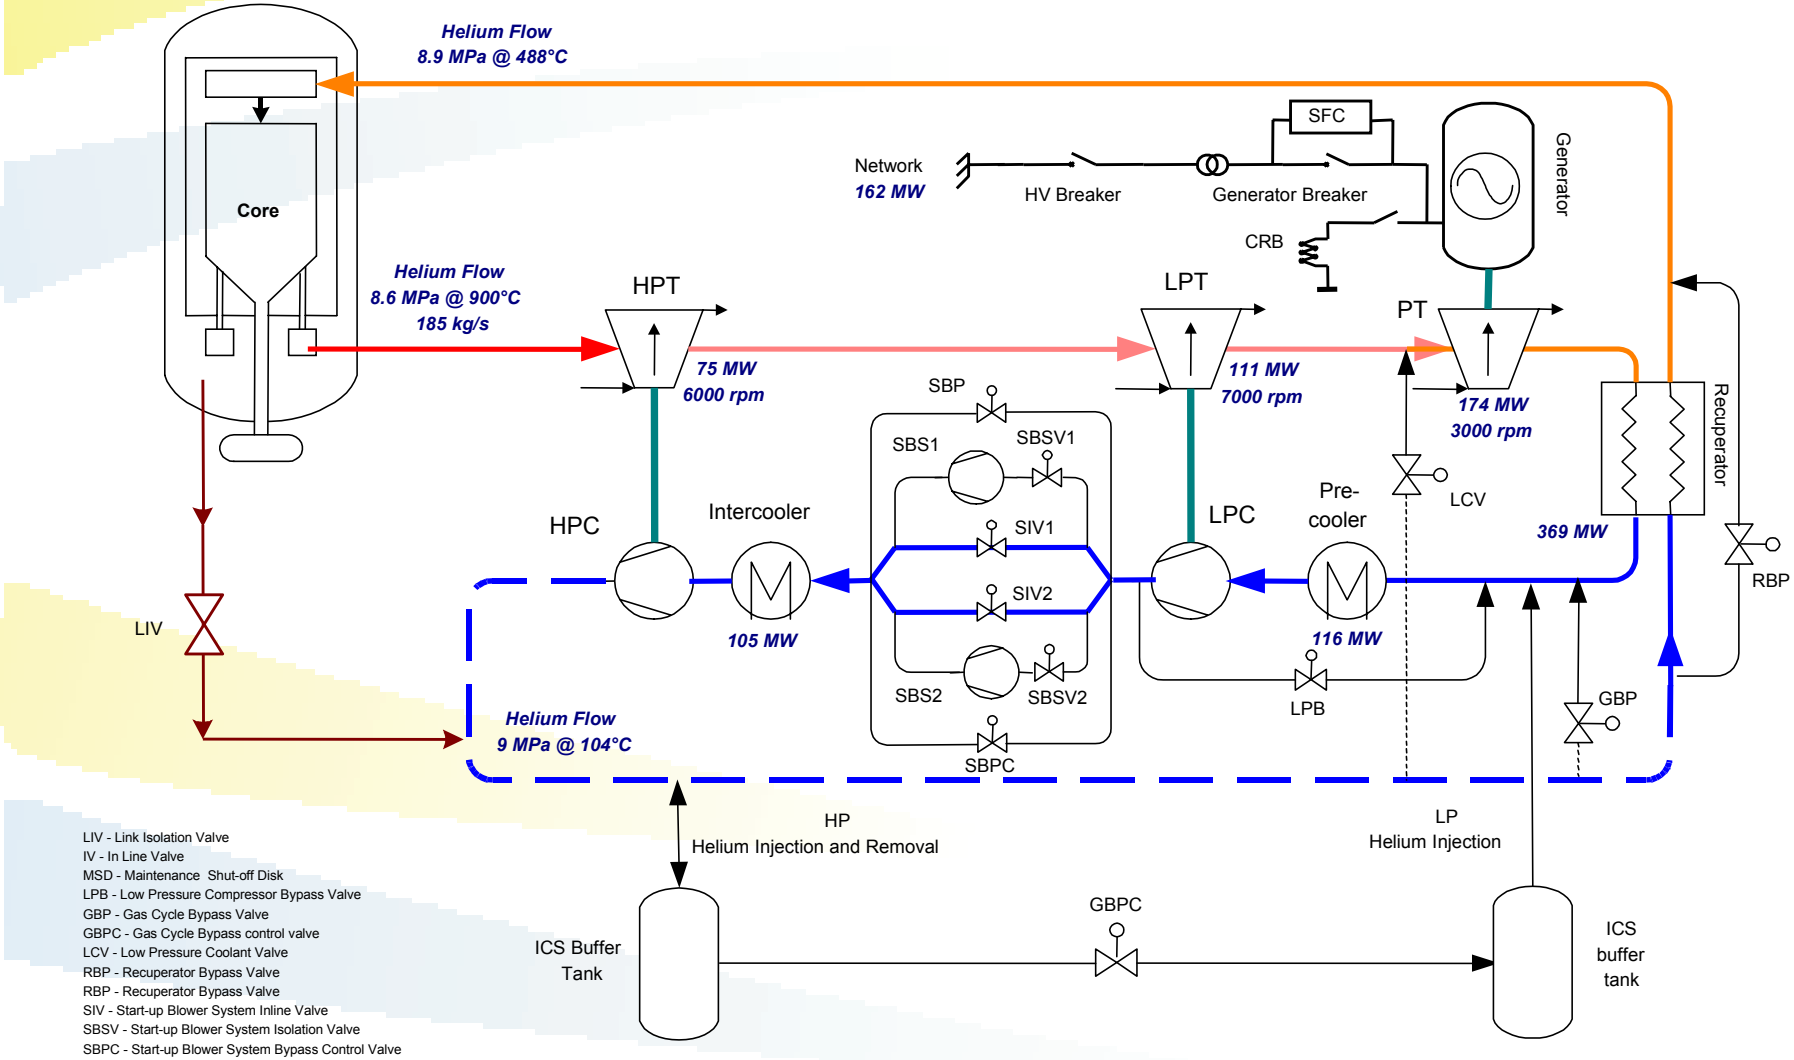

LIV - Link Isolation Valve
IV - In Line Valve
MSD - Maintenance Shut-off Disk
LPB - Low Pressure Compressor Bypass Valve
GBP - Gas Cycle Bypass Valve
GBPC - Gas Cycle Bypass control valve
LCV - Low Pressure Coolant Valve
RBP - Recuperator Bypass Valve
RBP - Recuperator Bypass Valve
SIV - Start-up Blower System Inline Valve
SBSV - Start-up Blower System Isolation Valve
SBPC - Start-up Blower System Bypass Control Valve
SBP - Start-up Blower System Bypass Valve

Schematic of the PBMR and Temperature – Entropy diagram for 100% MCR

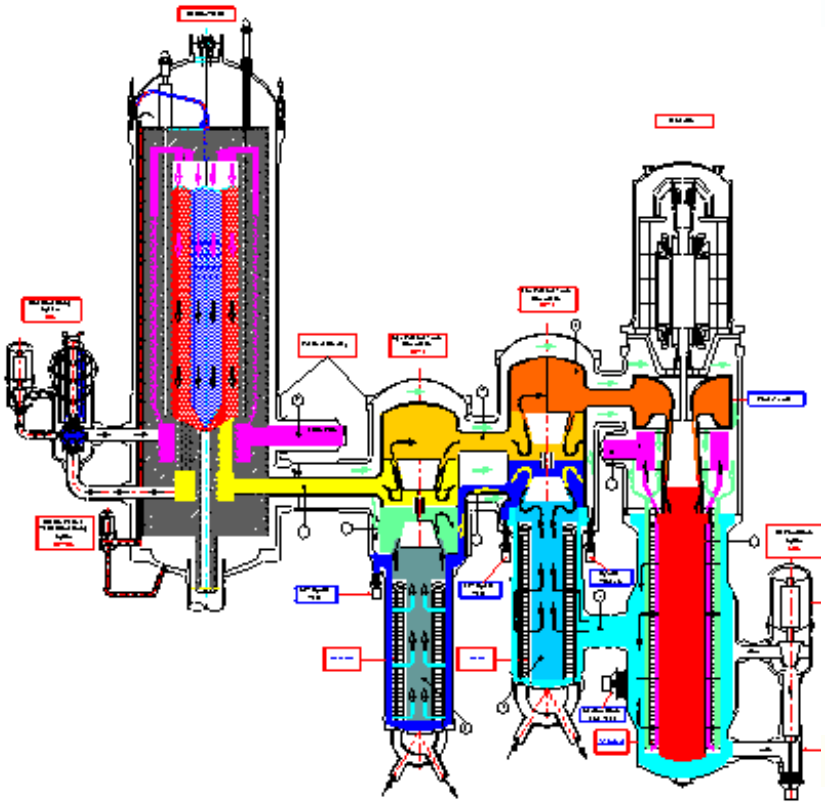

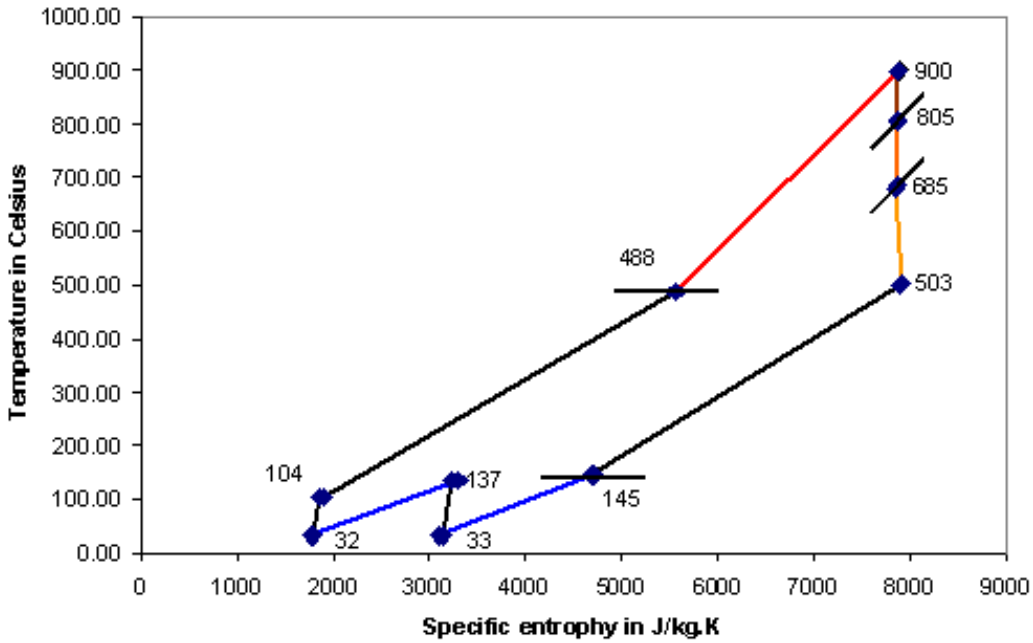

An example of the CFD Reactor Unit model

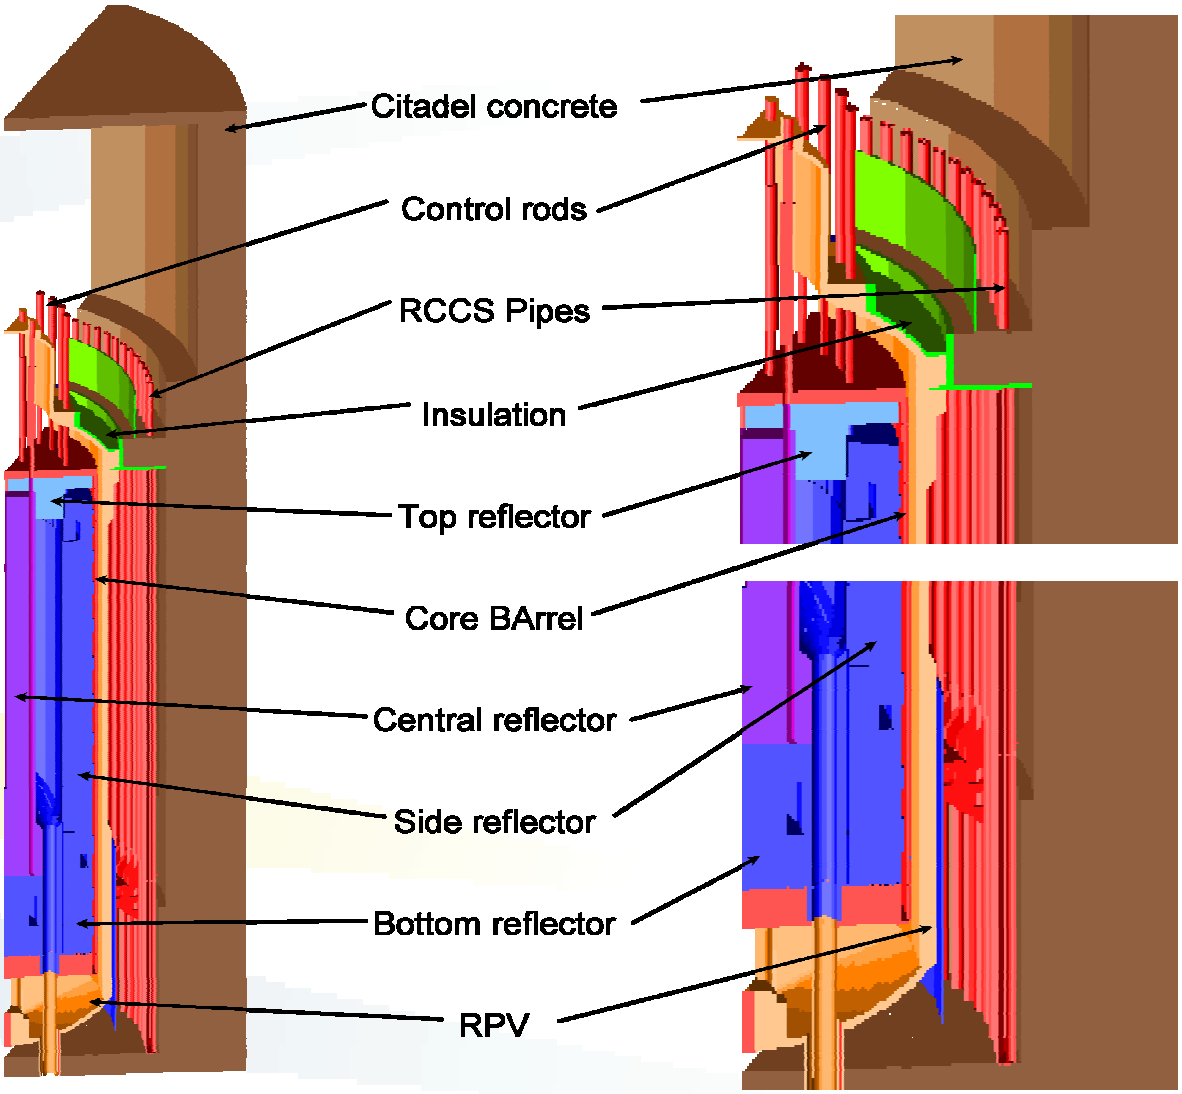

Reactor Unit CFD Analyses

Effect of Turbulent Mixing

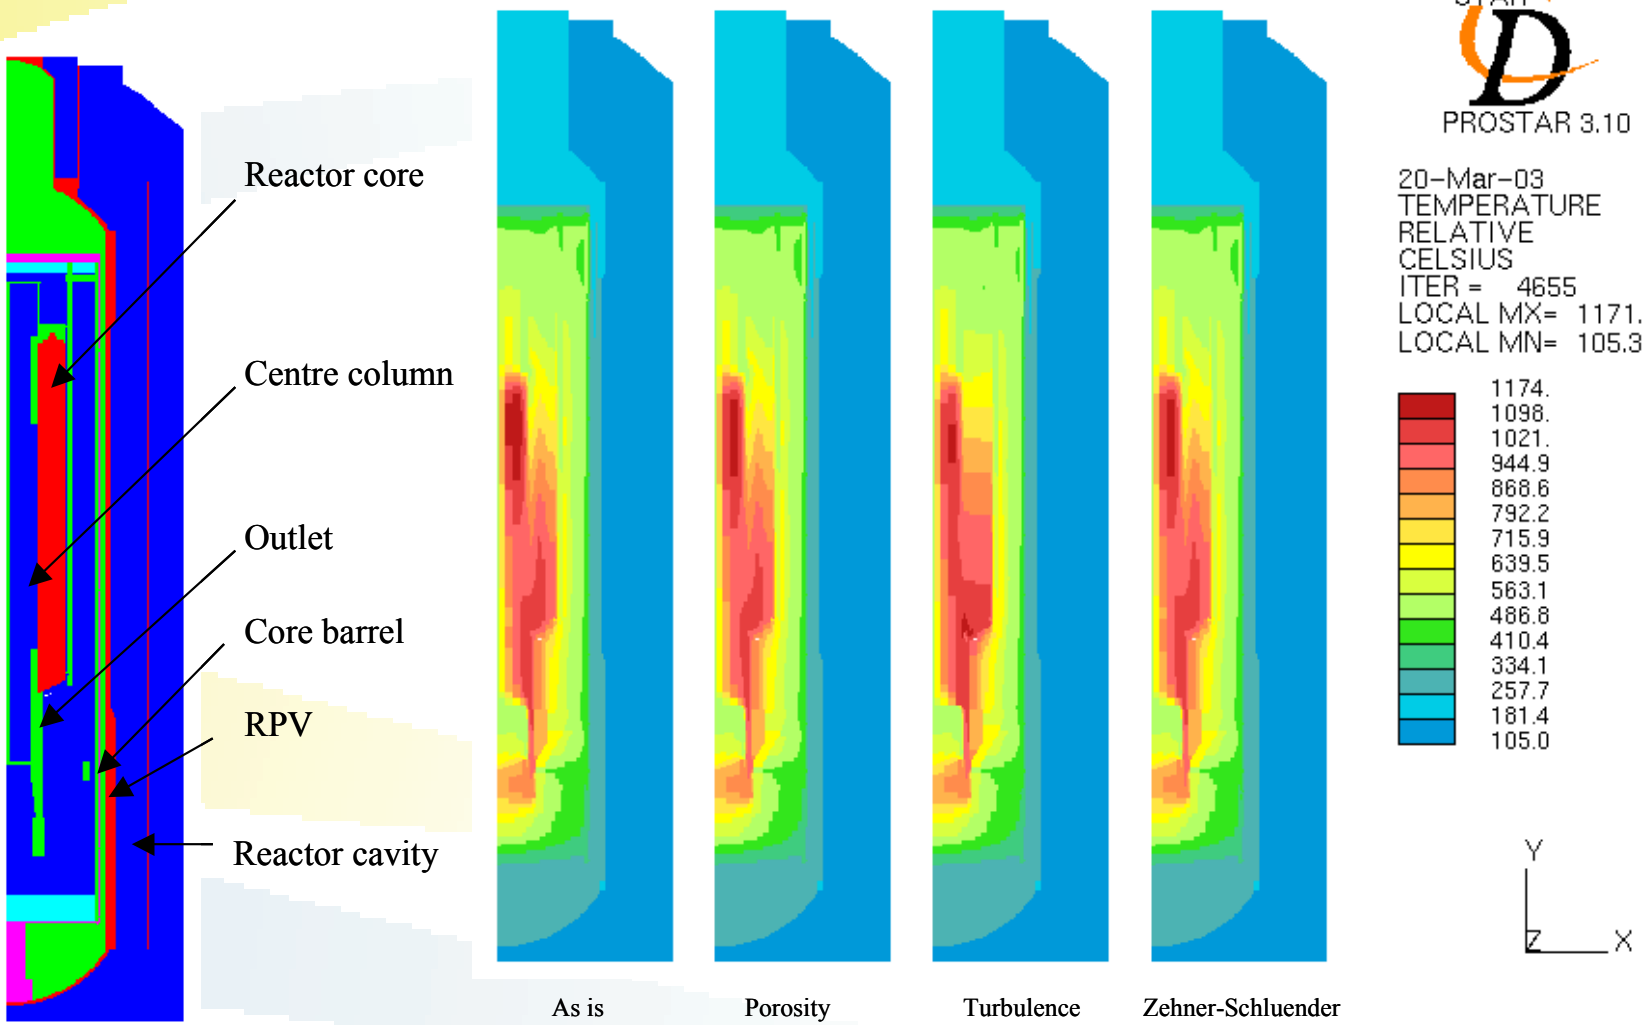

Reactor Unit CFD Analyses

Comparison of Helium Temperature in Core

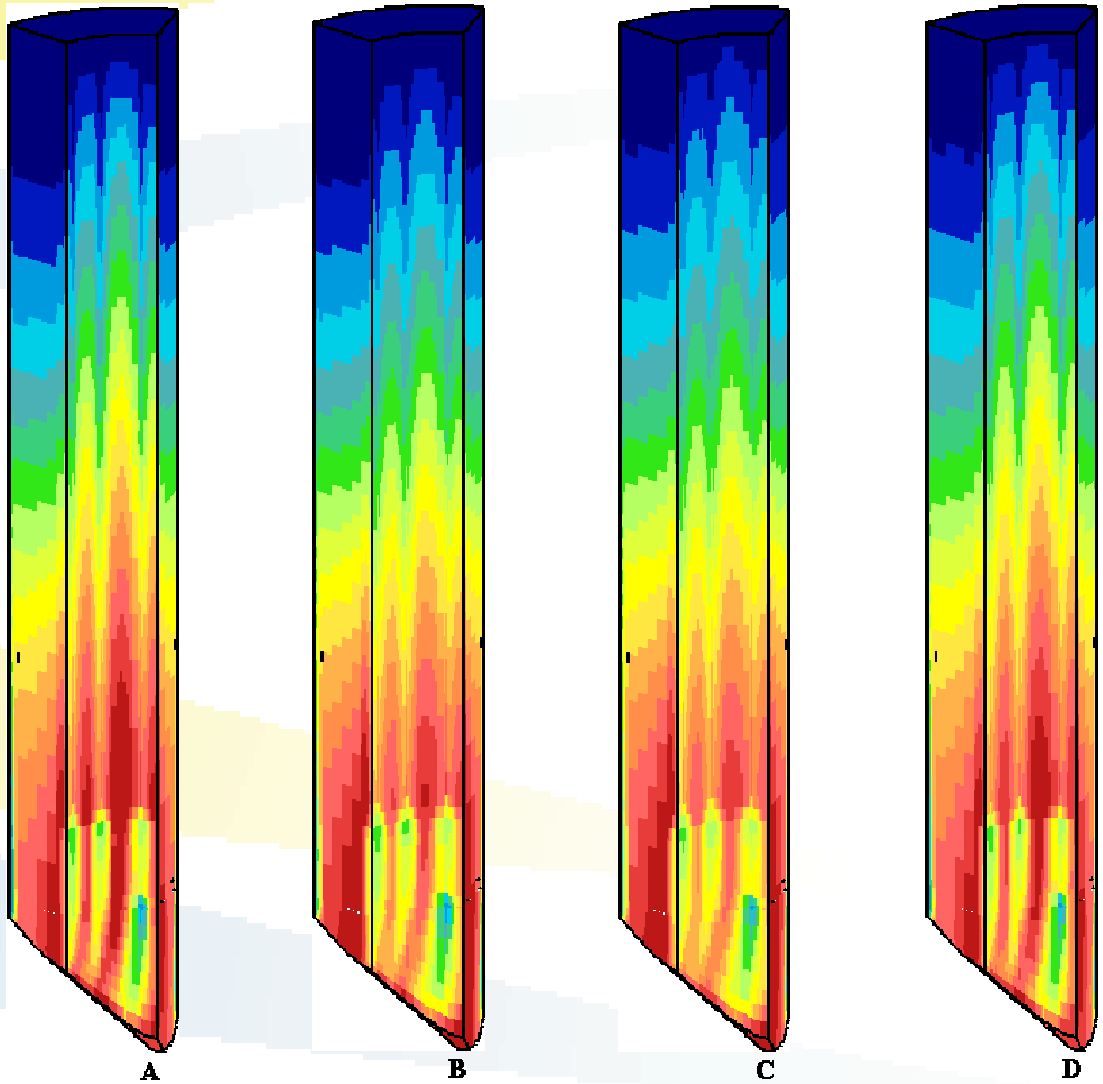



A - 2a - 100%MCR 100%MCRI
B - 2g - 40%MCR 40%MCRI
C - 2h - 16%MCR 40%MCRI
D - 2o - 43%MCR 100%MCRI

CFD TRANSIENT SIMULATION OF DLOFC EVENT

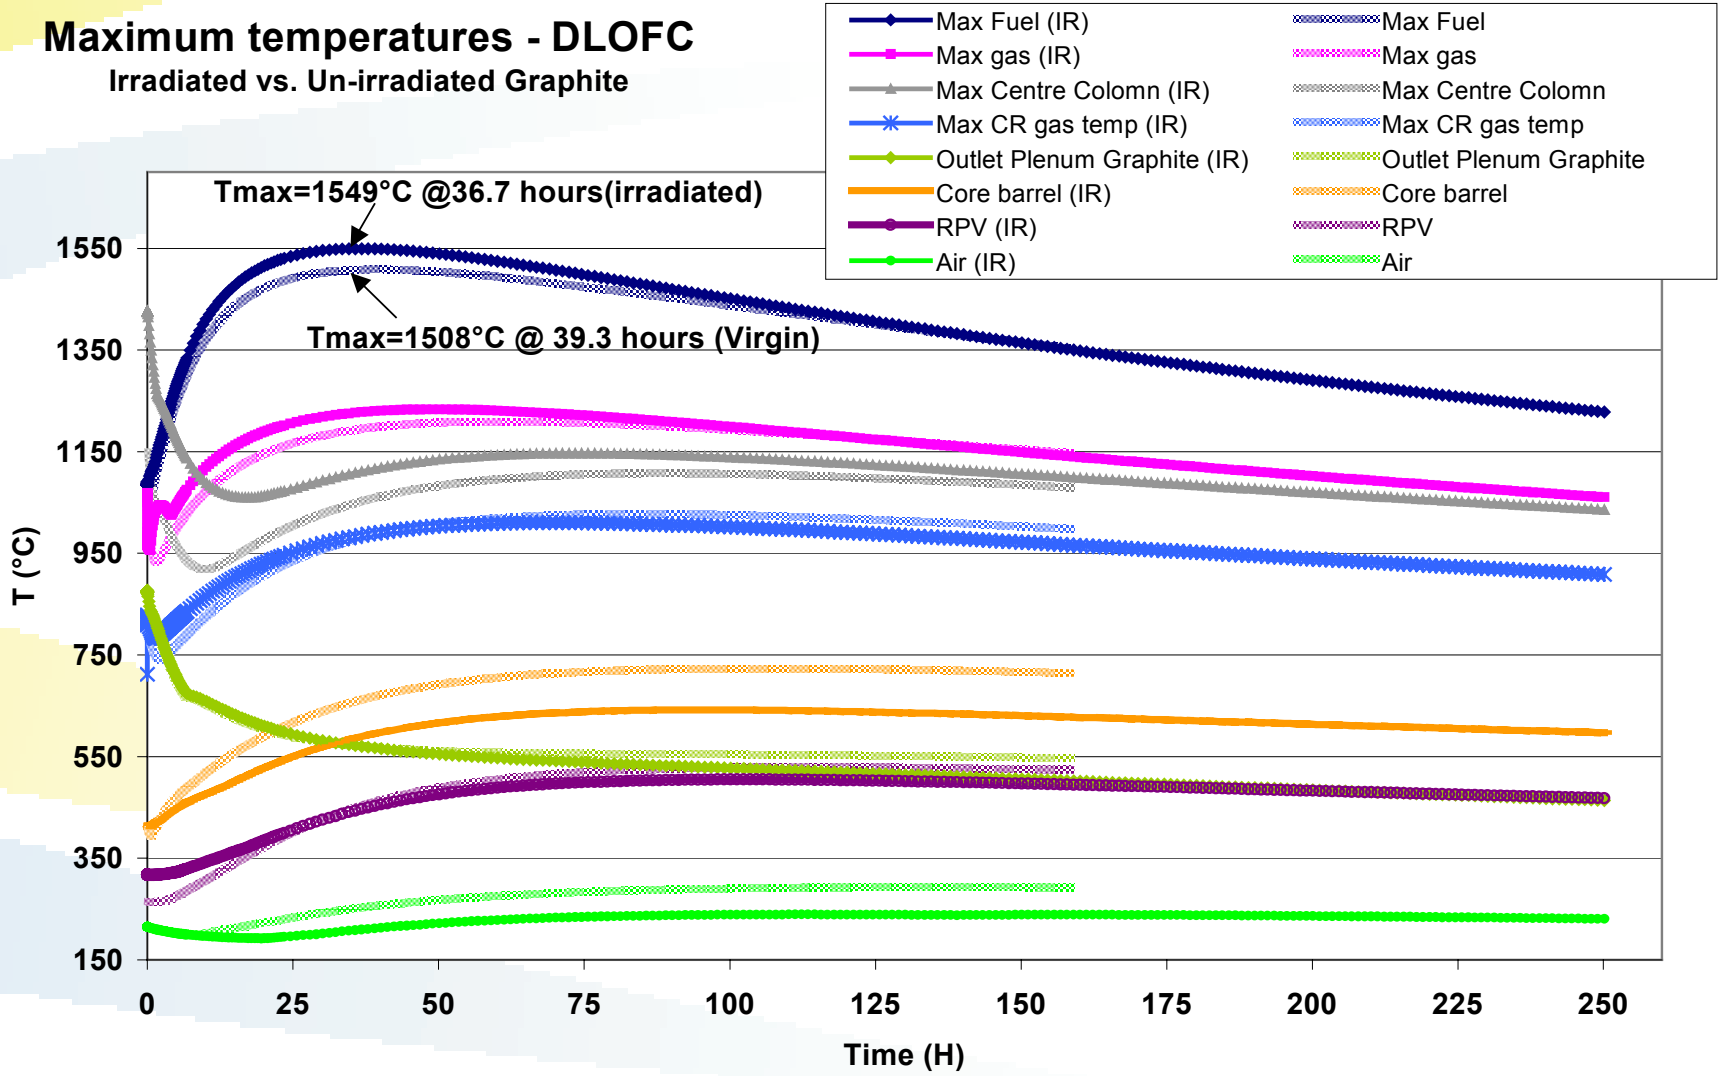

MPS Sensitivity Analyses

Definition:

Determine to which parameters the MPS are most sensitive by varying one input parameter at a time.

MPS output parameters examined are:

- **HPTU & LPTU Rotational Speed,**
- **HPC & LPC Surge Margin,**
- **Cycle Efficiency**
- **Grid Power**

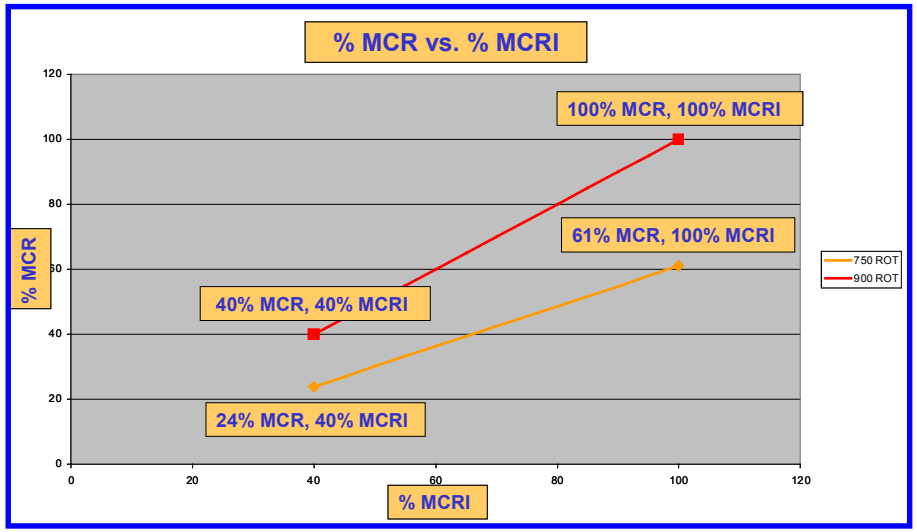

49 parameters are varied, including:

- **Turbo machine entrance and exit losses, efficiencies, throat areas & leakage**
- **Heat exchanger parameters (Heat Areas, etc.)**
- **Reactor parameters (Pebble bed length, bypass flow & outlet temperature)**
- **Cooling water temperature (Variation at Koeberg)**

MPS Sensitivity Analyses Results

P B M R

All Results Combined

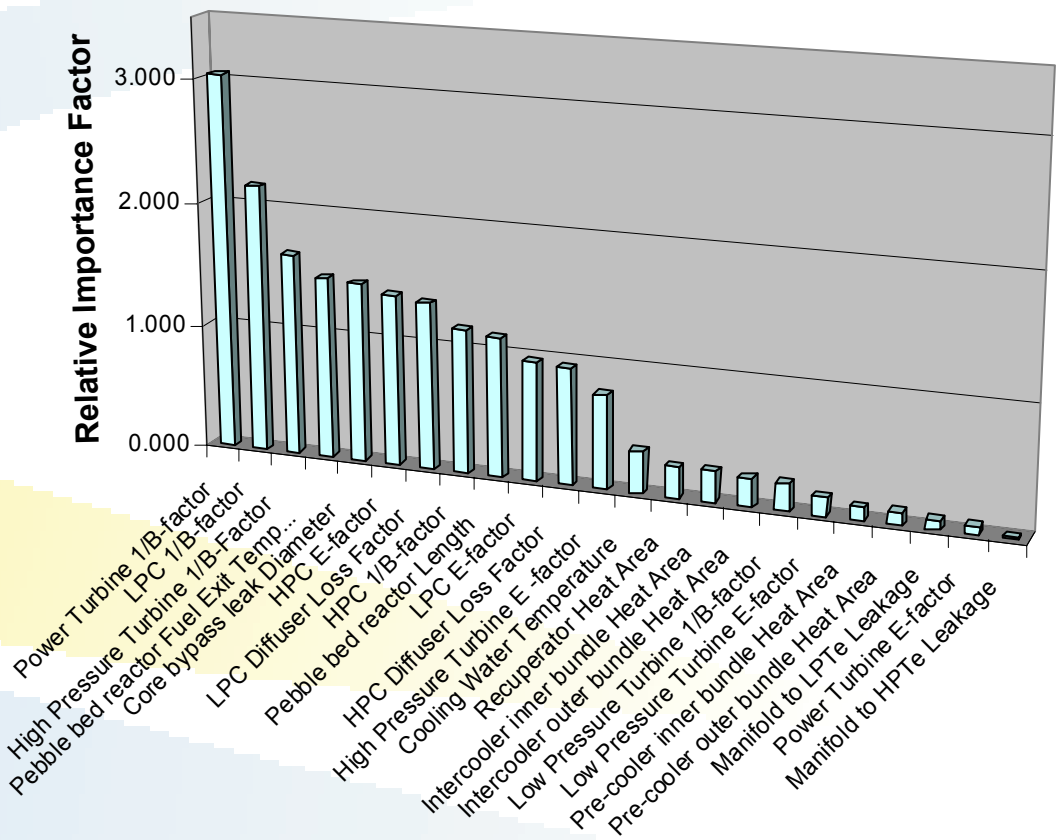

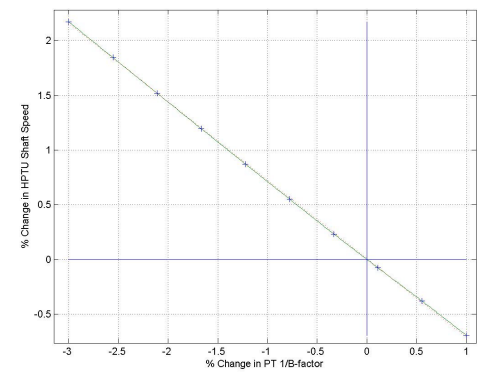

Sensitivity:

Gradient of straight line
x input variation.

$$y = mx + c \qquad m = \frac{\Delta y}{\Delta x}$$

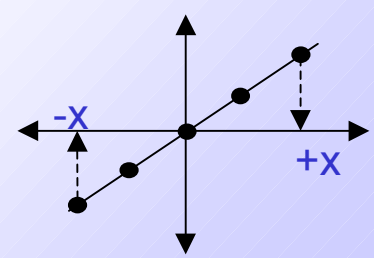

MPS Monte Carlo Analyses

P B M R

Definition:

Determine the likely variation in the MPS output parameters by simultaneously varying all the input parameters randomly, according to an uncertainty distribution.

MPS output parameters examined are:

- **HPTU & LPTU Rotational Speed,**
- **HPC & LPC Surge Margin,**
- **Cycle Efficiency**
- **Grid Power**

Comparing number of runs (Cycle Efficiency)

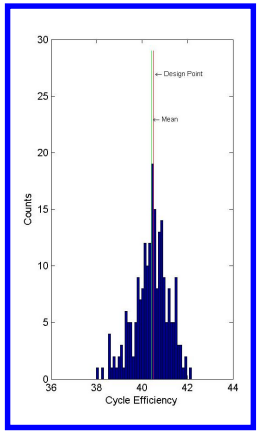

250

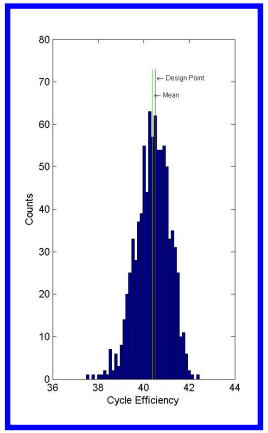

1000

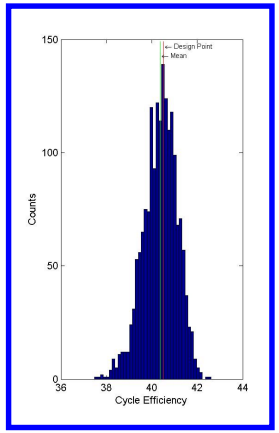

2000

Assumed sufficient for convergence

The same 49 parameters that were used in the Sensitivity Analyses, were used to perform the Monte Carlo Analyses.

MPS Monte Carlo Analyses

Turbo Machine Speed

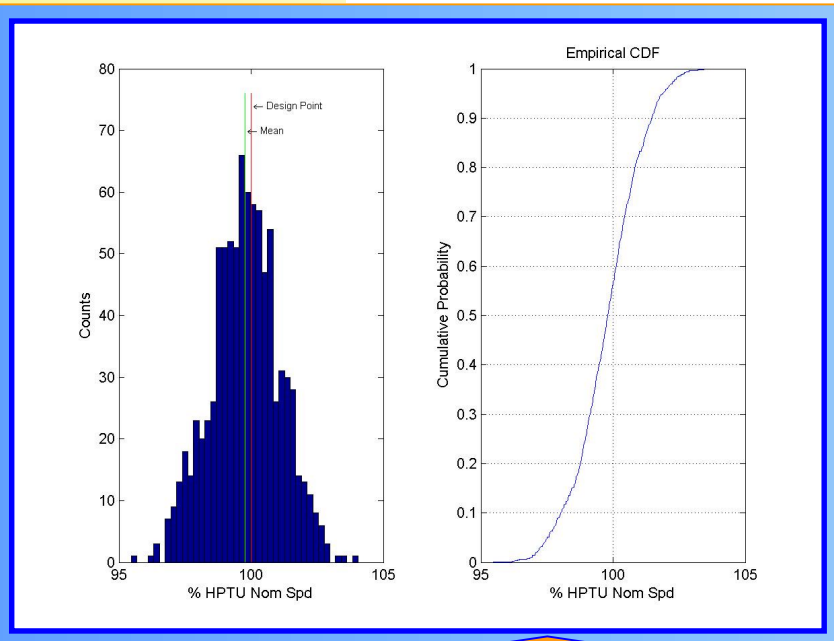

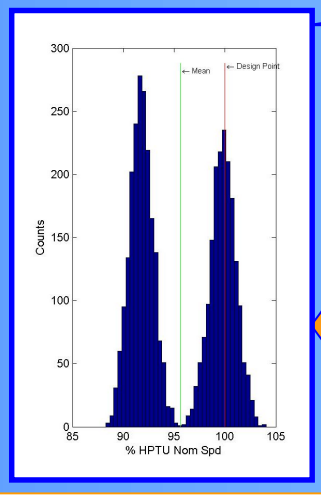

900°C ROT

750°C & 900°C ROT Combined

HPTU

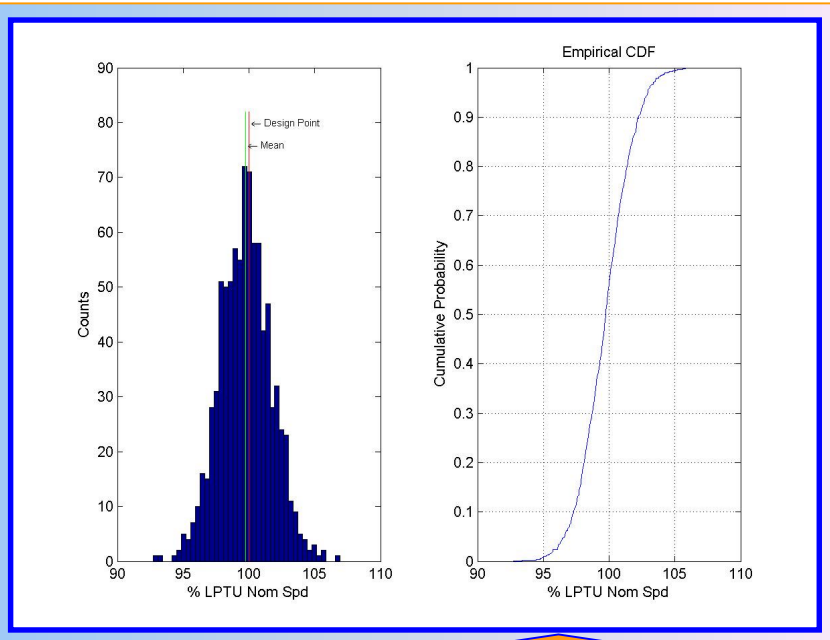

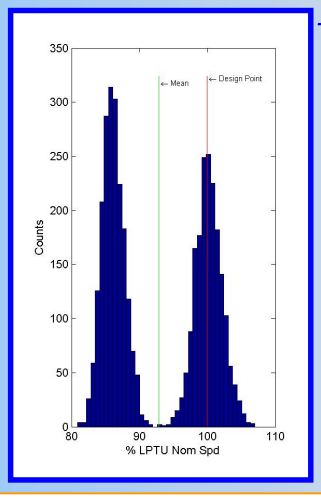

900°C ROT

750°C & 900°C ROT Combined

LPTU

DLOFC Monte Carlo Analyses on Reactor

Maximum Fuel Temperature Distribution

Reactor Layout

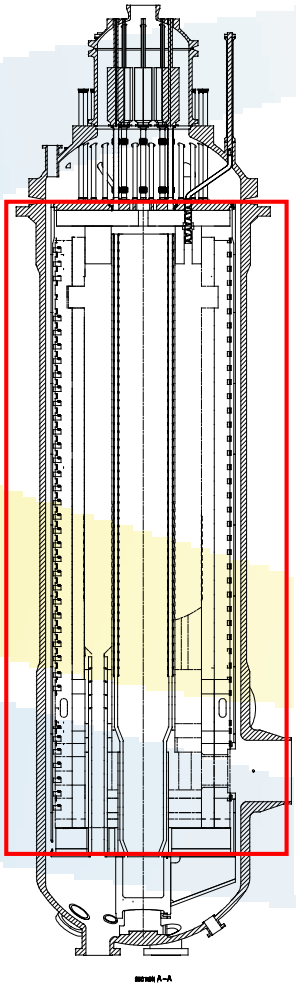

Simplified Model

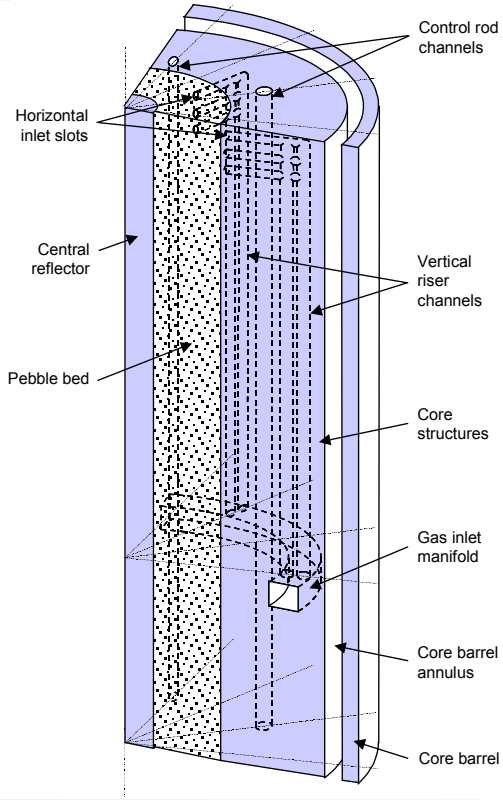

Flownex Model Layout

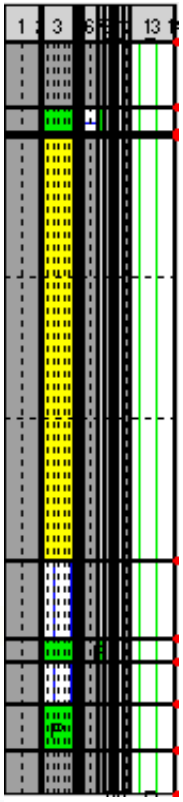

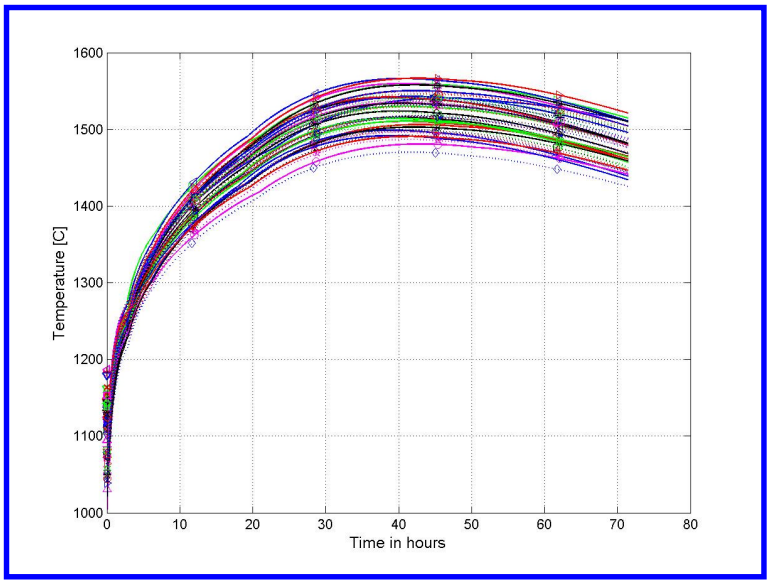

Transient Results

PCU CFD Analyses

Manifold & HPT-LPT Connection

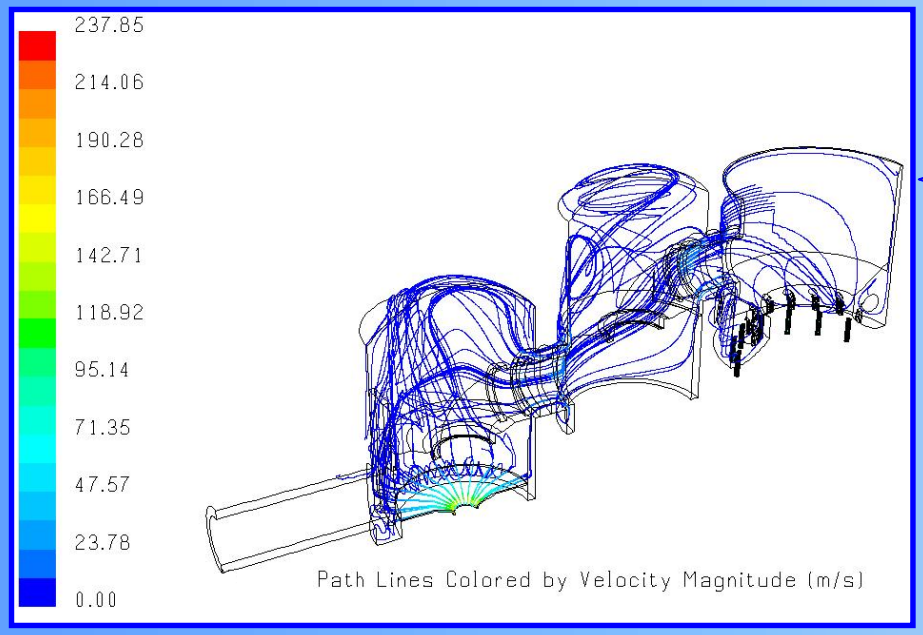

Velocity Path Lines

Velocity Magnitude

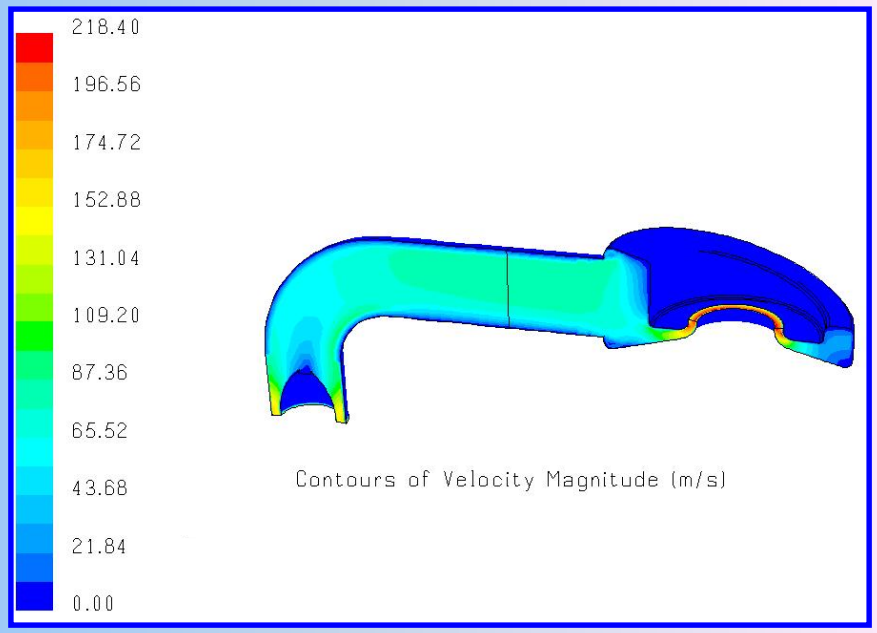

PCU CFD Analyses

HP Recuperator outlet header

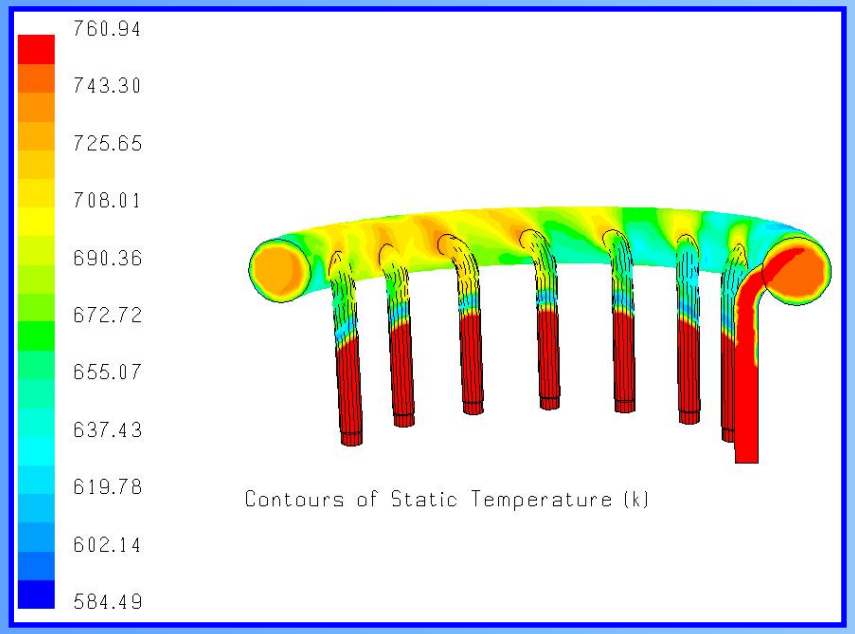

Static Temperature

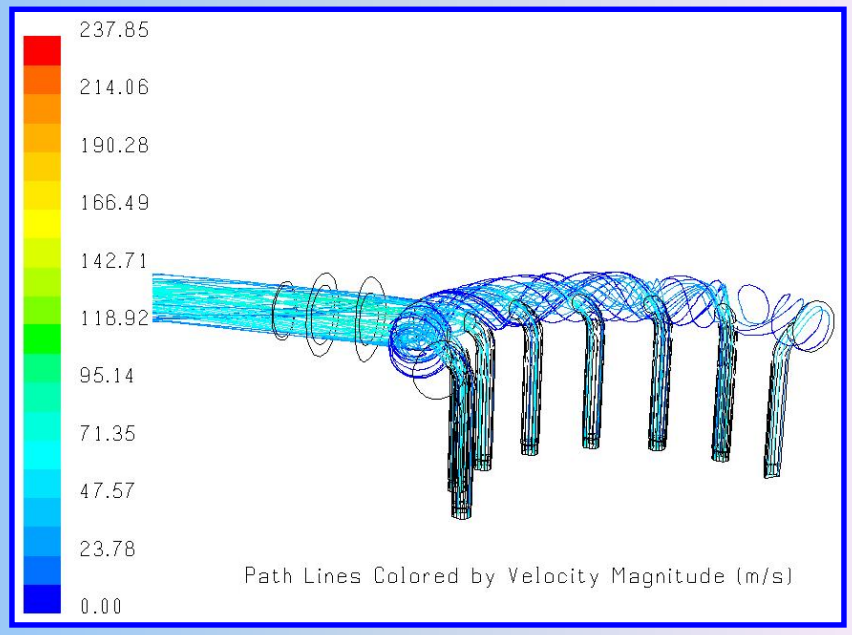

Velocity Path Lines

Start-Up – Turbo Unit Parameters

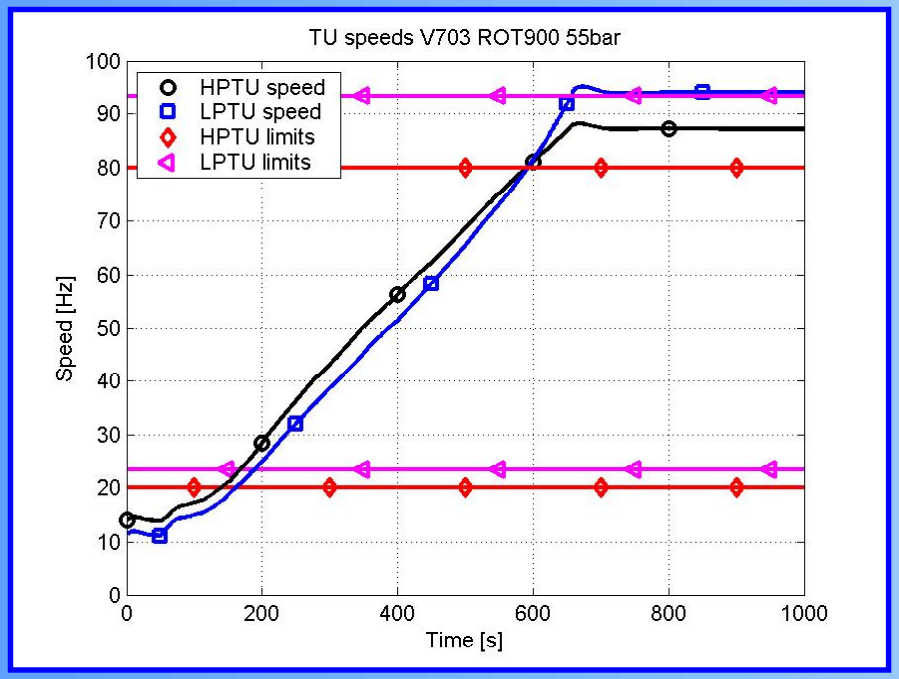

Turbo Unit Speeds

Compressor Surge Margins

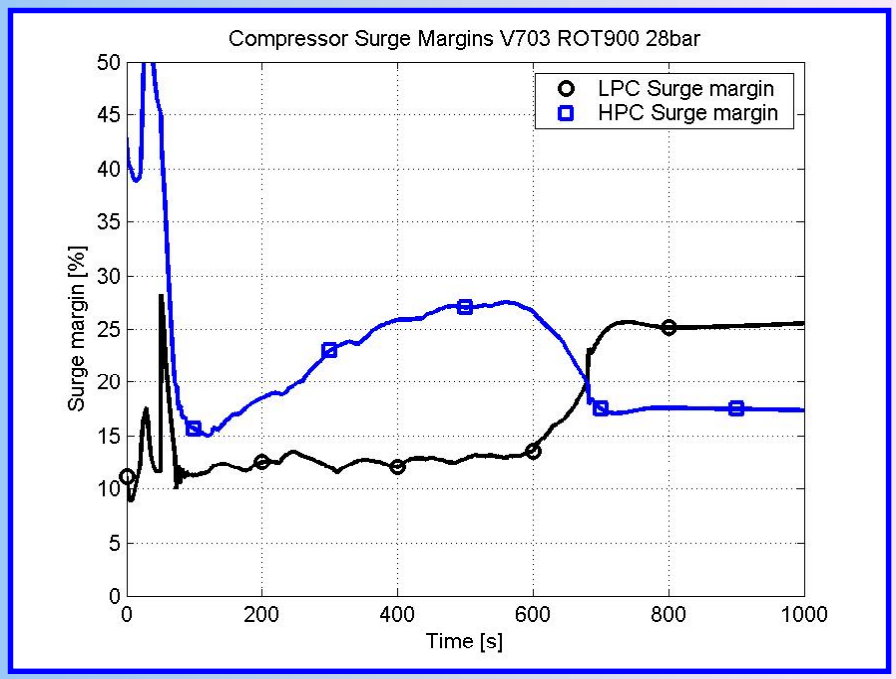

Start-Up – Reactor Parameters

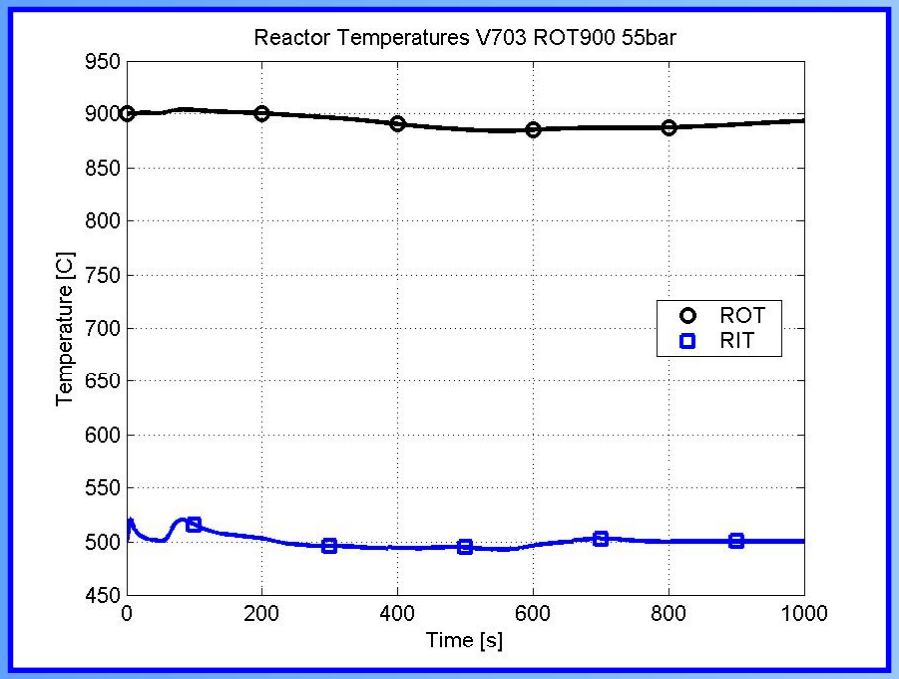

Reactor Temperatures

Reactor Power

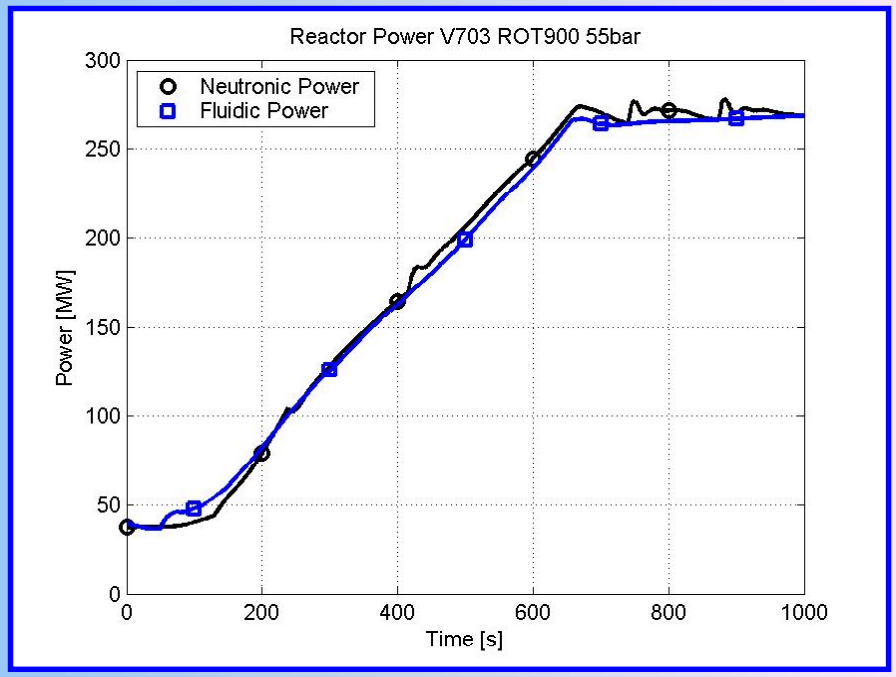

Start-Up – Compressor Map Movement

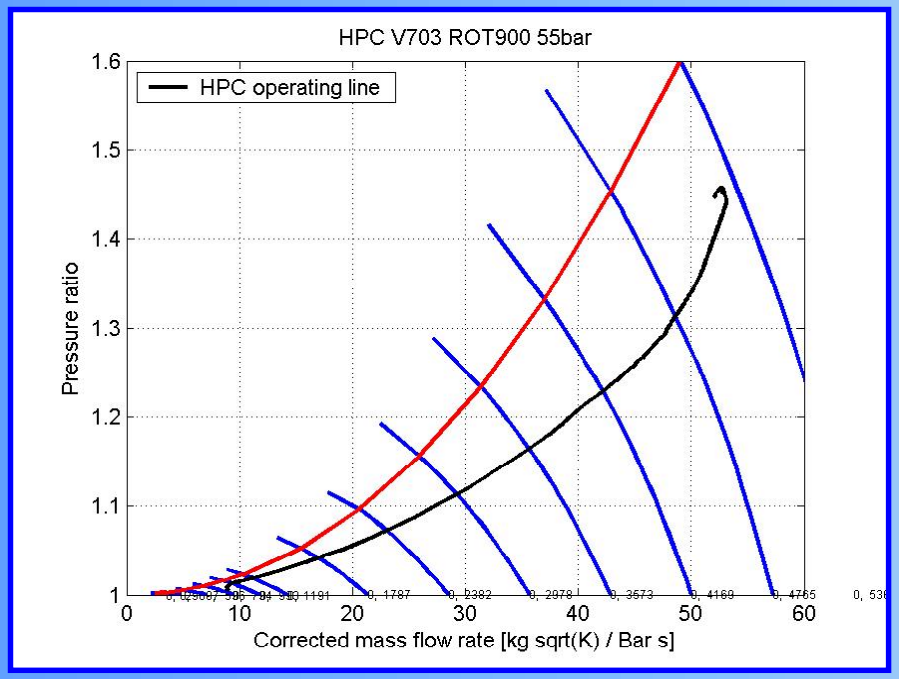

HPC movement

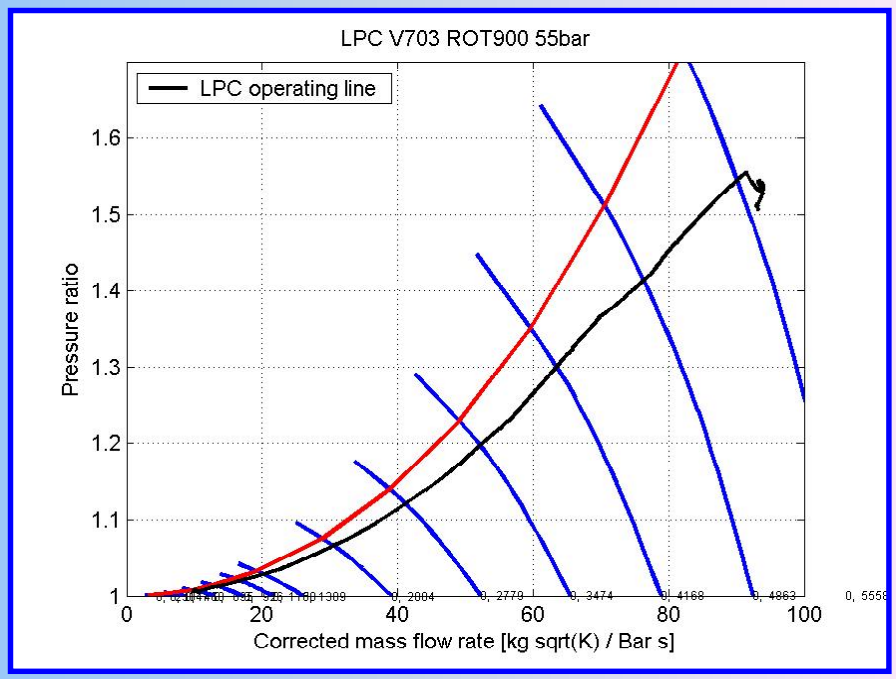

LPC movement