

CORRECTED COPY**MATERIALS LICENSE**

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 36, 39, 40, and 70, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s). This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

Licensee		In accordance with application dated August 28, 2002
1. Arctic Pipe Inspection, Inc 2. P.O. Box 1296 Kenai, Alaska 99611		3. License number 50-17314-01 is amended in its entirety to read as follows: 4. Expiration date December 31, 2012 5. Docket No. 030-12538 Reference No.
6. Byproduct, source, and/or special nuclear material	7. Chemical and/or physical form	8. Maximum amount that licensee may possess at any one time under this license
A. Cesium-137	A. Sealed sources (3M Co. Model 4F6H)	A. 1.5 curies per source and 1.5 curies total
9. Authorized use:	A. For use in NDT Systems, Inc. Model 13640 and Model 13640B tube wall calipers for measurement of wall thickness of pipes, and use in Ludlum Measurements, Inc. Model 3110 wall caliper with model 3001 source holder for wall thickness measurements.	

CONDITIONS

10. A. Licensed material may be stored or used only at the licensee's facilities located at Mile 18.5, Kenai Spur Highway, Kenai, Alaska, and Industrial Plant, North Slope, Alaska.
- B. Temporary job sites anywhere in the United States where the U.S. Nuclear Regulatory Commission maintains jurisdiction for regulating the use of licensed material, including areas of exclusive Federal jurisdiction within Agreement States.

If the jurisdiction status of a Federal facility within an Agreement state is unknown, the licensee should contact the federal agency controlling the job site in question to determine whether the proposed job site is an area of exclusive Federal jurisdiction. Authorization for use of radioactive materials at job sites in Agreement States not under exclusive Federal jurisdiction shall be obtained from the appropriate state regulatory agency.

11. Licensed material shall be used by, or under the supervision of, individuals who have received the training described in application dated August 28, 2002. The licensee shall maintain records of individuals designated as users for 3 years following the last use of licensed material by the individual.
12. The Radiation Safety Officer (RSO) for this license is Royce Roberts.

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**

License Number
50-17314-01


Docket or Reference Number
030-12538

Amendment No. 09
CORRECTED COPY

13. A. Sealed sources shall be tested for leakage and/or contamination at intervals not to exceed the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State.
- B. Notwithstanding Paragraph A of this condition, sealed sources designed to primarily emit alpha particles shall be tested for leakage and/or contamination at intervals not to exceed 3 months.
- C. In the absence of a certificate from a transferor indicating that a leak test has been made within the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State, prior to the transfer, a sealed source received from another person shall not be put into use until tested and the test results received.
- D. Sealed sources need not be tested if they contain only hydrogen-3; or they contain only a radioactive gas; or the half-life of the isotope is 30 days or less; or they contain not more than 100 microcuries of beta and/or gamma emitting material or not more than 10 microcuries of alpha emitting material.
- E. Sealed sources need not be tested if they are in storage and are not being used. However, when they are removed from storage for use or transferred to another person, and have not been tested within the required leak test interval, they shall be tested before use or transfer. No sealed source shall be stored for a period of more than 10 years without being tested for leakage and/or contamination.
- F. The leak test shall be capable of detecting the presence of 0.005 microcuries (185 becquerels) of radioactive material on the test sample. If the test reveals the presence of 0.005 microcuries (185 becquerels) or more of removable contamination, a report shall be filed with the U.S. Nuclear Regulatory Commission in accordance with 10 CFR 30.50(c)(2), and the source shall be removed immediately from service and decontaminated, repaired, or disposed of in accordance with Commission regulations. The report shall be filed within 5 days of the date the leak test result is known with the appropriate U.S. Nuclear Regulatory Commission, Region IV, 612 East Lamar Blvd., Suite 400, Arlington, Texas 76011-4125, ATTN: Director, Division of Nuclear Materials Safety. The report shall specify the source involved, the test results, and corrective action taken.
- G. Tests for leakage and/or contamination, limited to leak test sample collection shall be performed by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services. The licensee is not authorized to perform the analysis. Analysis of leak test samples must be performed by persons specifically licensed by the Commission or an Agreement State to perform such services
- H. Records of leak test results shall be kept in units of microcuries and shall be maintained for 3 years.
14. Sealed sources containing licensed material shall not be opened or sources removed from source holders by the licensee, except as specifically authorized.
15. The licensee shall conduct a physical inventory every 6 months, or at other intervals approved by the U.S. Nuclear Regulatory Commission, to account for all sealed sources and/or devices received and possessed under the license. Records of inventories shall be maintained for 5 years from the date of each inventory, and shall include the radionuclides, quantities, manufacturer's name and model numbers, and the date of the inventory.

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
50-17314-01Docket or Reference Number
030-12538Amendment No. 09
CORRECTED COPY

16. The following services shall not be performed by the licensee: installation, initial radiation surveys, relocation, removal from service, dismantling, alignment, replacement, disposal of the sealed source and non-routine maintenance or repair of components related to the radiological safety of the gauge (i.e., the sealed source, the source holder, source drive mechanism, on-off mechanism (shutter), shutter control, shielding). These services shall be performed only by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
17. A. The licensee may maintain, repair, or replace device components that are not related to the radiological safety of the device containing byproduct material and that do not result in the potential for any portion of the body to come into contact with the primary beam or in increased radiation levels in accessible areas.
- B. The licensee may not maintain, repair, or replace any of the following device components: the sealed source, the source holder, source drive mechanism, on-off mechanism (shutter), shutter control, or shielding, or any other component related to the radiological safety of the device, except as provided otherwise by specific condition of this license.
18. The licensee shall operate each device containing licensed material within the manufacturer's specified temperature and environmental limits such that the shielding and shutter mechanism of the source holder are not compromised.
19. Except for maintaining labeling as required by 10 CFR Part 20, or 71, the licensee shall obtain authorization from the U.S. Nuclear Regulatory Commission before making any changes in the sealed source, device or source-device combination that would alter the description or specifications as indicated in the respective certificate of registration issued either by the Commission pursuant to 10 CFR 32.210 or by an Agreement State.
20. The licensee is authorized to transport licensed material in accordance with the provisions of 10 CFR Part 71, "Packaging and Transportation of Radioactive Material."

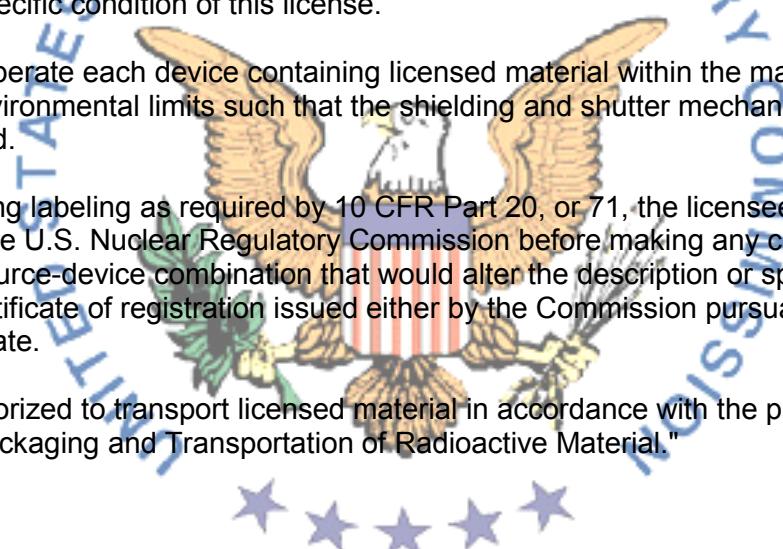

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
50-17314-01Docket or Reference Number
030-12538Amendment No. 09
CORRECTED COPY

21. Except as specifically provided otherwise in this license, the licensee shall conduct its program in accordance with the statements, representations, and procedures contained in the documents, including any enclosures, listed below. The U.S. Nuclear Regulatory Commission's regulations shall govern unless the statements, representations, and procedures in the licensee's application and correspondence are more restrictive than the regulations.

- A. Application dated August 28, 2002



FOR THE U.S. NUCLEAR REGULATORY COMMISSION

/RA/

Date June 25, 2011 By _____
Lizette Roldán-Otero, Ph.D., Health Physicist
Nuclear Materials Safety Branch B
Region IV
Arlington, Texas 76011-4125