


WM-315

HND #90

# FLOOD POTENTIAL OF TOPOPAH WASH AND TRIBUTARIES, EASTERN PART OF JACKASS FLATS, NEVADA TEST SITE, SOUTHERN NEVADA

U.S. GEOLOGICAL SURVEY

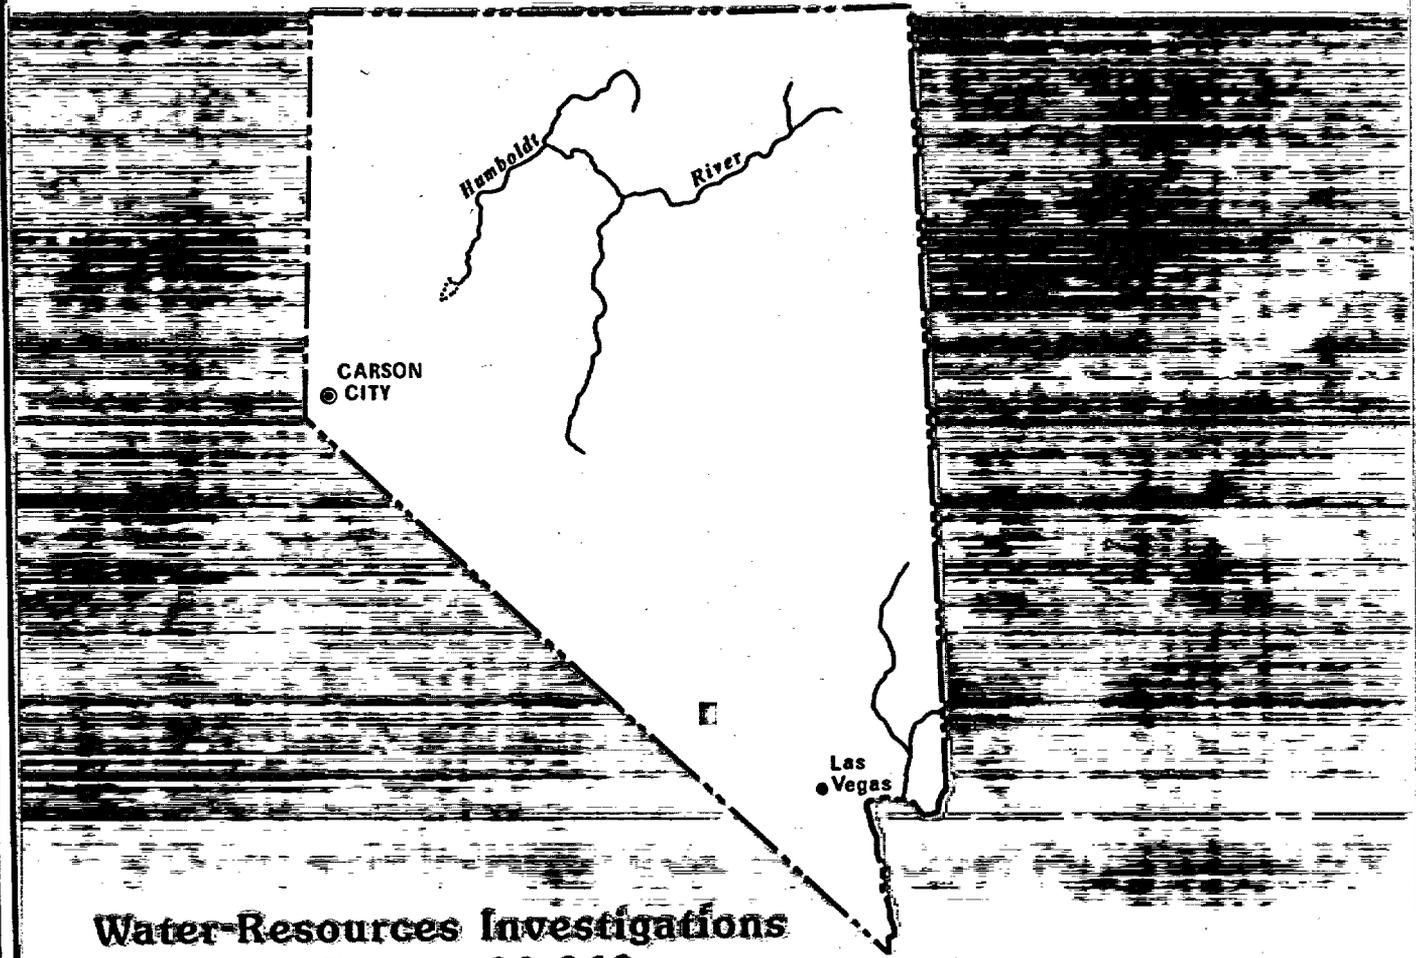

Water-Resources Investigations  
Open-File Report 80-963

Prepared in cooperation with the  
U.S. Department of Energy



**FLOOD POTENTIAL OF TOPOPAH WASH AND TRIBUTARIES,  
EASTERN PART OF JACKASS FLATS,  
NEVADA TEST SITE, SOUTHERN NEVADA**

**By Rulon C. Christensen and Norman E. Spahr**

---

**U.S. GEOLOGICAL SURVEY**

**WATER-RESOURCES INVESTIGATIONS**

**OPEN-FILE REPORT 80-963**

**Prepared in cooperation with the  
U.S. Department of Energy**

**Lakewood, Colorado  
1980**

UNITED STATES DEPARTMENT OF THE INTERIOR

CECIL D. ANDRUS, Secretary

GEOLOGICAL SURVEY

H. William Menard, Director

---

For additional information  
write to:

District Chief  
U.S. Geological Survey, MS 415  
Box 25046, Denver Federal Center  
Lakewood, CO 80225

For sale by:

Open-File Services Section  
Branch of Distribution  
U.S. Geological Survey, MS 306  
Box 25425, Denver Federal Center  
Denver, CO 80225  
(303) 234-5888

## CONTENTS

	Page
Conversion factors-----	IV
Abstract-----	1
Introduction-----	2
Description of Topopah Wash and tributaries-----	2
Climate-----	6
Hydrologic analyses-----	6
100- and 500-year floods-----	7
Maximum potential flood-----	10
Hydraulic analyses-----	14
Floodflow characteristics-----	20
Summary-----	21
References-----	22

## ILLUSTRATIONS

	Page
Plate 1. Map showing approximate flood-prone areas, Topopah Wash and tributaries, eastern Jackass Flats, Nevada Test Site, southern Nevada-----	In pocket
Figure 1. Index map showing location of the Nevada Test Site and study area-----	3
2-5. Photographs showing:	
2. Upstream (northward) view of Topopah Wash from cross-section 4-----	4
3. Upstream (northeastward) view of Topopah Wash tributary 1.3 and alluvial fan from cross-section 3-----	4
4. Typical low-water channel, streambed material, and vegetation on banks-----	5
5. Typical flood plain, ground material, and vegetative cover-----	5
6. Graph showing maximum potential discharge versus drainage area-----	11
7. Typical cross sections showing water surfaces for the 100- and 500-year floods, and the maximum potential flood-----	18

## TABLES

	Page
Table 1. Floodflow characteristics for the 100-year flood-----	8
2. Floodflow characteristics for the 500-year flood-----	12
3. Maximum observed discharges at six selected sites in Arizona, California, Nevada, New Mexico, and Utah-----	14
4. Floodflow characteristics for the maximum potential flood-----	16

## CONVERSION FACTORS

The following factors may be used to convert inch-pound units to metric units.

<i>Multiply inch-pound units</i>	<i>By</i>	<i>To obtain metric units</i>
inch	25.40	millimeter
foot	0.3048	meter
mile	1.609	kilometer
square foot	0.0929	square meter
square mile (mi <sup>2</sup> )	2.590	square kilometer
foot per second	0.3048	meter per second
cubic foot per second (ft <sup>3</sup> /s)	0.02832	cubic meter per second
cubic foot per second per square mile [(ft <sup>3</sup> /s)/mi <sup>2</sup> ]	0.01093	cubic meter per second per square kilometer
degree Fahrenheit (°F)	5/9(°F-32°)	degree Celsius (°C)

FLOOD POTENTIAL OF TOPOPAH WASH AND TRIBUTARIES,  
EASTERN PART OF JACKASS FLATS, NEVADA TEST SITE, SOUTHERN NEVADA

---

By Rulon C. Christensen and Norman E. Spahr

---

ABSTRACT

Guidelines for evaluating potential surface facilities to be used for the storage of high-level radioactive wastes on the Nevada Test Site in southern Nevada include the consideration of the potential for flooding. Those floods that are considered to constitute the principal flood hazards for these facilities are the 100- and 500-year floods, and the maximum potential flood. Flood-prone areas for the three floods with present natural-channel conditions were defined for the eastern part of Jackass Flats in the southwestern part of the Nevada Test Site in cooperation with the U.S. Department of Energy.

The 100-year flood-prone areas would closely parallel most stream channels with very few occurrences of out-of-bank flooding between adjacent channels. Out-of-bank flooding would occur at depths of less than 2 feet with mean velocities as much as 7 feet per second. Channel flood depths would range from 1 to 9 feet and mean velocities would range from 3 to 9 feet per second.

The 500-year flood would exceed the discharge capacities of all channels except for Topopah Wash and some channels in the upstream reaches of a few tributaries. Out-of-bank flows between adjacent channels would occur at depths as much as 3 feet with mean velocities of more than 7 feet per second. Channel flood depths would range from 1 to 12 feet and mean velocities would range from 3 to 13 feet per second.

The maximum potential flood would inundate most of the study area. Excluded areas would be those located immediately east of the upstream reach of Topopah Wash and between upstream channel reaches of some tributaries. Out-of-bank flows between adjacent channels would occur at depths as much as 5 feet with mean velocities as much as 13 feet per second. Channel flood depth would range from 2 to 23 feet and mean velocities would range from 4 to 26 feet per second.

Severe erosion of channels and flood plains would occur in parts of the study area during the 100-year flood, and would be more widespread during the 500-year flood and the maximum potential flood.

## INTRODUCTION

Environmental studies of the Nevada Test Site and vicinity (fig. 1) are being conducted by the U.S. Geological Survey in cooperation with the U.S. Department of Energy to define and describe those parts of the area that are both suitable and available for construction of surface-storage facilities for high-level radioactive wastes. Rogers, Perkins, and McKeown (1977) made a preliminary assessment of the seismic hazards of the Nevada Test Site region. Hoover, Eckel, and Ohl (1978) evaluated the topographic, geomorphic, and geologic features of the southwestern part of the Nevada Test Site and identified potential waste-storage sites for further study.

A more detailed study is being made now of the geology and hydrology of Jackass Flats, which is located in the southwestern part of the Nevada Test Site. This report describes that part of the hydrology that pertains to the evaluation of potential flooding in the eastern part of Jackass Flats. Data pertaining to 100- and 500-year floods and for the maximum potential flood were determined for Topopah Wash and tributaries upstream from Little Skull Mountain (pl. 1).

### Description of Topopah Wash and Tributaries

Topopah Wash is the only major drainage channel in the eastern part of Jackass Flats (pl. 1). The headwaters of Topopah Wash originate along the southern part of Shoshone Mountain (fig. 1), which has an altitude of about 7,140 feet. The ephemeral stream drains south to Jackass Flats, then southwest by south through the middle of the flats, and then south and parallel to Fortymile Wash to the confluence with the Amargosa River at an approximate altitude of 2,100 feet (fig. 1).

The tributary channels east of Topopah Wash drain the southeastern part of Shoshone Mountain, the mountain slopes southwest of Lookout Peak, and the north-facing slopes of Skull and Little Skull Mountains (fig. 1). These channels converge into two main tributaries before entering Topopah Wash.

For identifying and referencing tributary stream channels in the study area, a decimal numbering system was used in an upstream channel order as shown on plate 1. For example, tributary 1.1 is the first numbered tributary upstream from the mouth of tributary 1, which is the first tributary to Topopah Wash upstream from the southern study limit. Likewise, tributary 1.5.6 is the sixth tributary, shown on plate 1, upstream from the mouth of tributary 1.5. Tributary numbers are shown on plate 1 only for those channels included in this study.

The stream channels range in size from the well-defined channel of Topopah Wash (fig. 2), about 600 feet wide and more than 13 feet deep, to the swale-like channel of tributary 1.3 (fig. 3), 150 feet wide and less than 1 foot deep, located in the northeastern part of the study area. The bed material in a typical low-water channel (fig. 4) in the study area consists mostly of sand and gravel with scattered cobbles of various sizes; the largest cobbles are about 2 feet in diameter. Vegetation grows both in the low-water channels and along the banks and in some channels the vegetation is as dense in the streambed as on the flood plains.

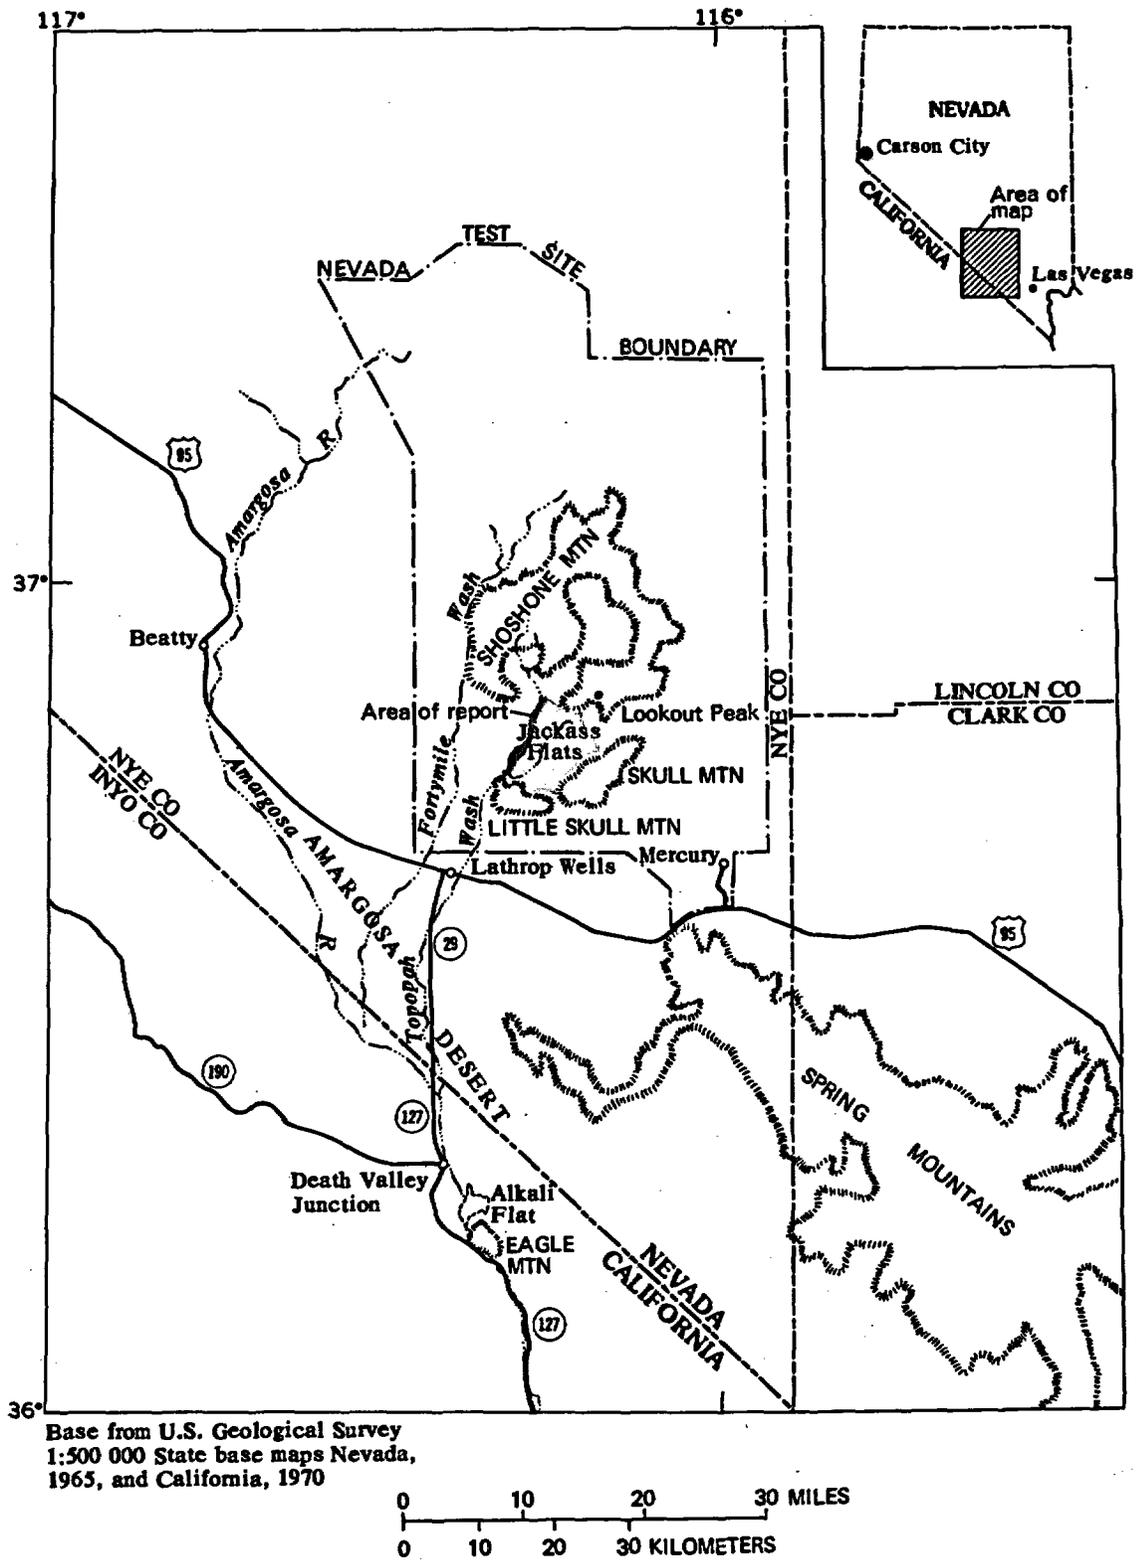


Figure 1.--Location of the Nevada Test Site and study area.



**Figure 2.--** Upstream (northward) view of Topopah Wash from cross-section 4.--Shoshone Mountain in background. Photograph by William Thordarson.



**Figure 3.--** Upstream (northeastward) view of Topopah Wash tributary 1.3 and alluvial fan from cross-section 3. Lookout Peak to the right in background. Photograph by William Thordarson.



**Figure 4.-- Typical low-water channel, streambed material, and vegetation on banks. Photograph by William Thordarson.**



**Figure 5.-- Typical flood plain, ground material, and vegetative cover. Photograph by William Thordarson.**

The typical flood plain shown in figure 5 generally is covered with gravel to cobble-sized material embedded in soil and with scattered vegetation. The vegetative cover in the study area grows on about 30 to 50 percent of the flood plain and includes creosote bush, burro bush, and a variety of yuccas (Winograd and Thordarson, 1975).

Streambed and land slopes increase from 1 percent in the downstream reaches of the study area to 4 percent at an altitude of 4,000 feet.

### Climate

Mean annual precipitation in the study area is about 4 inches (Nuclear Rocket Development Station, 1969) and on Shoshone Mountain, the highest point in the Topopah Wash basin, is less than 10 inches (Winograd and Thordarson, 1975, fig. 3). Mean monthly precipitation data for Jackass Flats indicate that about one-half of the annual precipitation occurs in the winter and most of the remainder occurs in the summer (Nuclear Rocket Development Station, 1969).

During the winter, storms associated with broad low-pressure systems that develop over the Pacific Ocean move eastward over the study area. Precipitation from these storms generally is widespread and only rarely is intense (Quiring, 1965). During the summer, local convective thunderstorms, associated with moisture from the Gulf of California and the southern Pacific Ocean, move northeastward over the study area. Precipitation from these storms generally is localized and can be intense (Hales, 1974; Hansen, 1975).

Temperature extremes in Jackass Flats range from about 7°F in January to 110°F in June and July. The average daily temperature is about 62°F (Nuclear Rocket Development Station, 1969).

### HYDROLOGIC ANALYSES

Hydrologic analyses were made to determine methods of estimating the 100-year, 500-year, and maximum potential floods in the study area. Floods of these magnitudes would constitute the principal flood hazards to surface facilities used for storage of high-level radioactive wastes.

In this report, a flood is the estimated quantity of surface flow (discharge) at a given stream site that exceeds the discharge capacity of the natural channel. The 100- and 500-year floods are identified by recurrence interval, which is the average interval of time within which a flood of a given magnitude will be equaled or exceeded once. The maximum potential flood is based on maximum floods known to have occurred somewhere in the region without reference to recurrence interval. These three floods will overflow low-water banks of channels, inundate flood plains to varying degrees depending on the magnitudes of the floods and the ability of the channels to discharge the floodflows, and probably cause damage to structures located in the flood plains.

## 100- and 500-Year Floods

The discharge of a 100-year flood has a 1-percent chance of being equaled or exceeded during any year, while the discharge of a 500-year flood has a 0.2-percent chance of being equaled or exceeded during any year. Although the recurrence interval represents the long-term average time between floods of a specific magnitude, floods with the same or greater magnitudes could occur at shorter intervals or even within the same year.

The magnitude and frequency of peak discharges at ungaged sites on streams generally are defined by applying a synthetic rainfall-runoff relation, or by relating statistically developed floodflow characteristics at streamflow-gaging stations to significant basin and climatic characteristics in a hydrologically homogeneous region. Because of the lack of available data in the study area to determine adequately: (1) The rate at which rainfall will infiltrate into the ground, (2) the channel-routing losses, and (3) the calibration of a rainfall-runoff model, a procedure using a regional analysis of streamflow records was selected to define the 100- and 500-year discharges in the study area.

The flood-frequency relations and the corresponding standard errors of estimate for the 10-, 25-, 50-, and 100-year discharges shown below were developed recently for streams in Nevada by U.S. Geological Survey personnel in Carson City, Nev. These relations, currently being reviewed, were determined using flood-frequency analyses of data from 71 gaged basins and multiple-regression analyses of flood, basin, and climatic characteristics. Although 19 of the gaged basins are located in southern Nevada, none of the basins are located in the study area.

Equation	Standard error of estimate, in log <sub>10</sub> units
$Q_{10} = 392A^{0.66}E^{-1.02}L^{-0.33}$	0.34
$Q_{25} = 1,810A^{0.61}E^{-1.14}L^{-0.70}$	0.35
$Q_{50} = 4,860A^{0.58}E^{-1.21}L^{-0.94}$	0.38
$Q_{100} = 11,900A^{0.55}E^{-1.28}L^{-1.16}$	0.42

In the above equations:

$A$ =drainage area, in square miles;

$E$ =mean basin altitude, in thousands of feet; and

$L$ =latitude of basin minus 35° latitude.

Limits of applicability of these relations are  $0.2 < A < 100$ ,  $2 < E < 10$ , and  $1 < L < 7$ . In the use of the relations, only the drainage-area limit was exceeded at Topopah Wash immediately downstream from Topopah Wash tributary 1, which has a drainage area of 105 square miles. The estimated discharges for the 100-year flood are listed in table 1. The significant figures to which the estimated discharges are shown in the tables for the 100-year flood, 500-year flood, and maximum potential floods are for computational consistency and are not based on the reliability of the estimates.

Table 1.--Floodflow characteristics for the 100-year flood

*Flooding source and cross section:* Stream-channel name and cross-section number shown on plate 1.

*Discharge:* 100-year discharge, in cubic feet per second.

*Area:* Cross-sectional area below the water surface, in square feet.

*Width:* Distance along the cross section and between the channel banks at the water surface, in feet.

*Mean velocity:* Discharge divided by area, in feet per second.

*Maximum depth:* Vertical distance from water surface to lowest point in cross section, in feet.

Flooding source and cross section	Discharge	Area	Width	Mean velocity	Maximum depth
<u>Topopah Wash</u>					
1-----	11,200	1,200	428	9	7
2-----	5,220	683	378	8	4
3-----	4,500	799	589	6	4
4-----	3,910	550	305	7	4
<u>Tributary 1</u>					
1-----	10,200	1,310	403	8	9
2-----	8,560	1,330	528	6	6
3-----	6,140	884	352	7	5
4-----	2,740	452	284	6	3
5-----	2,120	344	224	6	4
<u>Tributary 1.1</u>					
1-----	4,150	676	307	6	5
2-----	4,150	646	474	6	6
3-----	3,360	589	439	6	4
4-----	2,740	415	352	7	3
5-----	1,920	348	425	6	3
<u>Tributary 1.1.1</u>					
1-----	2,060	506	730	4	2
2-----	1,050	138	91	8	3
3-----	620	188	272	3	2
4-----	620	152	226	4	1
<u>Tributary 1.1.2</u>					
1-----	1,940	529	847	4	3
2-----	1,940	344	318	6	2
3-----	1,090	208	183	5	2
4 <sup>1</sup> -----	<sup>2</sup> 2,280	363	268	6	3
<u>Tributary 1.1.3</u>					
1-----	1,970	355	320	6	2
2-----	1,970	( <sup>3</sup> )	( <sup>3</sup> )	( <sup>3</sup> )	( <sup>3</sup> )
3-----	1,400	172	178	8	3
<u>Tributary 1.1.3.1</u>					
1-----	1,000	192	265	5	2

Table 1.--*Floodflow characteristics for the 100-year flood*--Continued

Flooding source and cross section	Discharge	Area	Width	Mean velocity	Maximum depth
<u>Tributary 1.1.4</u>					
1-----	1,260	(3)	(3)	(3)	(3)
<u>Tributary 1.3</u>					
1-----	5,700	1,340	1,360	4	3
2-----	2,950	(3)	(3)	(3)	(3)
3-----	1,730	(3)	(3)	(3)	(3)
<u>Tributary 1.3.1</u>					
1-----	2,640	(3)	(3)	(3)	(3)
2-----	2,330	385	335	6	2
<u>Tributary 1.3.2</u>					
1-----	2,630	579	495	5	3
2-----	1,870	384	386	5	2
3-----	1,420	184	169	8	3
<u>Tributary 1.3.2.1</u>					
1 <sup>4</sup> -----	22,280	363	268	6	3
<u>Tributary 1.3.3</u>					
1-----	1,650	398	588	4	1
<u>Tributary 1.5</u>					
1-----	4,060	(3)	(3)	(3)	(3)
2-----	3,300	681	600	5	4
3-----	2,200	376	219	6	3
4-----	1,740	(3)	(3)	(3)	(3)
<u>Tributary 1.5.6</u>					
1-----	1,220	298	362	4	1
<u>Tributary 1.6</u>					
1-----	2,380	678	913	4	3
2-----	2,040	328	199	6	3
<u>Tributary 2</u>					
1-----	1,540	168	70	9	4
2-----	710	144	173	5	3
3-----	<sup>5</sup> 280	51	125	5	1

<sup>1</sup>Same as cross-section 1 on tributary 1.3.2.1.

<sup>2</sup>Combined flows of tributaries 1.1.2 and 1.3.2.1.

<sup>3</sup>Floodflow characteristic not determined because discharge was not confined on one channel bank.

<sup>4</sup>Same as cross-section 4 on tributary 1.1.2.

<sup>5</sup>Estimated at approximately 40 percent of discharge of preceding cross-section 2.

The 500-year flood discharge at each selected stream site was determined from the extrapolation of the magnitude-frequency curve defined by the plots of the computed 10-, 25-, 50-, and 100-year discharges on a log-probability graph. The estimated discharges for the 500-year flood in the study area are listed in table 2.

#### Maximum Potential Flood

The history of flooding on Topopah Wash is not known, but data from maximum floods that have been observed on other streams having similar flood potential provide the best estimate of maximum potential flooding in the study area. Crippen and Bue (1977) compiled and analyzed selected maximum observed flood peaks as of September 1974 at 883 stream sites throughout the conterminous United States. Their study shows how such floods vary with geographical location and with size of drainage basin. They grouped the flood data by regions using physiographic information (Fenneman, 1931) and variations in rainfall intensity (U.S. Weather Bureau, 1961) as the initial basis for subdivision. The experience of hydrologists who had worked with flood data throughout the Nation was then sought as a guide to make further divisions, thus combining the data as regional sets. The region in which Topopah Wash is located includes most of Nevada, western Utah, southeastern California, the southern one-half of Arizona, and southwestern New Mexico.

Pertinent information in terms of discharge per unit of area for maximum floods of record at six sites within the region is from Crippen and Bue (1977) and is summarized in table 3. As of 1978, the maximum observed discharges per unit of area have not been exceeded in the region. Data for Arch Creek near Earp, Calif., were obtained from a conventional streamflow-gaging station. The other data were obtained from miscellaneous sites.

The envelope curve by Crippen and Bue (1977, fig. 18), illustrated in figure 6, shows the relation of discharge to drainage area of maximum floods known to have occurred in this region. The curve does not indicate any physical limitations; in fact, as time passes, floods may occur that lie above the curve shown. The shape of the upper part of the curve, where data are lacking, is typical of envelope curves drawn for other regions where data were available for drainage areas exceeding 200 square miles. From the relation, it is observed that the discharge per square mile decreases as the drainage area increases, indicating that there is a limit to storm size and that the proportion of storm size to drainage area decreases as the size of the drainage area increases. The maximum potential flood has no reference to recurrence interval or to the 100- and 500-year floods; however, the maximum potential flood exceeds the 500-year flood approximately 2 to 10 times for drainage areas ranging from 1 to 105 square miles. A reasonable estimate of the maximum potential flood can be made from figure 6 for sites in the study area. The maximum potential discharges for selected stream sites in the study area are listed in table 4 (p. 16) by flooding source and cross section.

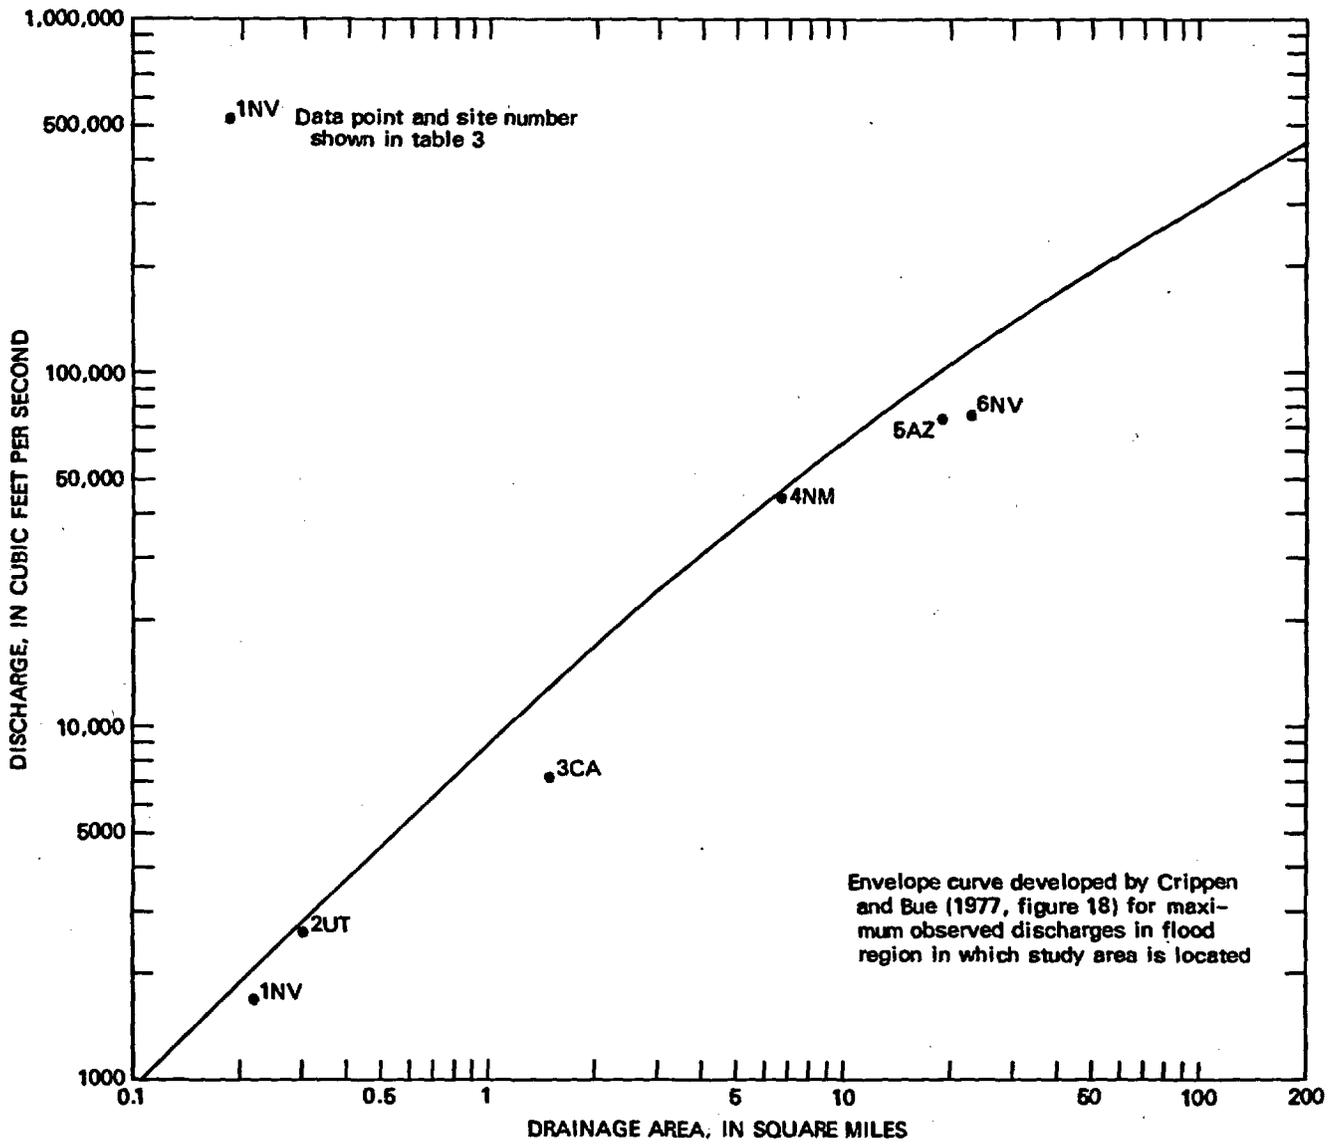


Figure 6.--Maximum potential discharge versus drainage area.

Table 2.--Floodflow characteristics for the 500-year flood

*Flooding source and cross section:* Stream-channel name and cross-section number shown on plate 1.

*Discharge:* 500-year discharge, in cubic feet per second.

*Area:* Cross-sectional area below the water surface, in square feet.

*Width:* Distance along cross section at the water surface and between defined end points, in feet. The end points may be located on channel banks or at imaginary divisions of out-of-bank flow between adjacent channels. The imaginary division of flow was determined, in general, by prorating the flood plain between adjacent channels in proportion to the magnitude of the 500-year discharges in the two channels.

*Mean velocity:* Discharge divided by area, in feet per second.

*Maximum depth:* Vertical distance from water surface to lowest point in cross section, in feet.

Flooding source and cross section	Discharge	Area	Width	Mean velocity	Maximum depth
<u>Topopah Wash</u>					
1-----	32,000	2,470	498	13	10
2-----	16,000	1,470	406	11	6
3-----	13,700	1,580	612	9	5
4-----	11,800	1,200	487	10	6
<u>Tributary 1</u>					
1-----	31,000	2,680	430	12	12
2-----	26,000	2,600	566	10	9
3-----	20,000	2,270	637	9	8
4-----	9,400	1,000	323	9	5
5-----	7,600	890	312	9	6
<u>Tributary 1.1</u>					
1-----	13,500	1,330	345	10	7
2-----	13,500	1,920	1,054	7	12
3-----	11,100	2,150	1,536	5	11
4-----	9,200	1,440	884	6	12
5-----	6,700	1,460	2,723	5	11
<u>Tributary 1.1.1</u>					
1-----	7,700	1,260	776	6	3
2-----	4,020	959	1,789	4	11
3-----	2,500	425	315	6	2
4-----	2,500	(2)	(2)	(2)	(2)
<u>Tributary 1.1.2</u>					
1-----	6,800	1,430	1,438	5	11
2-----	6,800	1,080	795	6	11
3-----	3,950	944	1,659	4	11
4 <sup>3</sup> -----	48,550	850	330	10	5
<u>Tributary 1.1.3</u>					
1-----	6,800	1,110	1,126	6	11
2-----	6,800	(2)	(2)	(2)	(2)
3-----	5,100	524	306	10	5

Table 2.--Floodflow characteristics for the 500-year flood--Continued

Flooding source and cross section	Discharge	Area	Width	Mean velocity	Maximum depth
<u>Tributary 1.1.3.1</u>					
1-----	3,750	617	770	6	11
<u>Tributary 1.1.4</u>					
1-----	4,650	784	1,005	6	11
<u>Tributary 1.3</u>					
1-----	18,500	3,170	1,858	6	12
2-----	10,200	2,170	2,186	5	11
3-----	6,200	1,050	1,226	6	11
<u>Tributary 1.3.1</u>					
1-----	9,400	2,090	1,818	4	11
2-----	8,050	866	352	9	4
<u>Tributary 1.3.2</u>					
1-----	9,400	1,690	989	6	12
2-----	6,650	1,490	2,795	4	11
3-----	5,200	738	594	7	11
<u>Tributary 1.3.2.1</u>					
1 <sup>5</sup> -----	48,550	850	336	10	5
<u>Tributary 1.3.3</u>					
1-----	6,100	923	722	7	2
<u>Tributary 1.5</u>					
1-----	14,400	1,800	608	8	13
2-----	11,800	1,810	861	7	5
3-----	8,200	1,420	904	6	4
4-----	6,550	952	609	7	12
<u>Tributary 1.5.6</u>					
1-----	4,600	1,030	1,253	4	2
<u>Tributary 1.6</u>					
1-----	8,250	1,690	1,419	5	3
2-----	7,200	712	232	10	5
<u>Tributary 2</u>					
1-----	5,900	462	138	13	7
2-----	3,000	928	2,314	3	(6)
3-----	71,200	193	155	6	2

<sup>1</sup>Mean depth in cross section, area divided by width.

<sup>2</sup>Floodflow characteristic not determined because definition of cross-section end points was too indefinite.

<sup>3</sup>Same as cross-section 1 on tributary 1.3.2.1.

<sup>4</sup>Combined flows of tributaries 1.1.2 and 1.3.2.1.

<sup>5</sup>Same as cross-section 4 on tributary 1.1.2.

<sup>6</sup>Mean depth about 0.4 foot.

<sup>7</sup>Estimated at 40 percent of discharge at preceding cross-section 2.

Table 3.--Maximum observed discharges at six selected sites in Arizona, California, Nevada, New Mexico, and Utah

Site no. in figure 6	Location	Drainage area (mi <sup>2</sup> )	Date	Discharge	
				Peak (ft <sup>3</sup> /s)	Unit [(ft <sup>3</sup> /s)/mi <sup>2</sup> ]
1NV	Lahonton Reservoir tributary no. 3 near Silver Springs, Nev-----	0.22	7-20-71	1,680	7,640
2UT	Little Pinto Creek tributary near Newcastle, Utah-----	.30	8-11-64	2,630	8,770
3CA	Arch Creek near Earp, Calif--	1.52	8-19-71	7,160	4,710
4NM	El Rancho Arroyo near Pojoaque, N. Mex-----	6.7	8-22-52	44,000	6,570
5AZ	Bronco Creek near Wikieup, Ariz-----	19.0	8-18-71	73,500	3,870
6NV	Eldorado Canyon, Nev-----	22.8	9-14-74	76,000	3,330

#### HYDRAULIC ANALYSES

Hydraulic characteristics of stream channels in the study area were analyzed to determine estimates of the flood depths in the channels for the 100- and 500-year floods, and for the maximum potential flood. These analyses were based on natural-flow conditions and the estimated discharges shown in tables 1, 2, and 4. Manmade improvements, such as embankments of roads and railroads, levees, dams, excavated areas, and local drainage channels, were not considered in the evaluation of the hydraulic characteristics. The discharge in each channel for each flood was treated as though it flowed uninterrupted through the length of the basin within the study area. The effects of out-of-bank flooding between adjacent channels and divisions of combined floodflows on downstream discharge magnitudes were not considered to significantly affect estimates of flood depths.

Most channels in the study area are not portrayed in sufficient detail on the available topographic maps (pl. 1) to make reliable estimates of discharge capacities or to delineate flood-plain boundaries. Consequently, 47 typical channel cross sections were measured at the locations shown on plate 1. When the discharge capacities of the cross sections were exceeded by the three floods, the cross sections were extended on the basis of the topography on plate 1. At cross sections where out-of-bank flow apparently would occur, the cross sections were ended at imaginary divisions of flow on the flood plains. The imaginary division of flow was determined by prorating the distance across the flood plain between adjacent channels by the magnitudes of the floodflows in the two channels. For example, a channel having two-thirds of the sum of the floodflows in adjacent channels would be given two-thirds of the intervening flood plain in its cross section.

Channel-roughness factors (Manning's  $n$ ) used in the hydraulic computations were chosen by engineering judgment and based on observations of the channels and flood-plain areas. Roughness values for the main channels range from 0.030 to 0.050 with flood-plain roughness values ranging from 0.038 to 0.055 for all floods.

Flood depths for the three floods were computed at each cross section using the following equation by Manning (Dalrymple and Benson, 1967), which provides a relationship between discharge and each selected depth in a cross section:

$$Q = \frac{1.486}{n} AR^{2/3} S^{1/2}, \quad (1)$$

where  $Q$ =discharge, in cubic feet per second, for a given flood depth;  
 $n$ =Manning roughness coefficient, based on field observation of channel and flood plains;  
 $A$ =area of cross section, in square feet, for a given flood depth;  
 $R$ =hydraulic radius, in feet, which is the ratio of the area to the wetted perimeter of the cross section; and  
 $S$ =friction slope, approximated by streambed slope determined from topographic contours shown on plate 1.

At each cross section a depth-discharge relation was developed by computing discharges for several depths through the range in discharge of the three floods. From this relation, the depth of floodflow for each flood was determined at each cross section and plotted on streambed profiles for the development of profiles for the three floods. Typical cross sections showing the water surfaces for the three floods are illustrated in figure 7.

Characteristics of floodflow (discharge, area, width, mean velocity, and maximum depth) that were determined at channel cross sections for the 100-year flood are listed in table 1, for the 500-year flood in table 2, and for the maximum potential flood in table 4. The flood-prone areas shown on plate 1 were outlined on the basis of information determined at the cross sections, and from flood profiles, and from streamlines and topographic contours shown on plate 1.

Table 4.--Floodflow characteristics for the maximum potential flood

*Flooding source and cross section:* Stream-channel name and cross-section number shown on plate 1.

*Discharge:* Maximum potential flood discharge, in cubic feet per second.

*Area:* Cross-sectional area below the water surface, in square feet.

*Width:* Distance along cross section at the water surface and between defined end points, in feet. The end points may be located on channel banks or at imaginary divisions of out-of-bank flow between adjacent channels. The imaginary division of flow was determined, in general, by prorating the flood plain between adjacent channels in proportion to the magnitude of the 500-year discharges in the two channels.

*Mean velocity:* Discharge divided by area, in feet per second.

*Maximum depth:* Vertical distance from water surface to lowest point in cross section, in feet.

Flooding source and cross section	Discharge	Area	Width	Mean velocity	Maximum depth
<u>Topopah Wash</u>					
1-----	310,000	12,700	1,179	24	23
2-----	160,000	6,810	908	23	16
3-----	160,000	7,210	806	22	13
4-----	130,000	4,950	540	26	13
<u>Tributary 1</u>					
1-----	235,000	(1)	(1)	(1)	(1)
2-----	192,000	9,790	877	20	19
3-----	123,000	(1)	(1)	(1)	(1)
4-----	43,700	3,410	876	13	9
5-----	33,800	3,030	732	11	10
<u>Tributary 1.1</u>					
1-----	92,500	(1)	(1)	(1)	(1)
2-----	92,500	9,160	2,705	10	23
3-----	73,200	6,930	1,780	11	24
4-----	53,800	4,010	884	13	24
5-----	38,100	4,970	3,885	8	21
<u>Tributary 1.1.1</u>					
1-----	22,000	3,100	1,462	7	4
2-----	9,100	1,930	2,425	5	21
3-----	4,100	590	343	7	4
4-----	4,100	(1)	(1)	(1)	(1)
<u>Tributary 1.1.2</u>					
1-----	29,000	3,300	1,438	9	22
2-----	29,000	2,930	1,185	10	22
3-----	14,000	2,290	1,680	6	21
4 <sup>3</sup> -----	427,000	1,800	440	15	7
<u>Tributary 1.1.3</u>					
1-----	33,000	3,260	1,129	10	23
2-----	33,000	(1)	(1)	(1)	(1)
3-----	18,000	1,480	556	12	7

Table 4.--Floodflow characteristics for the maximum potential flood--Continued

Flooding source and cross section	Discharge	Area	Width	Mean velocity	Maximum depth
<u>Tributary 1.1.3.1</u>					
1-----	13,000	1,460	770	9	22
<u>Tributary 1.1.4</u>					
1-----	15,000	2,160	1,525	7	21
<u>Tributary 1.3</u>					
1-----	120,000	10,300	2,186	12	25
2-----	54,000	5,840	2,385	9	22
3-----	29,000	(1)	(1)	(1)	(1)
<u>Tributary 1.3.1</u>					
1-----	47,000	6,060	2,375	8	22
2-----	40,000	2,310	386	17	8
<u>Tributary 1.3.2</u>					
1-----	43,000	4,130	1,020	10	24
2-----	29,000	4,780	3,340	6	21
3-----	33,000	4,600	3,565	7	21
<u>Tributary 1.3.2.1</u>					
1 <sup>5</sup> -----	<sup>4</sup> 27,000	1,800	440	15	7
<u>Tributary 1.3.3</u>					
1-----	24,000	3,010	1,790	8	22
<u>Tributary 1.5</u>					
1-----	64,000	5,320	1,110	12	25
2-----	50,000	5,020	1,374	10	24
3-----	27,000	3,900	1,663	7	6
4-----	18,000	2,020	708	9	23
<u>Tributary 1.5.6</u>					
1-----	12,000	2,130	1,680	6	2
<u>Tributary 1.6</u>					
1-----	39,000	4,720	2,000	8	5
2-----	32,000	2,000	401	16	9
<u>Tributary 2</u>					
1-----	14,000	1,870	1,570	7	21
2-----	4,300	1,160	2,845	4	(6)
3-----	<sup>7</sup> 1,720	240	163	7	2

<sup>1</sup>Floodflow characteristic not determined because definition of cross-section end points was too indefinite.

<sup>2</sup>Mean depth in cross section, area divided by width.



<sup>3</sup>Same as cross-section 1 on tributary 1.3.2.1.

<sup>4</sup>Combined flows of tributaries 1.1.2 and 1.3.2.1.

<sup>5</sup>Same as cross-section 4 on tributary 1.1.2.


<sup>6</sup>Mean depth about 0.4 foot.

<sup>7</sup>Estimated at 40 percent of discharge at preceding cross-section 2.

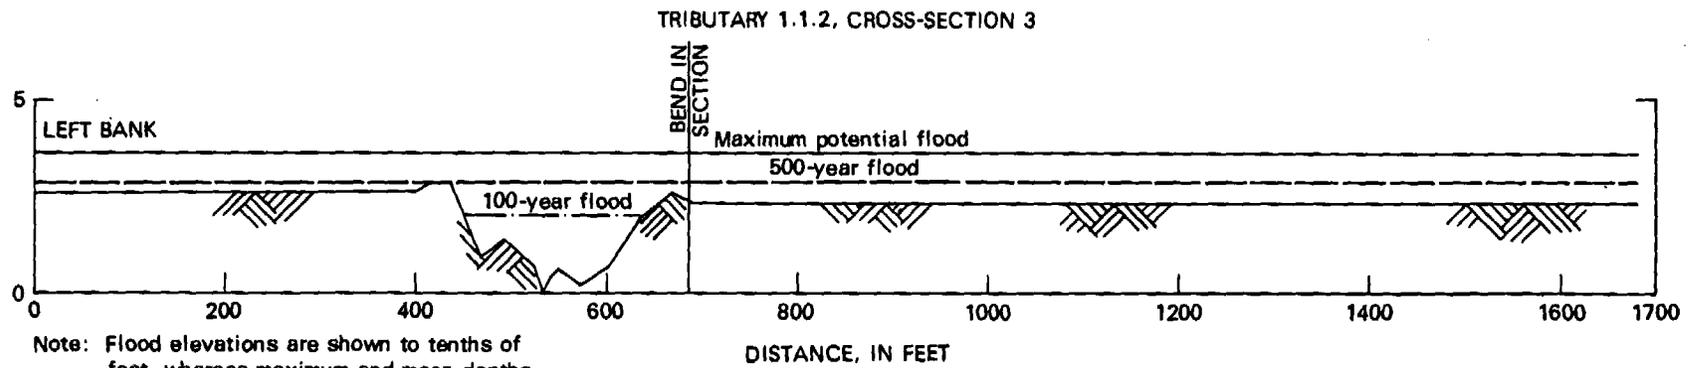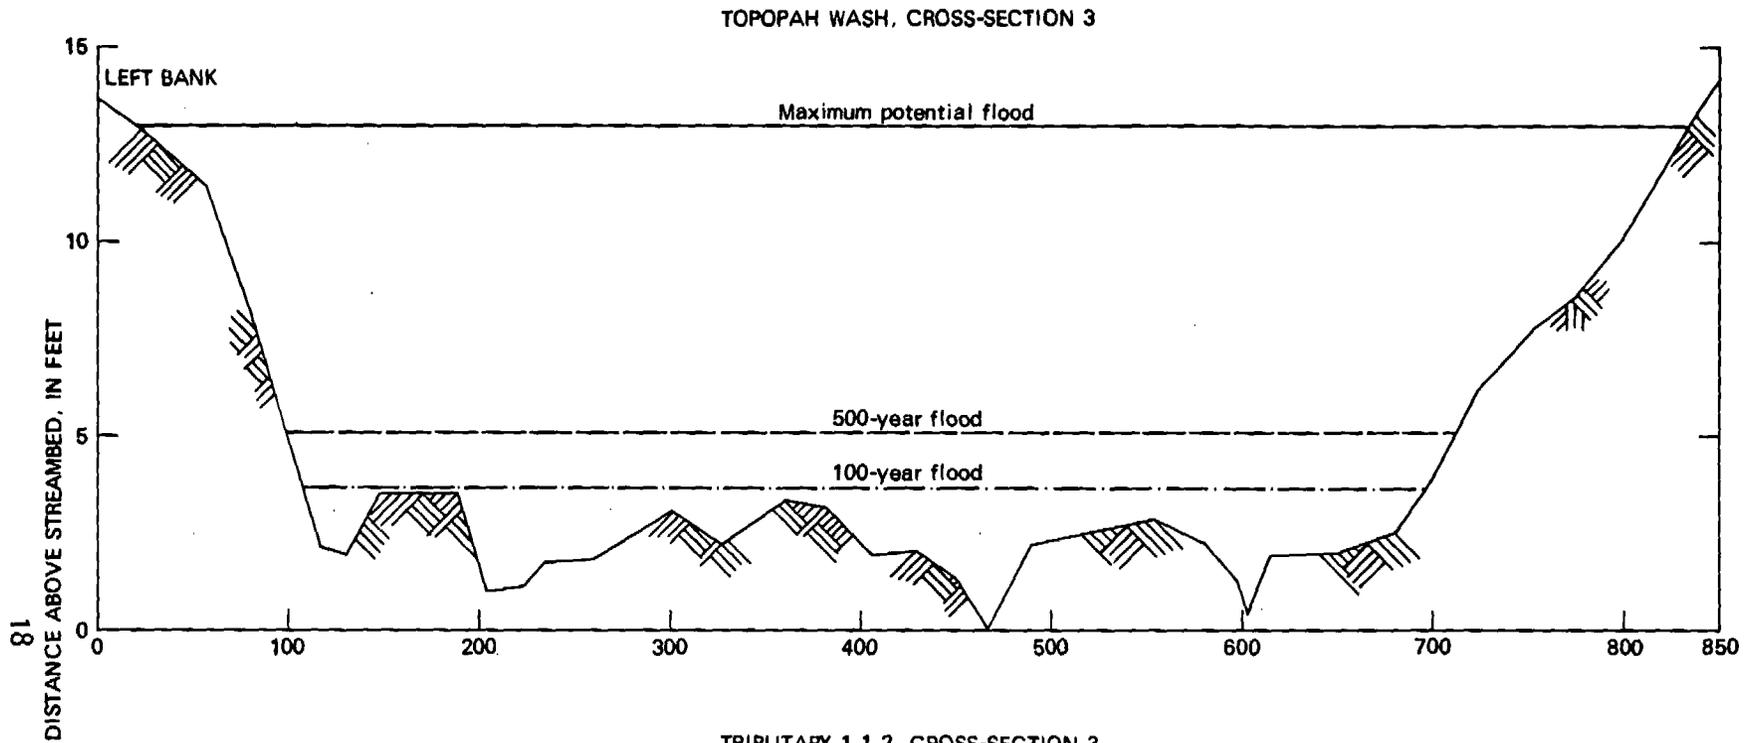

Note: Flood elevations are shown to tenths of feet, whereas maximum and mean depths shown in tables 1, 2, and 4 are rounded to the nearest foot

Figure 7.-- Typical cross sections showing water surfaces for the 100- and 500-year floods, and the maximum potential flood.

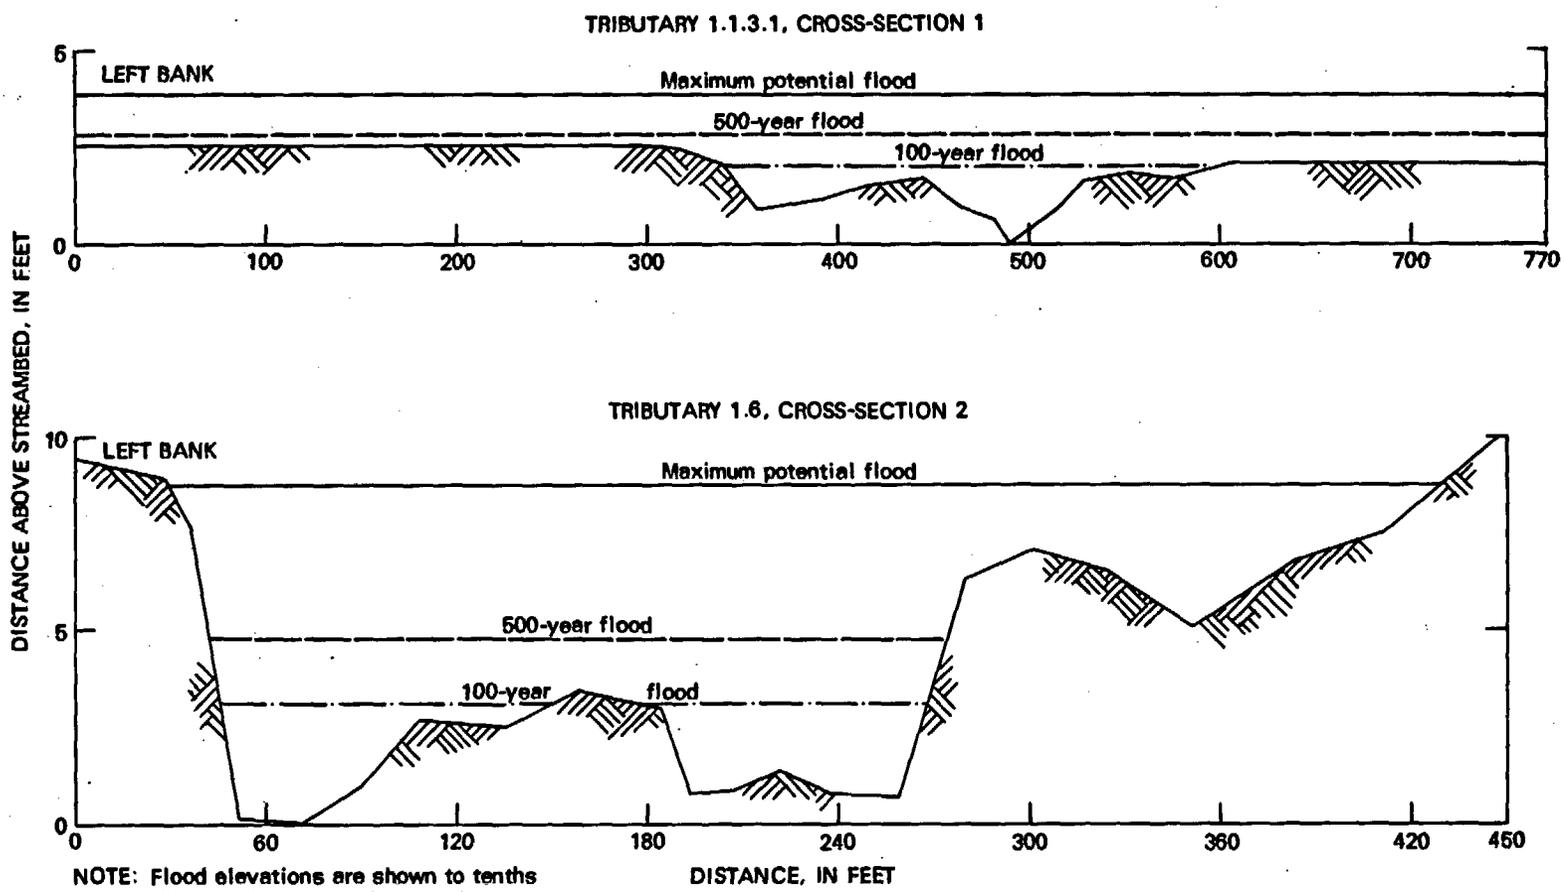

NOTE: Flood elevations are shown to tenths of feet, whereas maximum and mean depths shown in tables 1, 2, and 4 are rounded to the nearest foot

Figure 7.-- Typical cross sections showing water surfaces for the 100- and 500-year floods, and the maximum potential flood.--Continued.

## FLOODFLOW CHARACTERISTICS

Approximate areas that would be inundated by the 100- and 500-year floods, and by the maximum potential flood are shown on plate 1. The flood-prone areas for the 100-year flood, as depicted on plate 1, would closely parallel most stream channels. Out-of-bank flooding between adjacent channels is shown between tributaries 1.1.3 and 1.1.4, 1.1.2 and 1.3.2.1, and 1.3 and 1.3.1. Out-of-bank flooding would occur at depths of less than 2 feet with mean velocities as much as 7 feet per second on the steeper slopes. Maximum flood depths in the main channels would average about 3 feet and range in depth from 1 foot in the upstream reaches of several tributaries to 9 feet at the mouth (cross-section 1) of tributary 1. Mean velocities of floodflows in the channels would range from 3 to 9 feet per second with the greatest velocity occurring at cross-section 1 on Topopah Wash and at cross-section 1 on tributary 2.

The 500-year flood would exceed the discharge capacities of all channels except for the channel of Topopah Wash and the channels in upstream reaches of a few tributaries. Out-of-bank flows between adjacent channels would occur at depths as much as 3 feet and mean velocities more than 7 feet per second. Maximum flood depths in the main channels would range from 1 to 12 feet with the greatest depth occurring at the mouth of tributary 1. The mean velocities would range from 3 to 13 feet per second with the greatest velocity occurring at cross-section 1 on Topopah Wash and at cross-section 1 on tributary 2.

The maximum potential flood would inundate most of the study area; exceptions would be areas between Topopah Wash and tributaries 1.1.1 and 2, and between upstream channel reaches of some of the other tributaries. Topopah Wash would overtop its banks between the 3,380- and 3,600-foot topographic contours. Out-of-bank flows between adjacent channels would occur at depths as much as 5 feet and mean velocities as much as 13 feet per second. Maximum flood depths in the main channels would range from 2 feet in the upstream reaches of tributary channels to 23 feet at cross-section 1 on Topopah Wash downstream from tributary 1. The mean velocities would range from 4 to 26 feet per second with the greatest velocity occurring at cross-section 4 on Topopah Wash.

Water flowing at a velocity of 7 feet per second or greater will cause erosion in channels consisting of sand, gravel, and cobbles, as inferred from information on noneroding velocities in canals reported by Brater and King (1976). Also, where streambanks are eroded, large amounts of gravel, sand, and silt may be transported by water flowing at a velocity of 5 to 7 feet per second. The magnitude of mean velocities shown in tables 1, 2, and 4 indicates that severe erosion of channels and flood plains would occur in parts of the study area during the 100-year flood, and would be more widespread during the 500-year flood and the maximum potential flood. Channels eroded from their present condition would alter the floodflow characteristics of area, width, mean velocity, and maximum depth shown in this report.

## SUMMARY

Floods that occur in Jackass Flats are associated with moist-air flows from the Pacific Ocean and the Gulf of California. Precipitation from widespread winter storms only rarely is sufficiently intense to cause flooding; however, the more likely cause of flooding is the precipitation from the localized intense summer convective thunderstorms.

Estimates of 100-year, 500-year, and maximum potential floods were determined at selected stream sites. Flood-frequency relations based on 71 gaged basins in Nevada were used for the 100- and 500-year floods, and an envelope curve, defined by six maximum observed discharges--in terms of discharge per unit of area--that occurred in the hydrologic region in which the study area is located, was used for the maximum potential flood. Discharges determined for the three floods are listed in tables 1, 2, and 4.

Hydraulic characteristics of stream channels and flood plains were based on natural-flow conditions, 47 channel cross sections and Manning's roughness coefficients obtained in the field, and estimated discharges for the three floods. Flood depths at each cross section for the three floods were computed using Manning's equation relating discharge to channel-hydraulic properties.

The 100-year flood-prone areas would closely parallel most main-stream channels with very few occurrences of out-of-bank flooding between adjacent channels. Out-of-bank flooding would occur at depths of less than 2 feet with mean velocities as much as 7 feet per second on the steeper slopes. Channel flood depths would range from 1 to 9 feet and mean velocities would range from 3 to 9 feet per second.

The 500-year flood would exceed the discharge capacities of all channels except for Topopah Wash and the channels in upstream reaches of a few tributaries. Out-of-bank flows between adjacent channels would occur at depths as much as 3 feet with mean velocities more than 7 feet per second. Channel flood depths would range from 1 to 12 feet and mean velocities would range from 3 to 13 feet per second.

The maximum potential flood would inundate most of the study area. Excluded areas would be those located immediately east of the upstream reach of Topopah Wash and between upstream channel reaches of some tributaries. Out-of-bank flows between adjacent channels would occur at depths as much as 5 feet with mean velocities as much as 13 feet per second. Channel flood depths would range from 2 to 23 feet and mean velocities would range from 4 to 26 feet per second.

Severe erosion of channels and flood plains would occur in parts of the study area during the 100-year flood, and would be more widespread during the 500-year flood and the maximum potential flood. Channels eroded from their present condition would alter the floodflow characteristics shown in this report.

## REFERENCES

- Brater, E. F., and King, H. W., 1976, Handbook of hydraulics for the solution of hydraulic engineering problems (6th ed.): New York, McGraw-Hill, 573 p.
- Crippen, J. R., and Bue, C. D., 1977, Maximum floodflows in the conterminous United States: U.S. Geological Survey Water-Supply Paper 1887, 52 p.
- Dalrymple, Tate, and Benson, M. A., 1967, Measurement of peak discharge by the slope-area method: U.S. Geological Survey Techniques of Water-Resources Investigations, Book 3, Chapter A2, 12 p.
- Fenneman, N. M., 1931, Physiography of western United States: New York, McGraw-Hill, 534 p.
- Hales, J. E., Jr., 1974, Southwestern United States summer monsoon source--Gulf of Mexico or Pacific Ocean?: Journal of Applied Meteorology, v. 13, p. 331-342.
- Hansen, E. M., 1975, Moisture source for three extreme local rainfalls in the southern intermountain region: National Weather Service, Hydrometeorological Report 26, 57 p.
- Hoover, D. L., Eckel, E. B., and Ohl, J. P., 1978, Potential sites for a spent un-reprocessed fuel facility (SURFF), southwestern part of the Nevada Test Site: U.S. Geological Survey Open-File Report 78-269, 18 p.
- Nuclear Rocket Development Station, 1969, NRDS master plan 1969-1970: Jackass Flats, Nev., Space Nuclear Propulsion Office, sec. 5, p. 27-35.
- Quiring, R. F., 1965, Annual precipitation amount as a function of elevation in Nevada south of 38½ degrees latitude: Las Vegas, Nev., U.S. Weather Bureau Research Station, 14 p.
- Rogers, A. M., Perkins, D. M., and McKeown, F. A., 1977, A preliminary assessment of the seismic hazard of the Nevada Test Site region: Seismology Society of America Bulletin, v. 67, no. 6, p. 1587-1606.
- U.S. Weather Bureau, 1961, Rainfall frequency atlas of the United States: Technical Paper 40, 115 p.
- Winograd, I. J., and Thordarson, William, 1975, Hydrologic and hydrochemical framework, south-central Great Basin, Nevada-California, with special reference to the Nevada Test Site: U.S. Geological Survey Professional Paper 712-C, 126 p.

**THIS PAGE IS AN  
OVERSIZED DRAWING OR  
FIGURE,  
THAT CAN BE VIEWED AT THE  
RECORD TITLED:  
"MAP SHOWING APPROXIMATE  
FLOOD-PRONE AREAS, TOPOPAH  
WASH AND TRIBUTARIES, EASTERN  
JASKASS FLATS, NEVADA TEST SITE,  
SOUTHERN NEVADA." PLATE 1.  
WITHIN THIS PACKAGE.**

**NOTE: Because of these page's large file size, it may be more convenient to copy the file to a local drive and use the Imaging (Wang) viewer, which can be accessed from the Programs/Accessories menu.**

**D-01**