

NTS-976

USGS-OFR-82-1043

USGS-OFR-82-1043

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

RESISTIVITY SOUNDING INVESTIGATION BY THE SCHLUMBERGER METHOD IN
THE YUCCA MOUNTAIN AND JACKASS FLATS AREA,
NEVADA TEST SITE, NEVADA

Open-File Report 82-1043

1982

Prepared by the U.S. Geological Survey

for the

Nevada Operations Office
U.S. Department of Energy
(Interagency Agreement DE-A108-78ET44802)

HYDROLOGY DOCUMENT NUMBER 32

Copies of this Open-File Report
may be purchased from

Open-File Services Section
Branch of Distribution
U.S. Geological Survey
Box 25425, Federal Center
Denver, Colorado 80225

PREPAYMENT IS REQUIRED

Price information will be published
in the monthly listing
"New Publications of the Geological Survey"

FOR ADDITIONAL INFORMATION

CALL Commercial (303) 234-5888

ITS 234-5888

UNITED STATES DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Resistivity sounding investigation by the Schlumberger method
in the Yucca Mountain and Jackass Flats area,
Nevada Test Site, Nevada

by

R. M. Senterfit¹, D. B. Hoover¹, and M. Chornack²

This report is preliminary and has not been
edited or reviewed for conformity with U.S.
Geological Survey standards.

¹U.S. Geological Survey, Denver, CO.

²Fenix and Scisson, Inc., Mercury, NV.

Contents

	Page
Introduction.....	1
Schlumberger Vertical Electrical Soundings.....	1
Vertical Geoelectrical Sections.....	1
Conclusions.....	3
References.....	8
Appendix.....	9

Introduction

A Schlumberger resistivity survey was made in the west-central sector of the Nevada Test Site (fig. 1) as part of an extensive program to assess and identify potential repositories for high-level nuclear waste. The survey area is located within the Topopah Spring 15-minute quadrangle, part of which is shown in plate 1. The intent of the survey was to determine the geoelectric characteristics of the area and to relate them to the thicknesses and horizontal continuity of lithologic units in the Yucca Mountain and Jackass Flats area, and to locate faulting within the survey area. A total of 29 soundings is included in this report. The field data were interpreted in terms of rock layer resistivity and thickness by computer methods (Zohdy, 1973), and cross-sections were constructed to illustrate lateral resistivity variations within the near-surface rock.

Schlumberger vertical electrical sounding

Vertical electrical soundings (VES) were made with a four electrode configuration commonly referred to as the Schlumberger array (Keller and Frischknecht, 1966). The method uses four in-line electrodes; the inner pair for recording electrical potential as a current is passed through the outer pair. Measurements are made in a series of readings involving successively larger current electrode separations. The data are plotted on a logarithmic scale (see Appendix) to produce a sounding curve representing apparent resistivity variations as a function of half current-electrode separation ($AB/2$). For Schlumberger soundings, the greater the current, or outer electrode separation, the greater the depth of exploration. Sounding curves numbered YM-1 through YM-3, 24 through 27, 29 through 45, 47 through 50, and 79-3 show the results of these measurements. All the soundings used in this report are contained in the Appendix. The locations of the Schlumberger soundings are shown on plate 1. Each sounding curve has been inverted by use of a computer program to give a one-dimensional layered model (Zohdy, 1973). Interpretation of the sounding data assumes homogeneous, horizontal layering, therefore, where lateral heterogeneities in resistivity exist within the influence of the energizing current field, the sounding may exhibit distortions which, when present, the computer will model as horizontal layering. Data distortion resulting from lateral variations in rock resistivity are not always recognizable from the shape of the field curve.

Vertical geoelectrical sections

Three geoelectric cross sections were prepared from the computer derived one-dimensional layered models to illustrate resistivity variations within the sectors of the study area. The locations of the cross sections are shown on plate 1. The sections were compiled with a vertical exaggeration of 14.5 and contoured with seven logarithmically scaled intervals per decade. Each cross section includes at least one lithologic log on-line with the Schlumberger soundings in that cross-section to provide comparison of geoelectric and lithologic data.

Resistivity cross section A-A' is shown on figure 2. This cross section is constructed in a northwest-southeast direction across the northern part of Jackass Flats. Lithologic data from drillholes J-11 and J-13 are included. Resistivity values show a general decrease with depth, beginning at about 250

meters, which indicates that more conductive rocks are being sensed at increasing depths. Between VES 24 and 25, an abrupt change in depth to the conductive zone is shown. The Mine Mountain fault, mapped by Ekren and Sargent (1965) as a left-lateral strike-slip fault, striking northeast and down-dropped to the southeast, is mapped approximately 6 kilometers to the northeast of VES 25 and 24 (Orkild, 1968) and is inferred to pass between those two stations (D. L. Hoover, USGS, oral commun., 1981). From depths of about 150 meters and continuing downward through the section between VES 25 and 27, the resistivity contours have an apparent dip to the northwest. At VES 24, the apparent dip of the resistivity contours is more gradual to the southeast. These changes in apparent dip of the resistivity contours from VES 25 to the northwest and from VES 25 to the southeast support geologic evidence placing the Mine Mountain fault between VES 25 and 24 (Ekren and Sargent, 1965). At VES 25, beginning at a depth of about 150 meters, the resistivity contours show a gradient decreasing in value with depth, indicating the sensing of a more conductive zone. At VES 24, a similar gradient is seen beginning at a depth of about 280 meters, which supports evidence that the Mine Mountain fault is down-dropped to the southeast (Ekren and Sargent, 1965).

The two areas of low resistivity seen on cross section A-A' at depth intervals of 50 to 150 meters are probably caused by an increase in amounts of clay and other fine-grained material within alluvial fill (see lithologic data for drillholes J-11 and J-13, cross section A-A'). The area of high resistivity seen at a depth interval of 100 to 160 meters beneath VES 26 may be due to the presence of local basalts which occur throughout this area (McKay and Williams, 1964). The water table, at a depth of about 300 meters, does not appear to have been detected by the soundings in this area.

Cross section B-B' (fig. 3) runs from the top of Yucca Wash to Fortymile Wash. Lithologic information from drillhole J-13 is included. Geologic mapping of this area (Lipman and McKay, 1965; Christiansen and Lipman, 1965) indicates a thick section of volcanics dipping gently to the east. The geoelectrical data shows a general decrease in resistivity beginning at a depth of about 300 meters and continuing downward through the section, which indicates the presence of a more conductive layer within the tuffs. Several areas of high or low resistivity are seen along cross section B-B' from the surface to a depth of about 200 meters, indicating significant lateral variations in rock resistivity within this depth range. These lateral changes are attributed to differences in fracturing, faulting, and lithology of the tuffs throughout the area, and to varying amounts of clay and other fine-grained materials in the alluvium.

Cross section C-C' (fig. 4) runs from the northeast end of Drillhole Wash to the north-south road along Fortymile Wash. Lithologic data from drillhole Ue 25a-1 is included with the cross section. The deeper ranges sensed show a decrease in resistivity with depth, indicating the presence of more conductive rock in the lower part of the section. The variations in resistivity within the upper 100 meters of the section are associated with volcanic rocks, principally the Tiva formation mapped by Lipman and McKay as outcropping throughout the area. The area of high resistivity seen from VES 39 to VES 37, at a depth interval of 100 meters to about 450 meters, is probably a reflection of the Topopah Spring member of the Paintbrush Tuff (Spengler and others, 1979). In the vicinity of VES 37 and 36, sharp changes in resistivity

values are shown in the depth interval of 80 to about 350 meters. These changes could be a reflection of vertical displacement caused by faults crossing the line of the cross section.

Conclusions

The interpreted results of some of the 29 Schlumberger resistivity soundings, as shown in the cross sections of figures 2, 3, and 4, indicate some lateral discontinuities which appear to be caused by vertical displacement due to faulting. Because the lithologic section in this survey area is composed primarily of ash-flow tuffs beneath alluvium (Lipman and McKay, 1965), many of the lateral resistivity variations are probably caused by differences in amounts of clay and other fine-grained materials within the alluvium, variations of lithology within the volcanic rocks, and the effects of fracturing within the rock types.

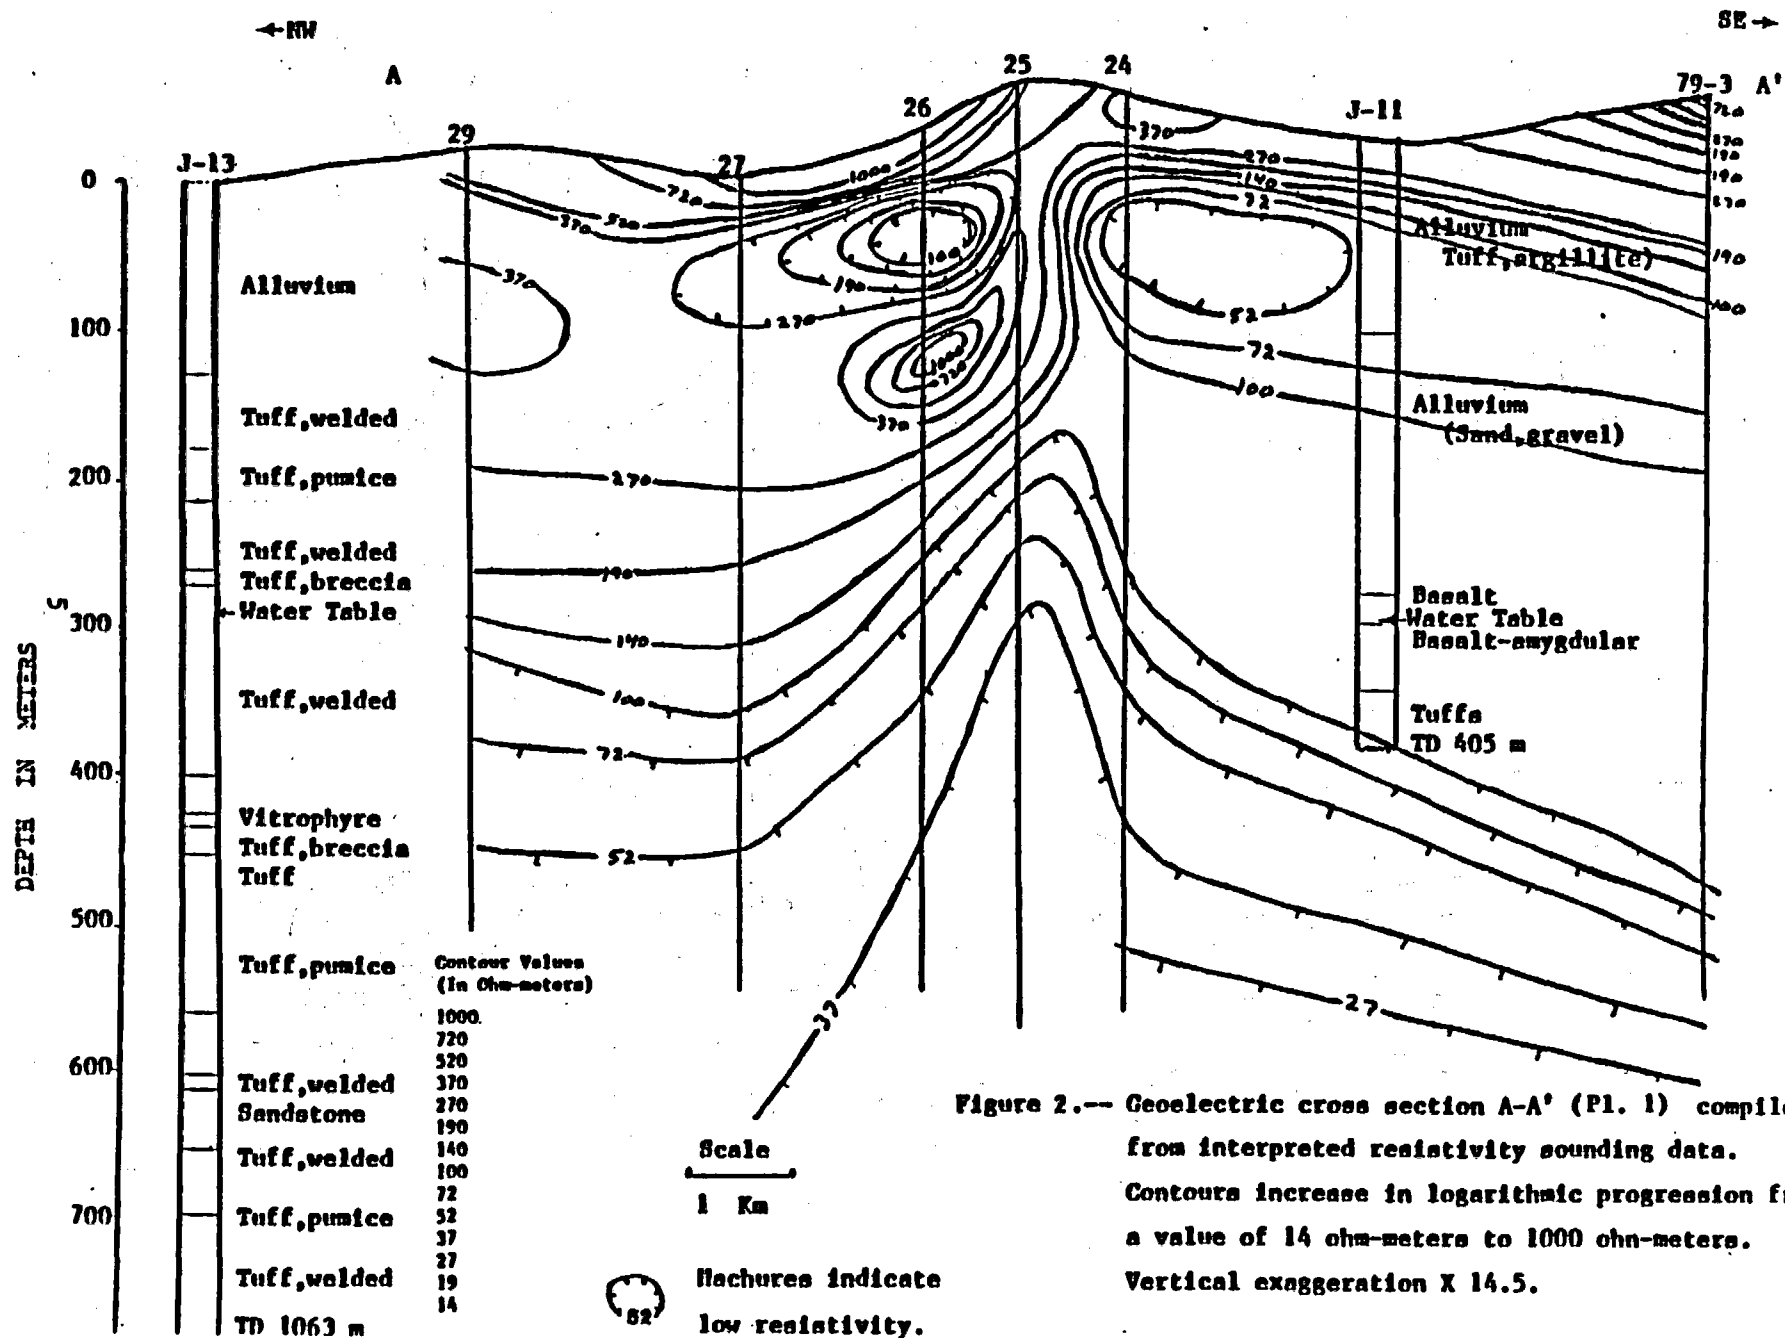


Figure 2.— Geoelectric cross section A-A' (Pl. 1) compiled from interpreted resistivity sounding data. Contours increase in logarithmic progression from a value of 14 ohm-meters to 1000 ohm-meters. Vertical exaggeration X 14.5.


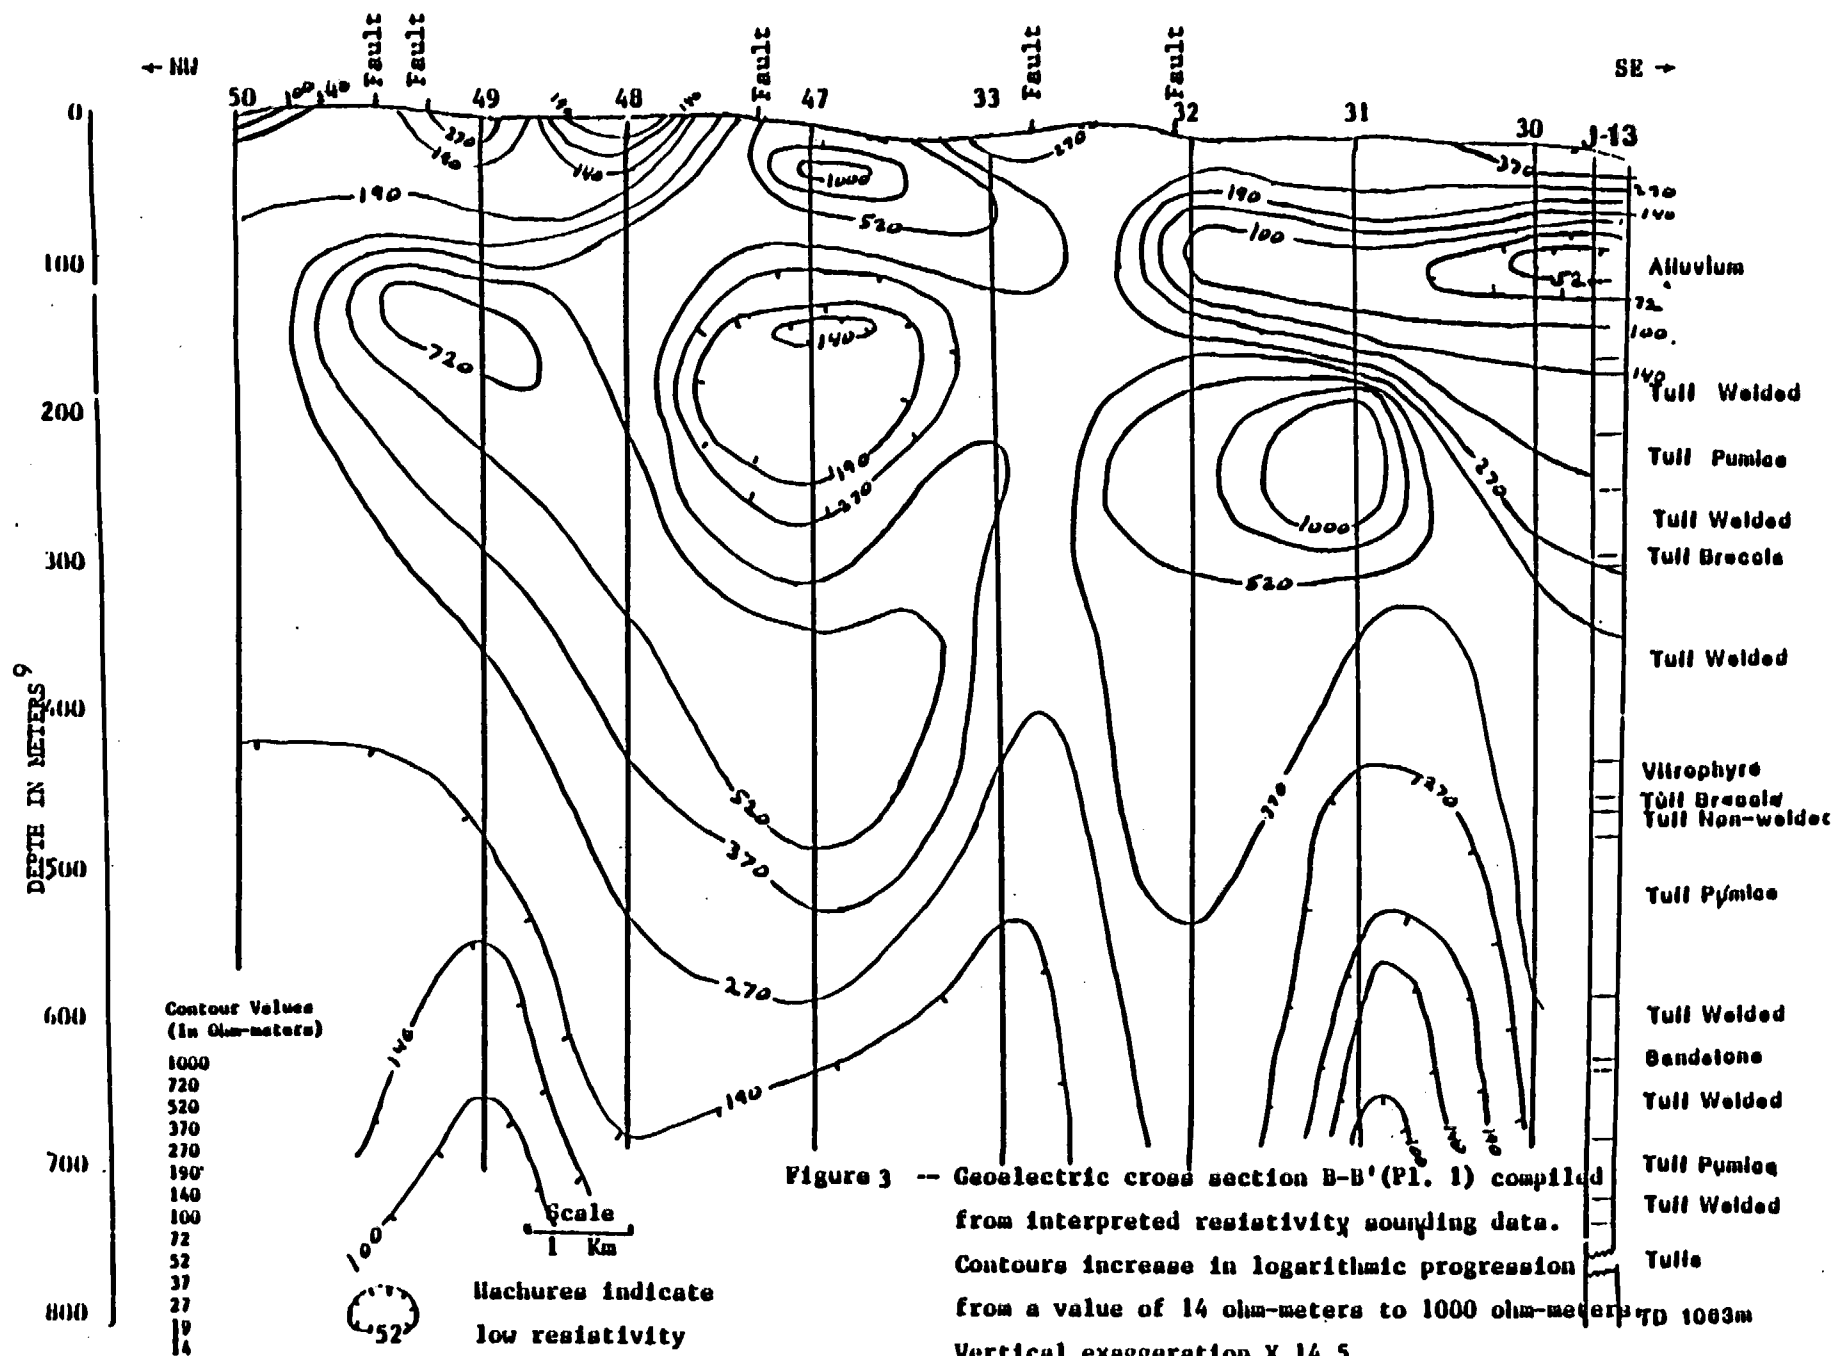


Figure 3 -- Geoelectric cross section B-B' (Pl. 1) compiled from interpreted resistivity sounding data. Contours increase in logarithmic progression from a value of 14 ohm-meters to 1000 ohm-meters. Vertical exaggeration X 14.5.

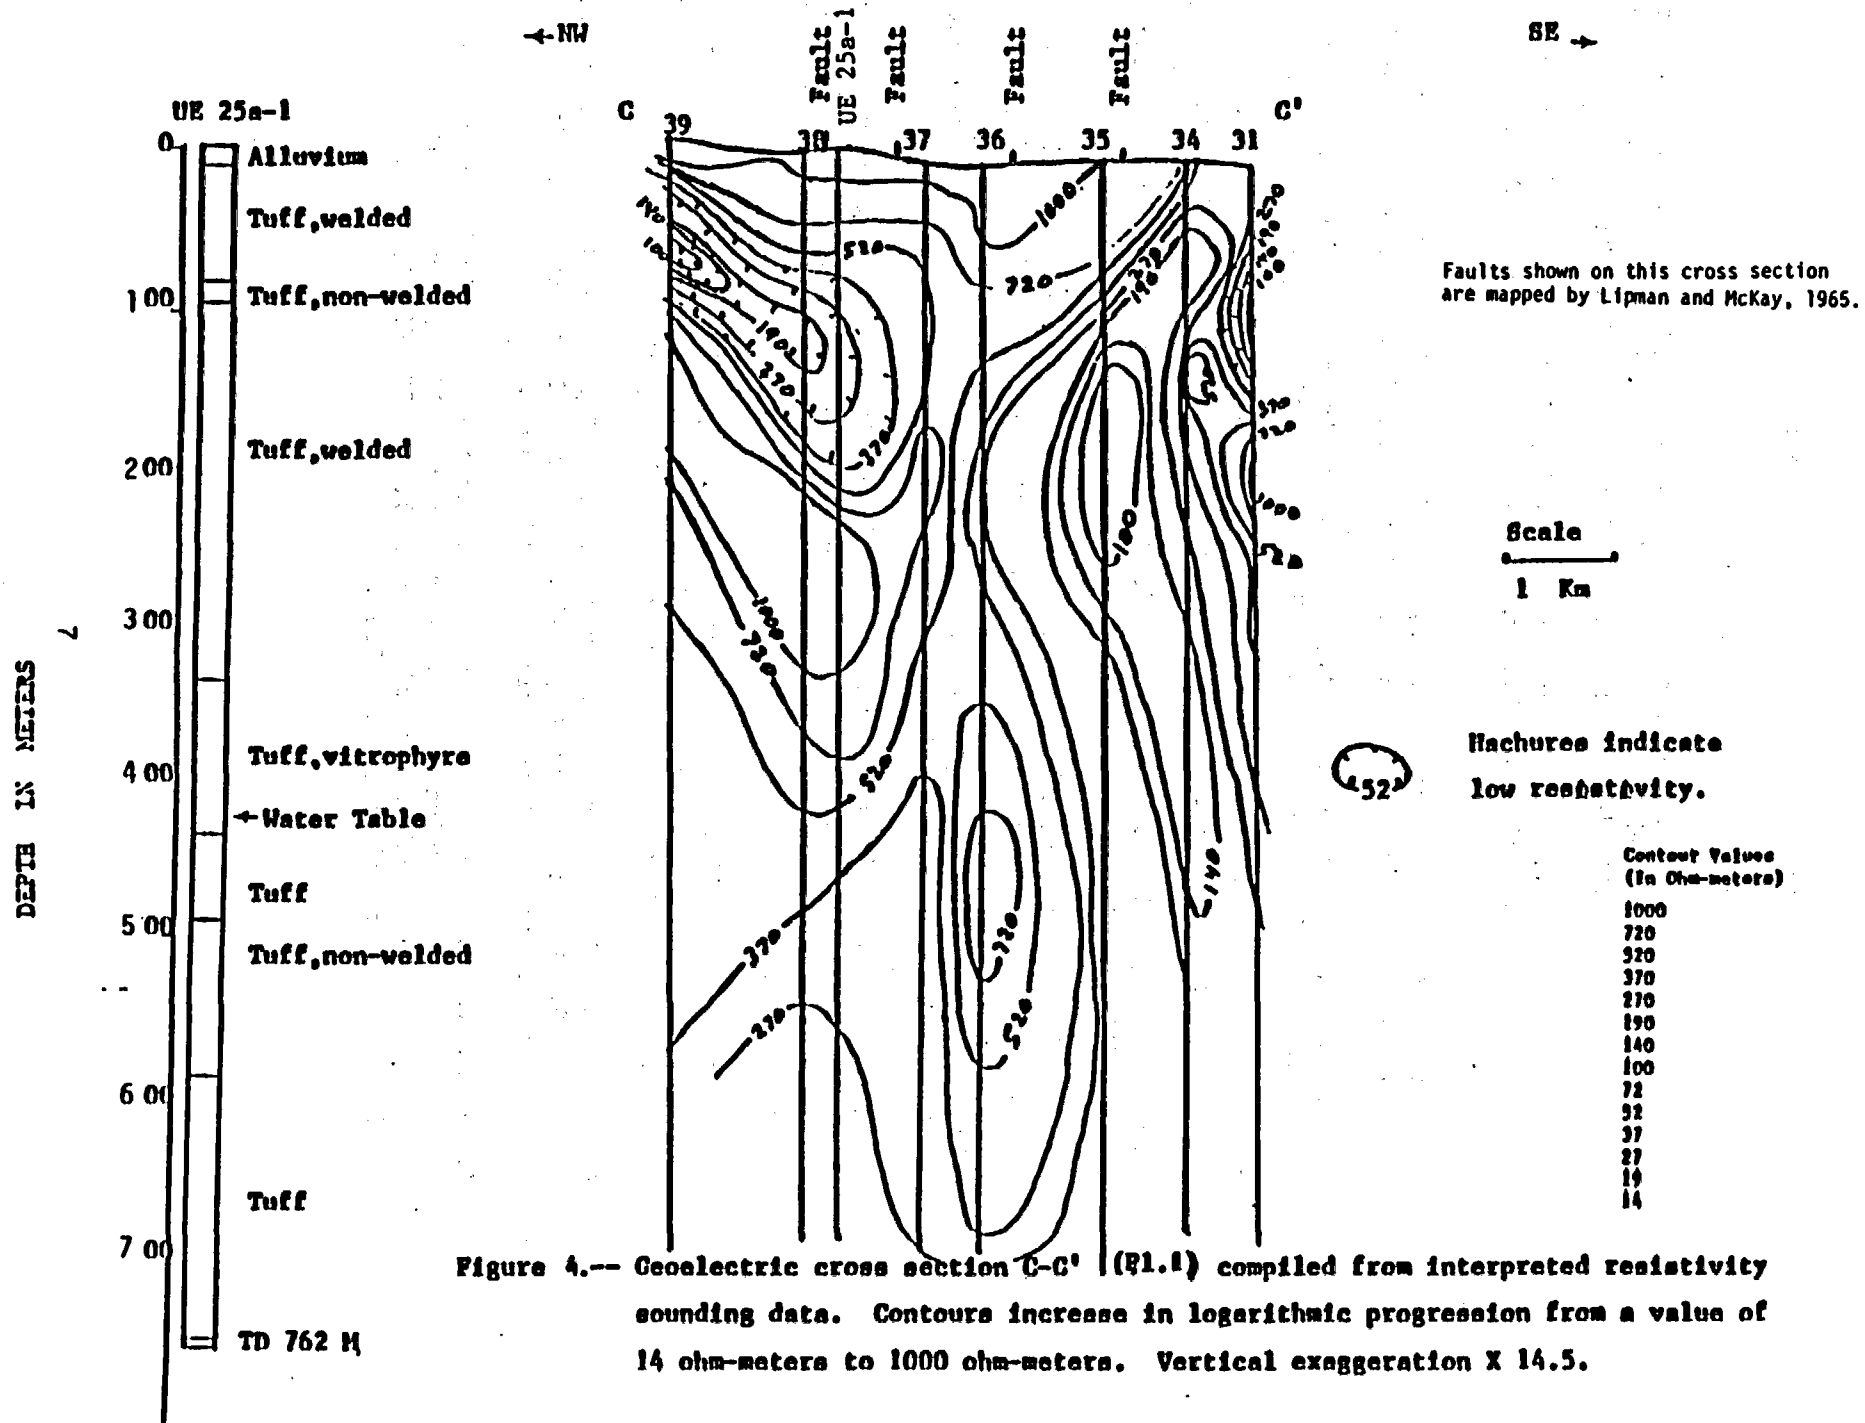

References


- Anderson, W. L., 1971, Application of bicubic spline functions to two dimensional gridded data: NTIS (National Technical Information Service), PB-203 579, available only from NTIS, Springfield, Va., 22161.
- Christiansen, R. L., and Lipman, P. W., 1965, Geologic map of the Topopah Spring NW quadrangle, Nye County, Nevada: U.S. Geological Survey GQ-444, 1 p.
- Classen, H. C., 1973, Water quality and physical characteristics of Nevada Test Site water-supply wells: U.S. Geological Survey NTS Report 474-158.
- Ekren, E. B., and Sargent, K. A., 1965, Geologic map of the Skull Mountain Quadrangle, Nye County, Nevada: U.S. Geological Survey GQ-389, 1 p.
- Keller, G. V., and Frischknecht, F. C., 1966, Electrical methods in geophysical prospecting: Pergamon Press, London, New York Toronto, 517 p.
- Lipman, P. W., and McKay, E. J., 1965, Geologic map of the Topopah Spring SW Quadrangle, Nye County, Nevada: U.S. Geological Survey GQ-439, 1 p.
- McKay, E. J., and Williams, W. P., 1964, Geologic map of the Jackass Flats Quadrangle, Nye County, Nevada, U.S. Geological Survey GQ-368, 1 p.
- Orkild, P. P., 1968, Geologic map of the Mine Mountain Quadrangle, Nye County, Nevada, U.S. Geological Survey GQ-746, 1 p.
- Spengler, R. W., and Rosenbaum, J. G., 1980, Preliminary interpretations of geologic results obtained from boreholes UE 25a-4, -5, -6 and -7, Yucca Mountain, Nevada Test Site: U.S. Geological Survey Open-File Report 80-929, 33 p.
- Spengler, R. W., Muller, D. C., Livermore, R. B., 1979, Preliminary report on the geology and geophysics of drillhole UE 25a-1, Yucca Mountain, Nevada Test Site: U.S. Geological Survey Open-File Report 79-1244, 43 p.
- Young, R. A., 1972, Water supply for the Nuclear Rocket Development Station at the U.S. Atomic Energy Commission's Nevada Test Site, Nevada: U.S. Geological Survey Water-Supply Paper 1938 19 p.
- Zohdy, A. A. R., 1973, A computer program for the automatic interpretation of Schlumberger sounding curves over horizontally layered media: NTIS (National Technical Information Service), PB-232 703/AS, 25 p., available from NTIS, Springfield, Va., 22161.

Appendix


Vertical electrical soundings YM-1 through YM-3, 24 through 27, 29 through 45, 47 through 50, and 79-3. On each curve the measured field data are represented by the symbol X, connected by straight line segments; the circles portray a shifted field curve obtained by vertical adjustment of individual segments relative to the last segment on the right-hand side of the sounding curve (Zohdy, 1973); the resistivity model is represented by the columnar graph wherein the width of a particular column designates the thickness of an individual layer and its vertical position corresponds to the resistivity of that layer.

RESISTIVITIES IN OHM-METERS

YM-1

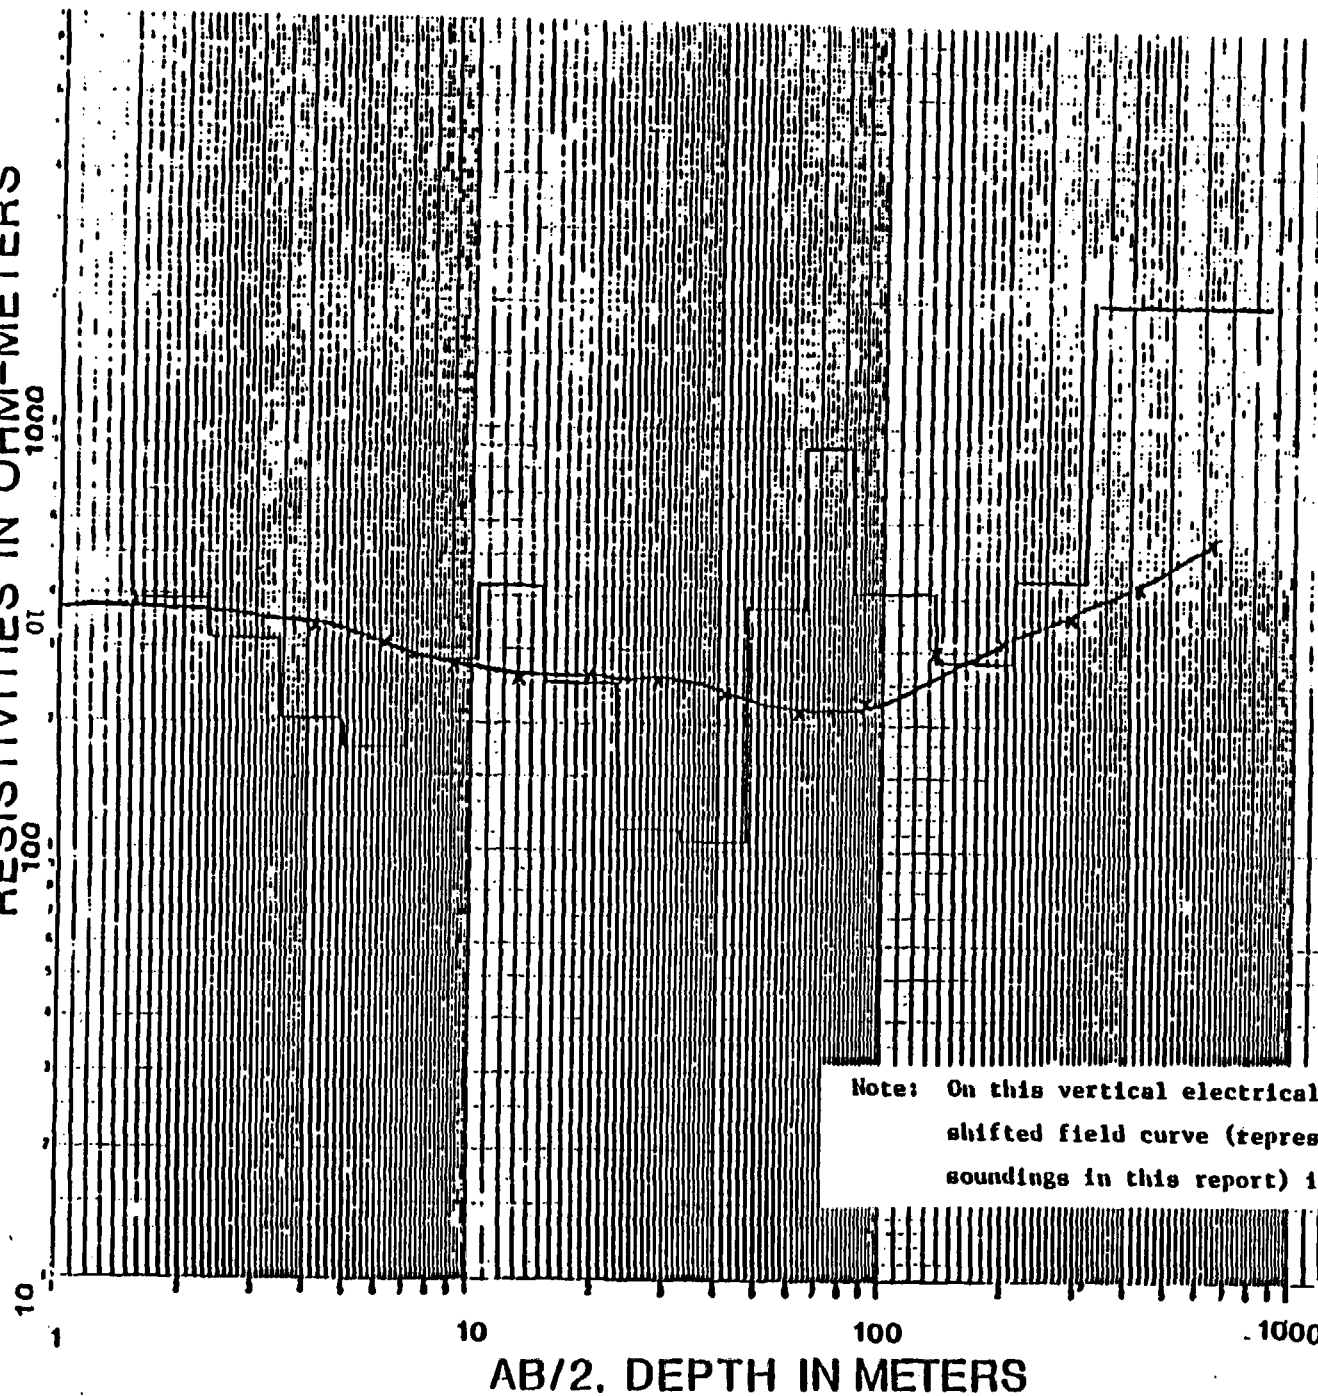


YM-2

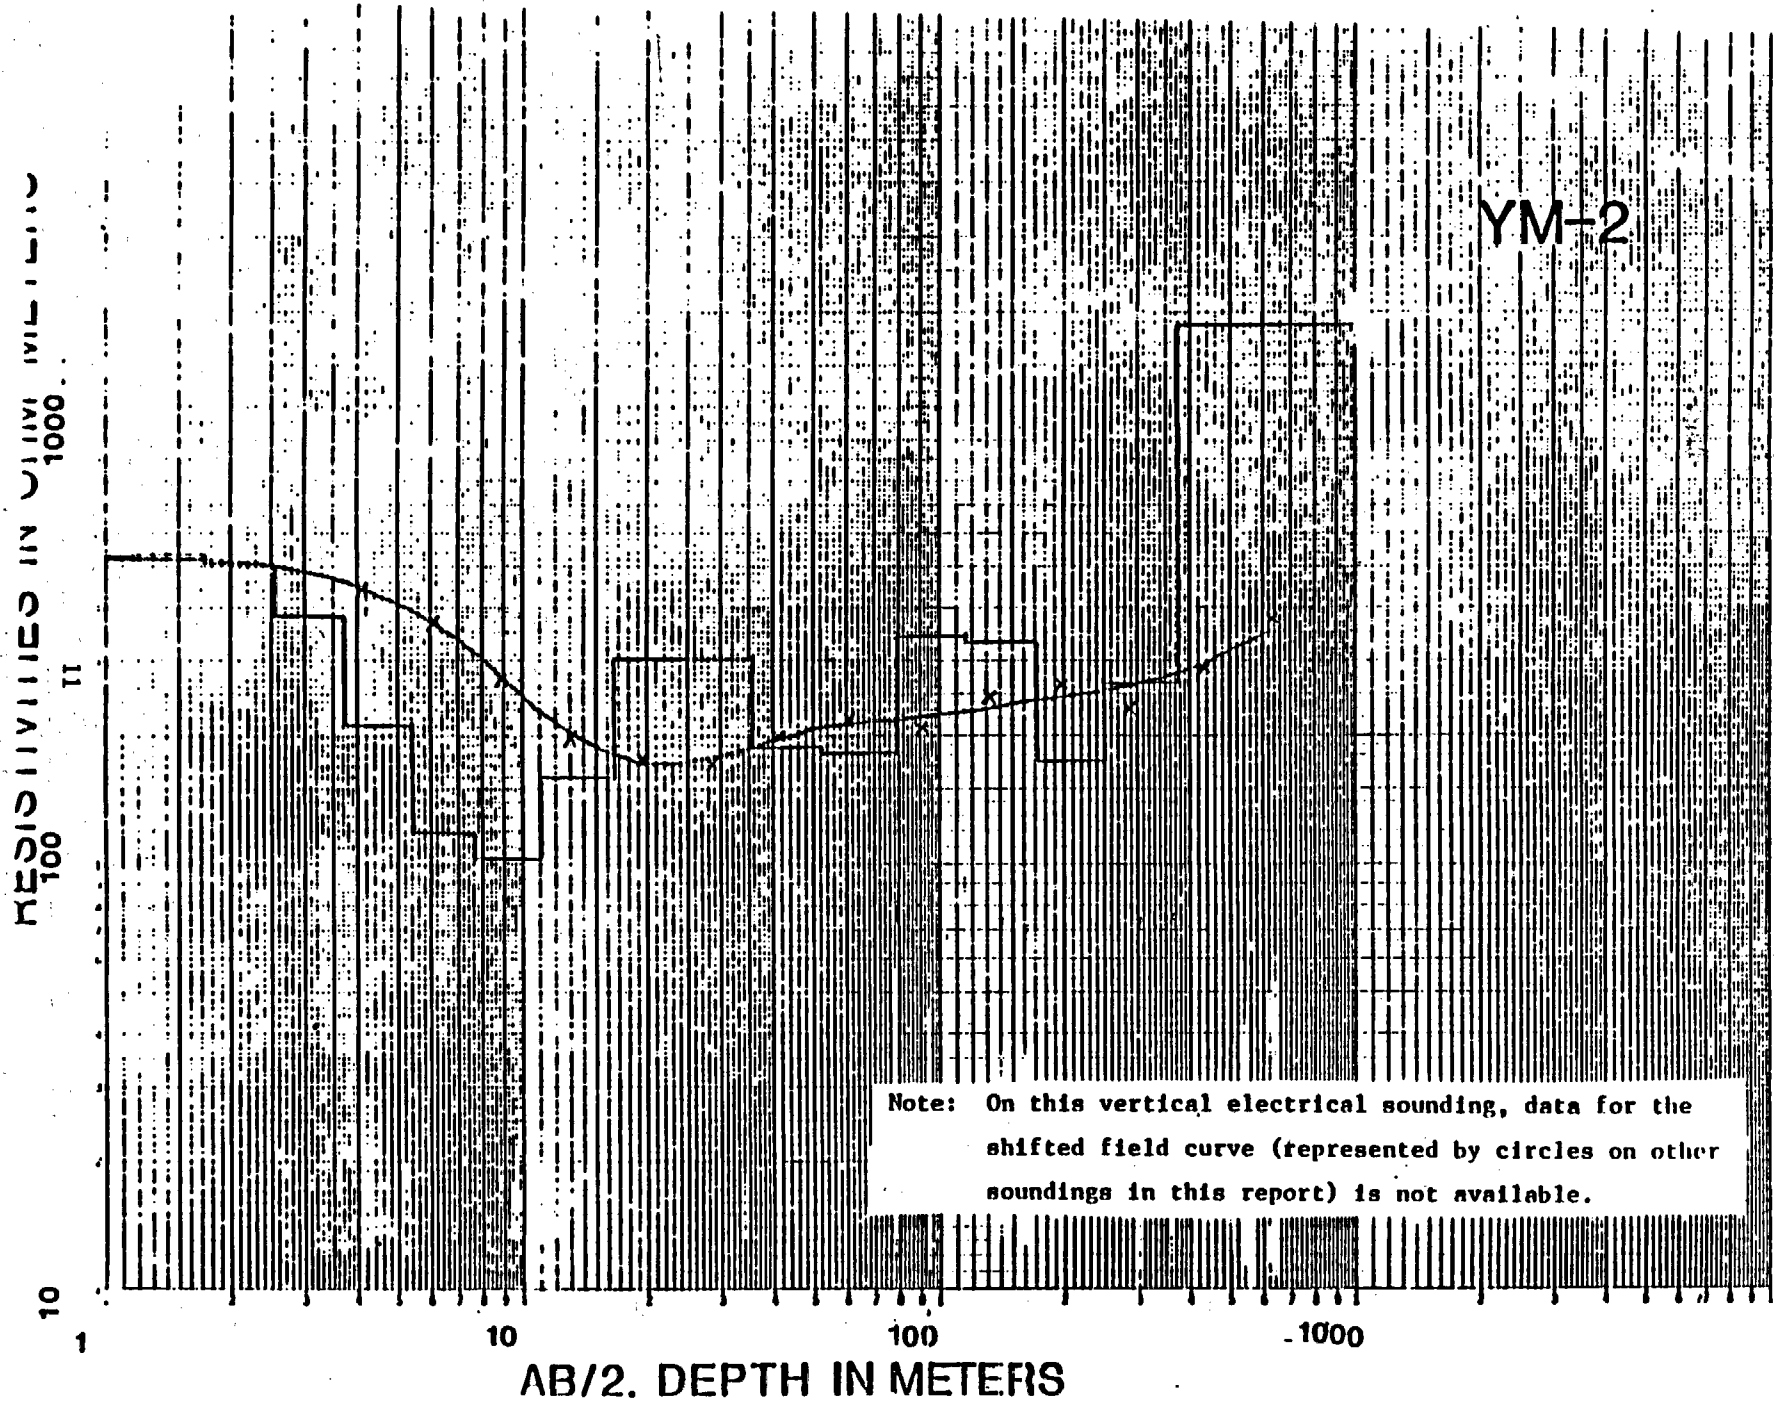


RESISTIVITIES IN OHM-METERS


YM-3

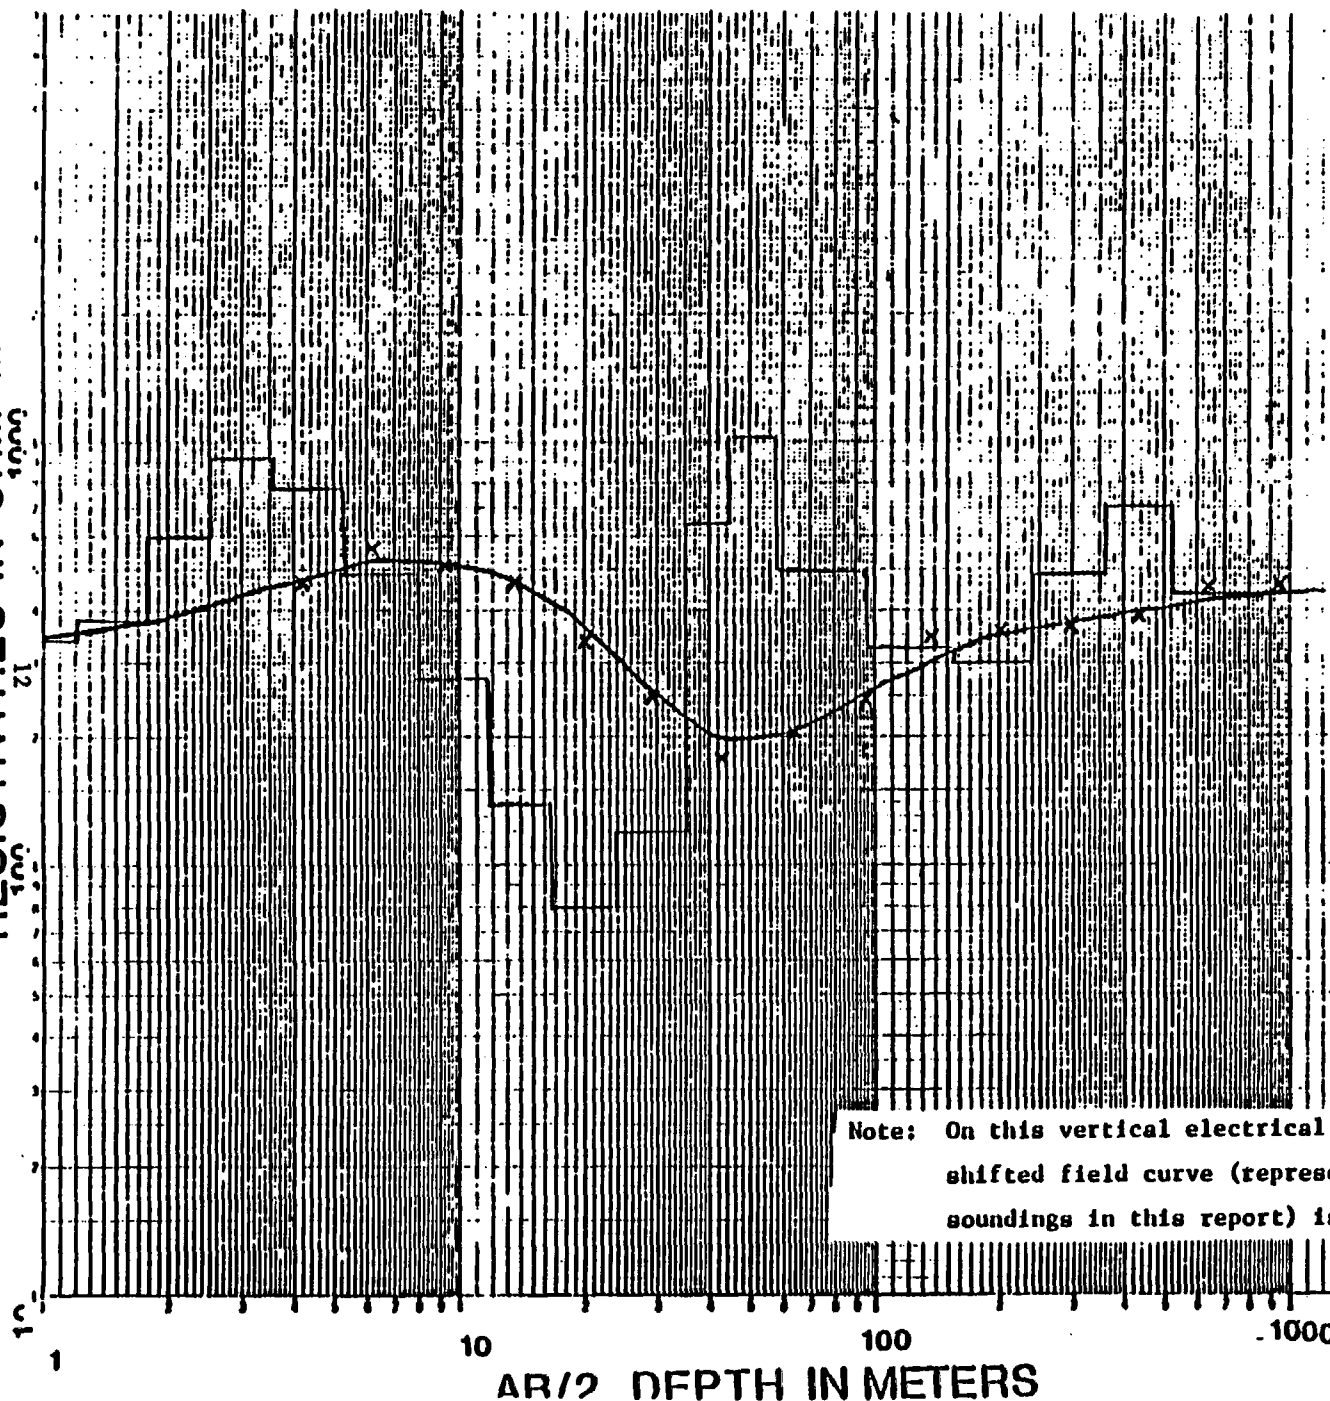


RESISTIVITIES IN OHM-METERS

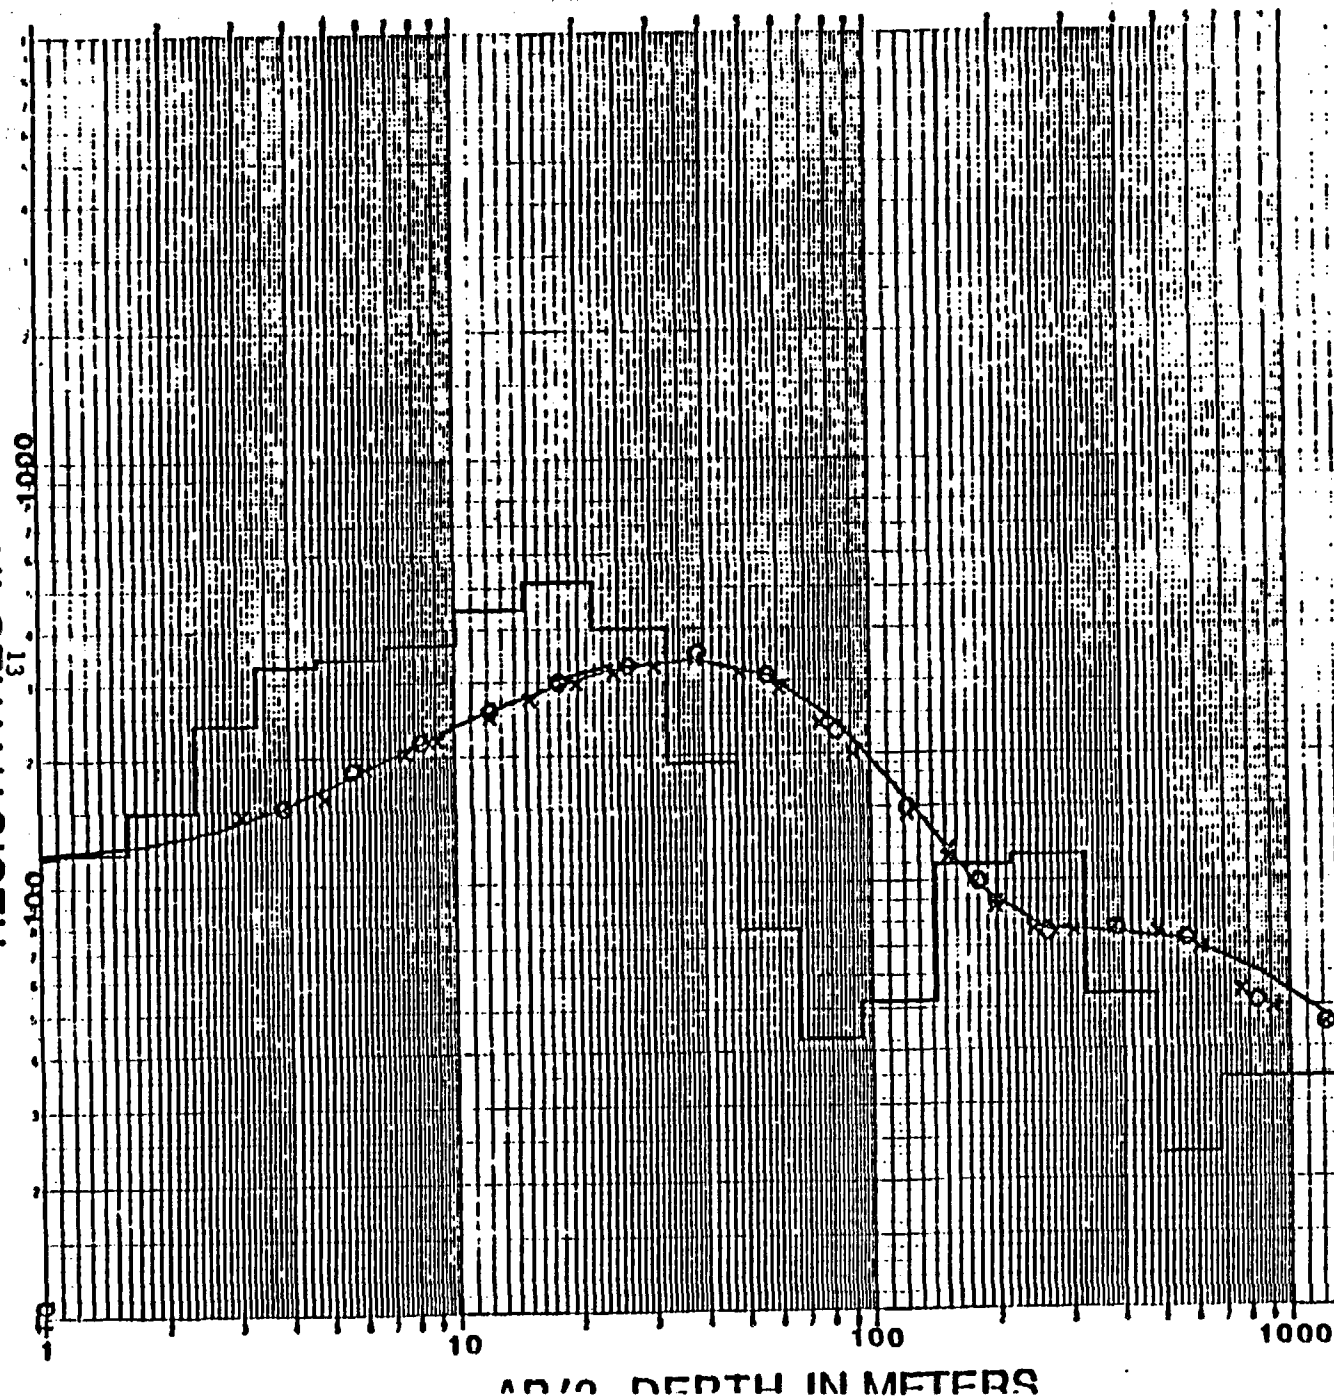


AB/2, DEPTH IN METERS

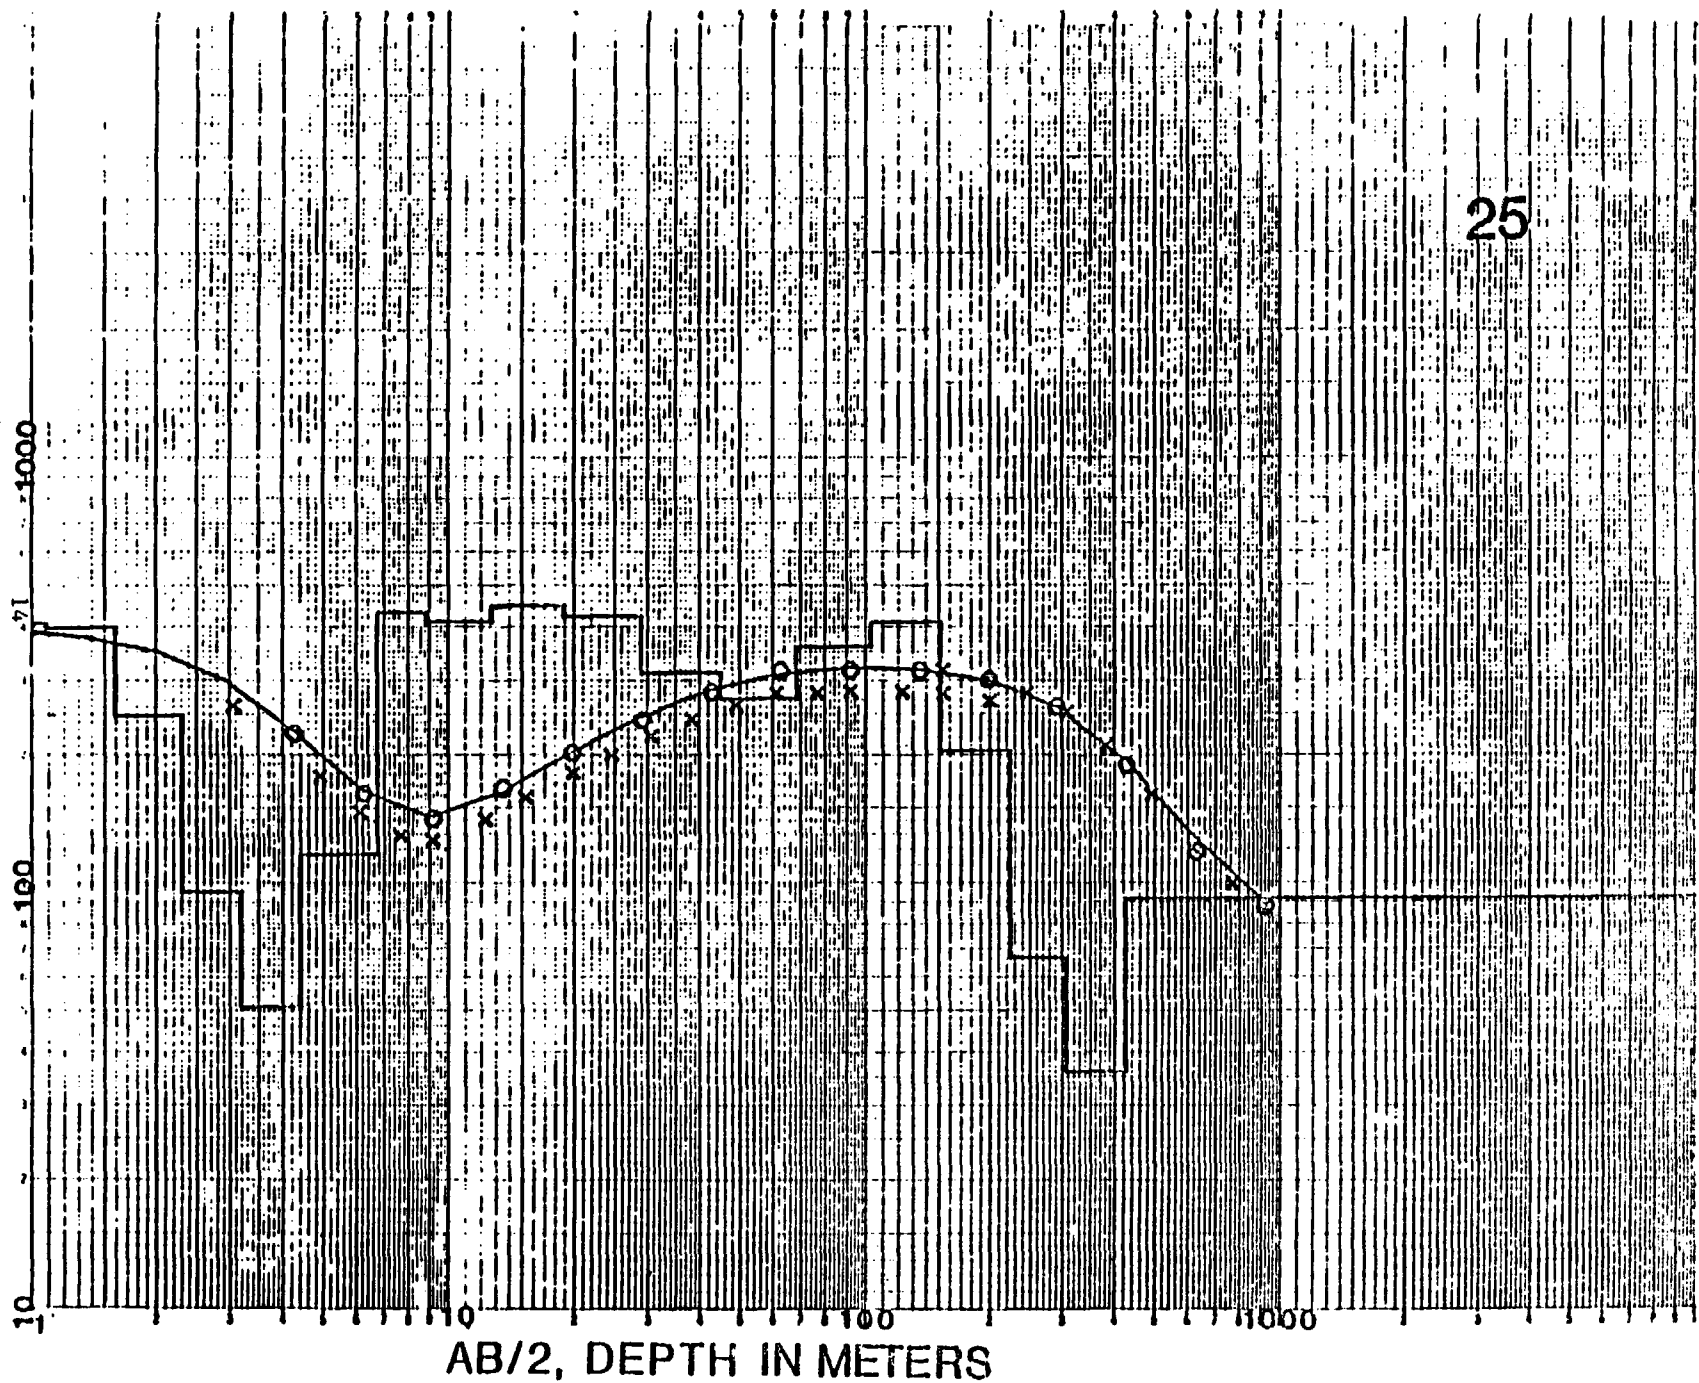

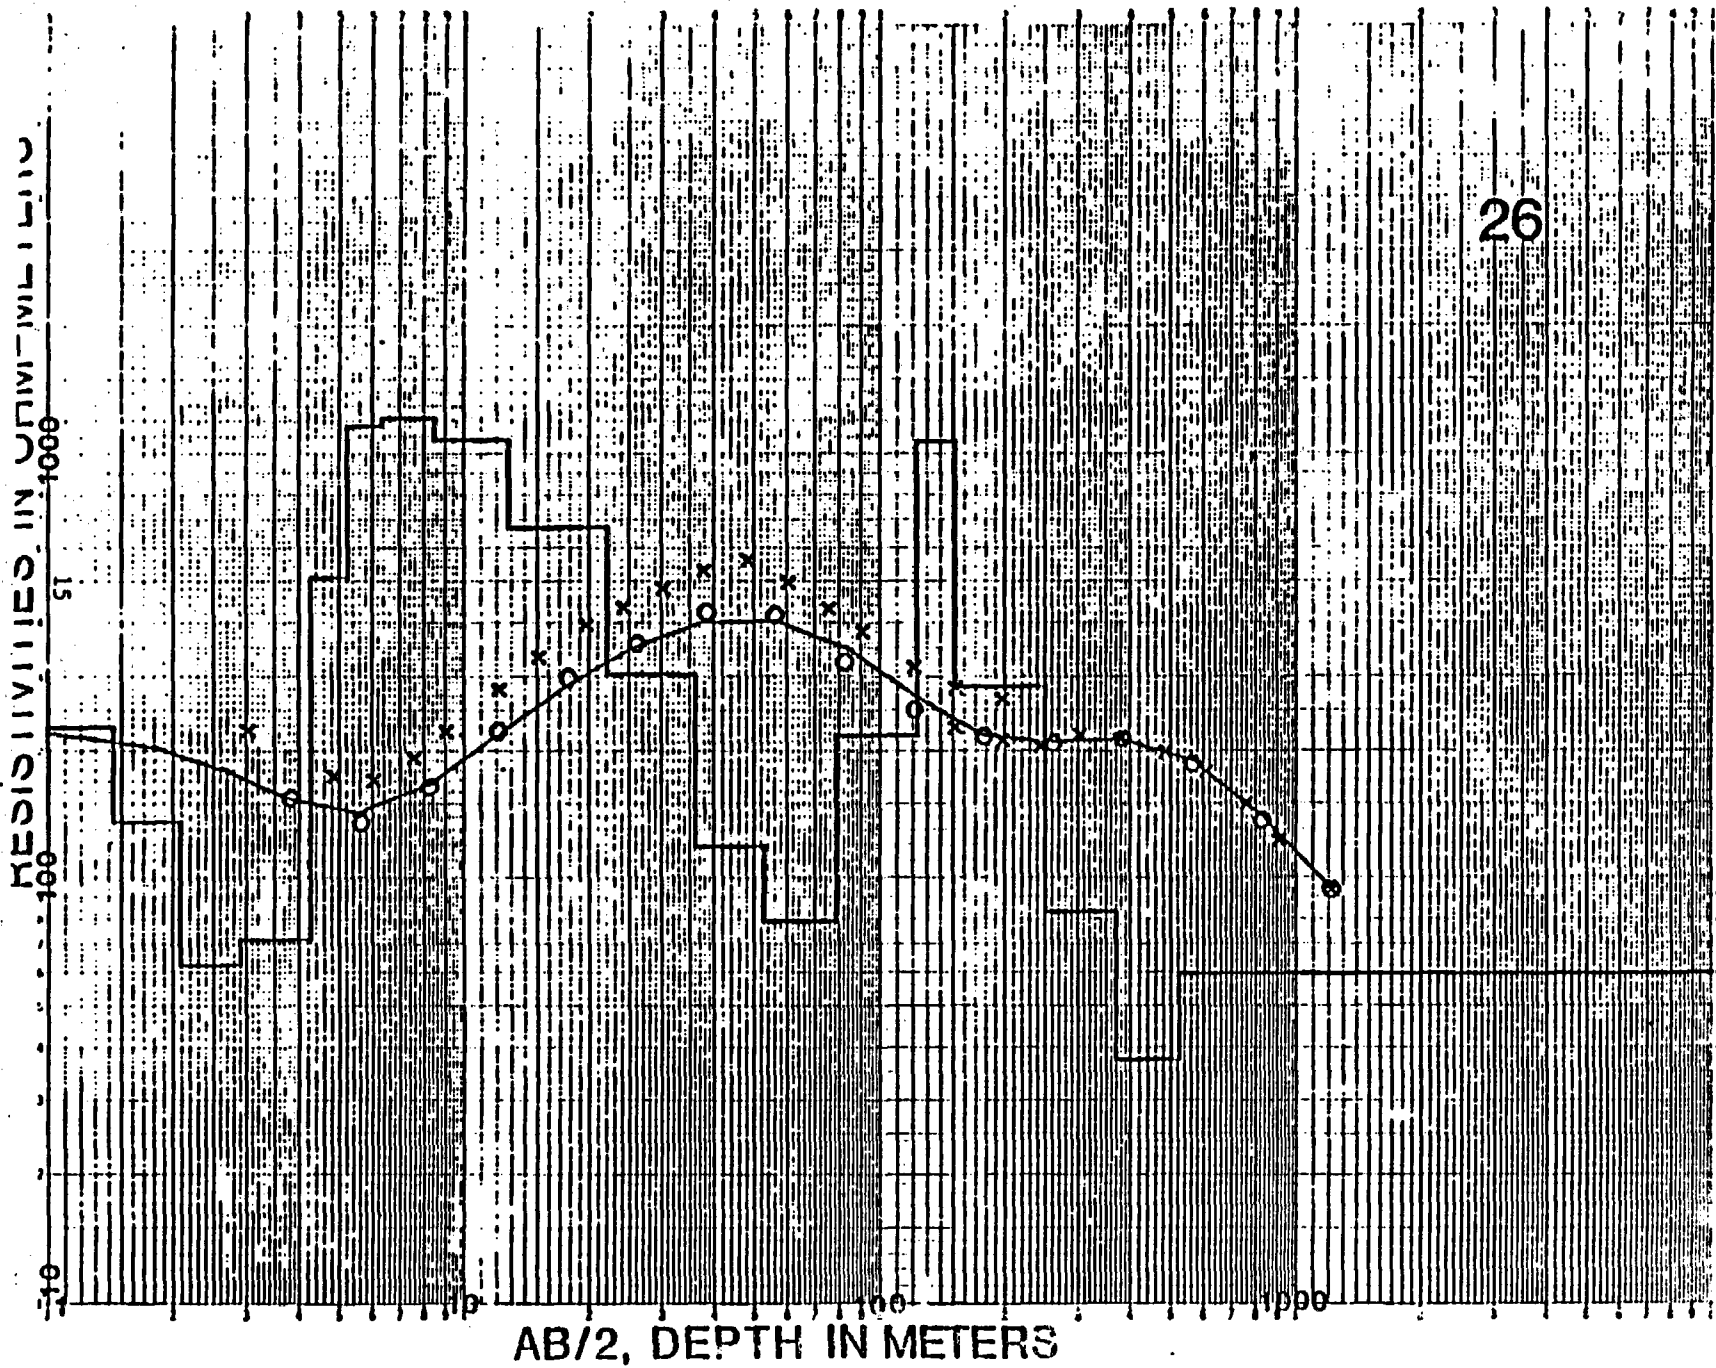


RESISTIVITIES IN OHM-METERS

27

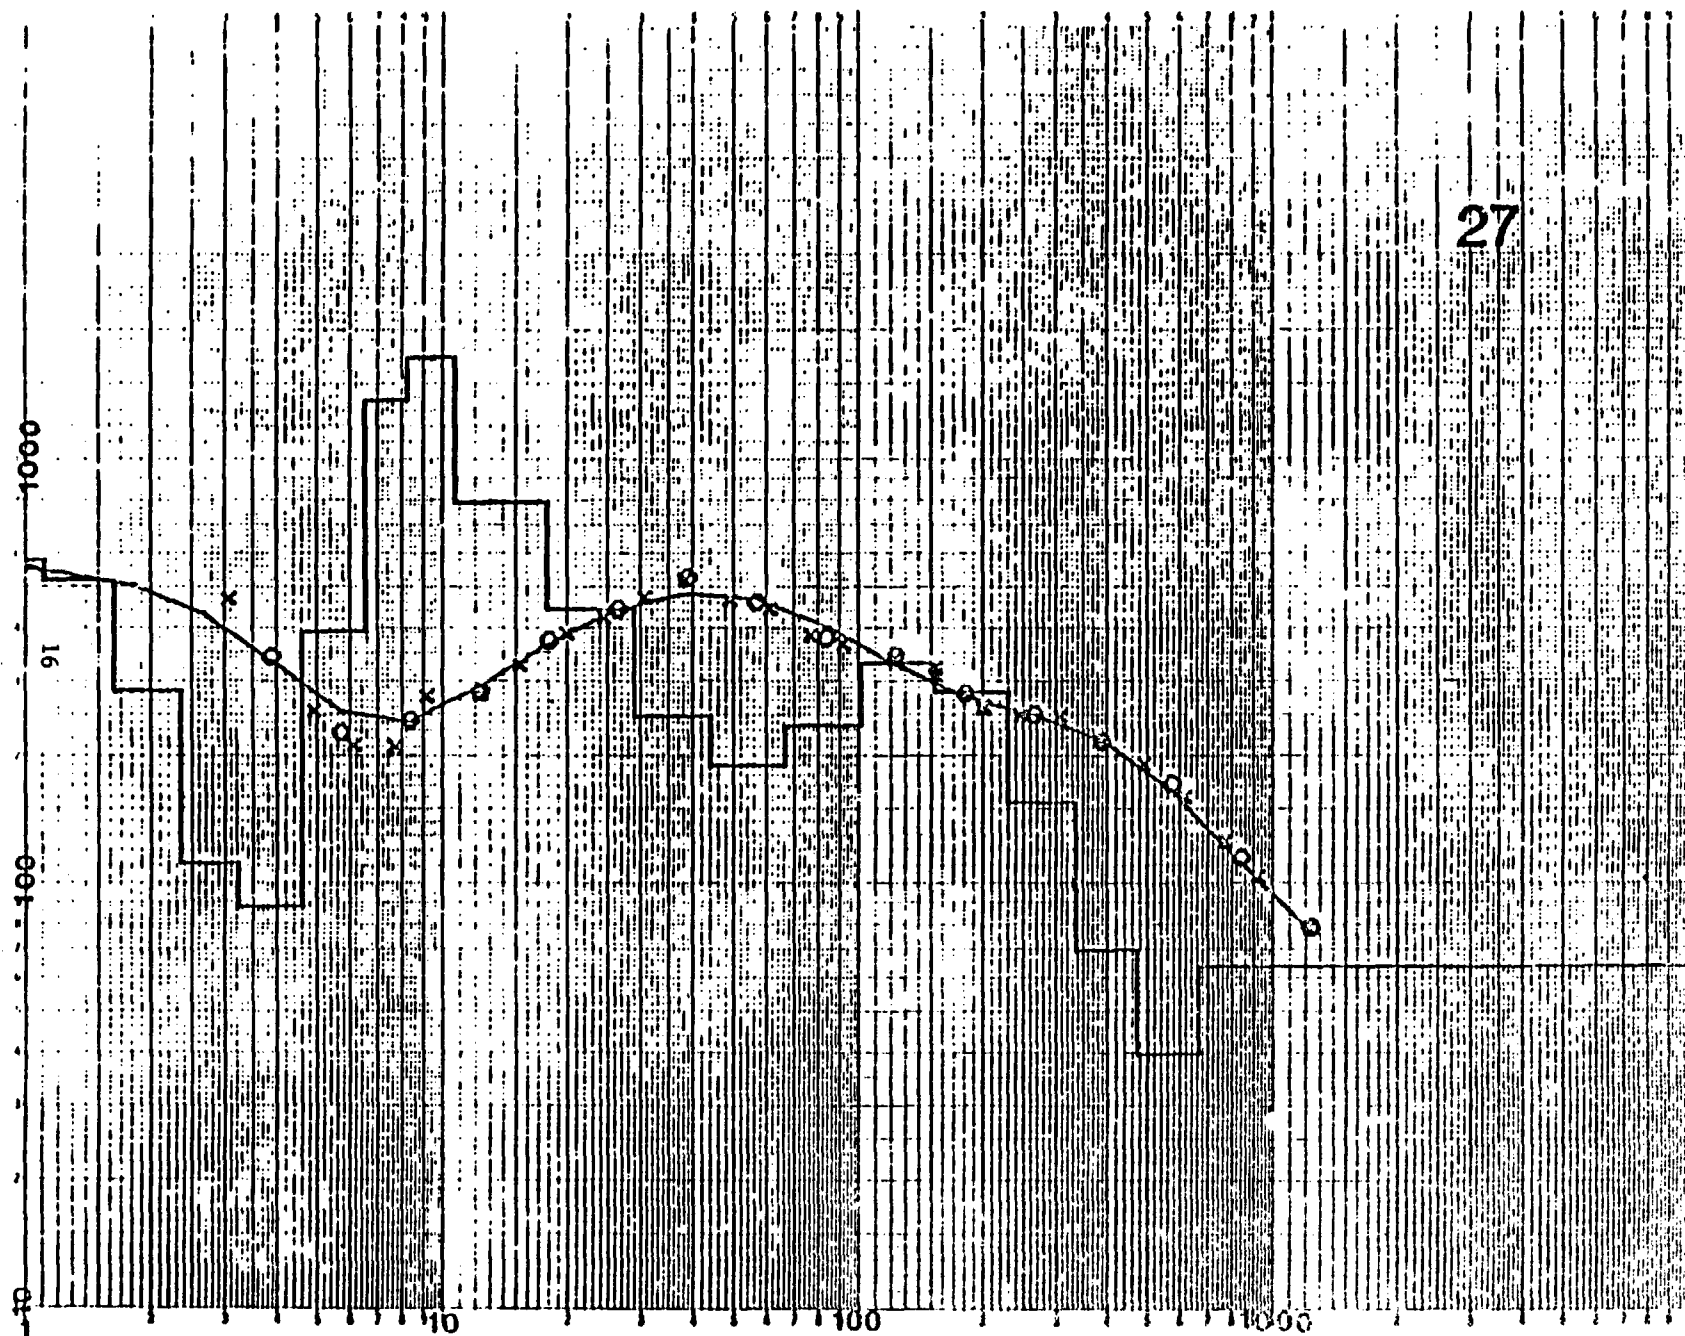

AB/2, DEPTH IN METERS

RESISTIVITIES IN OHM-METERS

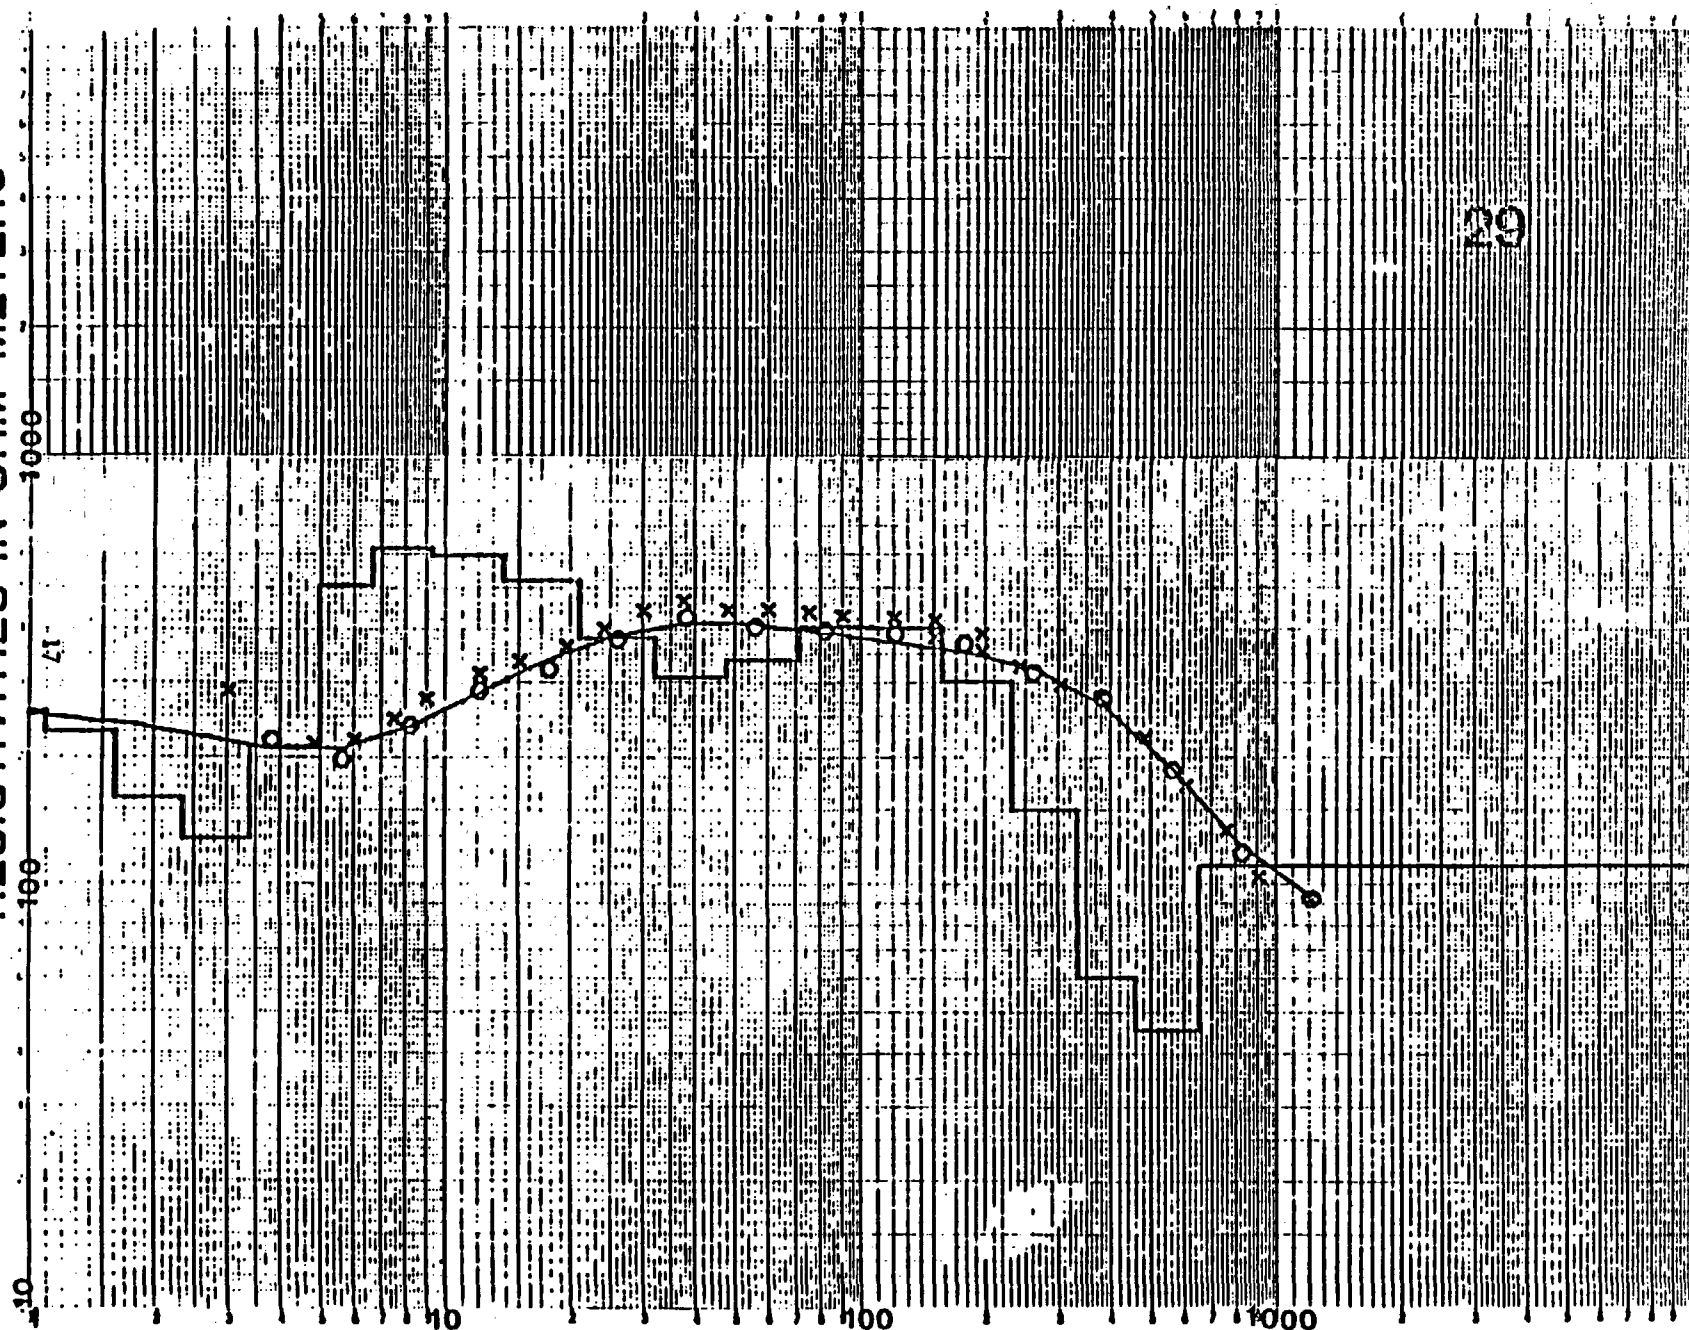

AB/2. DEPTH IN METERS

RESISTIVITIES IN OHM-METERS

10
1

1000

81

100


10

100


1000

AB/2 DEPTH IN METERS


30

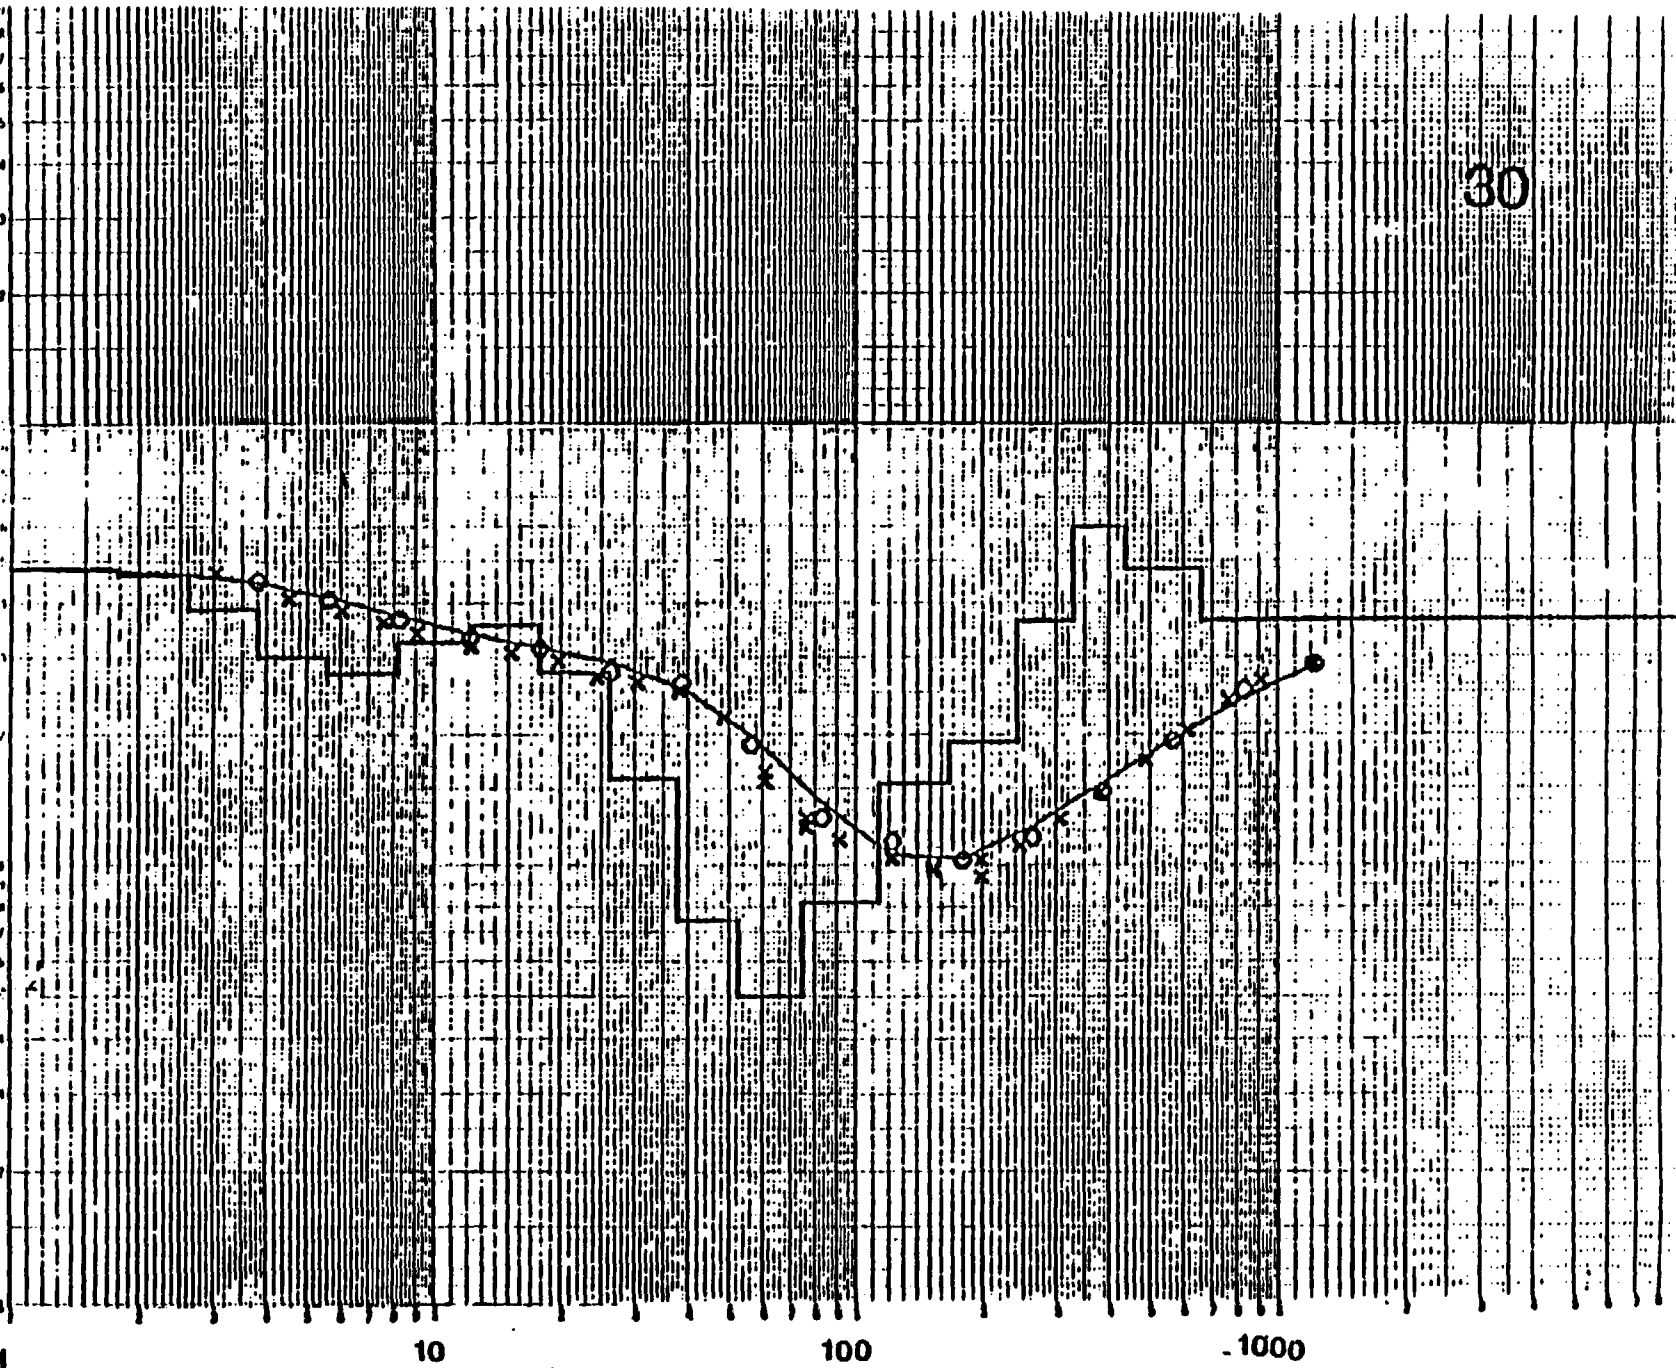

RESISTIVITIES IN OHM-METERS

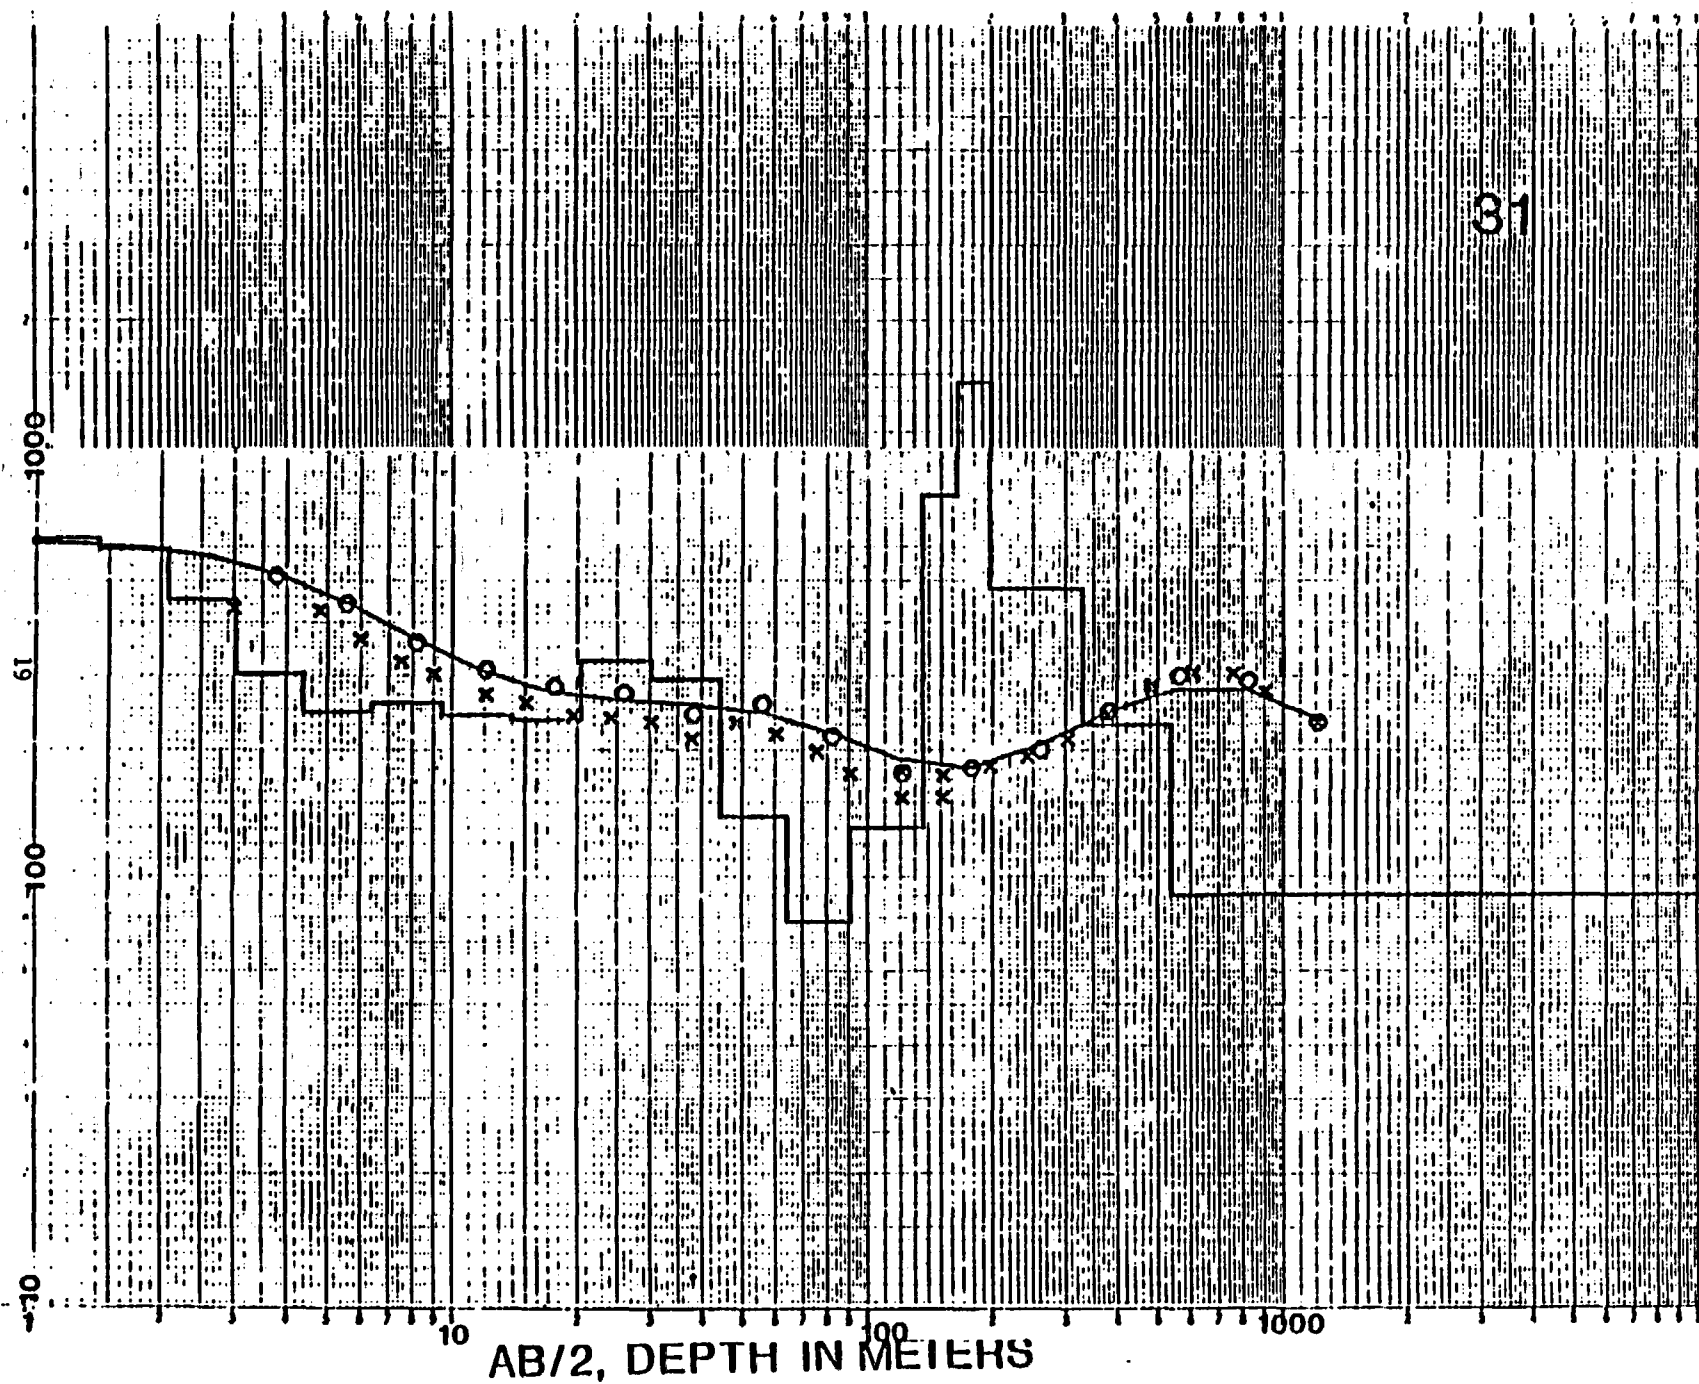


RESISTIVITIES IN OHM-METERS

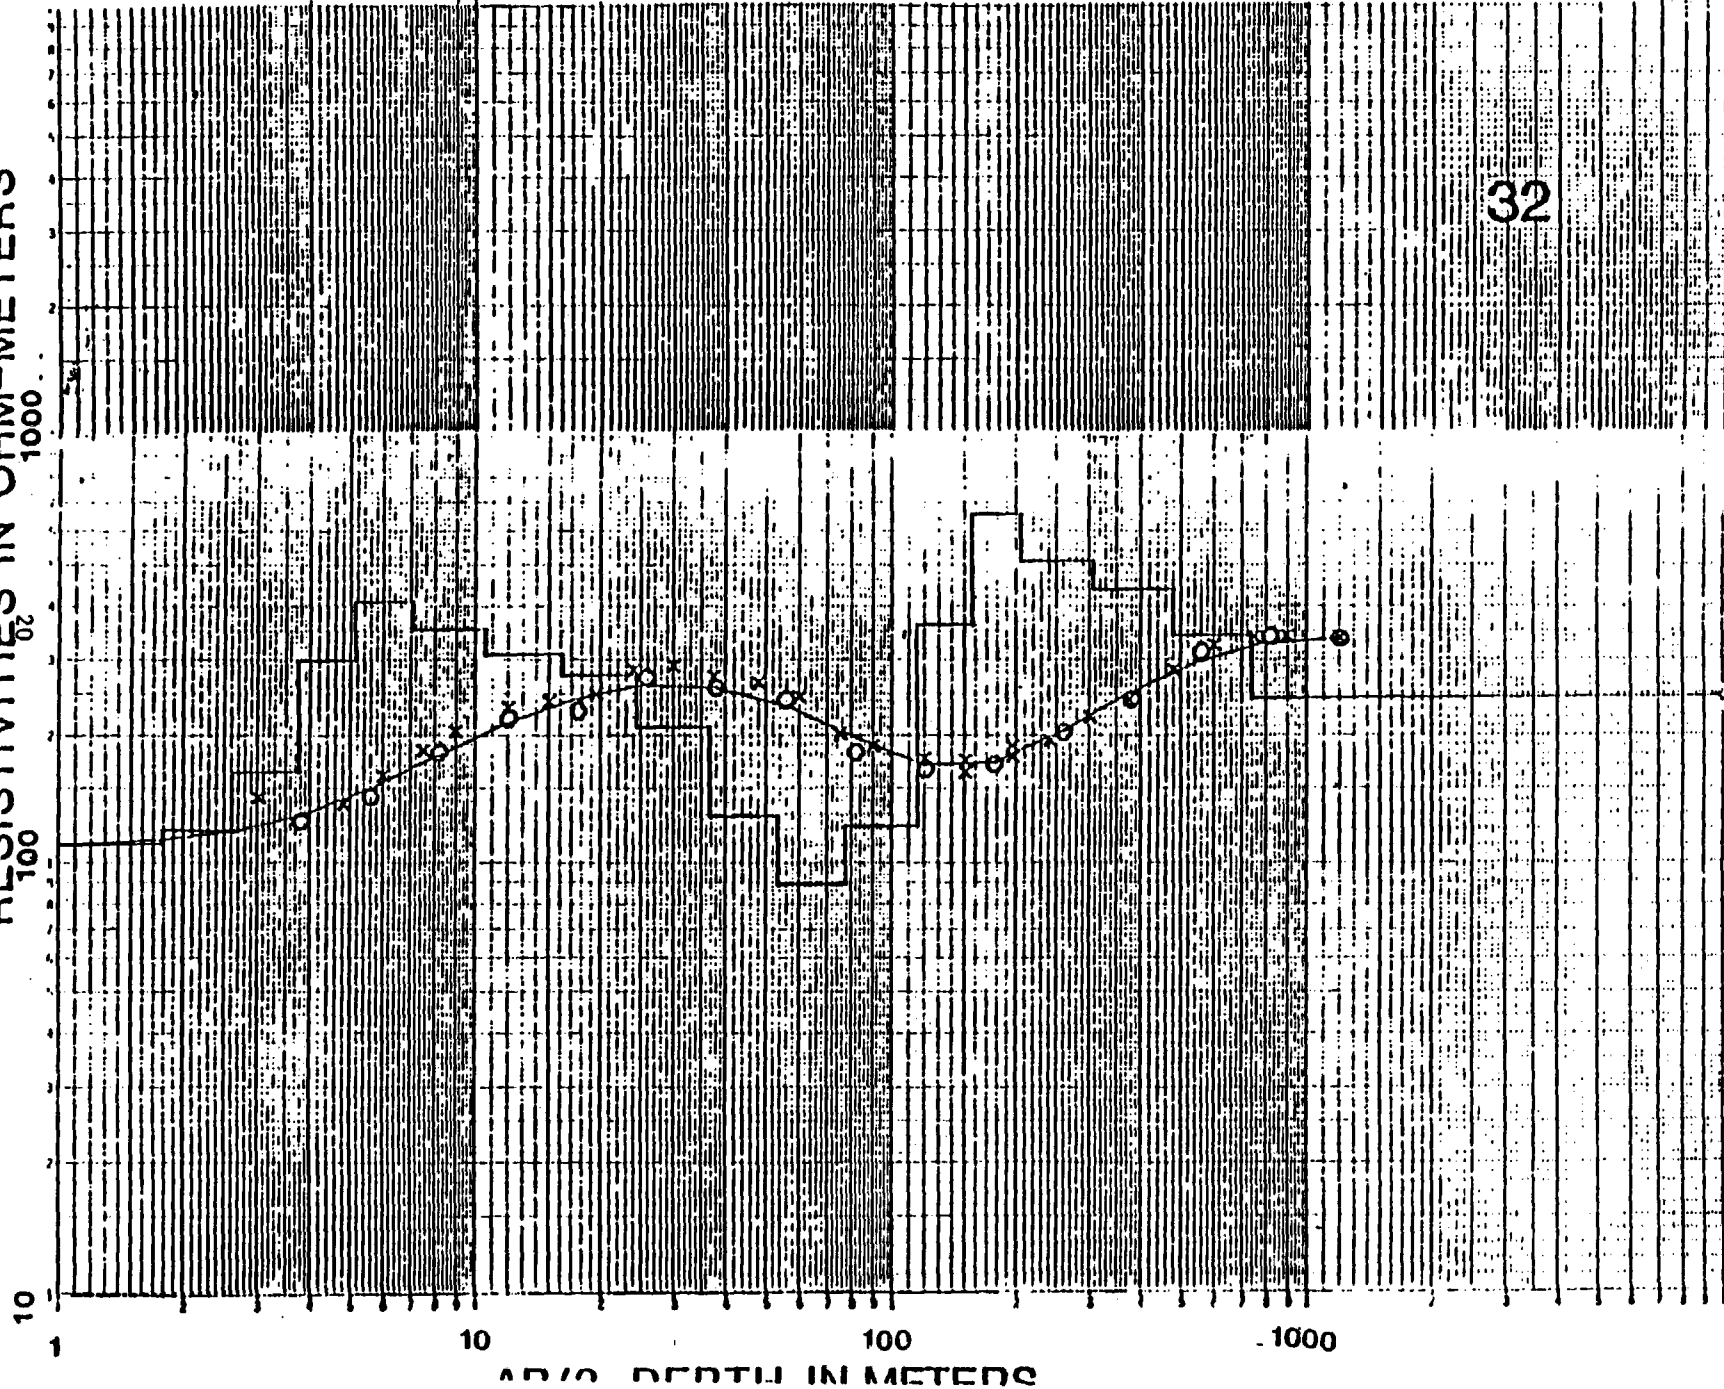

RESISTIVITIES IN OHM-METERS

33

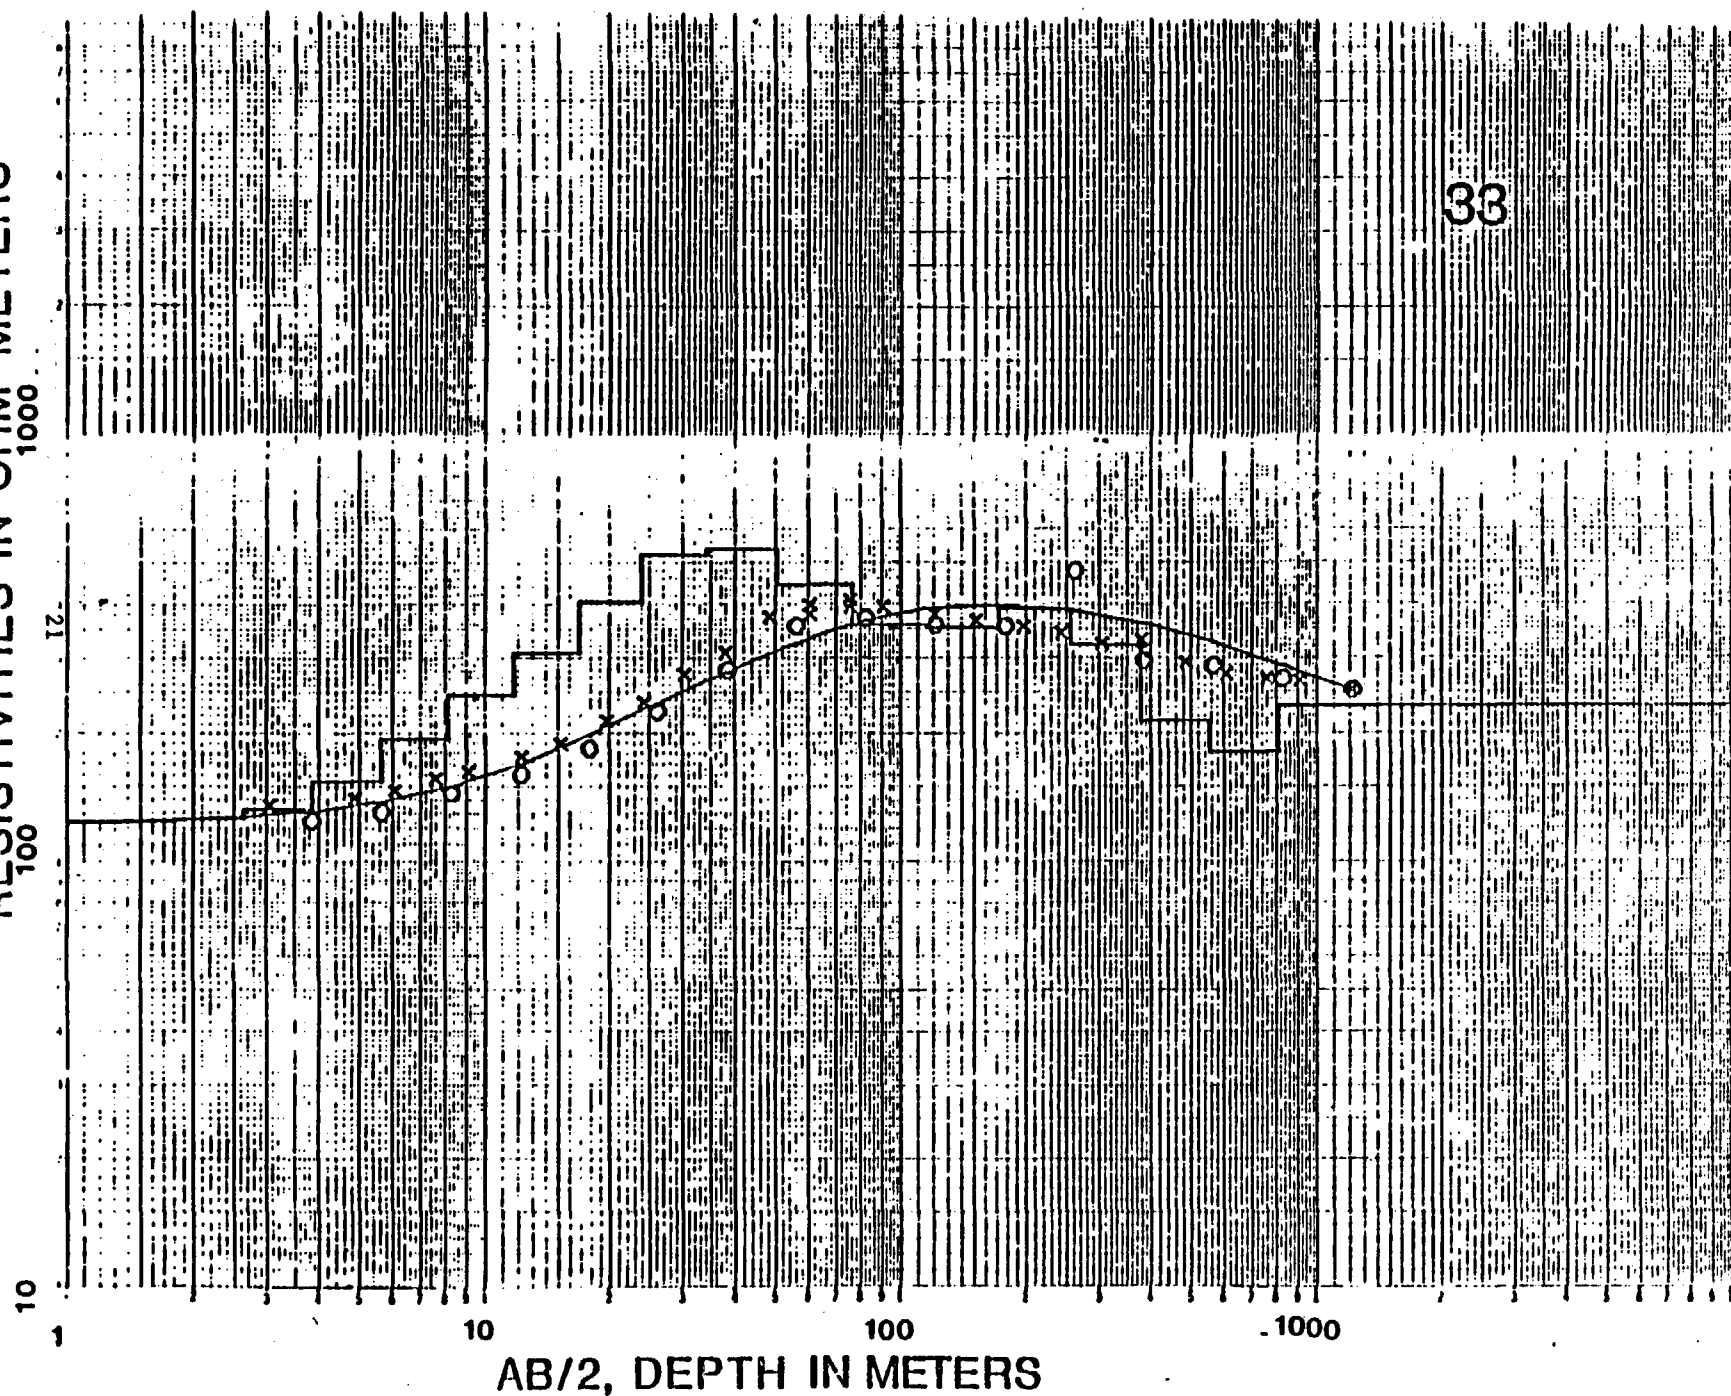

RESISTIVITIES IN OHM-METERS

1000

100

10


10

100

1000


AB/2, DEPTH IN METERS

34

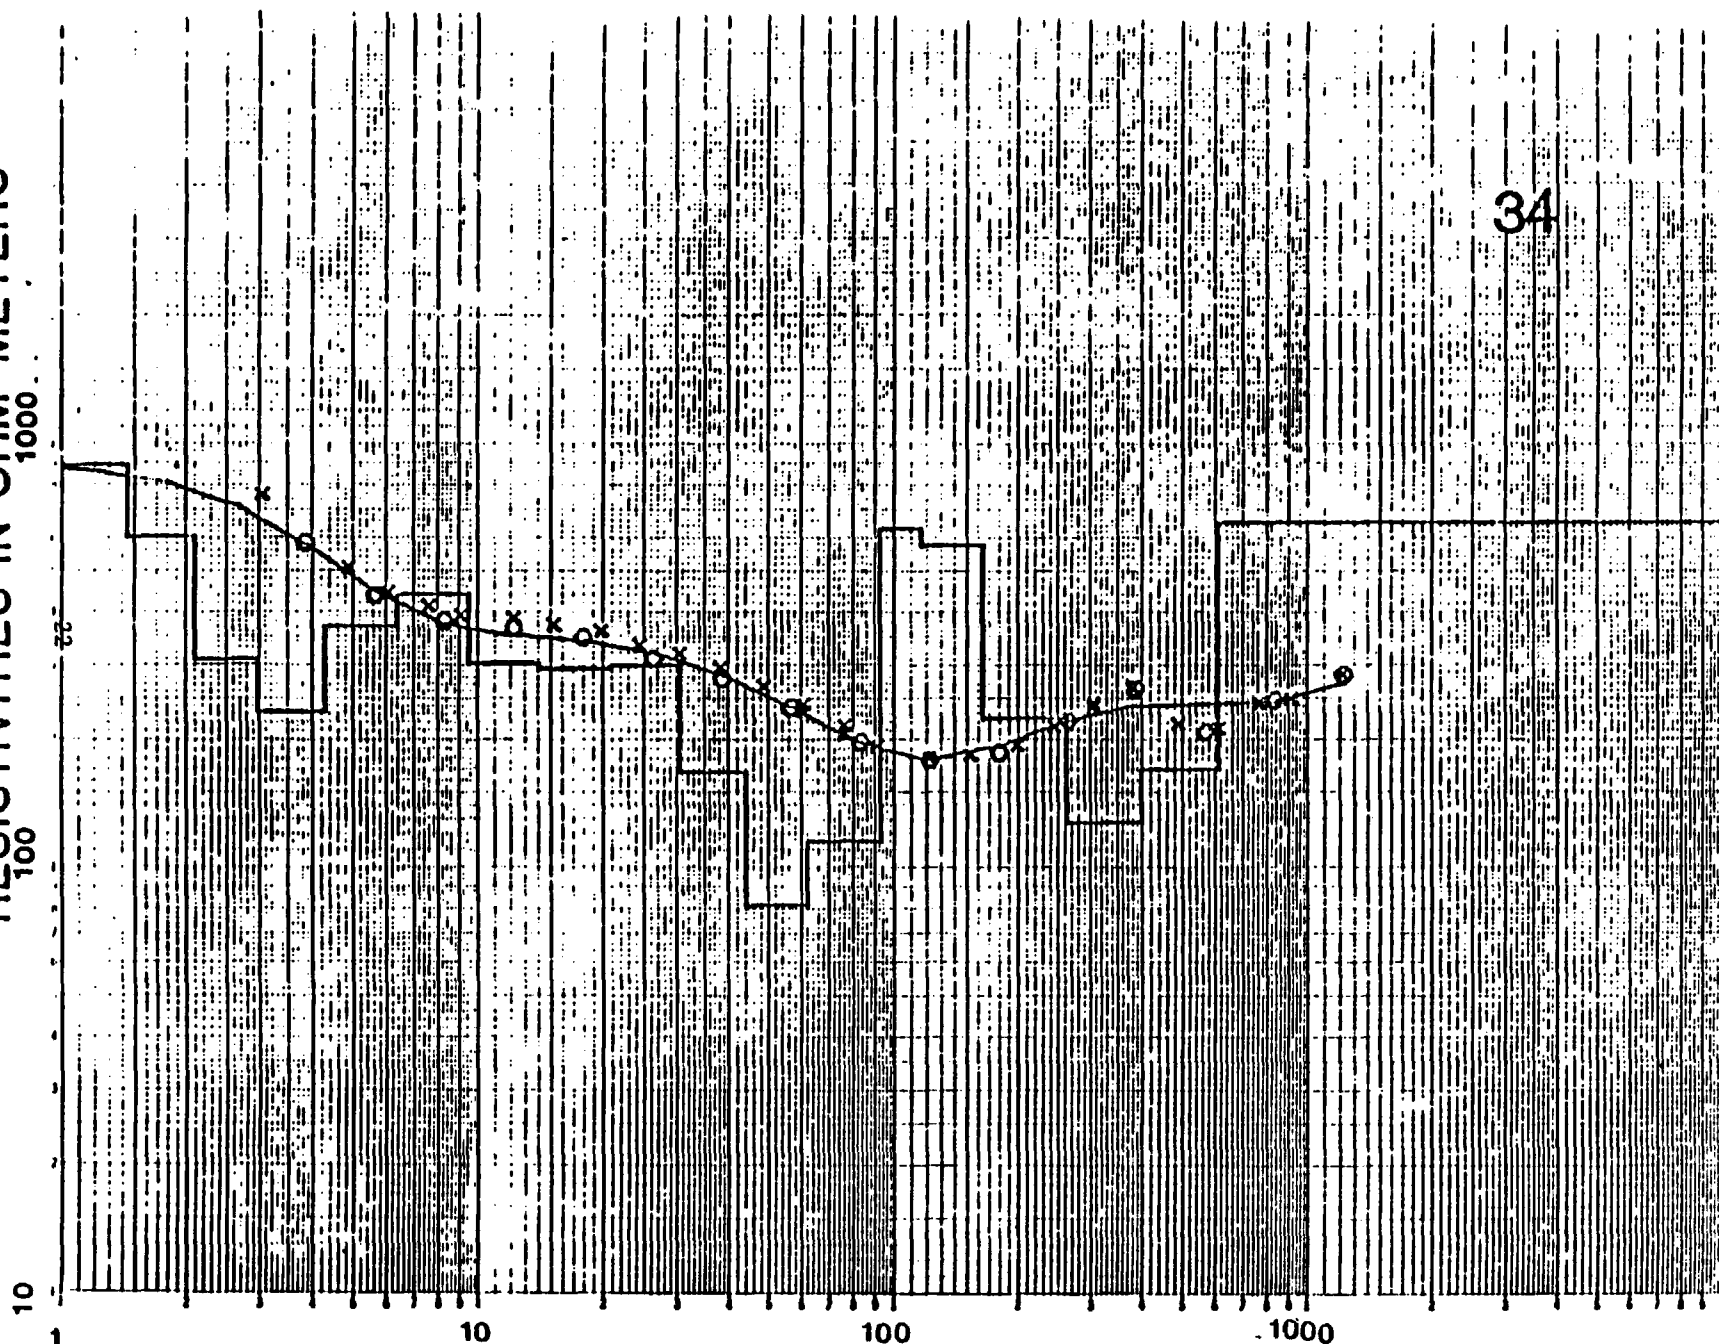

RESISTIVITIES IN OHM-METERS

35

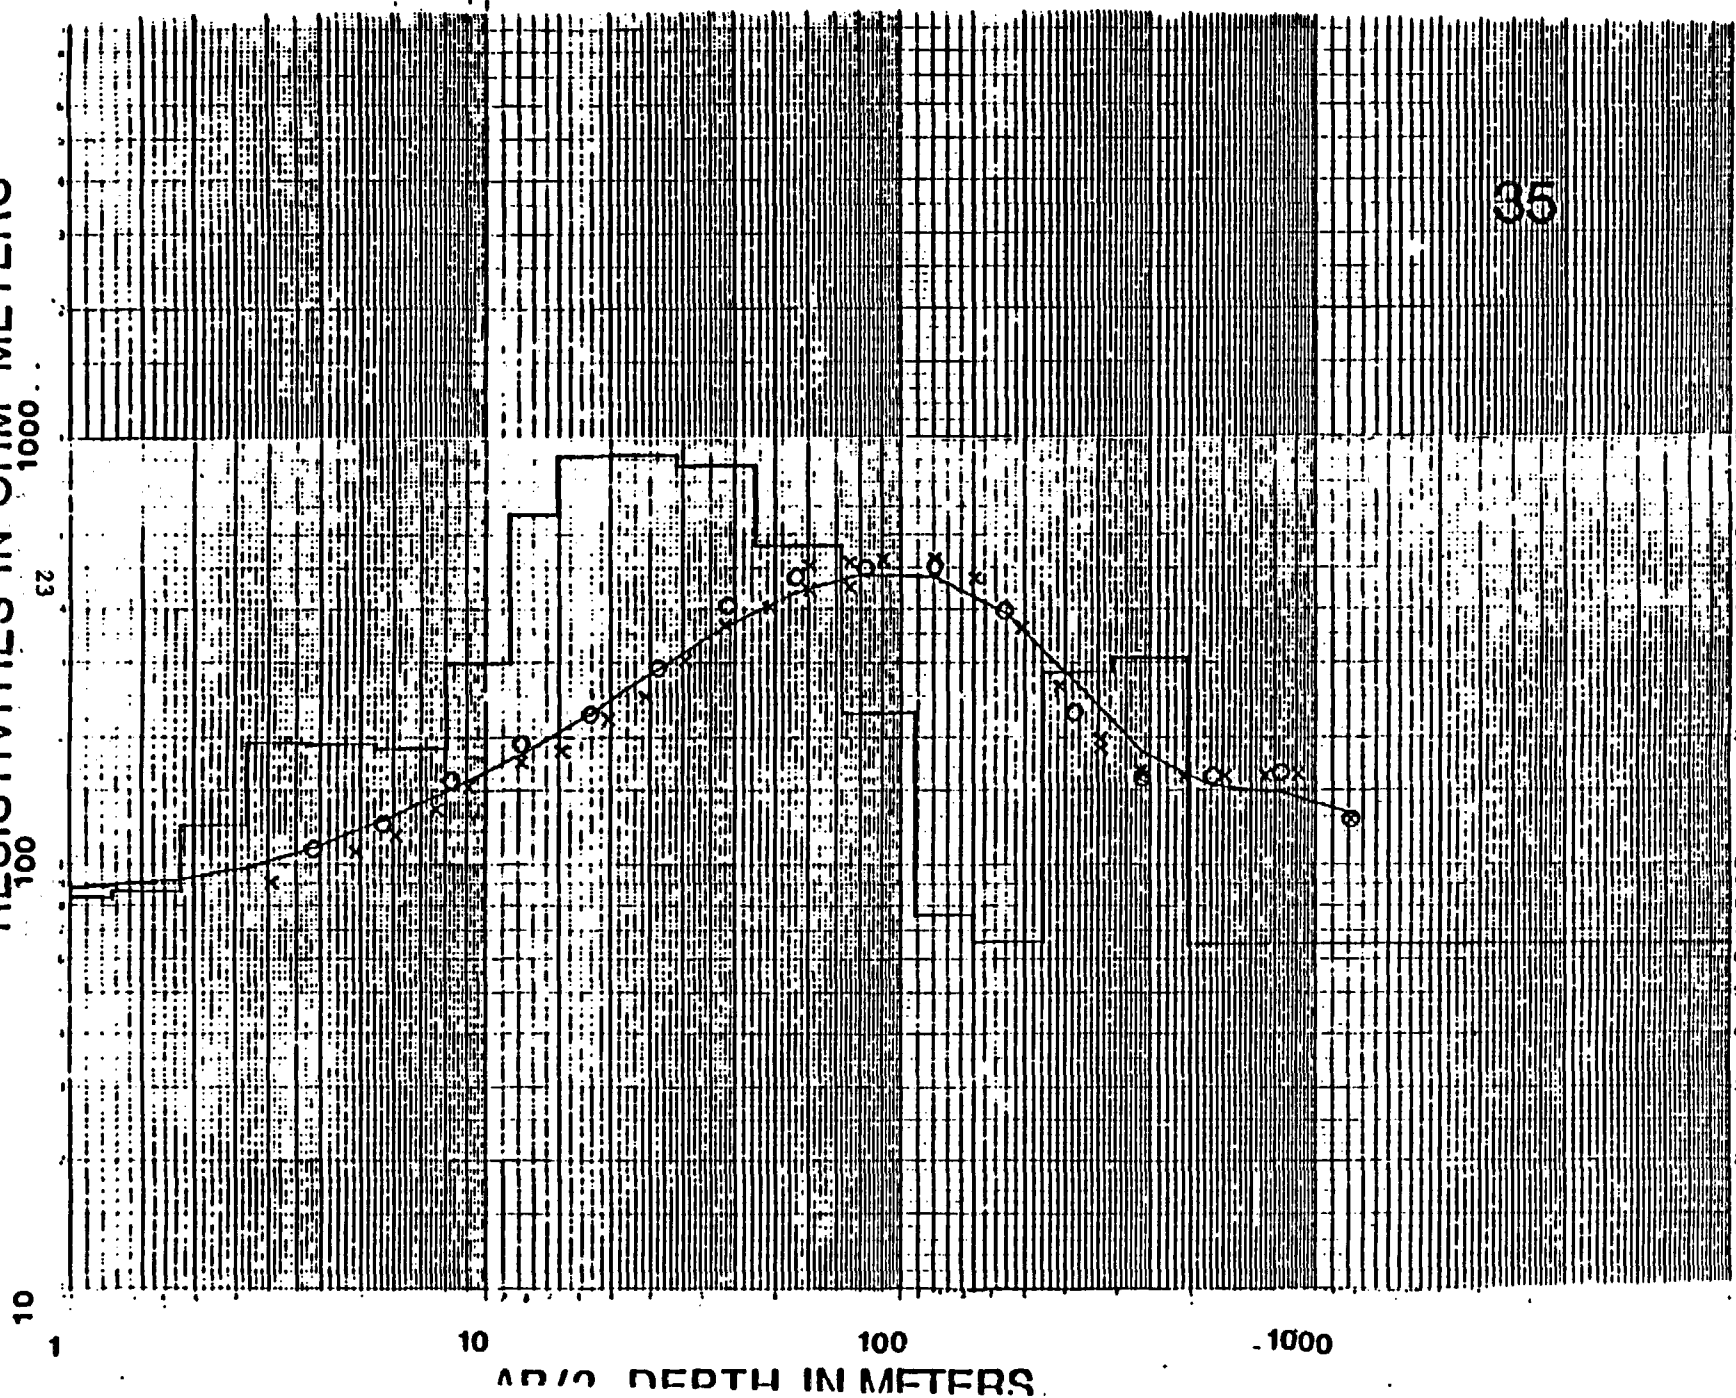

RESISTIVITIES IN OHM-METERS

36

10

1

2

3

4

5

6

7

8

9

10

20

30

40

50

60

70

80

90

100

200

300

400

500

600

700

800

900

1000

2000

3000

4000

5000

6000

7000

8000

9000

10000

10

1

2

3

4

5

6

7

8

9

10

20

30

40

50

60

70

80

90

100

200

300

400

500

600

700

800

900

1000

2000

3000

4000

5000

6000

7000


8000

9000

10000

AB/2, DEPTH IN METERS

RESISTIVITIES IN OHM-METERS

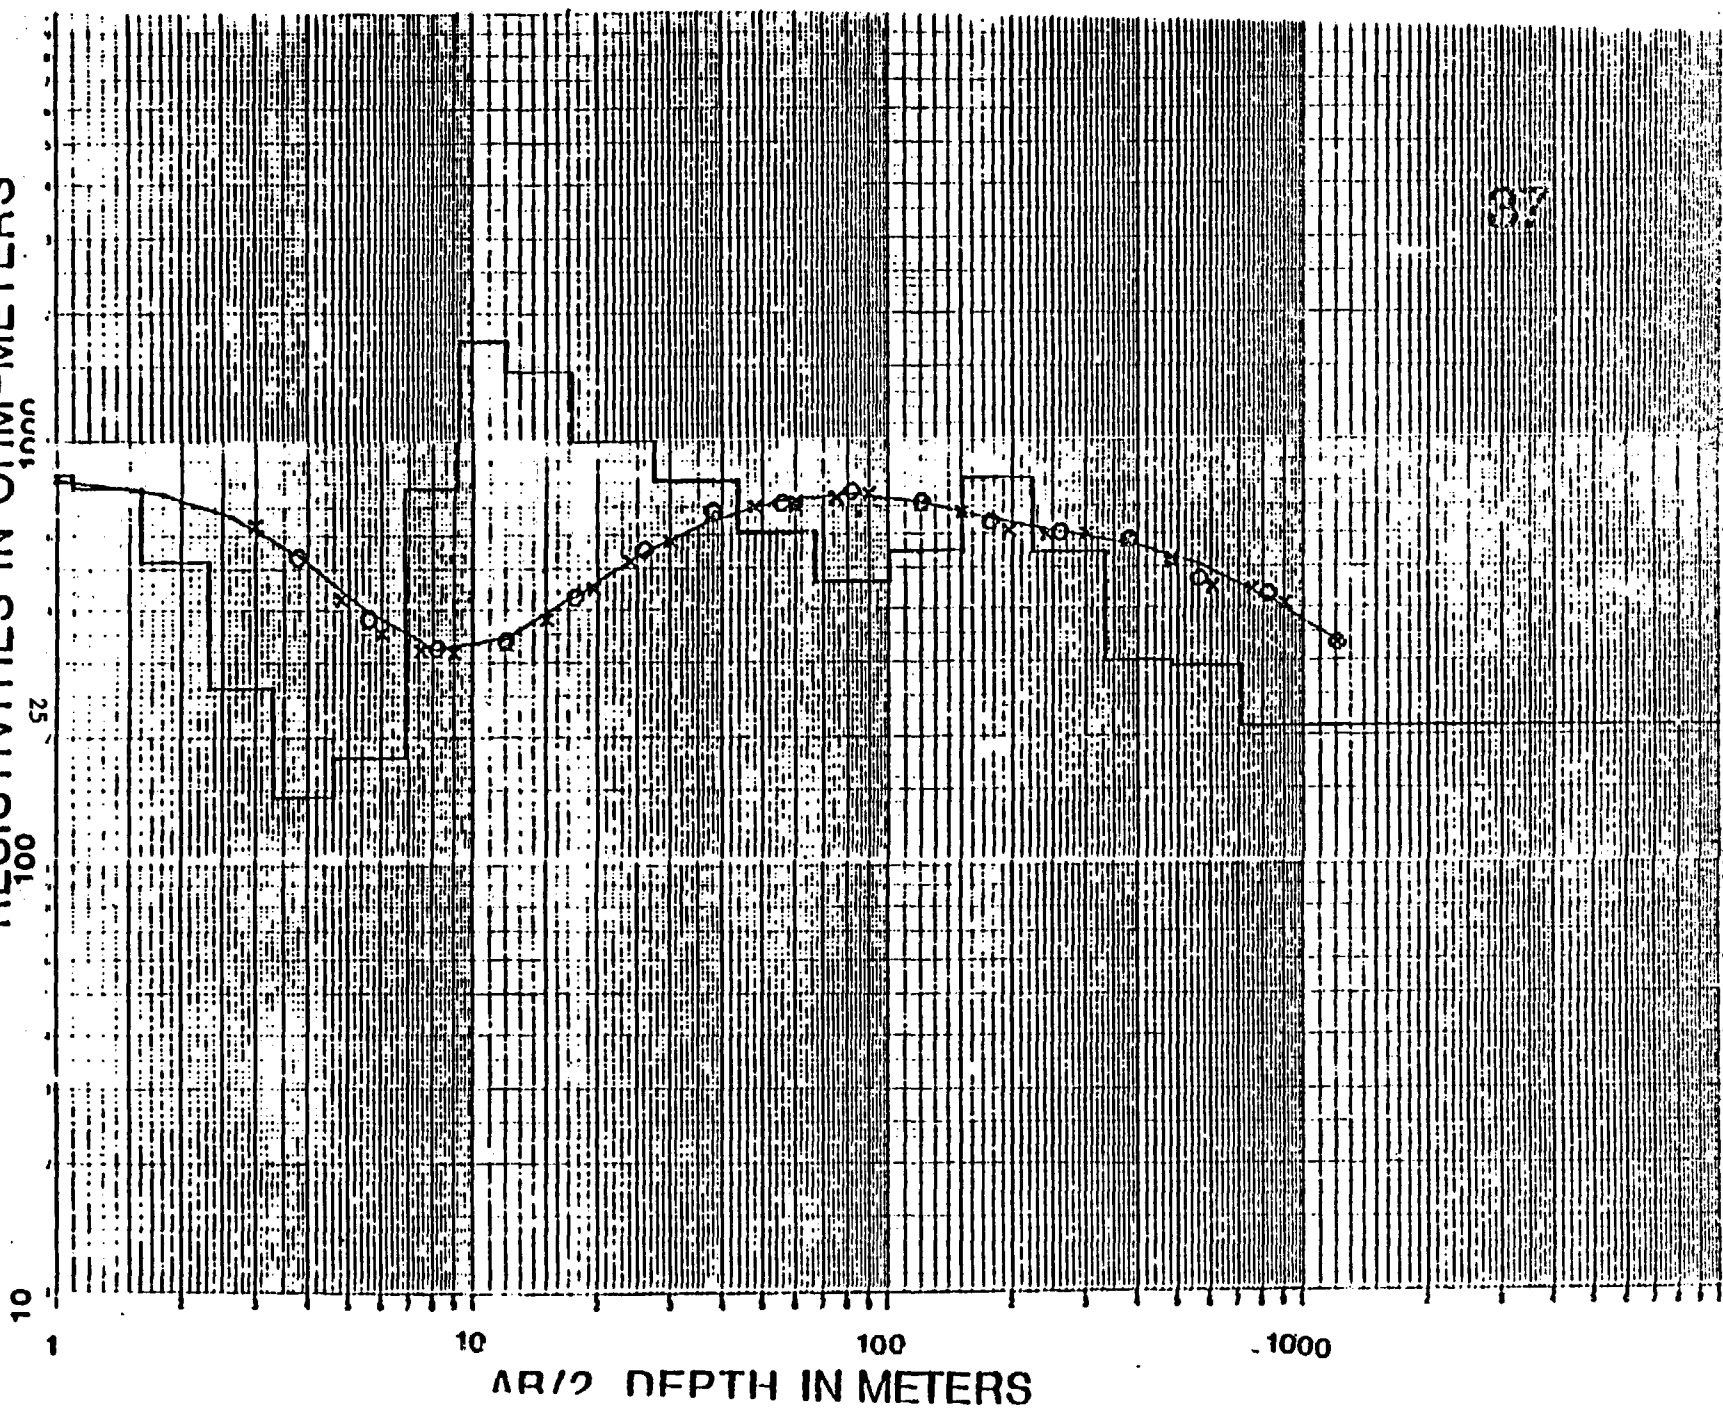

RESISTIVITIES IN OHM-METERS

10

100

1000

92


10

100

1000


AR/2. DEPTH IN METERS

38

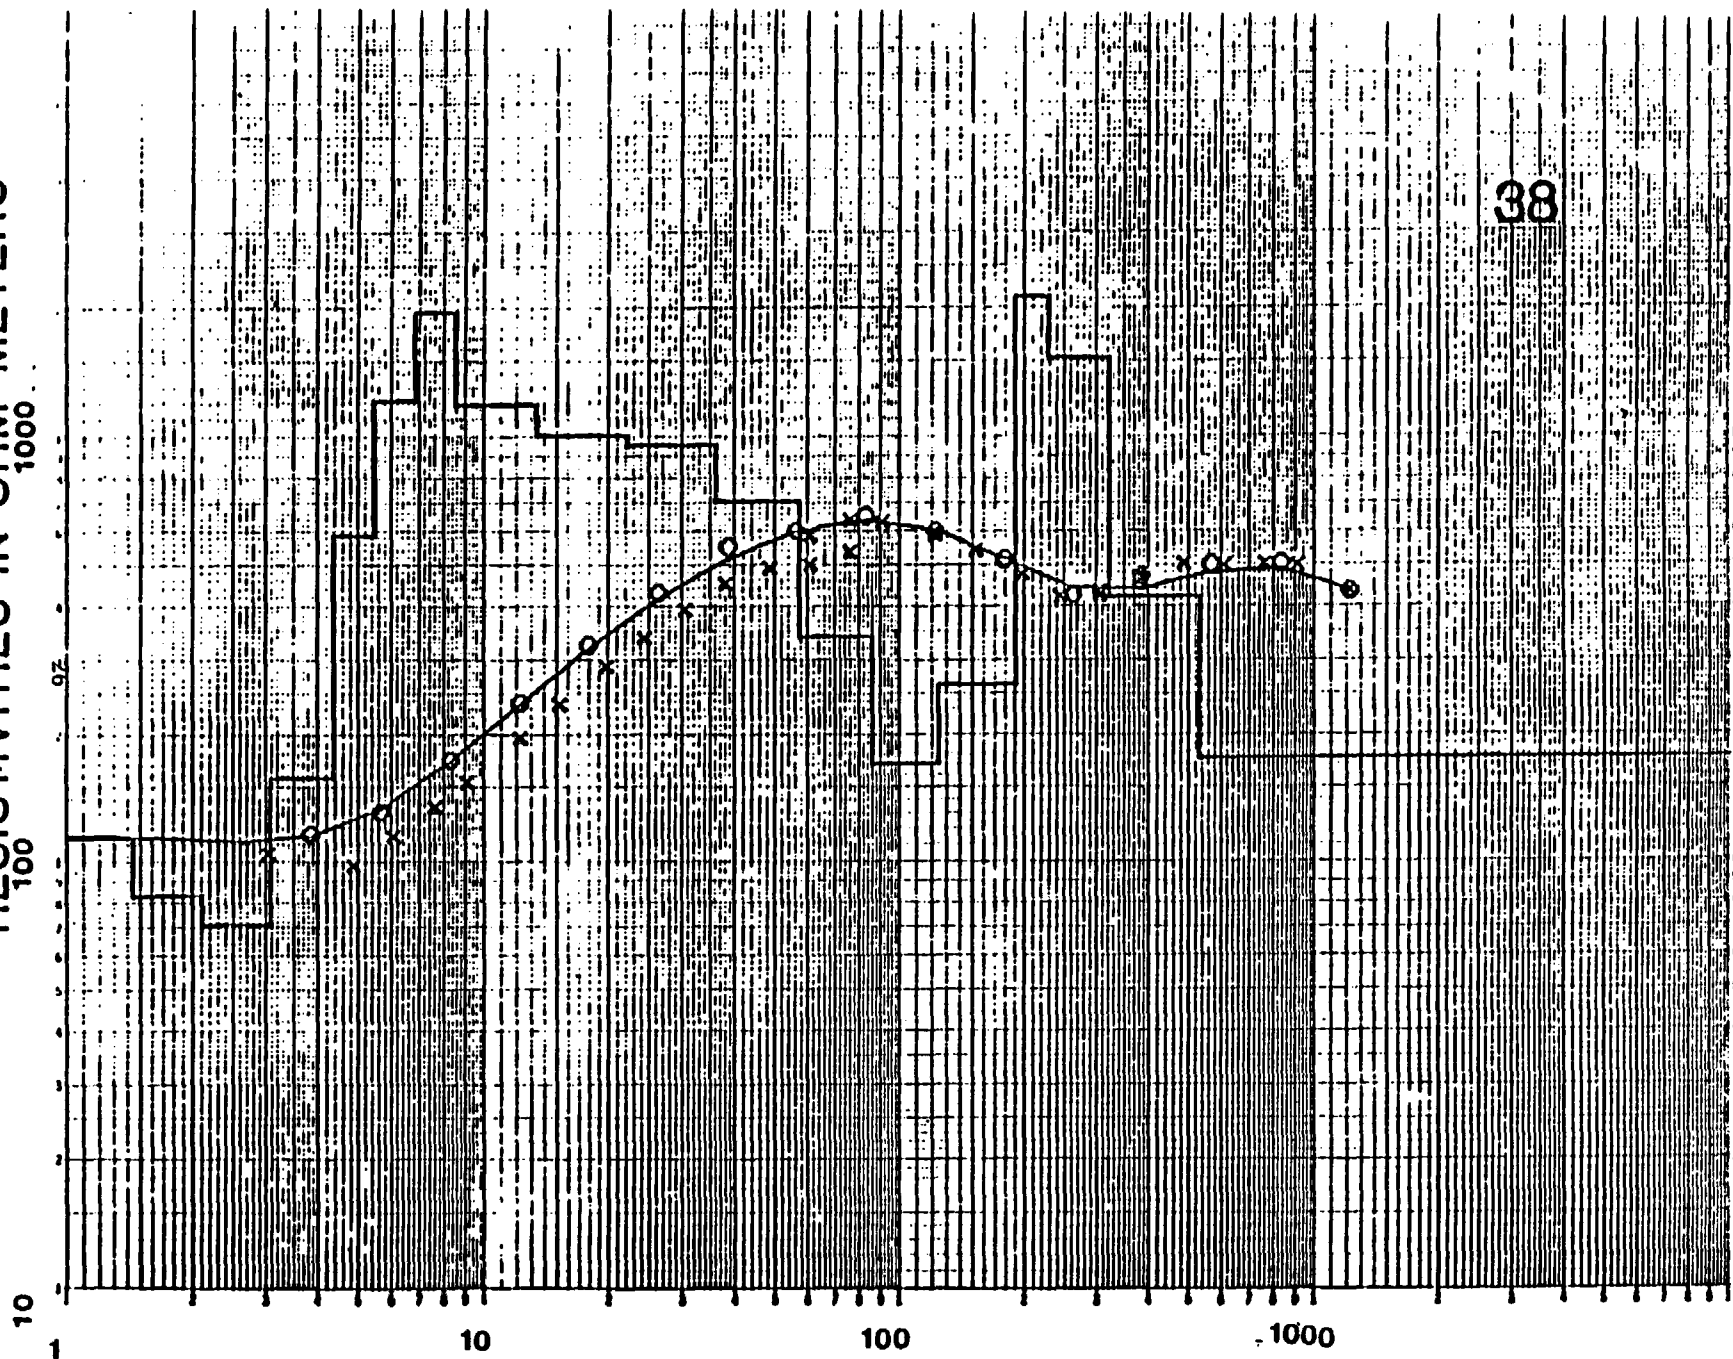

RESISTIVITIES IN OHM-METERS

39

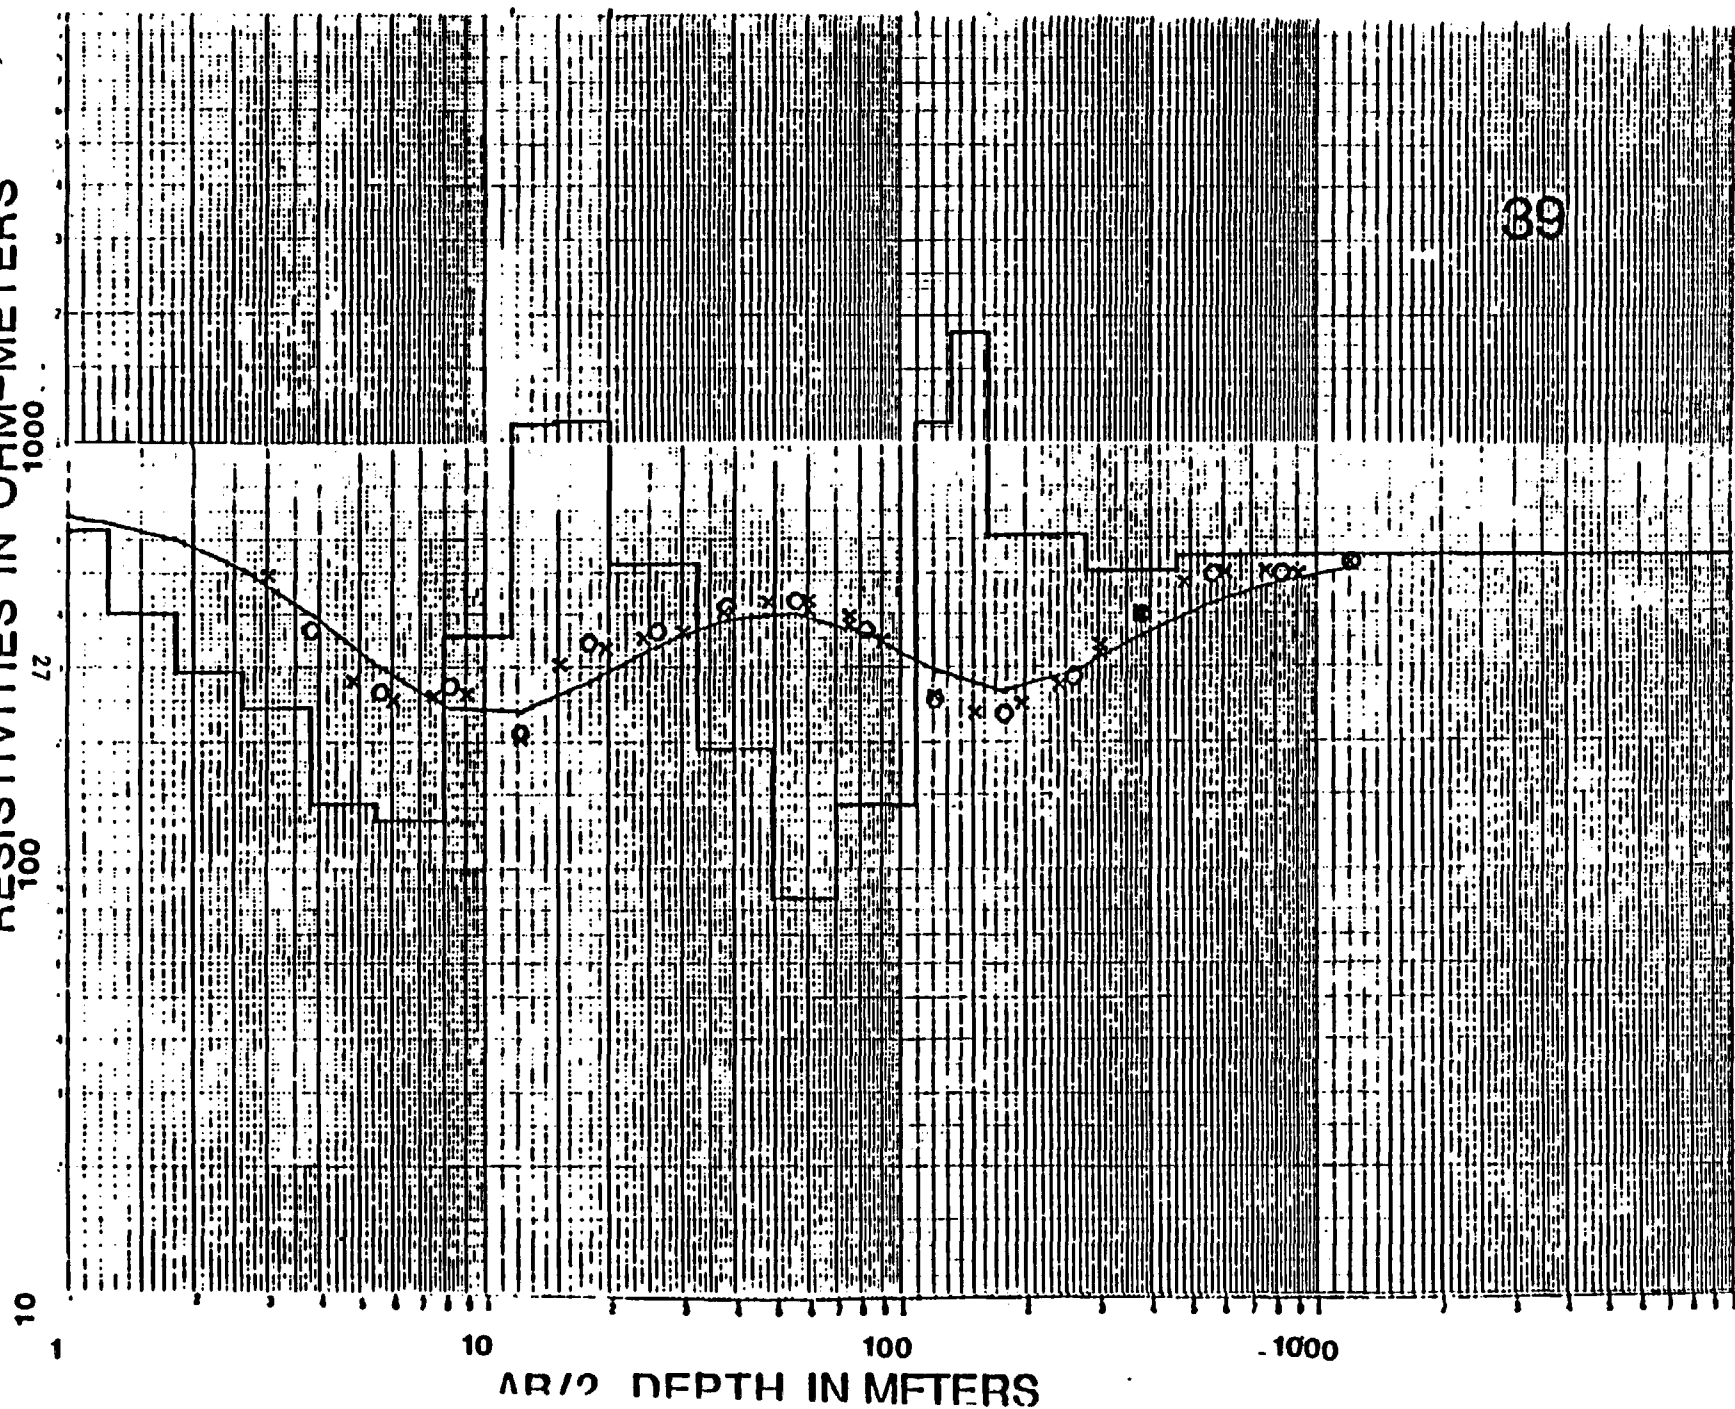

RESISTIVITIES IN OHM-METERS

10
1

100

1000

-82-


AB/2, DEPTH IN METERS

10


100

1000

40

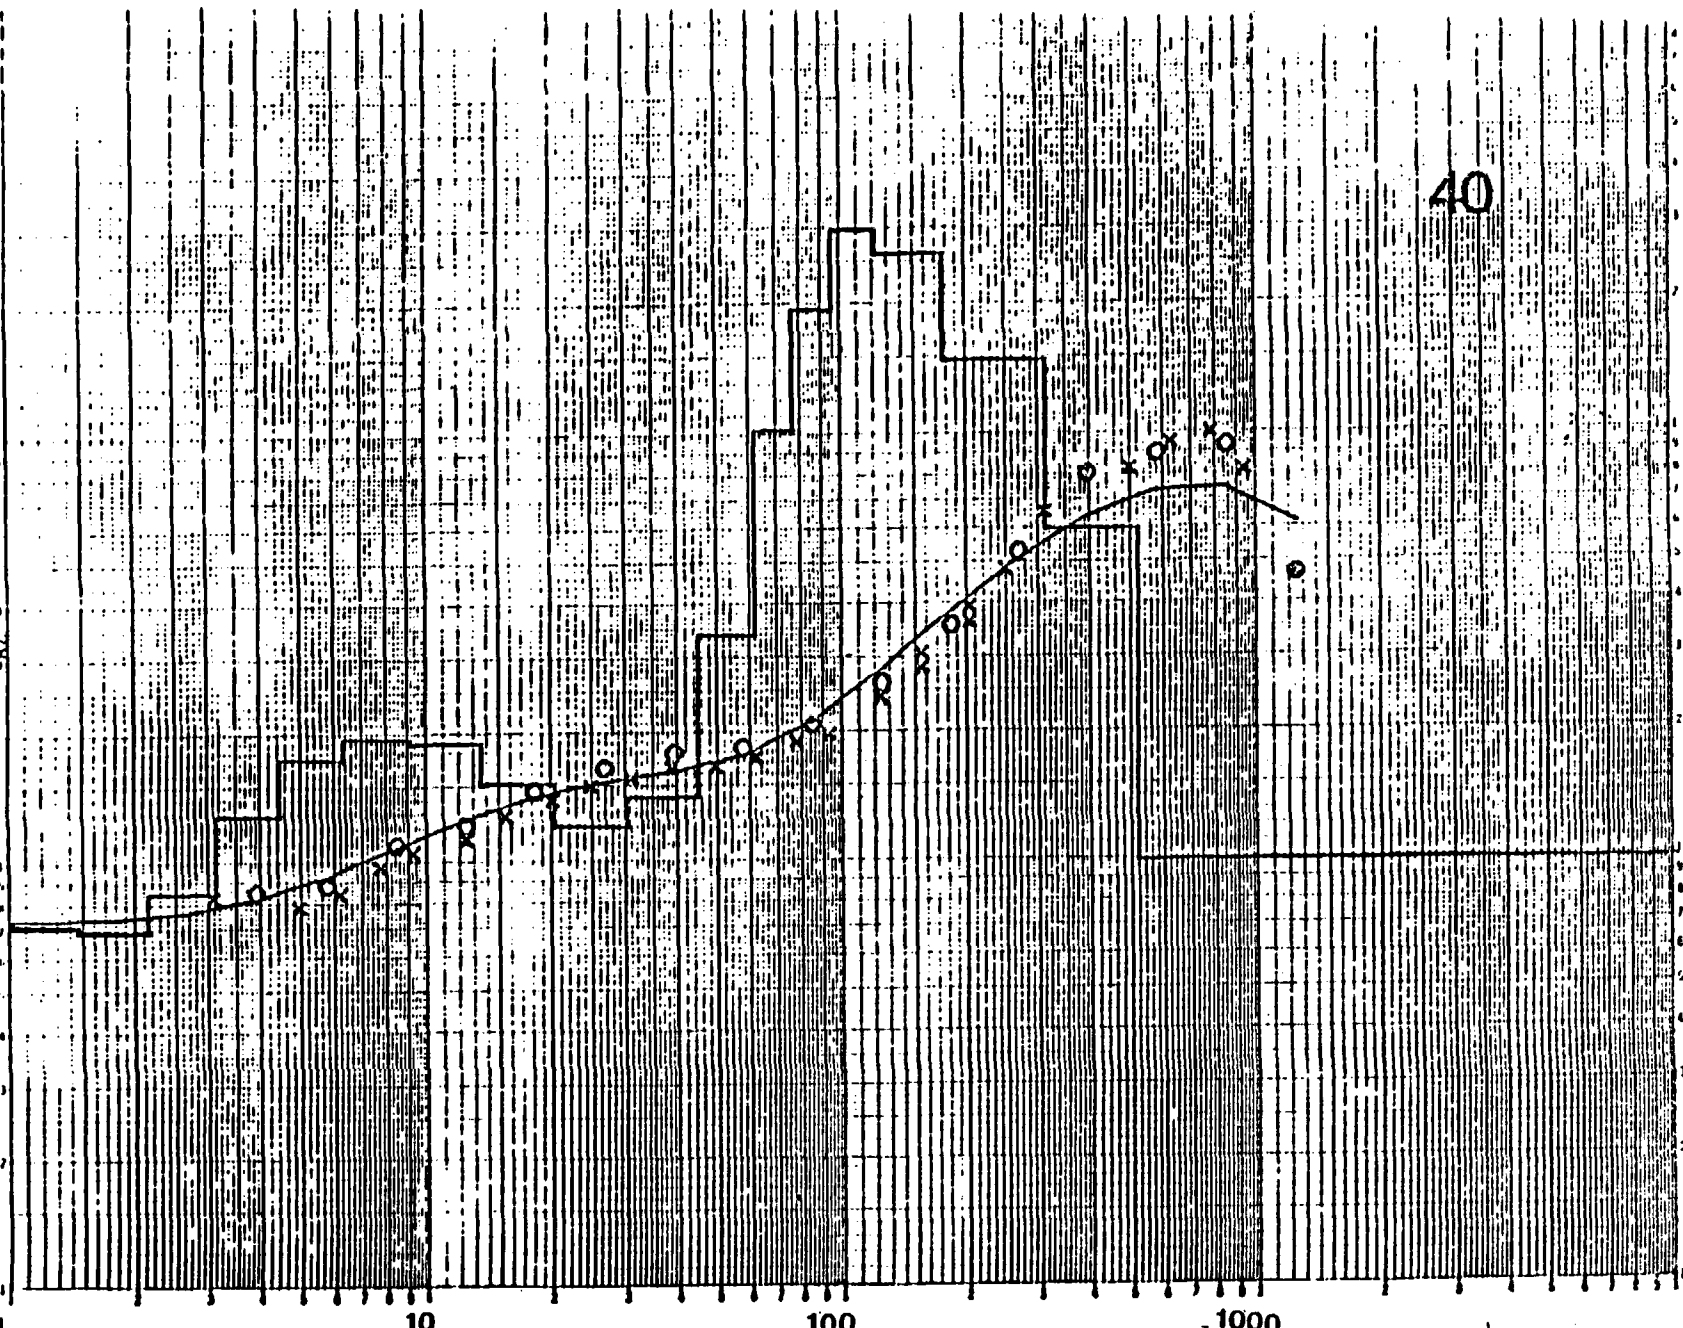

RESISTIVITIES IN OHM-METERS

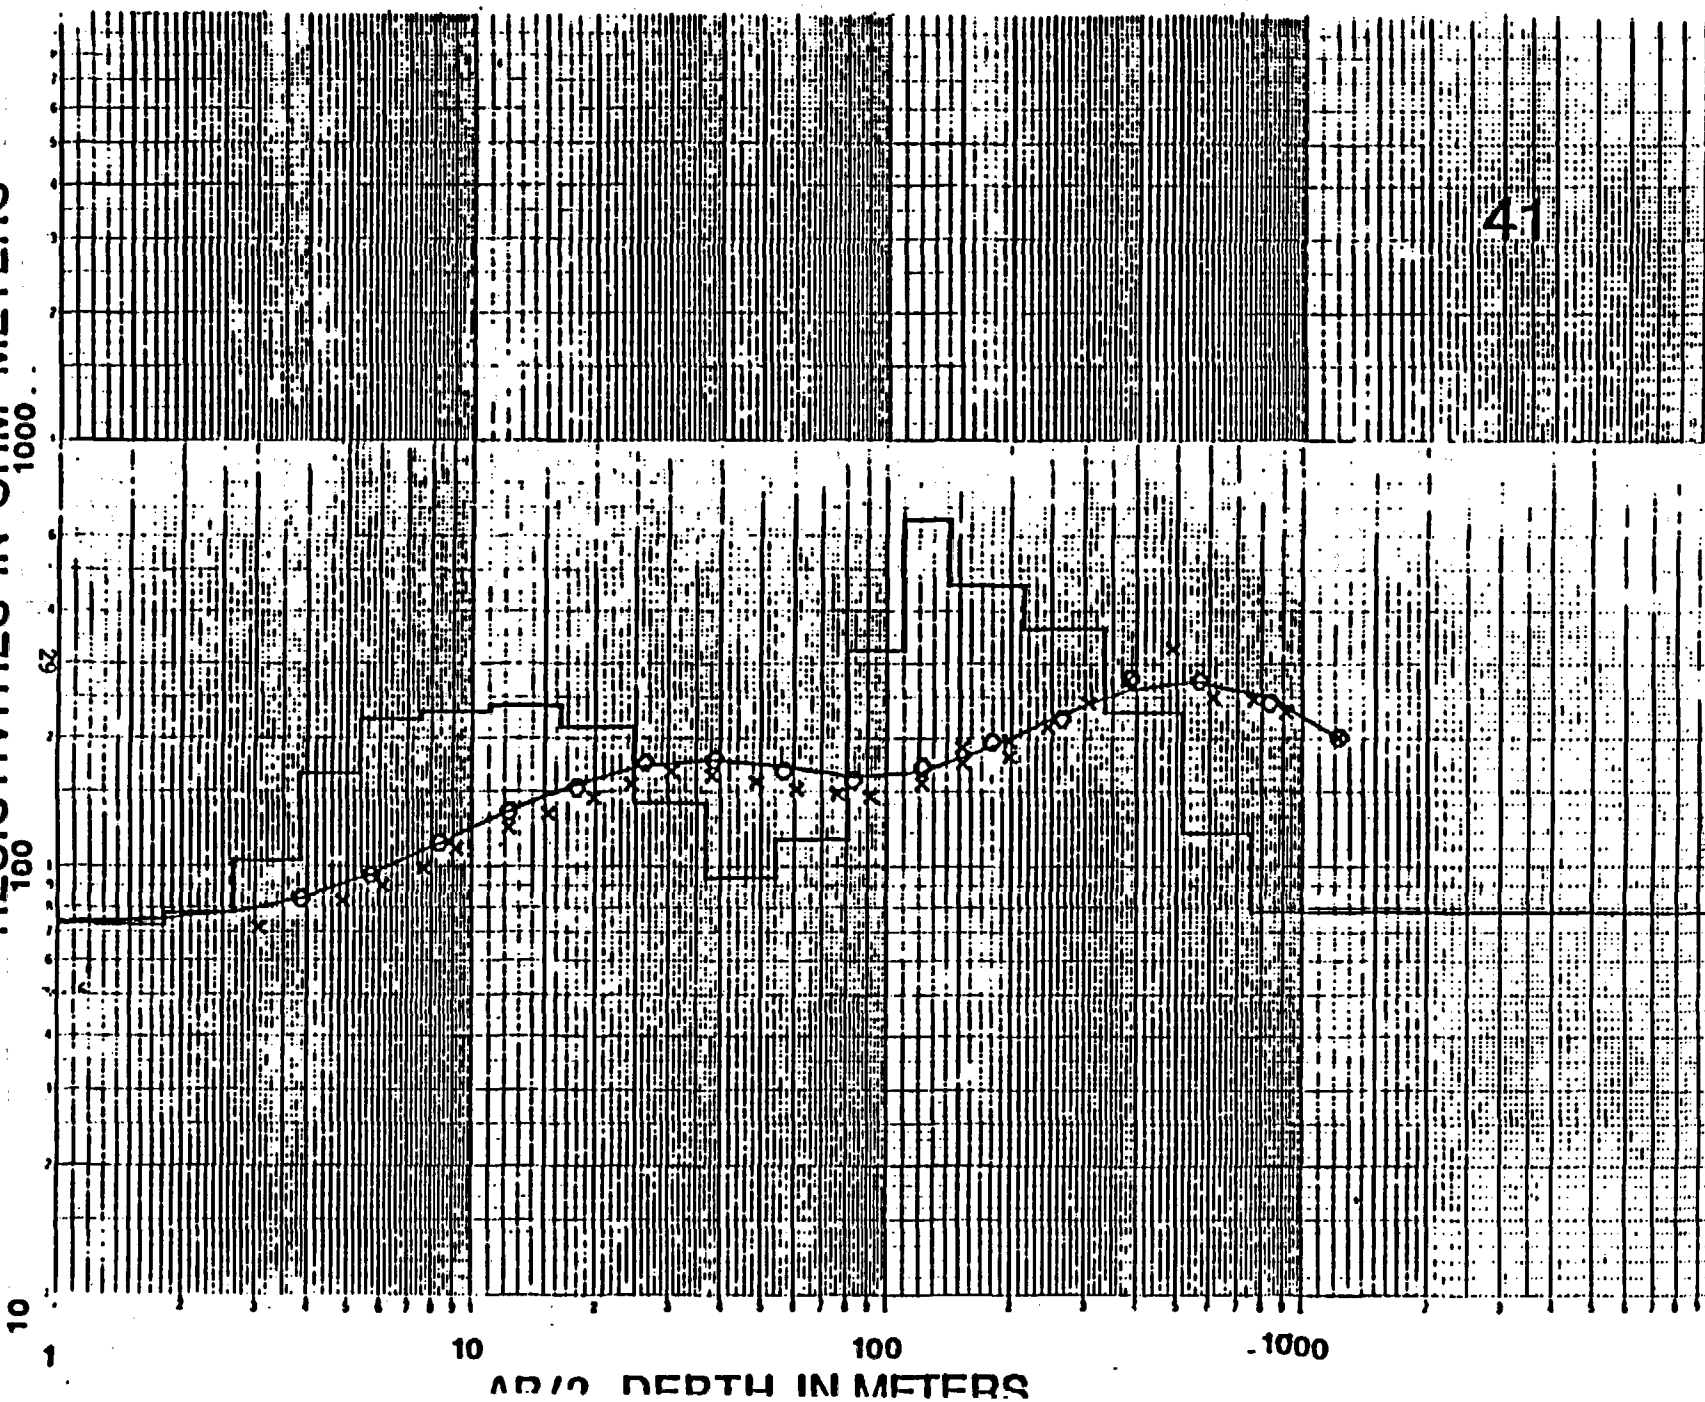


DEPTH IN METERS


RESISTIVITIES IN OHM-METERS

10

1

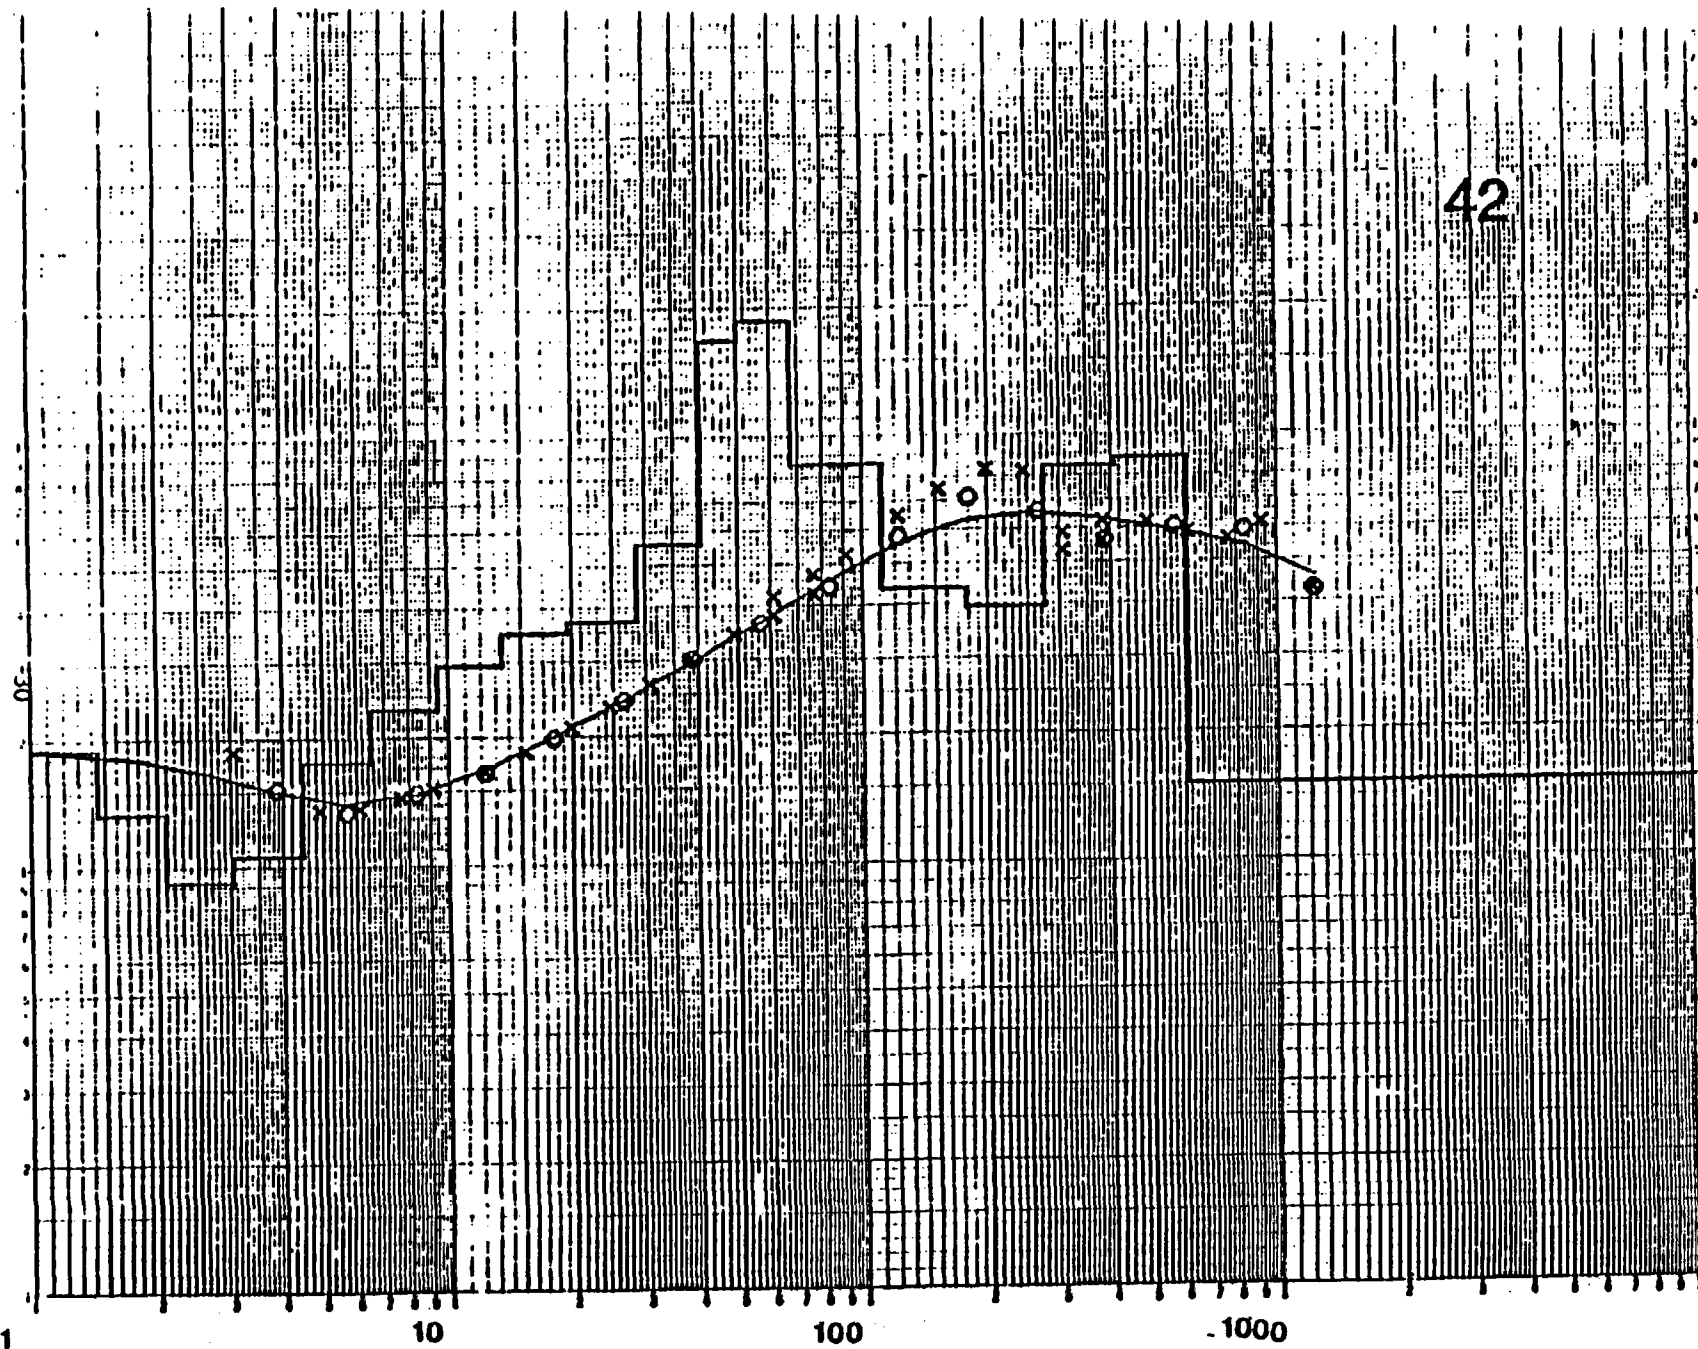

AB/2, DEPTH IN METERS

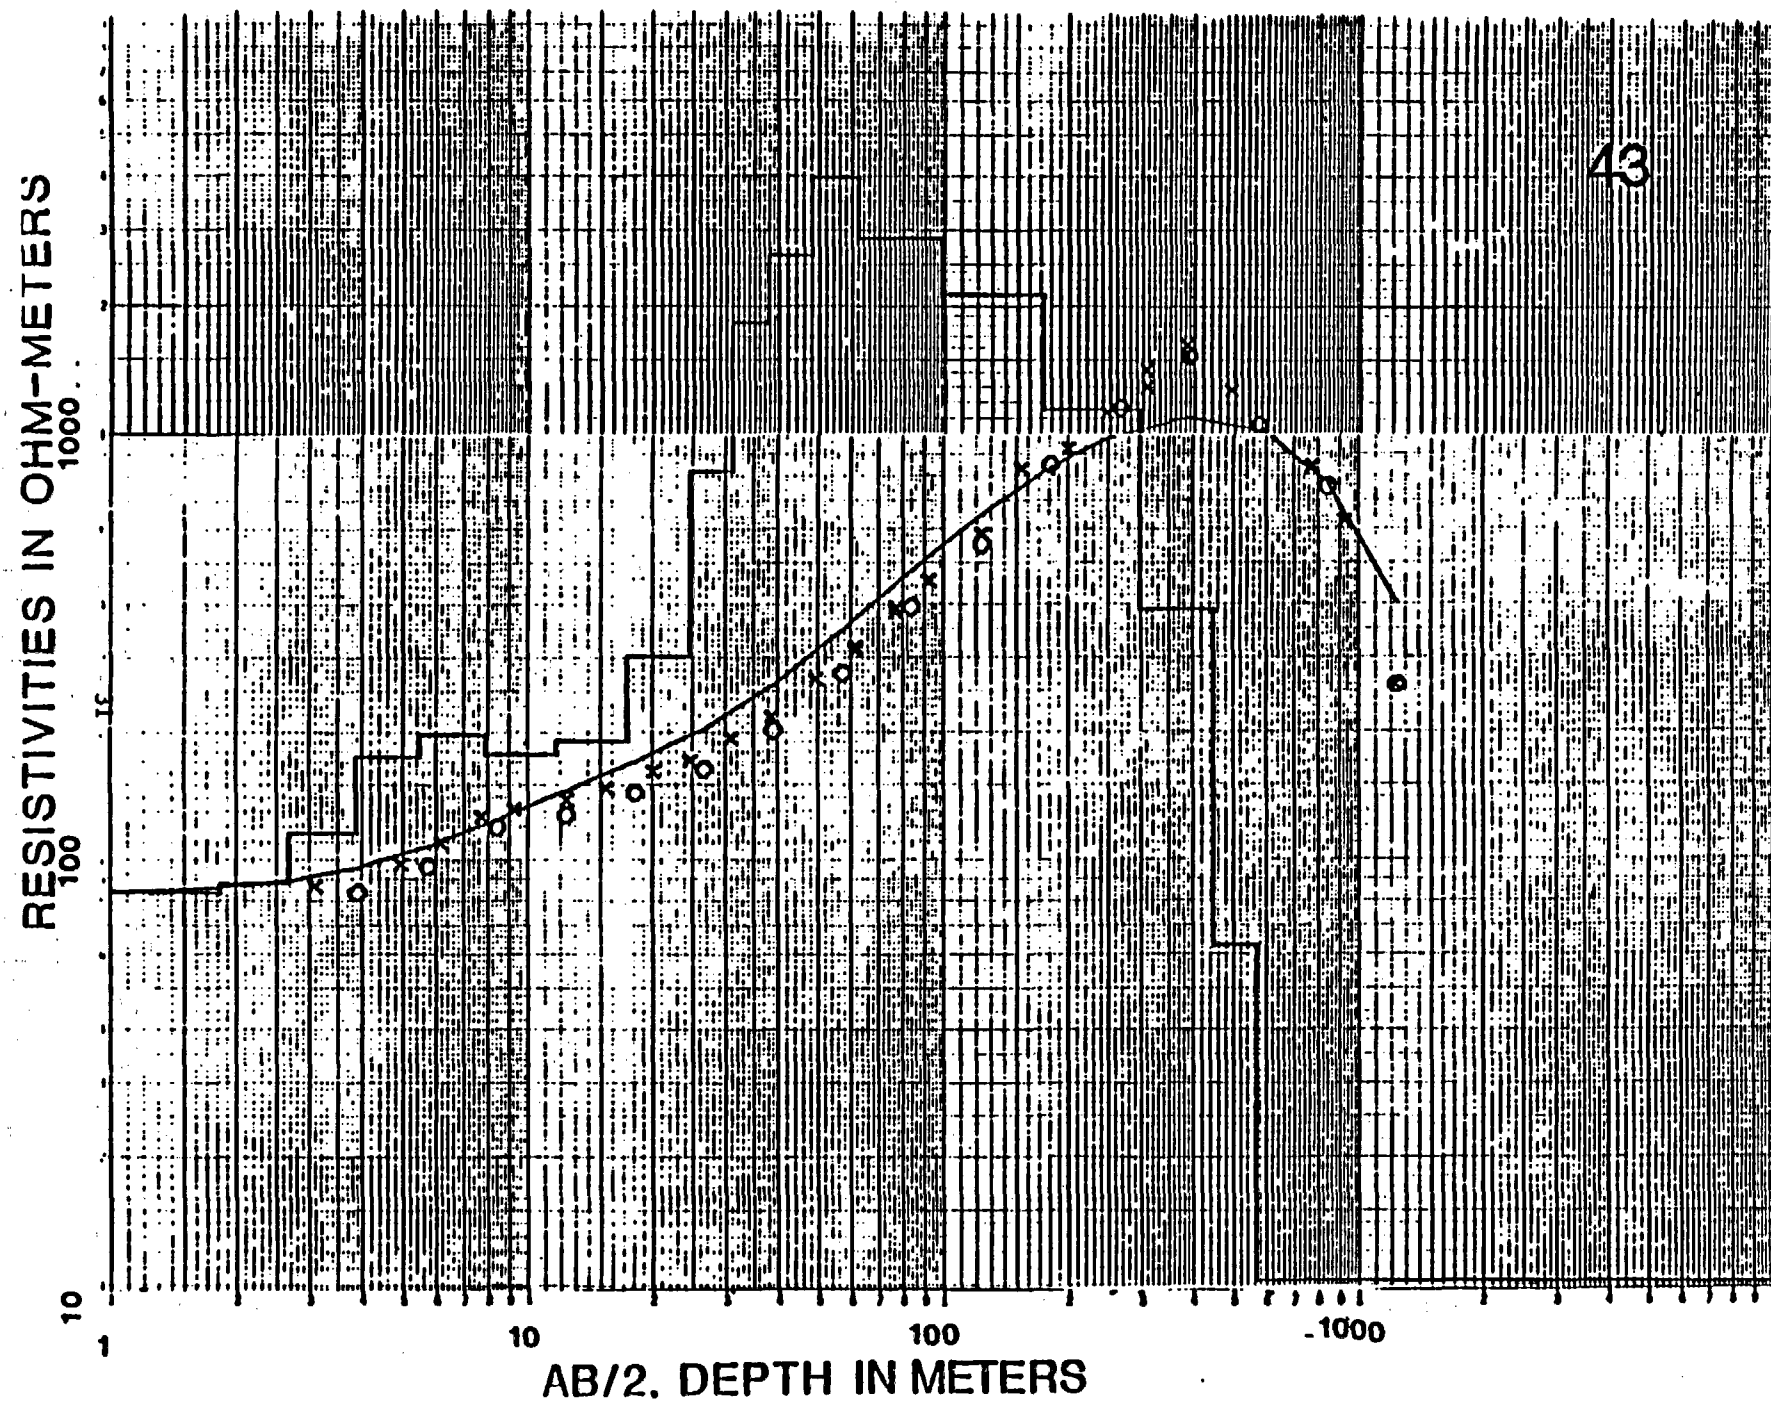

RESISTIVITIES IN OHM-METERS

10

32

100

1000

1


10


100

1000

DEPTH IN METERS


44

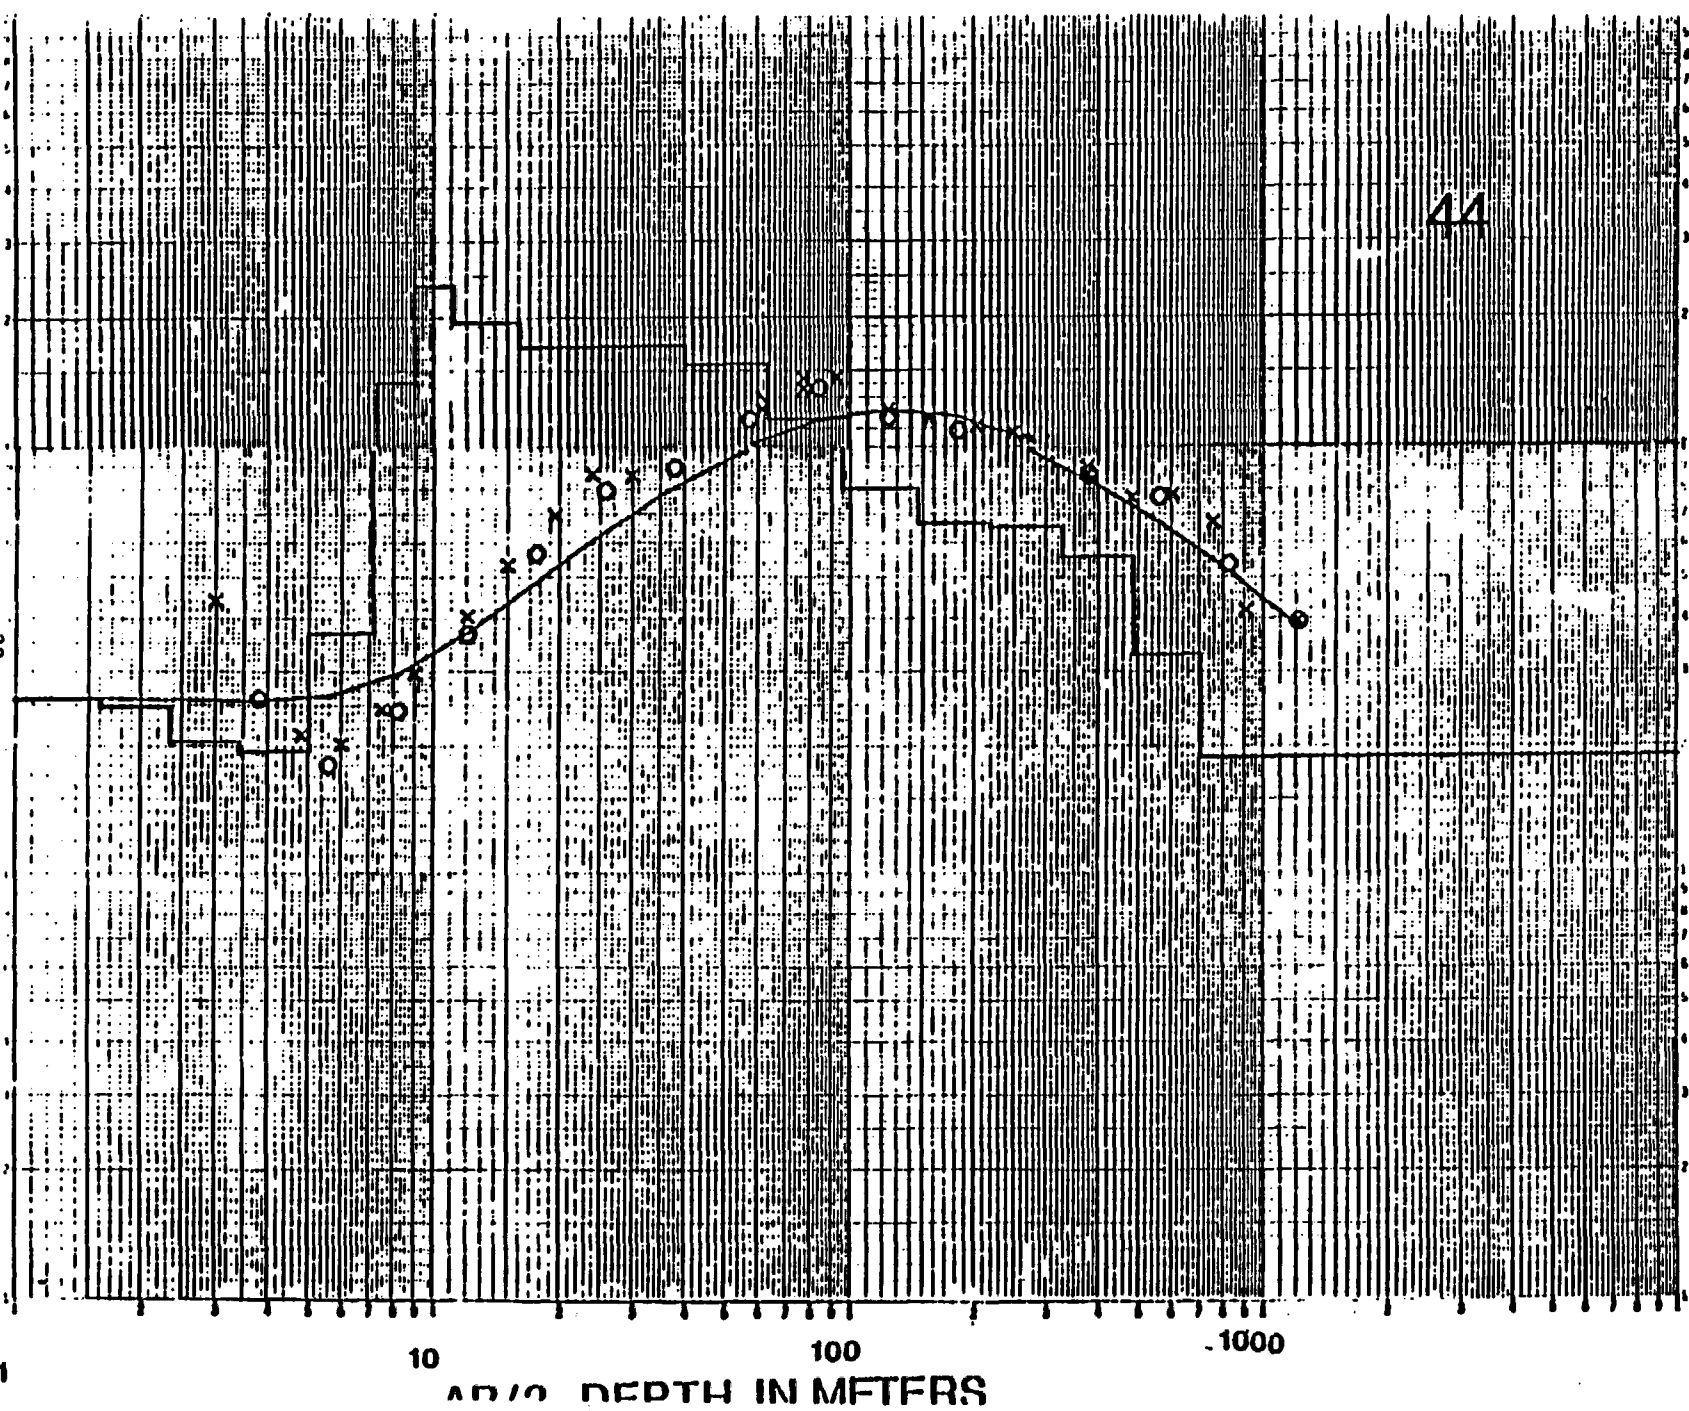

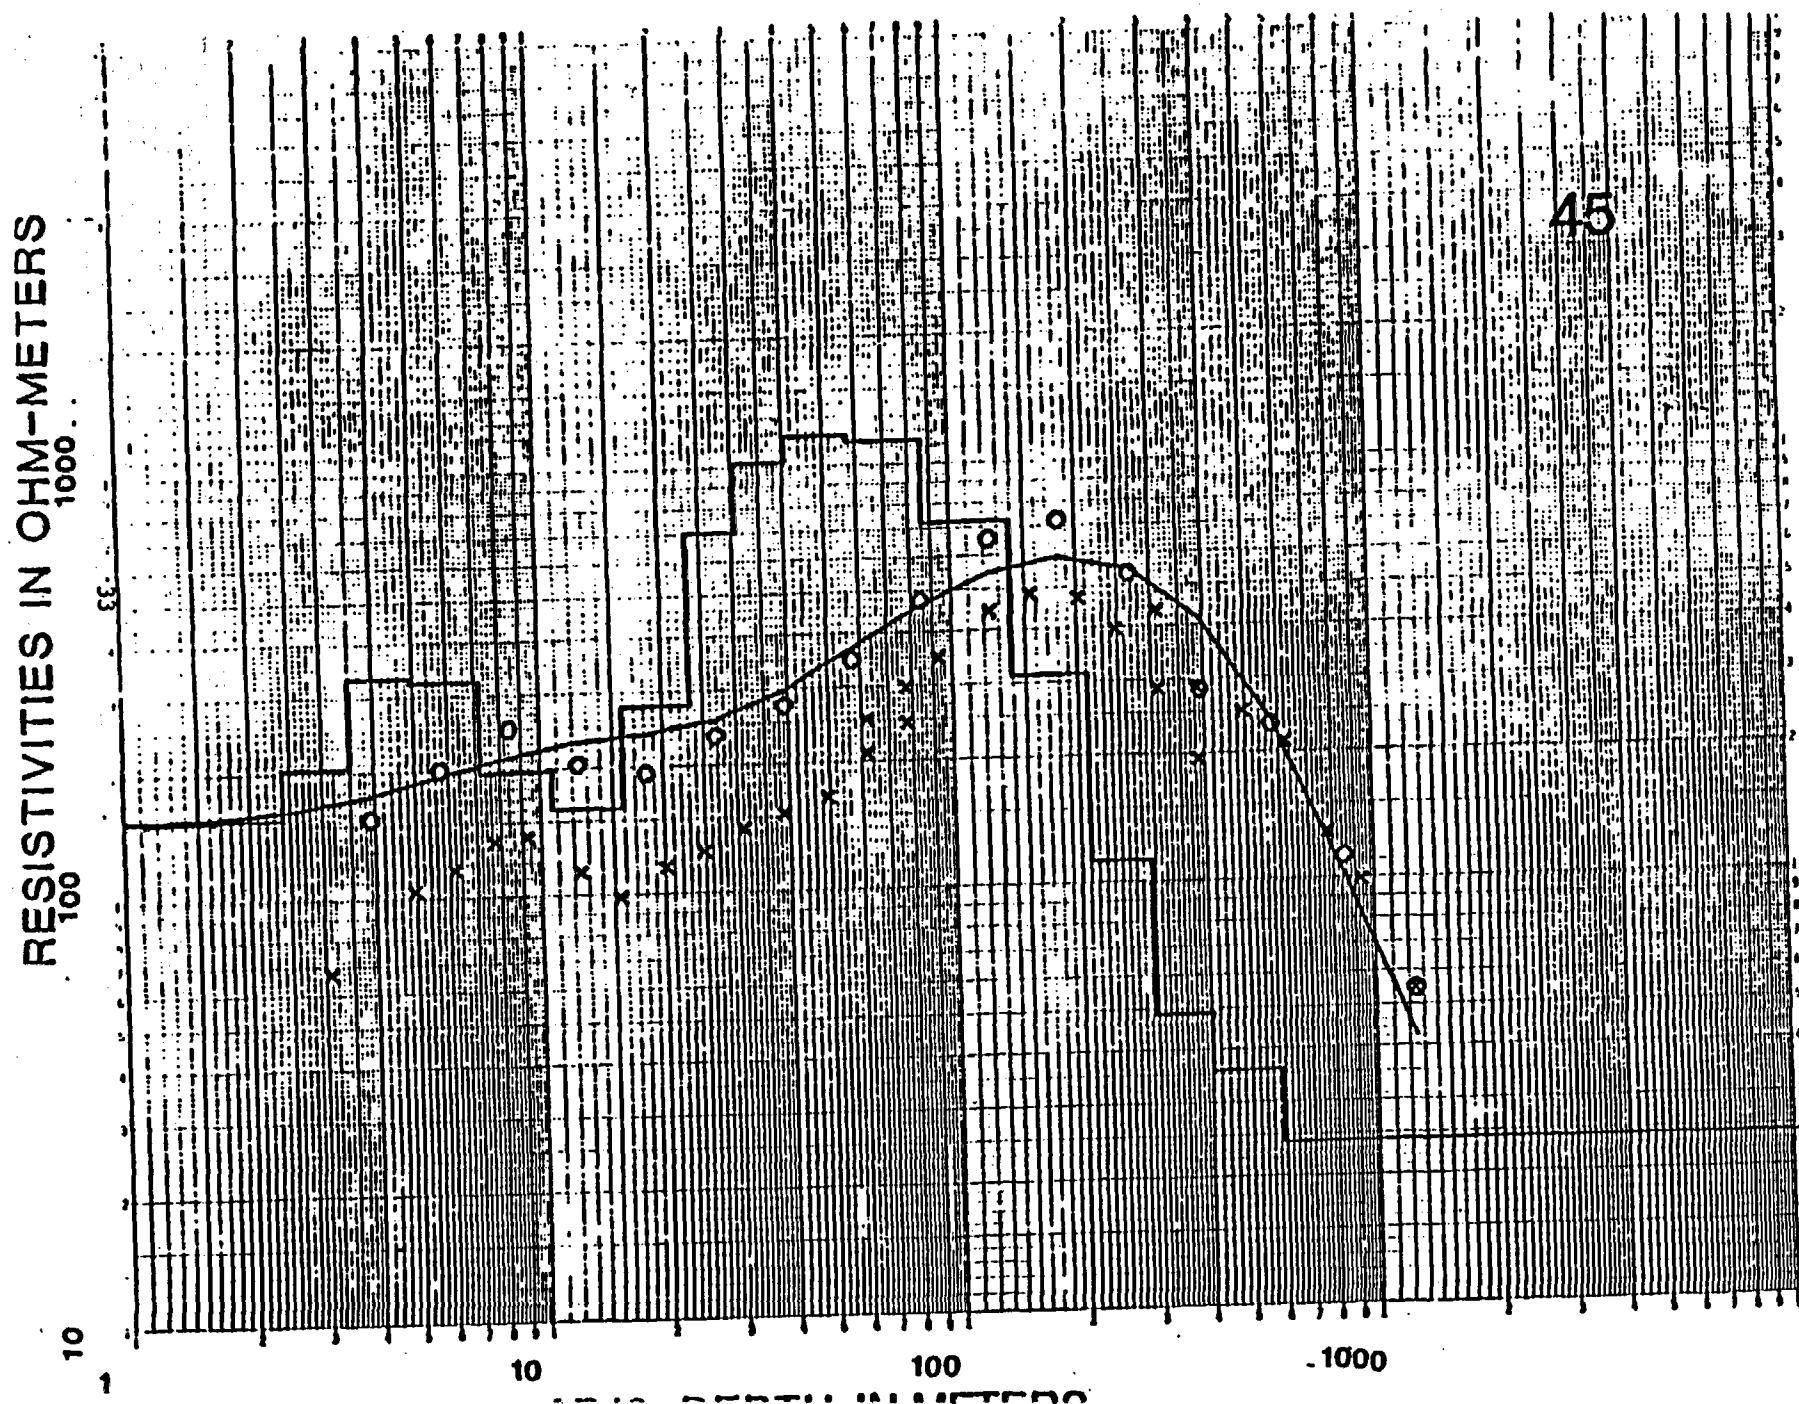


RESISTIVITIES IN OHM-METERS

47

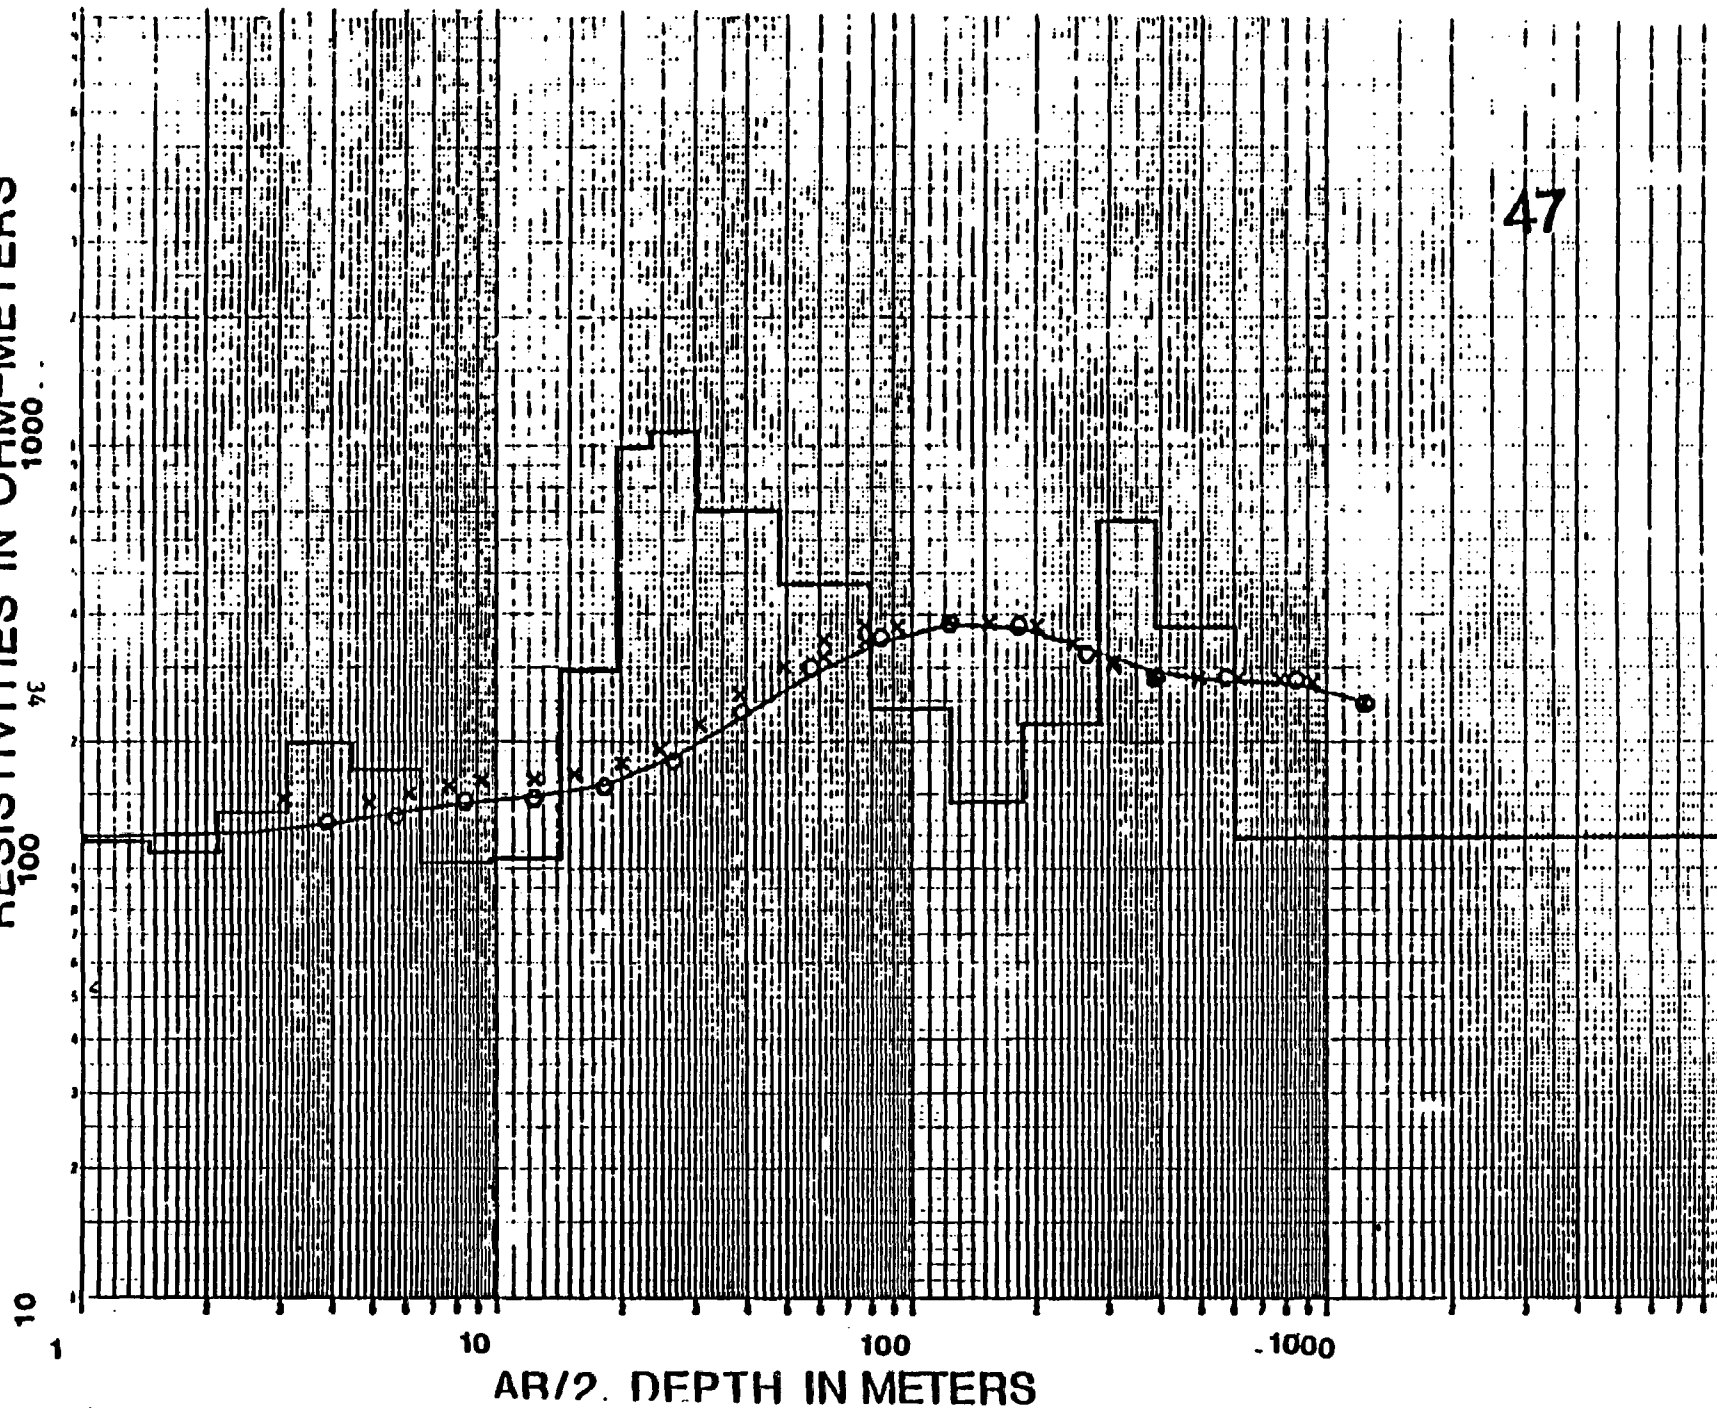

RESISTIVITIES IN OHM-METERS

48

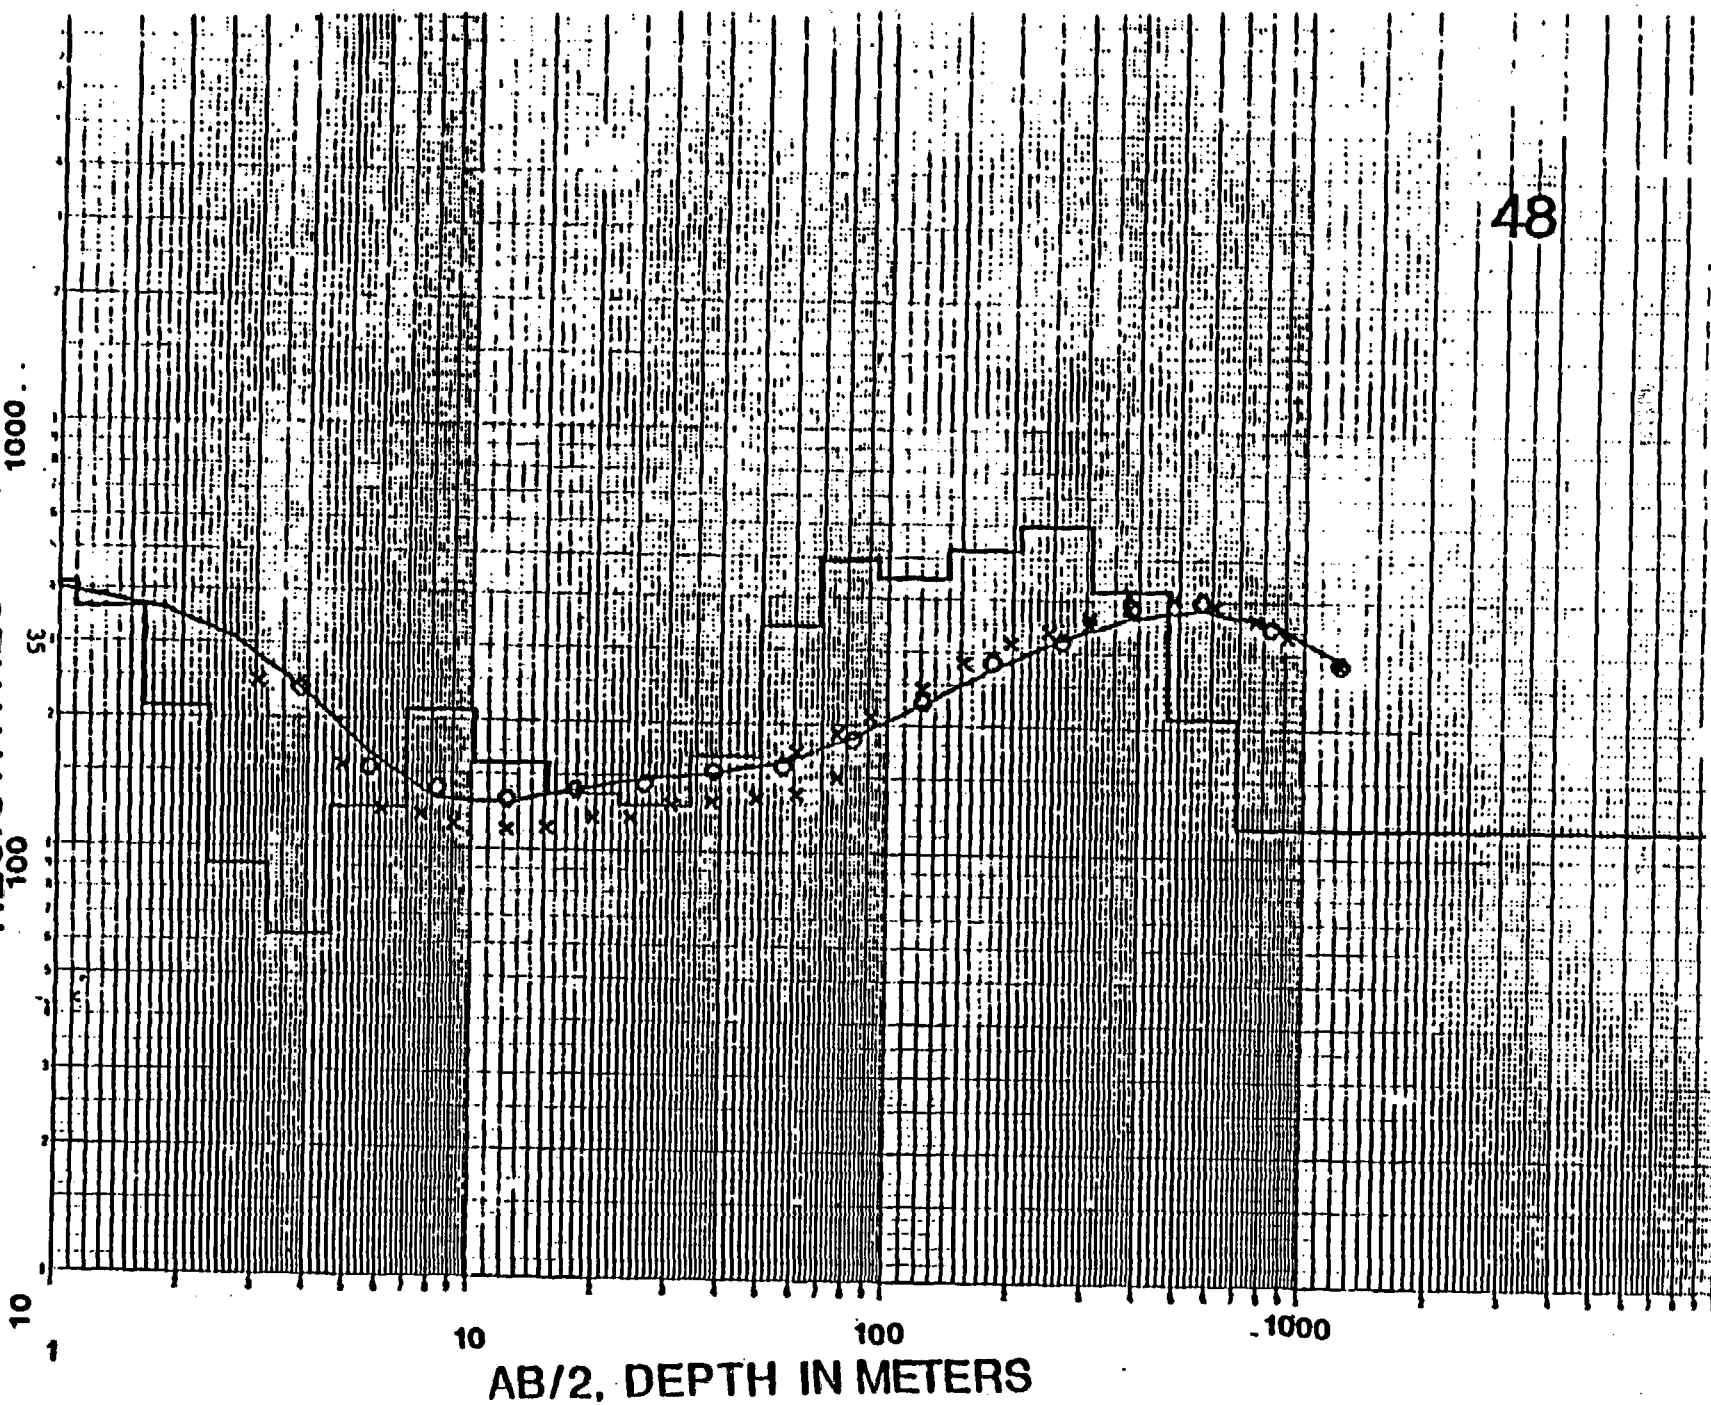

RESISTIVITIES IN OHM-METERS

49

10
1


10

100

1000

AR/2 DEPTH IN METERS

96

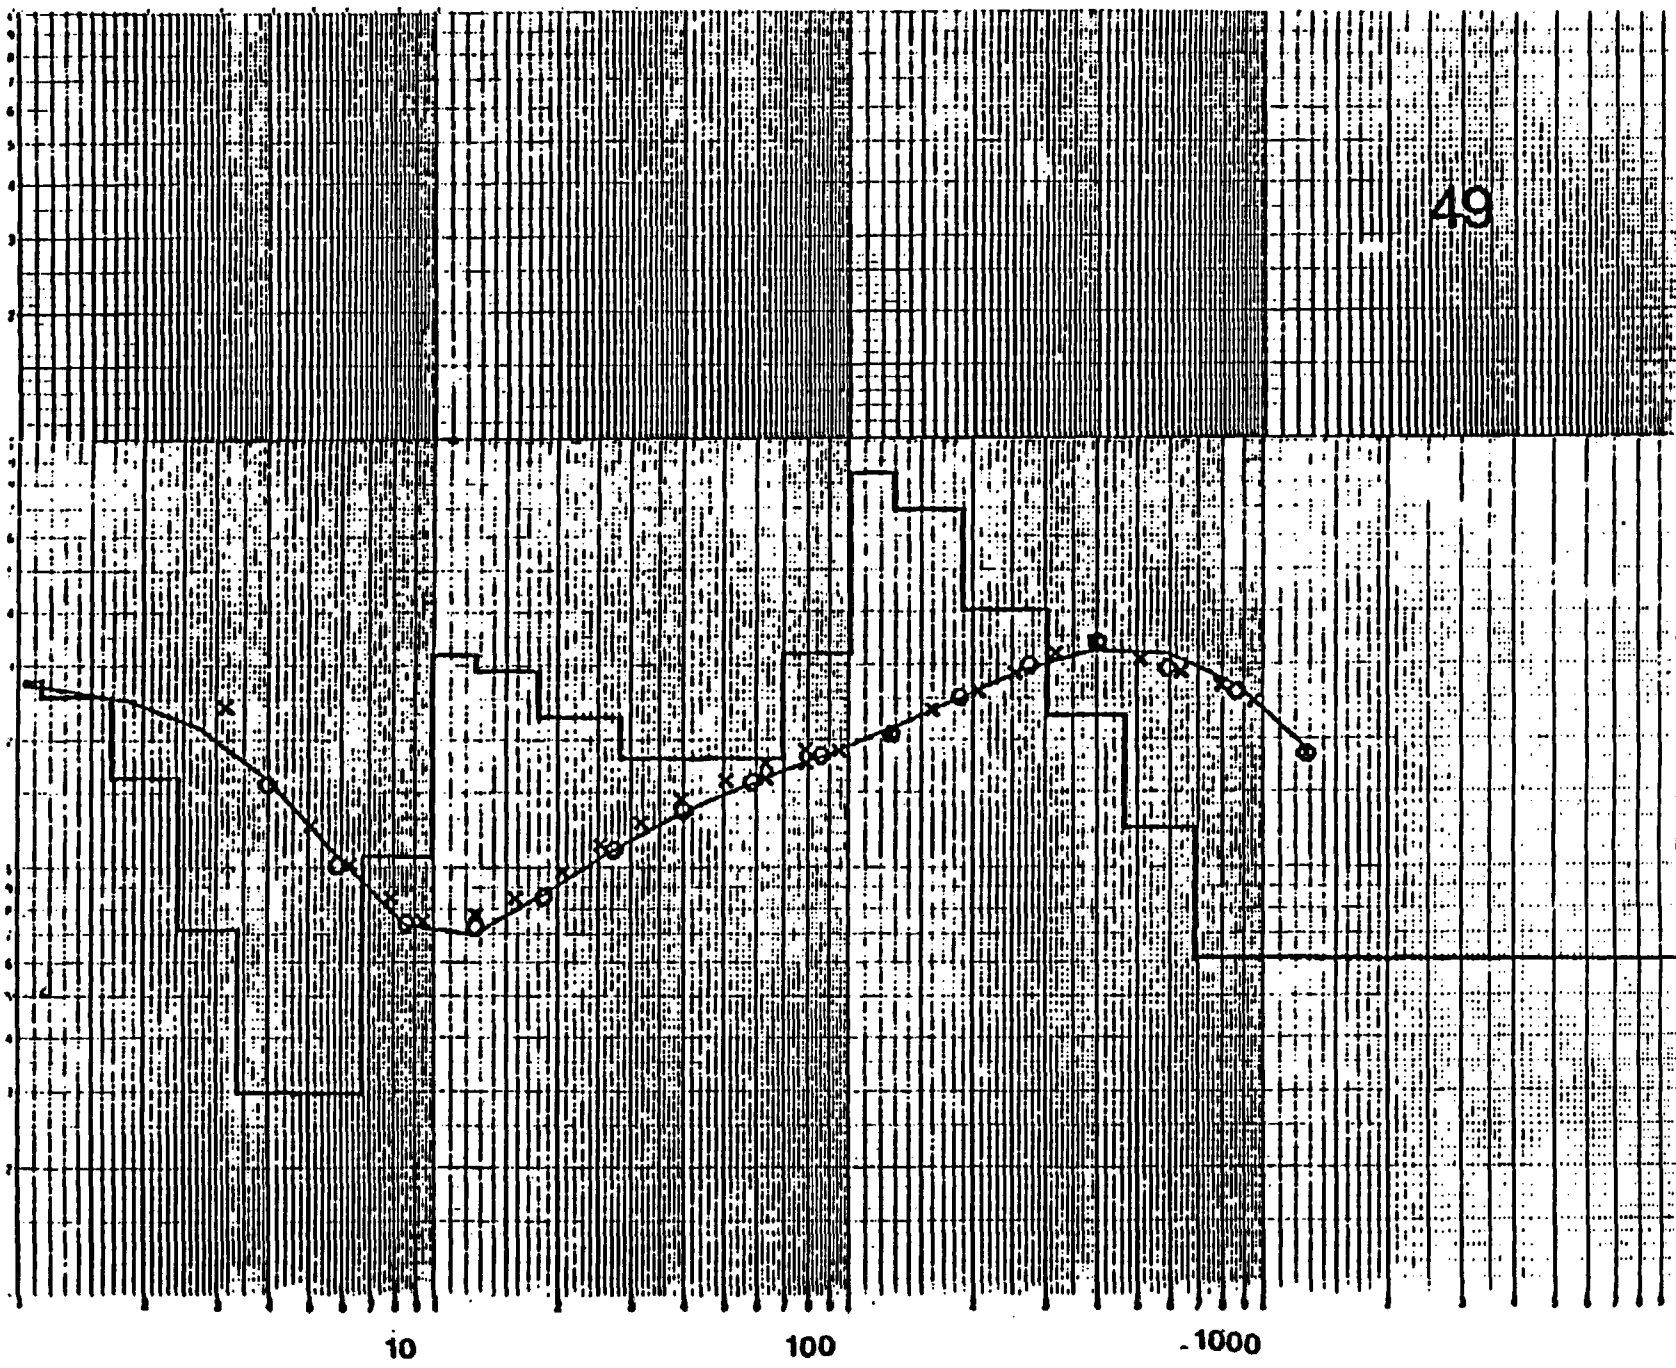


RESISTIVITIES IN OHM-METERS

10
1

100
1000


AB/2, DEPTH IN METERS

50

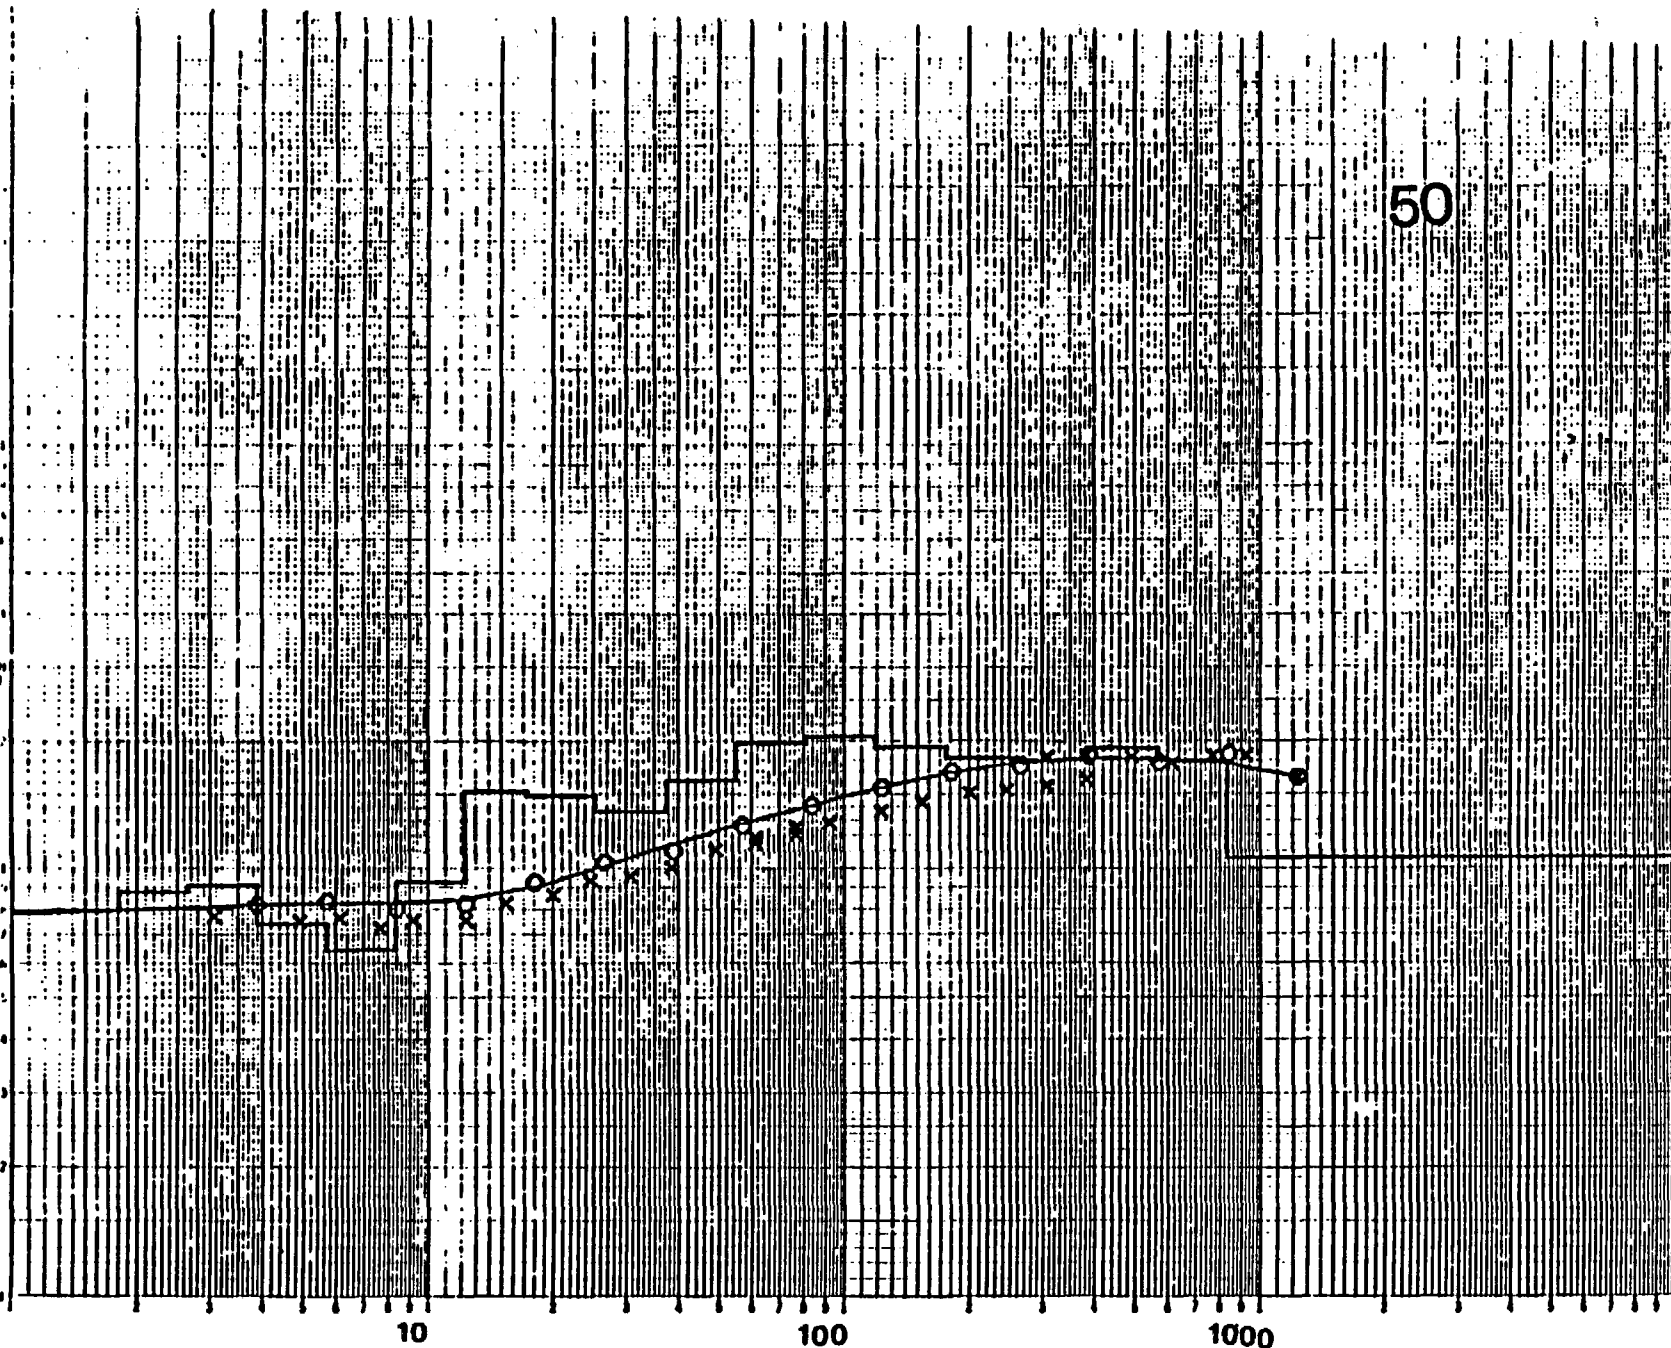

RESISTIVITIES IN OHM-METERS

79-3

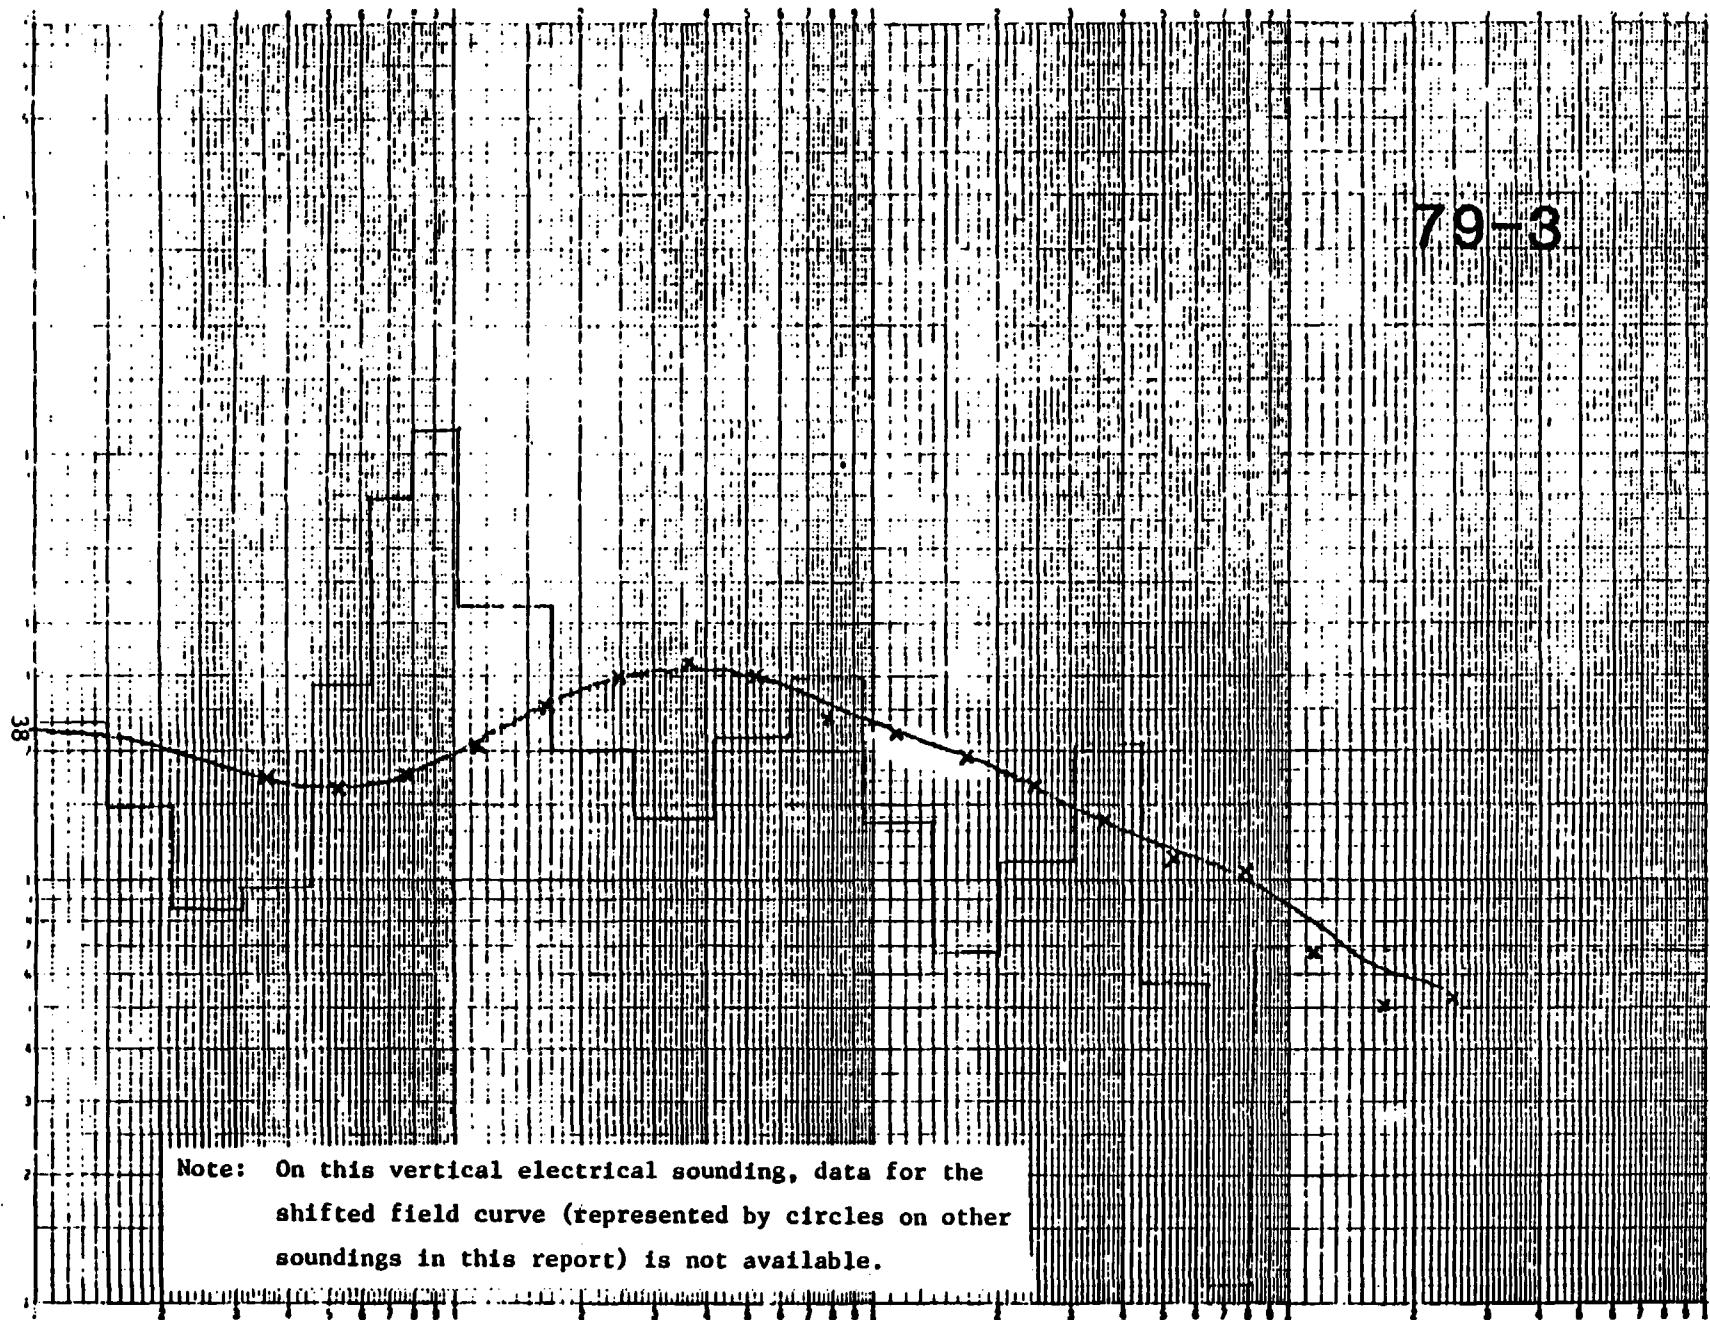

Note: On this vertical electrical sounding, data for the shifted field curve (represented by circles on other soundings in this report) is not available.

AR/2 DEPTH IN METERS

