

WBS: 1.2.1.10  
QA: L

MOL.19980216.0440

**Civilian Radioactive Waste Management System  
Management & Operating Contractor**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned  
Spent Fuel: Phase II  
Degraded Codisposal Canister Internal Criticality**

Document Identifier: BBA000000-01717-5705-00017 REV 00

December 15, 1997

Prepared for:

U.S. Department of Energy  
Westinghouse Savannah River Co.  
Savannah River Site  
P.O. Box 616  
Aiken, SC 29802

Prepared By:

Civilian Radioactive Waste Management System  
Management & Operating Contractor  
1180 Town Center Drive  
Las Vegas, NV 89134

Under Contract Number  
DE-AC01-91RW00134

134

Civilian Radioactive Waste Management System  
Management & Operating Contractor

Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned  
Spent Fuel: Phase II  
Degraded Codisposal Waste Package Internal Criticality

Document Identifier: BBA000000-01717-5705-00017 REV 00

December 15, 1997

Prepared By: John W. Davis  
John W. Davis

Date: 12/15/97

Prepared By: Peter Gottlieb  
Peter Gottlieb

Date: 12/15/97

Concurrence: Donald A. Nitti  
Donald A. Nitti, Checker

Date: 12/15/97

Approved By: Peter Gottlieb  
Peter Gottlieb, Manager  
Degraded Mode and Risk  
Evaluation

Date: 12/15/97

Approved By: Hugh A. Benton  
Hugh A. Benton, Manager  
Waste Package Operations

Date: 12/15/97

---

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**EXECUTIVE SUMMARY**

This report presents the analysis and conclusions with respect to disposal criticality for canisters containing aluminum-based fuels from research reactors. The analysis has been divided into three phases. Phase I, dealt with breached and flooded waste packages containing relatively intact canisters and intact internal (basket) structures; Phase II, the subject of this report, covers the degradation of the spent nuclear fuel (SNF) and structures internal to the codisposal waste package including high level waste (HLW), canisters, and criticality control material. Massachusetts Institute of Technology (MIT) uranium aluminide (U-Al) fuel with 93.5% enriched uranium and Oak Ridge Research Reactor (ORR) uranium silicide (U-Si-Al) fuel with 20.56% enriched uranium were selected by the Alternative Technology Program of the Westinghouse Savannah River Company (SRS) as being representative of the high enriched uranium (HEU) and medium enriched uranium (MEU) fuel inventories, respectively. Phase III will consider the possibility of external criticality, which can arise from a flow of water carrying fissile material out of the waste package.

The objectives of this work are to:

- 1) develop canister designs for codisposal of HEU and MEU SNF,
- 2) show that these designs meet the regulatory requirements for emplacement in the repository, and
- 3) demonstrate that the degraded configurations will meet the criticality requirements for long-term disposal.

The first two objectives were met in the Phase I report and the third is addressed in this report.

Conceptual canister designs were developed for codisposal of HEU and MEU SNF as documented in the Phase I report. Designs with 64 MIT assemblies (16 assemblies per layer, 4 layers) or 40 ORR assemblies (10 assemblies per layer, 4 layers) were developed for these fuel types. As a result of the differences in assembly size, uranium enrichment, and uranium loading, the amount of  $^{235}\text{U}$  per package is significantly different in the MIT and ORR canister designs with 32.9 kg of  $^{235}\text{U}$  (35.2 kg of U) and with 13.9 kg of  $^{235}\text{U}$  (67.5 kg of U), respectively. The nominal design for the codisposal waste package contains 5 HLW canisters (represented by 5 Defense Waste Processing Facility (DWPF) canisters from the SRS) in a pentagonal array with the fuel canister placed in the center. For Phase I, criticality control was maintained within a 439.3 mm OD, 15 mm thick XM-19 canister shell by means of borated stainless steel plates incorporated into an internal stainless steel basket structure. This design satisfied criticality requirements with the intact basket.

Ranges of environmental parameters and failure mechanisms were evaluated to develop degradation scenarios. The chemistry/geochemistry of the system was analyzed as a function of time using the EQ3/6 program with successive runs linked to simulate water dripping into, and flowing out of, the waste package. A typical sequence of degradation would be the following:

- 1) water dripping on a waste package;
- 2) corrosion and eventual breach of waste package barriers allowing accumulation of water

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

- in the waste package;
- 3) aqueous corrosion of stainless steel HLW and fuel canisters;
  - 4) degradation of HLW glass to form clay;
  - 5) degradation of Al-based fuel concurrent with or after the HLW glass;
  - 6) degradation of fuel canister basket materials including criticality control material; and
  - 7) flushing of the solution from the waste package by dripping water, which may thereby remove neutronically significant elements such as boron, for example, from the waste package.

Parametric analyses of criticality were conducted for a range of possible configurations of degraded SNF within the waste package using the MCNP code to identify the most reactive configurations and determine the minimum amount of neutron absorber required to assure that the subcritical limit was not exceeded.

Based on currently published test data, the aluminum cladding and uranium aluminum fuel matrix is expected to degrade by oxidation within a few decades after breaching the fuel canister. If the fuel canister is penetrated while the HLW glass is degrading, the chemistry (primarily pH > 10.0) would be such that most of the uranium could dissolve and be flushed out of the waste package. Such a scenario does not produce criticality and is not examined in further detail.

The more limiting scenario results when the fuel canister is penetrated after the HLW glass has been degraded and the pH has returned to near neutral; The uranium is not very soluble at neutral pH, so it would remain in the canister or waste package. Three general types of configuration could result, depending on the level of degradation of the other components and on the location of the canister as it degraded within the waste package:

- 1) degraded (oxidized) homogenized fuel material in the intact or degraded basket within the fuel canister,
- 2) a layer of hydrated aluminum, uranium, and iron oxides from the degraded fuel canister above the clay formed by the degraded HLW glass, and
- 3) degraded products from the fuel mixed with various fractions of the degraded HLW glass.

Materials tests and the geochemistry analysis with EQ3/6 indicated that as the borated stainless steel in the basket degrades, the borides may dissolve and be carried away by the flushing action of dripping water. Gadolinium (Gd) oxide or phosphate, which are relatively insoluble, are better alternatives which should be used in the absorber plates of DOE-SNF canisters. The geochemistry analysis indicated the possibility of bounding chemical conditions under which Gd oxide could become sufficiently soluble to be flushed from the waste package. Gadolinium phosphate, on the other hand, remained insoluble under all chemical conditions which could occur in the waste package.

The geochemical analyses summarized above lead to a set of nominal configurations which were analyzed for criticality. The criticality analysis was extended by parametric variations from the nominal configurations. For example, the volume fraction of water in the clay formed by the degraded HLW was varied to identify the most reactive mixture fuel considering various masses of iron oxide from the degraded canisters and basket. This optimization assured a conservative

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

analysis of the margin to the criticality limit.

Such criticality evaluations of the most reactive degraded fuel mixture (i.e., configuration 1, homogenized fuel in the DOE SNF canister) indicates the following:

- The intact basket configurations with degraded fuel is the most reactive configuration, requiring the largest mass of added neutron absorber to ensure subcriticality.
- Approximately 1 kg of Gd is required to be distributed in the canister basket for the MIT fuel if stainless steel is used for the basket, but approximately 1.25 kg of Gd is required if carbon steel is used.
- The configuration with a degraded basket requires less than 0.25 kg of Gd to ensure subcriticality if the basket is of stainless steel or only 0.10 kg of Gd if the basket is of carbon steel (because the corrosion of carbon steel releases more moderator excluding iron oxide than does stainless steel).

Parametric analysis of configurations 2 and 3 using the MCNP code indicates these configurations to be much less reactive than configuration 1. In particular, only 0.2 kg of Gd is required to ensure subcriticality of the degraded MIT fuel, and no Gd is required to ensure subcriticality of the ORR fuel.

Based on the Phase II work documented in this report, the following design guidance is provided, superseding the criticality design guidance provided in the Phase I report.

- The  $k_{eff}$  must be less than 0.95 after allowance for bias and uncertainty (ANSI/ANS-8.17) for both intact and degraded configurations.
- A dispersed insoluble neutron must be utilized in the basket unless the insoluble degradation products from the basket can be demonstrated to provide sufficient water displacement and/or neutron absorption to prevent criticality within the canister.
- Carbon steel is preferred over stainless steel for the basket material, in order to minimize the presence of chromium (which may produce acidic conditions when oxidized); carbon steel also maximizes the water displacement potential of iron oxide and increases the mixing potential of the fuel with the degraded basket and neutron absorber materials.
- The neutron absorber and the degradation products from the basket must be insoluble over the pH range of 5 to 11.
- Gadolinium is preferred over boron, as the neutron absorber for criticality control, because it is much less soluble over the expected range of pH values.
- The selection of a Gd criticality control material should consider that Gd-phosphate is preferred over Gd-oxide because it is less soluble, particularly in the mildly acidic regime which could result from the corrosion of stainless steel.

In conclusion, this report documents the sufficiency of the proposed criticality control designs. The MIT fuel (HEU) canister design with 1.25 kg of Gd distributed throughout the carbon steel basket will reduce the probability of criticality, during the first several hundred thousand years following emplacement, to virtually zero. The combination of Gd phosphate absorber and carbon steel basket material offers the potential for defense in depth to prevent criticality in the

---

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

canister if desired.

The ORR fuel (MEU) canister design which uses carbon steel for the basket structure and borated stainless steel absorber plates between-layers absorber plates will also reduce the probability of criticality to virtually zero.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**Table of Contents:**

<u>Item</u>	<u>Page</u>
EXECUTIVE SUMMARY .....	iii
1. PURPOSE .....	1
2. QUALITY ASSURANCE .....	2
3. METHOD .....	2
3.1 Degradation Scenarios.....	3
3.2 Geochemistry Analysis.....	3
3.3 Identification of Final Configurations for Neutronics Evaluations .....	4
3.4 Neutronics .....	4
3.5 Evaluation of Probability of Occurrence of Potentially Critical Configurations .....	4
4. DESIGN INPUTS .....	5
4.1 Design Parameters.....	5
4.1.1 Codisposal Waste Package.....	5
4.1.2 HLW Glass Pour Canisters .....	6
4.1.3 Codisposal Canister.....	6
4.1.4 Al-Based DOE SNF .....	9
4.1.4.1 Massachusetts Institute of Technology SNF .....	9
4.1.4.2 Oak Ridge Research SNF.....	9
4.1.5 Water Chemistry.....	11
4.1.6 Chemical Reaction Rates .....	11
4.2 Design Criteria .....	12
4.3 Design Assumptions.....	14
4.4 Codes and Standards .....	17
5. USE OF COMPUTER SOFTWARE.....	18
5.1 Scientific and Engineering Software.....	18
5.2 Software Routines .....	19
6. DESIGN ANALYSIS.....	20
6.1 Introduction .....	20
6.2 Scenario Generation .....	20
6.3 Geochemistry Calculations.....	32
6.3.1 Degradation of the HLW Glass.....	33
6.3.2 Degradation Products of Aluminum and Uranium Aluminide .....	33
6.3.2.1 SNF Degradation in a High pH Environment: Removal of Uranium and Boron .....	34
6.3.2.2 SNF Degradation in a Neutral pH Environment: Removal of Gd .....	35
6.3.3 Worst Case Removal of Boron.....	35
6.3.4 Worst Case Removal of Gadolinium .....	36
6.3.4.1 Gadolinium Added as Gd <sub>2</sub> O <sub>3</sub> .....	36
6.3.4.2 Gadolinium Added as GdPO <sub>4</sub> .....	37

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

6.3.5 Degradation Products of Uranium Silicide .....	37
6.3.6 Summary of Geochemistry Results for Borated Stainless Steel Neutron Absorber.....	38
6.3.7 Summary of Geochemistry Results for Gd Neutron Absorber and Recommended Materials.....	38
6.4 Configurations Having Separation Between Uranium and the Neutron Absorber .....	39
6.4.1 Separation Mechanisms.....	40
6.4.2 Evaluation of Differential Settling of Solid Particles of Different Densities.....	40
6.4.3 Worst Case Separation of the Neutron Absorber Boron from Uranium .....	42
6.4.4 Separation of Gadolinium Absorber from Uranium.....	43
6.4.4.1 Maximum Separation of Gadolinium as $Gd_2O_3$ .....	43
6.4.4.2 Maximum Separation of Gadolinium as $GdPO_4$ .....	44
6.5 Criticality Calculation Models and Results.....	49
6.5.1 Degraded MIT SNF Criticality Analysis.....	49
6.5.1.1 Homogeneous Mixture of Degraded MIT SNF in DOE SNF Canister.....	49
6.5.1.2 Degraded MIT SNF on Top of Degraded HLW.....	54
6.5.1.3 Degraded MIT SNF Mixed With Degraded HLW .....	56
6.5.2 Degraded ORR SNF Criticality Analysis.....	59
6.5.2.1 Homogeneous Mixture of Degraded ORR SNF in DOE SNF Canister.....	59
6.5.2.2 Degraded ORR SNF on Top of Degraded HLW.....	60
6.5.2.3 Degraded ORR SNF Mixed With Degraded HLW .....	60
6.6 Uncertain Parameters and Sensitivity.....	61
6.7 Probability of Criticality: Comparison of Alternatives .....	61
7. CONCLUSIONS .....	61
7.1 Analysis Results .....	61
7.2 Guidance for the Codisposal Canister Design.....	61
7.3 Future Plans.....	61
8. REFERENCES .....	61

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**Figures**

Figure 4.1-1. Codisposal Waste Package Assembly .....	5
Figure 4.1-2. Longitudinal Cross-Sectional View of the Codisposal Waste Package .....	6
Figure 4.1-3. MIT SNF Canister Radial Cross-Sectional View.....	7
Figure 4.1-4. ORR SNF Canister Radial Cross-Sectional View.....	8
Figure 6.2-1. Internal Degradation Scenarios for Al-Clad DOE SNF.....	22
Figure 6.2-2. Cross Section of Waste Package Showing the DOE SNF Canister in the Center: Surrounded by HLW Canisters .....	23
Figure 6.2-3a. Early Stage of Degradation; No Holes in the Bottom; Some Ponding Water; No Penetration of the DOE SNF Canister; Most of the HLW Canister Degraded .....	24
Figure 6.2-3b. Alternative Early Stage of Degradation; Hole in the Bottom Which Drains Water and Some of the Clay; No Penetration of the DOE SNF Canister .....	25
Figure 6.2-4. HLW Glass Completely Degraded; But Some of the HLW Canister Steel Shells Intact and Supporting the Still-Intact DOE SNF Canister.....	26
Figure 6.2-5. Further Degradation Following Figure 6.2-4 Configuration; All Steel Shells have Broken, But some Fragments Remain Uncorroded; DOE SNF Canister Breached and Basket Degraded .....	27
Figure 6.2-6. Further Degradation Following Figure 6.2-5 Configuration; All Canister Contents and Shells have Completely Degraded.....	28
Figure 6.2-7. Further Degradation Following Figure 6.2-4 Configuration; DOE SNF Canister Mostly Degraded but Still Supported on the Steel Shells of HLW Canisters; Holes in the Bottom have Drained Some Clay.....	29
Figure 6.2-8. Further Degradation Following Figure 6.2-7 Configuration; All Canister Contents and Shells have Completely Degraded.....	30
Figure 6.2-9. Extreme Stratification within the DOE SNF Canister: 78% of <sup>235</sup> U in Lower Layer and 22% in Upper Layer.....	31
Figure 6.5-1. Degraded MIT SNF in an Intact Basket .....	50
Figure 6.5-2. Homogeneous Mixture of Degraded DOE SNF and Degraded Basket in a DOE SNF Canister .....	52
Figure 6.5-3. Degraded MIT SNF on Top of Degraded HLW .....	55
Figure 6.5-4. Degraded MIT SNF Mixed With Degraded HLW .....	57

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**Tables**

Table 4.1.5-1. Analyzed Composition of J-13 Well Water.....	11
Table 4.1.6-1. Reaction Rates for Waste Package Materials .....	12
Table 6.3-1. Typical Corrosion Periods/Lifetimes of Materials which Affect Criticality.....	32
Table 6.3-2. Selected Time History for Simultaneous Degradation of SNF and HLW (Initially High pH Environment).....	34
Table 6.3-3. Selected Time History of Boron Concentration in a Codisposal Waste Package Relying on Borated Stainless Steel for Criticality Control.....	36
Table 6.3-4. Summary of Geochemistry Results for DOE SNF Canister Using Borated Stainless Steel Absorber .....	38
Table 6.3-5. Summary of Geochemistry Results for DOE SNF Canister Using Gd Absorber....	39
Table 6.4-1a. Cutout Statistics for a 19 x 75 Grid (to model carbon steel).....	46
Table 6.4-1b. Cutout Statistics for a 190 x 750 Grid (to model stainless steel).....	46
Table 6.4-2. Worst Case (Maximum Cutout) Maximum U which can Settle to the Bottom and Minimum Gd which will Settle to the Bottom.....	48
Table 6.5.1.1-1. Degraded MIT SNF in an Intact Stainless Steel Basket with Gd Absorber.....	50
Table 6.5.1.1-2. Check Cases - Carbon Steel Substitution for Stainless Steel in an Intact Basket .....	51
Table 6.5.1.1-3. Degraded MIT SNF Homogenized with Iron Oxide and Gd.....	53
Table 6.5.1.1-4. Check Cases - Degraded MIT SNF Homogenized with Iron Oxide and Gd.....	53
Table 6.5.1.1-5. Degraded MIT SNF and Undegraded Basket Pieces Homogenized and Settled to Bottom of DOE-SNF Canister .....	54
Table 6.5.1.2-1. Stratified Layers with Degraded MIT Fuel on Top.....	55
Table 6.5.1.2-2. Stratified Layers with Degraded MIT Fuel on Top with Different Fe <sub>2</sub> O <sub>3</sub> and Gd Loadings .....	56
Table 6.5.1.3-1. Clay Mixed With Degraded MIT Fuel.....	58
Table 6.5.1.3-2. Stratified Layers with Degraded MIT Fuel Mixed with 15% of HLW Glass Clay at bottom with Different Gd and Fe <sub>2</sub> O <sub>3</sub> Loadings .....	58
Table 6.5.2.1-1. Degraded ORR Fuel Homogenized In DOE SNF Canister with Iron Oxide From Degraded Basket (No Boron Remaining; Canister Surrounded by Clay) .....	60
Table 6.5.2.2-1. Layer of Degraded ORR Fuel on Top of Degraded HLW Glass Clayey Material .....	60
Table 6.5.2.3-1. Degraded ORR Fuel at the Bottom of Waste Package Mixed With Various Amounts of Clay From Degraded HLW Glass .....	61
Table 6.7-1. Probabilities (per waste package) of the Occurrence of Potentially Critical Configurations for Alternative Criticality Control Materials.....	61

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

### **1. Purpose**

This evaluation is prepared by the Mined Geologic Disposal System (MGDS) Waste Package Development Department (WPDD) to provide an assessment of the viability of disposing of aluminum (Al)-based Department of Energy-owned research reactor spent nuclear fuel (DOE SNF) in a codisposal waste package with five canisters of vitrified high-level waste (HLW). This is the second of three phases of this work. Analyses were performed for geochemistry, configurations, criticality safety, and probabilities of critical events for degraded aluminum-based SNF, DOE SNF canister, and other components of the codisposal waste package. The objective was to provide sufficient detail to establish the technical viability of the aluminum-based DOE SNF canister option. This report focuses on the DOE SNF canister and on how it interfaces with the waste container and repository.

Two DOE SNF fuel types were selected by the Alternative Technology Program of the Westinghouse Savannah River Company (reference 1) as representative of the range of variations (particularly with respect to criticality) found in Al-based research reactor fuels. These two fuel types were the high-enrichment Massachusetts Institute of Technology (MIT) reactor fuel and the medium-enrichment Oak Ridge Research (ORR) reactor fuel. The MIT fuel has an initial maximum uranium enrichment of 93.5 weight percent  $^{235}\text{U}$  and the ORR fuel has an initial maximum uranium enrichment of 20.56 weight percent  $^{235}\text{U}$ .

The phase I criticality calculations, reported in reference 2, were performed for intact fuel contained within the codisposal canister (interchangeable with DOE SNF canister) for fully flooded conditions as typically assumed as worst case for both transport and disposal. Sufficient criticality analyses of the potential degraded states of MIT and ORR fuel within an intact codisposal canister basket were also performed in order to establish the quantity of stainless steel/boron alloy needed to ensure subcriticality if the fuel degrades within an intact basket. Thermal, structural, and shielding analyses were also performed for intact fuel contained within the codisposal canister for repository conditions as documented in the Phase I report.

This Phase II report evaluates the possibility and probability of criticality in a more severely degraded mode in which the fissile material could be released from the codisposal canister and reconfigured into a critical mass (assuming sufficient moderator) within the waste package. Subsequent Phase III work will evaluate the possibility and probability of criticality in a degraded mode in which the released fissile material is transported out of the waste package and accumulates in the drift or host rock of the repository. Phases II and III do not involve any further thermal, structural, or shielding analysis, so the technical viability of the codisposal waste package (WP) shown in the Phase I report can be regarded as final. The criticality control measures were modified as a result of evaluations in Phase II and Phase III evaluations may identify needs for additional criticality control measures or reductions in the fissile mass loading of codisposal canisters.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

## 2. Quality Assurance

The Quality Assurance (QA) program applies to this document. The work reported in this document is part of the preliminary WP design analysis that will eventually support the License Application Design phase. This waste package design activity, when appropriately confirmed, can affect the proper functioning of the MGDS waste package. The QAP-2-3 evaluation entitled *Classification of Permanent Items Classification of the Preliminary MGDS Repository Design* (reference 3, TBV-228) has identified the waste package as an MGDS item important to safety, waste isolation, and physical protection of materials. The Waste Package Operations responsible manager has evaluated this criticality analysis activity in accordance with QAP-2-0, *Conduct of Activities*. The QAP-2-0 activity evaluation, (reference 4) has determined that work performed for this analysis is subject to *Quality Assurance Requirements and Description* (reference 5). As specified in NLP-3-18, *Documentation of QA Controls on Drawings, Specifications, Design Analyses, and Technical Documents*, this activity is subject to QA controls.

All design inputs which are identified in this document are for the preliminary stage of the WP design process; all of these design inputs will require subsequent confirmation (or superseding inputs) as the waste package design proceeds. This document will not directly support any Department of Energy (DOE) Office of Civilian Radioactivity Waste Management (OCRWM) construction, fabrication, or procurement activity and therefore is not required to be procedurally controlled as TBV (to be verified). In addition, the inputs associated with this document are not required to be procedurally controlled as TBV. However, any data from this document used for input into OCRWM documents supporting construction, fabrication, or procurement are required to be controlled as TBV in accordance with the appropriate procedures.

The specific activities involved with the production and review of this document have been performed according to an approved Technical Document Preparation Plan (reference 6).

## 3. Method

The methodology used for these analyses of possible criticality for DOE SNF is similar to that used for corresponding evaluations of commercial SNF. In most cases the same computer codes are used for corresponding analyses. The same regulatory requirements are used, wherever appropriate.

The specific methodology for evaluating criticality within the degraded waste package consists of the following activities:

- 1) comprehensive degradation scenarios are developed based on the range of degradation rates for the individual waste package components;
- 2) the geochemical and physical processes involved in the degradation scenarios are quantified, using verified computer codes, and are used to determine the compositions of the materials remaining in the waste package (after degradation) and to identify specific configurations that have significant separation between the highly fissile <sup>235</sup>U and the neutron absorber material; and
- 3) the criticality ( $k_{eff}$ ) of the resulting configurations is evaluated.

---

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

These three methodology steps are further explained in the following subsections. Additional detail is provided with the implementation of the methodology in Section 6.

### **3.1 Degradation Scenarios**

Since the repository is basically dry and since all the degradation processes involve significant amounts of water, the degradation scenarios leading to criticality should all be considered unlikely. For convenience, this hypothetical nature of these scenarios is not specifically reiterated in each of the analyses in this document. The only exception is for those examples in which a probability of criticality is computed.

All degradation scenarios begin with some enhanced dripping (greater than 1 mm/yr drift flow rate) on the waste package, followed by the formation of some depression or deposit which can serve to capture a small amount of water to begin pit corrosion into the upper portion of the waste package outer barrier. If the dripping continues long enough, the pit will penetrate both the outer and inner barrier. Next in this hypothetical scenario is the entry of water into the waste package, followed by the onset of corrosion of the individual canisters. Following this, there is a range of possible scenario variations depending on which canisters are wetted first and how fast they corrode. The representative scenarios and their resulting configurations are presented in Sections 6.2 and 6.3, respectively.

### **3.2 Geochemistry Analysis**

Since the repository is basically dry and since all the degradation processes involve significant amounts of water, the degradation scenarios leading to criticality events have a very low probability of occurrences. For convenience, however, the hypothetical nature of these improbable scenarios is not reiterated for each analysis in this document. The one exception is for those examples in which a probability of criticality is computed.

All degradation scenarios begin with some enhanced dripping (a water drip rate greater than 1 mm/yr) on the waste package, followed by the formation of some depression or deposit which can serve to capture a small amount of water to begin pit corrosion into the upper portion of the waste package outer barrier. If the dripping continues long enough, the pit will penetrate both the outer and inner barrier of the waste package. Based on the best available and conservative corrosion estimates, it is expected that between 3,000 and 10,000 years will be required for penetration of both barriers. This estimate is offered for information purposes only since actual time of penetration makes no difference because all of the results reported in this document measure time from the initial waste package aqueous penetration of the waste package.

Next in this hypothetical sequence is the accumulation of water into the waste package, followed by the onset of corrosion of the individual canisters. Following this, there is a range of possible scenarios depending on the randomness of which canisters are wetted first and how fast they corrode. The representative scenarios and their resulting configurations are presented in Sections 6.2, and 6.3, respectively.

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

The results of this methodology are expressed in the following forms:

- Fissile concentrations in solution as a function of time (from the output of EQ6 sequences over times up to 140,000 yrs).
- Amount of fissile material released from the waste package as a function of time (which thereby reduces the chance of criticality within the waste package).
- Concentrations of neutron absorbers, such as Gd, in solution and precipitated as a function of time (from the output of EQ6 sequences over times up to 140,000 yrs).

### **3.3 Identification of Final Configurations for Neutronics Evaluations**

The results of the scenario generation are screened to identify potentially critical configurations. The principal features of such configurations are:

- 1) an accumulation of a significant amount of  $^{235}\text{U}$ ,
- 2) a significant amount of moderator, and
- 3) an absence of neutron absorbers.

The threshold values of the parameters associated with these features are based on published single parameter criticality limits (reference 7) and are set conservatively so that no critical configuration will be missed.

### **3.4 Neutronics**

The nuclear reactivity of the DOE SNF canister within a waste package is analyzed for criticality with the MCNP4A computer code (reference 8) as the SNF and other waste package components degrade. All calculations are performed with the fresh fuel isotopics; i.e., there is no credit for fuel burnup (see Section 4.3, Assumption 4.3.2). The reactivity of the codisposal canister was evaluated for both MIT and ORR SNF.

The material compositions and geometries analyzed are based on the configurations generated by the geochemistry analysis described in Section 3.2, and identified according to the screening criteria mentioned in Section 3.3. There were also variations on the basic configurations used for parametric analyses to identify worst-cases, which in turn, determine minimum amounts of neutron absorber material needed. The basic configurations, together with their variations, cover the range of possibilities with respect to removal of uranium or neutron absorber from the waste package and the range of water concentrations in the waste package to serve as moderator and reflector.

### **3.5 Evaluation of Probability of Occurrence of Potentially Critical Configurations**

For configurations identified by the scenario/configuration generation process (Sections 3.1 through 3.3, above) and found to have the potential for criticality (Section 3.4) the probability of occurrence of a criticality event is estimated. This probability is estimated by combining the estimated probabilities of the required parameter values for the individual processes of the scenario.

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 4. Design Inputs

All design inputs which are identified in this document are for the preliminary stage of the design process; all of these design inputs will require subsequent confirmation (or superseding inputs) as the DOE SNF codisposal canister and waste package designs proceed. This document will not directly support any Civilian Radioactive Waste Management System (CRWMS) construction, fabrication, or procurement activity and therefore is not required to be procedurally controlled as TBV.

#### 4.1 Design Parameters

##### 4.1.1 Codisposal Waste Package

The codisposal waste package containing 5 HLW canisters surrounding a DOE SNF codisposal canister is shown in Figure 4.1.-1. The barrier materials are typical of those used for commercial SNF waste packages. The inner barrier is composed of 20 mm of Alloy 625 serving as a corrosion resistant material, and the outer barrier is composed of a 100 mm of carbon steel serving as a corrosion allowance material (reference 2).

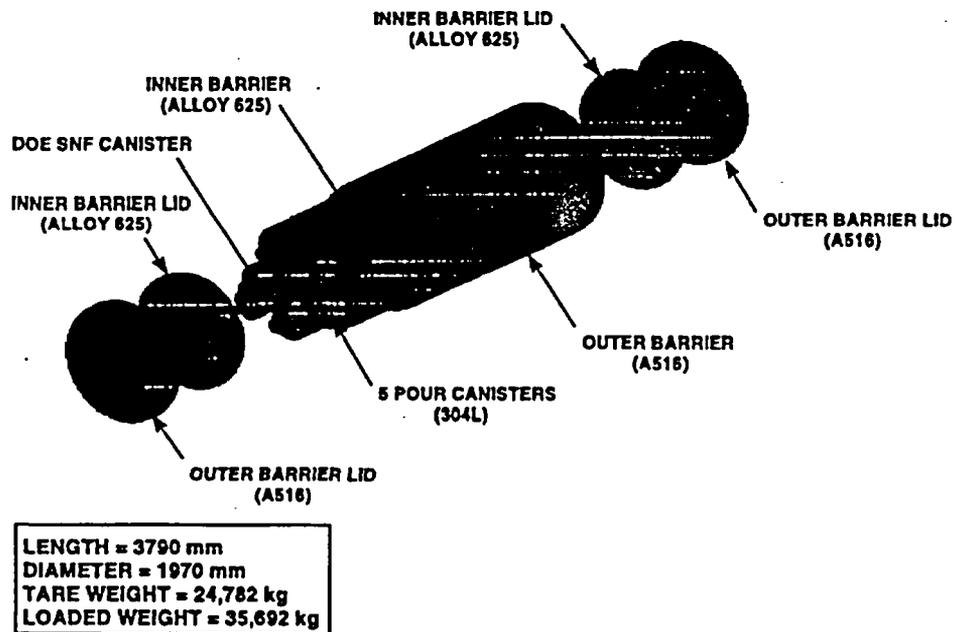


Figure 4.1-1. Codisposal Waste Package Assembly

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 4.1.2 HLW Glass Pour Canisters

The Savannah River Site (SRS) Defense Waste Processing Facility (DWPF) HLW canister per reference 9, p. 3.3-4 (TBV) is a cylindrical stainless steel (Type 304L) shell with an outer diameter of approximately 610 mm (24.00 inch), a 9.525 mm wall thickness, and a nominal length of 3 m. The canister inside volume is 0.736 m<sup>3</sup> and the glass weight is 1682 kg (reference 9, p. 3.3-6). HLW glass (reference 9, p. 3.3-1) is poured into the canisters until 85% of the volume is filled. The nominal dimensions of the pour canister are used for these analyses.

### 4.1.3 Codisposal Canister

The conceptual design for the DOE SNF canister is taken from reference 2. The canister is a right circular cylinder of stainless steel XM-19 that contains a stainless steel 316L basket. DOE-owned SNF is to be loaded into the basket. The dimensions for the DOE SNF canister are a 439.3 mm outer diameter with a 15 mm wall thickness. The DOE SNF canister contains basket locations for 16 MIT or 10 ORR SNF assemblies in four layers as illustrated in Figure 4.1-2. Stainless steel/boron alloy (10 mm thick) is used to separate each layer from the adjacent layer within the canister. In the MIT SNF canister, stainless steel/boron alloy is also used in the basket between each assembly. The length of the canister is defined for this analysis as the length of four stacked fuel assemblies plus tolerances and between-layer (axial) separator plate thicknesses. The MIT SNF canister is nominally 2628 mm long and the ORR SNF canister is 2901 mm long.

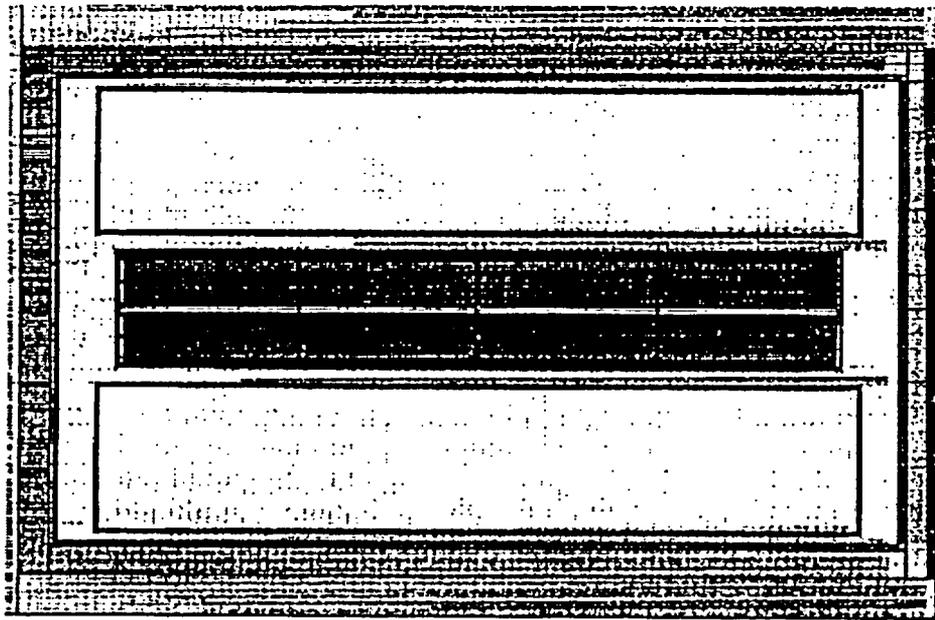


Figure 4.1-2. Longitudinal Cross-Sectional View of the Codisposal Waste Package

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

The MIT SNF codisposal canister basket consists of plates formed into parallelogram slots that fit into a steel disk to provide structural support for the SNF as shown in Figure 4.1-3. Panels of stainless steel/boron 2.54 mm thick are attached to one side of each slot to provide neutron attenuation between the slots. Stainless steel/boron in-row separator plates, 2.13 mm thick, are provided between adjacent pairs of MIT SNF assemblies to reduce neutronic interactions between adjacent assemblies. The rhomboidal slots provide a 1.72 mm nominal clearance around the MIT assembly. The inner diameter of the codisposal canister is 409.3 mm.

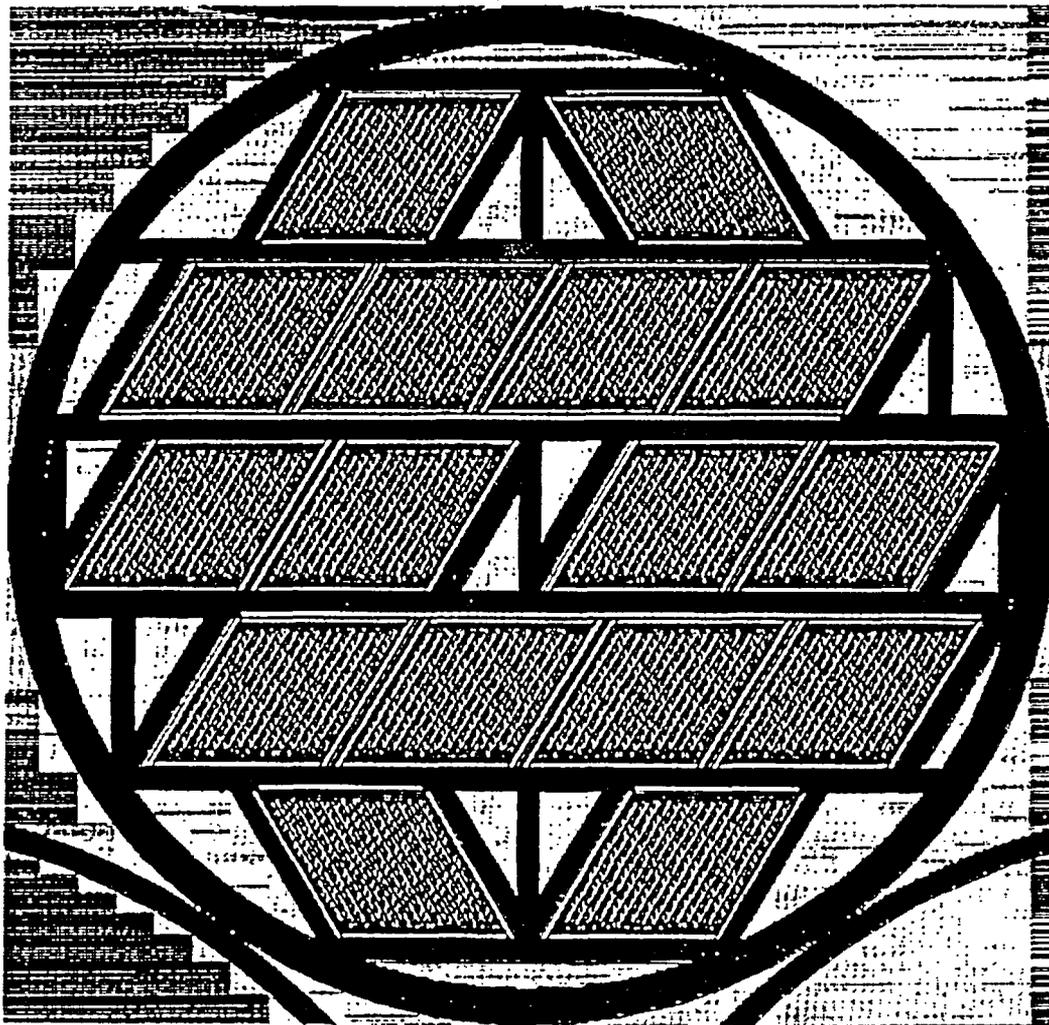


Figure 4.1-3. MIT SNF Canister Radial Cross-Sectional View

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

The ORR SNF codisposal canister basket consists of plates formed into ten rectangular tubes (5.0 mm wall thickness) aligned so that straight structural load paths progress from one side of the basket to the other as shown in Figure 4.1-4. The tubes do not contain boron neutron absorber materials due to the moderate enrichment and low  $^{235}\text{U}$  loading of the ORR fuel assemblies. A nominal clearance of at least 2.54 mm is provided for the assembly in the basket.

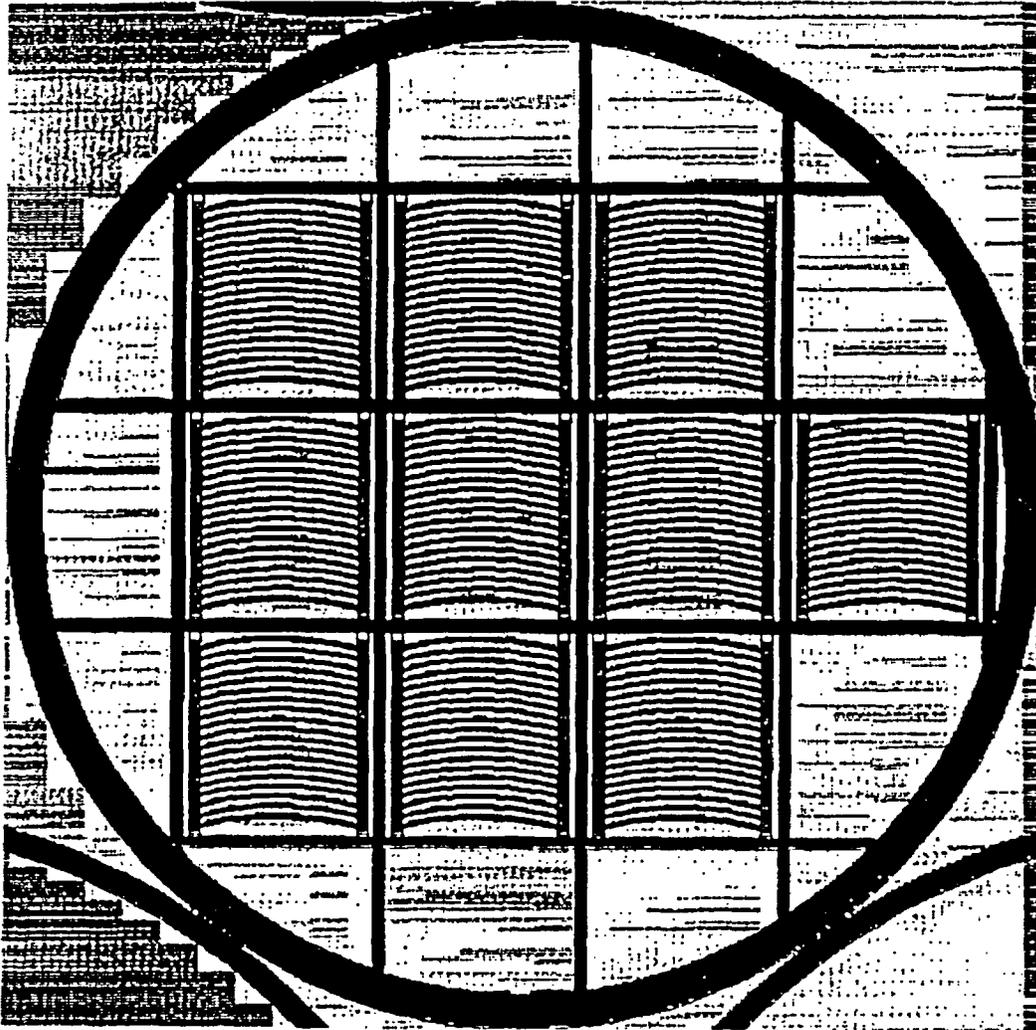


Figure 4.1-4. ORR SNF Canister Radial Cross-Sectional View

As a result of the difference in the MIT and ORR assembly sizes, uranium enrichment, and uranium loading, the amount of  $^{235}\text{U}$  per canister is significantly different. The MIT SNF canister with 64 fuel elements has a  $^{235}\text{U}$  loading of 32.9 kg (35.2 kg of U). The ORR SNF canister with 40 fuel elements has a  $^{235}\text{U}$  loading of 13.9 kg (67.5 kg of U).

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 4.1.4 Al-Based DOE SNF

#### 4.1.4.1 Massachusetts Institute of Technology SNF

The characteristics of the MIT SNF were obtained from the MIT fuel data package (Appendix A of reference 1). The geometry of the MIT plate/assembly were taken from drawings (R3F-3-2, R3F-1-4) provided by Savannah River Site (SRS) as part of reference 1. The MIT fuel assembly is constructed from 15 flat plates tilted at a sixty degree angle so that the resulting assembly has a rhomboidal (equilateral parallelogram with 60° acute angles) cross section, instead of the more common square or hexagon cross section. The MIT fuel length values used in these analyses are shorter than the original as-built length of the MIT assembly because the top and bottom ends of the assembly, which do not contain uranium materials, have been removed by cutting. The fuel plates consist of an aluminum cladding over an uranium/aluminum (U-Al<sub>x</sub>) alloy. The maximum fuel mass for the MIT assembly is 514.25 grams of <sup>235</sup>U with an enrichment of 93.5 weight percent and one weight percent of <sup>234</sup>U. The amount of aluminum present in the U-Al<sub>x</sub> alloy fuel meat is 30.5 weight percent.

#### Fuel Plates

The flat plates are 2.552 +0.000, -0.002 inches wide, and 23 inches long. All 15 plates are the same and have a finned cladding surface with a total thickness of 0.080 ± 0.003 inches including a fin height of 0.010 ± 0.002 inches on both faces. The fuel alloy is 0.030 +0.000, -0.002 inches thick, 2.177 +0.000, -0.1875 inches wide, and 22.375 ± 0.375 inches long.

#### Fuel Element

The aluminum outer shroud which encloses the 15 fuel plates on 4 sides is a 2.405 inch outside dimension rhomboid with a 0.044 inch thick wall parallel with the fuel plates and a 0.188 inch thick comb plate at 60° to the fuel plates, and a nominal length (after cutting) of 23.368 inches. The fuel plates are centered within this rhomboid angled 60° off the comb plate. The plates are fixed relative to each other by comb plates along two sides and the lip of the end fittings across the top and bottom. Drawing R3F-1-4 (reference 1) shows a fuel plate center-to-center spacing of 0.158 inch, which is the spacing of the notches on the comb plates.

#### 4.1.4.2 Oak Ridge Research SNF

Details of the construction of the ORR fuel element are contained in drawings M-11495-OR-001 ("19 Plate Fuel Element Assembly & Finish Machining", reference), M-11495-OR-003 ("Misc. Details for ORR Fuel Element", reference 1), and M-11495-OR-004 ("Fuel Plate Details", reference 1). The element is constructed from 19 curved fuel plates that are held within two opposing aluminum comb plates. The ORR fuel length values used in these analyses are shorter than the original as-built length of the ORR assembly because the top and bottom ends of the assembly, which do not contain uranium materials, have been removed by cutting. Appendix A of reference 1 contains the material information for the ORR fuel. The fuel plates consist of an aluminum cladding over an U-Si-Al fuel material. The maximum fuel mass for the ORR assembly is 347 grams of <sup>235</sup>U with an enrichment of 20.56 weight percent. The uranium present

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

in the U-Si-Al alloy is 77.5 weight percent. There are 2 atoms of Si per 3 atoms of U, and Al fills out the remainder of the fuel material.

**Fuel Plates**

The curved plates are manufactured as flat laminated sheets that are formed to the 5.5 inch inner radius of curvature. Seventeen of the plates are inner plates, with a thickness of 0.0494 to 0.0510 inches and a 0.0105 inch minimum aluminum cladding on both sides of a 0.020 inch nominal fuel foil, which is assumed to have a tolerance of 0.005 inches since this is the default for the drawing; these plates are 2.7955 (minimum) to 2.7985 (maximum) inches wide. Two of the plates are outer plates, with a thickness of 0.063 to 0.066 inches, with a 0.018 inch minimum cladding on both sides of a 0.020 inch nominal fuel foil these plates are 2.7925 (minimum) to 2.7955 (maximum) inches wide. For the inner fuel plates, the width of the fuel foil allows a 0.126 to 0.200 inch inset from the edge of the plate on both sides. The overall length of the inner fuel plate is 24.620 to 24.630 inches and the fuel foil is centered within the plate longitudinally, with an inset at each end of 0.318 to 0.775 inches. For the outer fuel plates, the width of the fuel foil allows a 0.126 to 0.198 inch inset from the edge of the plate on both sides. The overall length of the outer fuel plate is 27.120 to 27.130 inches and the fuel foil is centered within the plate longitudinally, with an inset at each end of 1.574 to 2.011 inches. The top and bottom ends of the inner and outer fuel foils are chamfered, but this trimming of the fuel material was neglected.

**Fuel Element**

The aluminum comb plates enclose the 19 fuel plates on 2 sides giving a cross section bounded by a rectangle having the approximate dimensions of 3.25 inch by 3.00 inch, and a nominal length (after cutting) of 27 1/8 inches. The fuel plates are centered within this box, and form a nearly square fuel/water region bounded by the 3.169 inch longitudinal comb plate width. The plates are fixed relative to each other by comb plates along two sides and by a comb strap across the top and bottom. Drawing M-11495-OR-003 ("Misc. Details for ORR Fuel Element", reference 1) shows a fuel plate edge-to-edge spacing of 0.166 inch, which is the spacing of the notches on the comb plates.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**4.1.5 Water Chemistry**

The composition of water entering the waste package was taken to be the average of the measurements at the J-13 well at Yucca Mountain. Water from this well has been analyzed repeatedly over a span of at least two decades (reference 10). This composition is reproduced in Table 4.1.5-1.

Table 4.1.5-1. Analyzed Composition of J-13 Well Water

J-13 water		
Element	Molality	Mole Fr.
Na	1.99e-03	1.20e-05
Si	1.02e-03	6.11e-06
Ca	3.24e-04	1.95e-06
K	1.29e-04	7.74e-07
C	1.45e-04	8.69e-07
F	1.15e-04	6.89e-07
Cl*	2.15e-04	1.29e-06
N	1.42e-04	8.53e-07
Mg	8.27e-05	4.97e-07
S	1.92e-04	1.15e-06
B	1.24e-05	7.44e-08
P	1.27e-06	7.63e-09
H	1.11e+02	6.67e-01
O	5.55e+01	3.33e-01
Total	1.67e+02	1.00e+00

\* Adjusted from the nominal value to produce electrical neutrality

**4.1.6 Chemical Reaction Rates**

The rates of aqueous corrosion and dissolution for the various solid forms in the waste package are given in Table 4.1.6-1. The rates for glass are expressed in the standard intrinsic material units, gm/m<sup>2</sup>/day. The rates for the various types of steel are expressed in microns per year under the standard assumption that all plates have a thickness much less than length or width.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

Table 4.1.6-1. Reaction Rates for Waste Package Materials

Material	Rate, $\mu\text{m}/\text{yr}$	Rate, $\text{gm}/\text{m}^2/\text{d}$
Alloy 625 <sup>1</sup>	1.008e-02	-
316L <sup>2</sup>	1.000e-01	-
304L <sup>2</sup>	1.500e-01	-
Carbon Steel <sup>3</sup>	3.000e+01	-
A516 <sup>3</sup>	2.223e+01	-
Borated Stainless Steel <sup>4</sup>	8.000e-01	-
HLW glass <sup>5</sup>	-	2.791e-02
HLW glass <sup>6</sup>	-	2.000e-04

<sup>1</sup> Assumption 4.3.6.

<sup>2</sup> Reference 11, p. 11.

<sup>3</sup> Reference 12, p. 47.

<sup>4</sup> Reference 11, p. 12, rate doubled for conservatism (Assumption 4.3.7).

<sup>5</sup> Reference 13, p. 4 high degradation rate cases.

<sup>6</sup> Reference 12, Fig. 6.2-5, pH ca. 5.5-8.5.

## 4.2 Design Criteria

All design inputs which are identified in this document are for the preliminary stage of the design process; all of these design inputs will require subsequent confirmation (or superseding inputs) as the DOE SNF codisposal canister and waste package designs proceed. This document will not directly support any Civilian Radioactive Waste Management System (CRWMS) construction, fabrication, or procurement activity and therefore is not required to be procedurally controlled as TBV.

The design of the Engineered Barrier System (EBS) segment will depend on neutronic, geochemistry, and probability analyses to demonstrate criticality safety of the WP in the repository. Criteria that relate to the analysis of the EBS are derived from the applicable requirements and planning documents. Requirements are provided in the Engineered Barrier Design Requirements Document (EBDRD, reference 14) as specific requirements for EBS design. The Controlled Design Assumptions Document (CDA, reference 15) provides guidance for requirements listed in the EBDRD which have unqualified or unconfirmed data associated with the requirement. The criteria applicable to analyses of waste package emplacement are equivalent to the applicable requirements, interface requirements, and criteria cited in the EBDRD.

The "TBD" (to be determined) terms identified in the available criteria in this section will not be carried to the conclusions of this document based on the rationale that the conclusions derived by this analysis are for preliminary design that will not be used as input into OCRWM documents supporting construction, fabrication, or procurement.

The following criteria are applicable to the design subject. Each criterion references the relevant EBDRD (reference 14) requirement from which it has been derived; however, it is not the intent

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

of this evaluation to show direct compliance with the referenced requirements from the EBDRD. Rather, they are used as guidelines and design goals for the preliminary design.

### Criticality Control

The EBDRD requirements 3.2.2.6 and 3.7.1.3.A (reference 14) both indicate that a WP criticality shall not be possible unless at least two unlikely, independent, and concurrent or sequential changes have occurred in the conditions essential to nuclear criticality safety. These requirements also indicate that the design must provide for criticality safety under normal and accident conditions, and that the calculated effective multiplication factor ( $k_{eff}$ ) must be sufficiently below unity to show at least a five percent margin after allowance for the bias in the method of calculation and the uncertainty in the experiments used to validate the methods of calculation.

CDA Assumption EBDRD 3.7.1.3.A (reference 15, p. 4-32) clarifies that the above requirement is applicable to only the preclosure phase of the MGDS, in accordance with the current DOE position on postclosure criticality. This assumption also indicates that for postclosure, the probability and consequences of a criticality provide reasonable assurance that the performance objective of 10CFR60.112 (reference 16) is met. While the Nuclear Regulatory Commission has not yet endorsed any specific change for postclosure, they have indicated that they agree that one is necessary.

### Geochemical Analysis

The EBDRD (reference 14) requirement EBDRD 3.7.1.A indicates that packages for SNF and HLW shall be designed so that the in situ chemical, physical, and nuclear properties of the waste package and its interactions with the emplacement environment do not compromise the function of the waste packages or the performance of the underground facility or the geologic setting.

Similarly, EBDRD 3.7.1.2.G indicates that the container shall be designed so that neither its in situ chemical, physical and nuclear properties, nor its interactions with the waste form and the emplacement environment, compromise the function of the waste package or the performance of the natural barriers or engineered barriers.

This analysis contributes to satisfying the above two requirements by evaluating the chemical processes that will occur as the DOE SNF canister, DOE SNF waste form, HLW glass canisters, and the HLW glass degrade, following breach of the waste package. The results of the geochemical analysis will be used as input to criticality analyses that will determine if any of the resulting degraded configurations cause failure of the criticality control function of the waste package. Any assessment of whether the criticality control criteria are met will be performed in the subsequent criticality analyses.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

### **4.3 Design Assumptions**

Based upon the rationale that the conclusions derived in this document are for preliminary design and will not be used as input into documents supporting construction, fabrication, or procurement, a TBD or TBV will not be carried to the conclusions to this document.

The assumptions used in this document are:

- 4.3.1 The codisposal waste package contains 16 MIT or 10 ORR DOE SNF assemblies in the basket cross section, and assemblies are stacked four high within each position in the fuel basket for a total of 64 MIT or 40 ORR assemblies. The basis for this assumption is that these are the maximum number of assemblies of each type that can physically fit in the DOE SNF canister. This assumption is used in Section 4.1 and throughout Section 6. (TBV)
- 4.3.2 The MIT and ORR fuel is assumed fresh (unburned) for criticality calculations. The basis for this assumption is because the National Spent Nuclear Fuel Program Criticality Team recently came to the consensus opinion that the benefit gained from burnup credit would not be significant enough to pursue for DOE SNF because of cost and lack of qualified data (reference 17). This assumption is used in Section 6.5.
- 4.3.3 No credit is taken for any boron neutron absorber contained in borated stainless steel in severely degraded cases. The basis for this assumption is that the boride particles contained in the borated stainless steel may corrode and dissolve following degradation of the stainless steel, since they have a large surface-to-volume ratio and preliminary research indicates that they have corrosion rates similar to that of the stainless steel matrix (reference 18, p. VII-22). If the borides dissolve, they are likely to be transported out of the waste package as water flows out. This assumption is used throughout Section 6.5 for Al degradation rate. (TBV)
- 4.3.4 The void space in the waste package is assumed to be fully flooded with water for criticality calculations. The basis for this assumption is that this is the most reactive condition and is conservative. This assumption is used in Section 6.5.
- 4.3.5 It is assumed that all degraded configurations considered credible in the geochemistry and degradation mode analysis (reference 25) will require criticality analysis even if they require more than 10,000 years to develop. The basis for this assumption is CDA Key 039 (reference 15) which indicates that the time period over which criticality control must be maintained is not defined, but is expected to be greater than 10,000 years. This assumption is used throughout Section 6.5.
- 4.3.6 It is assumed, in the absence of data for relevant conditions, that the corrosion rate of Alloy 625 is no more than 10 percent of the corrosion rate of 316L stainless steel. The justification for this assumption is that Alloy 625 is generally assumed to have corrosion properties similar to Alloy 825 (reference 19 and 20), and the most recent measurements of Alloy 825 corrosion rate indicate that it is less than 10 percent of that for 316L.

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

(reference 20). The conservatively high corrosion rate assumed for Alloy 625 resulted in virtually no effect on the simulations, because very little of the Alloy 625 had reacted by the time all of the other materials had degraded. Therefore, further analysis of the sensitivity to the corrosion rate was not necessary. This assumption applies to Sections 4.1.6, 6.2, and 6.3 (TBV).

- 4.3.7 It is assumed that XM-19 is chemically equivalent to 316L stainless steel. The basis for this assumption is their similar chemical compositions. For purposes of calculating worst case corrosion time, the corrosion rate for XM-19 was conservatively assumed to be twice that for 316L stainless steel. This assumption is used only in Table 6.3-1. (TBV)
- 4.3.8 The Savannah River HLW canister is assumed to be representative for HLW canisters. Reference 9 specifies the geometry and materials of construction. The outer diameter is 0.6095 m and the thickness is 0.009525 m. The canister inside volume is 0.736 m<sup>3</sup> and the glass weight is 1682 kg. The glass loading in each canister is 85% of the total volume. The basis for this assumption is that the SRS HLW glass is the most developed of the HLW types. This assumption is used throughout Section 6. (TBV)
- 4.3.9 The waste package will be emplaced in-drift in a horizontal mode. The basis for this assumption this is consistent with CDA Key 011 and Key 066, reference 15. This assumption is used throughout Section 6.
- 4.3.10 It was assumed that U-Al and U-Al-S would corrode at a rate resembling that for aluminum metal. The basis for this assumption is that U-Al and U-Al-S are thermodynamically unstable in the presence of water and atmospheric oxygen to approximately the same degree as is aluminum metal. Consequently, rather rapid corrosion is likely to occur. As long as the degradation of the aluminum fuel matrix occurs in a time frame much shorter than that for the HLW glass or other metals, errors in the fuel degradation rates have no significant impact on the results of the analyses in this report. This assumption applies to Sections 6.2 through 6.3. (TBV)
- 4.3.11 It is assumed that the inner corrosion resistant barrier will react so slowly with the infiltrating water as to have negligible effect on the chemistry, because this metal corrodes very slowly compared to other reactions occurring in the waste package and to the rate at which soluble corrosion products will likely be flushed from the package. This assumption applies to Sections 6.2 through 6.3. (TBV)
- 4.3.12 For purposes of estimating the fraction of neutronically significant material which could fall to the bottom of the basket in the DOE SNF canister, it is assumed that the waste package is oriented such that the large basket plates (shown horizontal in Figure 4.1-3) actually are horizontal. It is further assumed that the disposition of material from the plates which are angled to the large plates (shown in Figure 4.1.3) will be the same as for the horizontal plates. This assumption is made for modeling purposes only. The basis for this assumption is that it is conservative. Any material resting on top of a non-horizontal basket plate would tend to slide down the plate to the corner formed by the intersection of the plate with the canister wall. There would be one such corner for each basket plate,

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

and the collection of such corners would be a less favorable geometry for criticality than the one collection at the bottom assumed here. The same considerations apply to corroded material from the angled plates. This assumption is used in Section 6.4.4.2

- 4.3.13 It is assumed that fuel matrix will corrode at a rate of  $2.6e-10$  gm/cm<sup>2</sup>/yr (reference 25) which is fast compared to the degradation rates of other material in the waste package in general, and material in the basket of the DOE SNF canister, in particular. At this rate, the aluminum fuel matrix will completely corrode in 10 years. This assumption applies to Section 4.1 and to Section 6.
- 4.3.14 It is assumed that the drip rates of water into the repository will vary within the range 0.1 mm/yr to 10 mm/yr over the long term. This range of drip rates is the same as the range of filtration rates given in TSPA-95 (reference 12); the range is lower than that given in the CDA (reference 15). Infiltration rate is the net flow into the ground at a small distance beneath the surface (precipitation minus evapotranspiration, minus runoff). Drip rate is the net flow into the repository. The difference is the lateral diversion, away from the repository, by relatively impervious layers between the surface and the repository. This difference is uncertain at the present time, but experiments are expected to provide definitive information within the next few years. The CDA specifies an upper limit for the range of infiltration rates which is much higher than 10 mm/yr. The justification for not using a much higher upper limit for the drip rate range is based on the following:
- 1) except in regions where the lateral diversion mechanisms (layers) are broken by a nearly vertical fault or similar geologic structure, the drip rate must be significantly lower than infiltration rate,
  - 2) the assumption of a low drip rate is conservative with respect to reaction rates which can be enhanced by buildup of ionic strength or deviation of pH from neutrality, and
  - 3) the only criticality enhancing effect of a high drip rate is the faster removal, from the waste package, of neutron absorbers already in solution, which is already discounted by extending the run times until the absorber was removed, for those cases which showed significant absorber depletion by this mechanism. To verify this assumption, analyses will be included in REV 01 of this document that are consistent with both the CDA and TSPA-VA infiltration and drip rate ranges. The conclusions of the REV 01 document will reflect any differences from the present analysis.

Drip rate, in mm/yr, is converted to volumetric flow by multiplying by the WP interior horizontal cross sectional projected area (1.73 x 3.04 m).

- 4.3.15 It is assumed that any effects of contact of the dripping water with the drift liner will be minimal after the 3000 to 10,000 years required to breach the waste package. The justification for this assumption is as follows:
- 1) the drift liner on the top of the drift is expected to collapse with the roof support, well before 1000 years,
  - 2) the travel time of water through the liner, while probably faster than the time through holes in the waste package barriers, will still be much less than the travel time through

---

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

- the rock above the repository, and
- 3) even if the drift liner lasted beyond the 3000 to 10,000 years required to breach the waste package, the alkalinity would not add significantly to the high pH expected to be produced during the HLW glass degradation phase.

It should further be noted that a longer duration of the high pH period would only increase the probability of uranium being flushed from the waste package or to reduce the probability of neutron absorber being flushed from the waste package, both of which reduce the probability of criticality. Therefore, this assumption is conservative. This assumption is used in Sections 6.2 and 6.3.

#### **4.4 Codes and Standards**

Not Applicable.

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 5. Use of Computer Software

#### 5.1 Scientific and Engineering Software

The criticality evaluation of fresh fuel configurations was performed with the MCNP4A computer code that is identified with the Computer Software Configuration Item (CSCI): 30006-V.4A (reference 8). MCNP4A calculates  $k_{eff}$  for a variety of geometric configurations with neutron cross sections for elements and isotopes described in the Evaluated Nuclear Data File version B-V (ENDF-B/V). MCNP4A is appropriate for the fuel geometries and materials required for these analyses. The calculations using the MCNP4A software were executed on Hewlett-Packard UNIX workstations. The software qualification of the MCNP4A software, including problems related to calculation of  $k_{eff}$  for fissile systems, is summarized in the Software Qualification Report for the Monte Carlo N-Particle code (reference 8). The MCNP4A evaluations performed for this design are fully within the range of the validation for the MCNP4A software used. Access to and use of the MCNP4A software for this analysis was granted by Software Configuration Management and performed in accordance with the QAP-SI series procedures.

An allowance for calculational bias and experimental uncertainties in criticality benchmark calculations must be made per the requirements listed in Section 4.2. Forty-seven criticality benchmark calculations representative for research reactor fuel were run based on reviewed experiments (reference 21). The sum of bias and uncertainty is less than 0.02 in  $k_{eff}$  for all cases (reference 22). One hundred nineteen highly enriched uranium (HEU) nitrate solution experiments in various configurations including no reflection, water (polyethylene) reflection, concrete reflection, boron absorber, gadolinium absorber, aluminum containers, stainless steel containers, single units, and arrays were run (reference 23). The average  $k_{eff}$  for these cases minus the average statistical uncertainty is over 1.0 although the values for a few cases fall below 1.0. The worst experimental uncertainty is 1.5% and is for a set utilizing gadolinium. The bias and uncertainty value was conservatively rounded up to 0.02  $k_{eff}$  for all homogeneous cases to account for geometry variations and material combinations not explicitly covered in the available criticality benchmark cases.

Concentrations of  $^{235}\text{U}$  and absorbers are considered when evaluating whether benchmarks are similar to or bound the cases documented in this report. In addition, two spectrum indexes are used in evaluating whether benchmarks are similar to or bound the cases documented in this report in regards to the neutron spectrum. These two indexes are the  $\text{H}/^{235}\text{U}$  ratio and the average energy of the neutron causing fission (AENCF). The  $\text{H}/^{235}\text{U}$  ratio is simply the number density for hydrogen divided by that for  $^{235}\text{U}$  in the region containing  $^{235}\text{U}$ . The AENCF is the energy per source particle lost to fission divided by the weight per source neutron lost to fission from the "problem summary section" of an MCNP output. The  $\text{H}/^{235}\text{U}$  ratio and AENCF determined for cases documented in this report were compared to those values for benchmark cases (reference 23); the values for the benchmark cases were found to bound those for the cases in this report.

In this study, EQ3/6 (reference 24) was used to provide:

- 1) a general overview of the nature of chemical reactions to be expected,

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

- 2) the degradation products likely to result from corrosion of the waste forms and canisters, and
- 3) an indication of the minerals, and their amounts, likely to precipitate in the various geologic environments expected to precipitate within the WP.

The programs have not been used outside the range of parameters for which they have been verified. The EQ3/6 calculations reported in this document used version 7.0 of the code and were executed on the Hewlett-Packard 9000 Series 735 workstation.

The EQ3/6 (reference 24) package has been verified by its present custodian, Lawrence Livermore National Laboratory, but it has not been qualified under the Management and Operating Contractor Quality Administrative Procedure (M&O QAP). Therefore all the results are considered TBV with respect to any CRWMS design supporting construction, fabrication, or procurement.

## **5.2 Software Routines**

Microsoft Excel 97 spreadsheets (considered "Software Routines" under the QAP-SI series procedures) were used for simple calculations as documented in the QAP-3-9 Design Analyses which support this technical report. Microsoft Excel 97 was executed on an IBM PC compatible personal computer to provide data manipulation for the analyses.

The following software routines were developed specifically for this study for the purpose of facilitating the setup and execution of successive cases of EQ6, by transforming the output of one case to the input of the following case: bldinput.bat, bldinput.c, nxtinput.bat, and nxtinput.c. An individual EQ6 run diluted the solution constituents to reflect the inflow of fresh water and the routines periodically remove water and solutes corresponding to the inflow. These routines were verified by visual inspection in accordance with QAP-SI-0, 5.3.2C, by an individual independent of the person doing the original development in accordance with QAP-SI-0, 5.3.2B, and are documented in reference 25, in accordance with QAP-SI-0, 5.3.2D.

The C program pitgen.c was developed for the cutout analysis done in reference 25, and summarized for this document in Section 6.4.4.2. The program does the following:

- 1) generates a rectangular array of square locations on a rectangular plate,
- 2) randomly selects, from this array, the locations for the occurrence of pits, and
- 3) after each of a specified number of pits is generated, scans the array to detect the areas which are completely encircled by pits, defines these areas as cutouts, and counts the area (number of square locations) enclosed in the cutouts.

This program was verified by visual inspection in accordance with QAP-SI-0, 5.3.2C, by an individual independent of the person doing the original development in accordance with QAP-SI-0, 5.3.2B, and is documented in reference 25, in accordance with QAP-SI-0, 5.3.2D.

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

### **6. Design Analysis**

#### **6.1 Introduction**

This section describes the evaluations of degraded mode criticality for the MIT and ORR SNF. The exposition of these evaluations follows the methodology described in Section 3.

The scenarios that could result in the accumulation of a critical mass of uranium are described in Section 6.2; these results are presented primarily in terms of intermediate and final geometries of waste forms and the degradation products, particularly uranium and the hydrated clay which serves as the primary moderator. Section 6.3 summarizes, from reference 25, Section 7.2 and 7.3, the geochemistry calculations leading to compositions of solids found in the final configurations. Section 6.4 summarizes the final configurations with particular emphasis on the possibilities for separation of uranium from the neutron absorber criticality control material, summarized from reference 24, Section 7.4.

Section 6.5 describes MCNP models and the results of the MCNP calculations on the models; this section is also a summary of more detailed results in reference 35 Sections 7.2 and 7.3. Parametric/sensitivity comparisons of the criticality results, with respect to changes in the most uncertain parameters, are given in Section 6.6. A very conservative estimate of probability of criticality is given in Section 6.7, for comparison of alternatives only.

#### **6.2 Scenario Generation**

An overview of the scenario generation process is given by the flowchart in Figure 6.2-1.

This figure has three lower branches from a single stem at the top. This single stem represents the processes that are necessary for all scenarios that could lead to criticality, as already identified in Section 3.1. The three lower branches lead to final configurations with the uranium in the following locations:

- 1) in the bottom of the waste package,
- 2) on top of a clay layer filling most of the waste package, and
- 3) removed from the waste package.

Only the first two branches can support criticality inside the waste package.

The intact configuration, from which all scenarios start, is shown in Figure 6.2-2. The HLW canisters are shown as having settled into the lowest gravitational state; the design may ultimately specify that there be some basket structure to maintain them in a more nearly symmetrical geometry.

Two different possibilities for the initial stages of degradation are shown in Figures 6.2-3a and 6.2-3b, for the alternative possibilities of:

---

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

- 1) no early holes in the bottom of the waste package, and
- 2) an early hole large enough to drain all of the water and some of the clay, respectively.

The initial degradation with no early holes in the waste package bottom leads to the intermediate configurations shown in Figures 6.2-4, 6.2-5, and 6.2-6, which culminate in a layer of uranium mixed with clay at the bottom of the waste package. This sequence corresponds to the leftmost branch in the flowchart.

The initial degradation with a hole of the type illustrated in Figure 6.2-3b will lead to the sequence of configurations shown in Figures 6.2-7 and 6.2-8.

If the waste package bottom is breached, the flushing action for removing subsequent degradation products is simple flow-through; if the waste package bottom is not breached, or if any holes in the bottom are plugged with clay, the flushing action is maintained by flow near the water surface fed by thermally driven circulation within the waste package. This flushing is at a volumetric rate equal to the imputed inflow rate (the product of the drip rate multiplied by the horizontal cross section area).

The sequences illustrated in Figures 6.2-2 through 6.2-8 focus on the configurations of the HLW canisters and contents in relation to the DOE-SNF canister within the waste package. Variations in the configuration within the DOE-SNF canister will exist also. Initially, the DOE SNF and basket will be intact as shown in Figure 6.2-2. The fuel will then degrade within each basket cell and could concentrate as a layer on the bottom plate of the cell or remain dispersed throughout the cell. The Phase I results (reference 2) indicated that the degraded fuel was most reactive when it was dispersed throughout the basket cell; therefore, the settling configuration is not considered further in this analysis. As the basket degrades the components could settle as shown in Figure 6.2-9 or the degradation products could be hydrated and remain dispersed within the basket as shown in Figure 6.2-5. The focus of the analysis for the degraded basket configuration is on the dispersed case shown in Figure 6.2-5 because it is the most reactive configuration. The settled configuration shown in Figure 6.2-9 is addressed for completeness in the criticality analysis in Section 6.5.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**


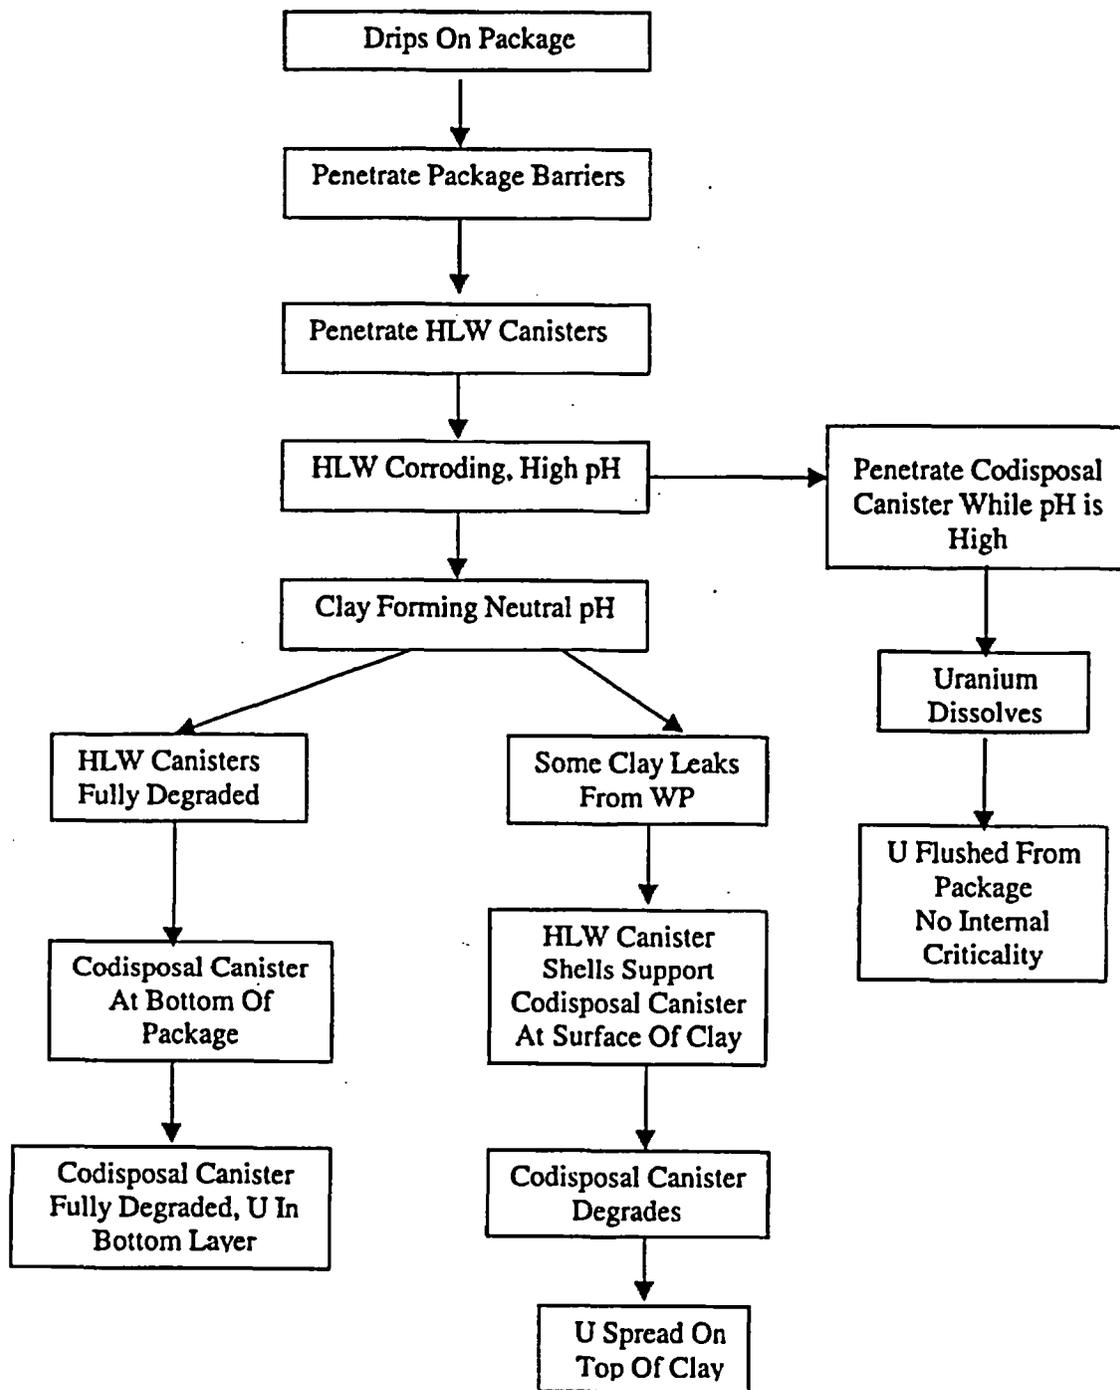



Figure 6.2-1. Internal Degradation Scenarios for Al-Clad DOE SNF

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

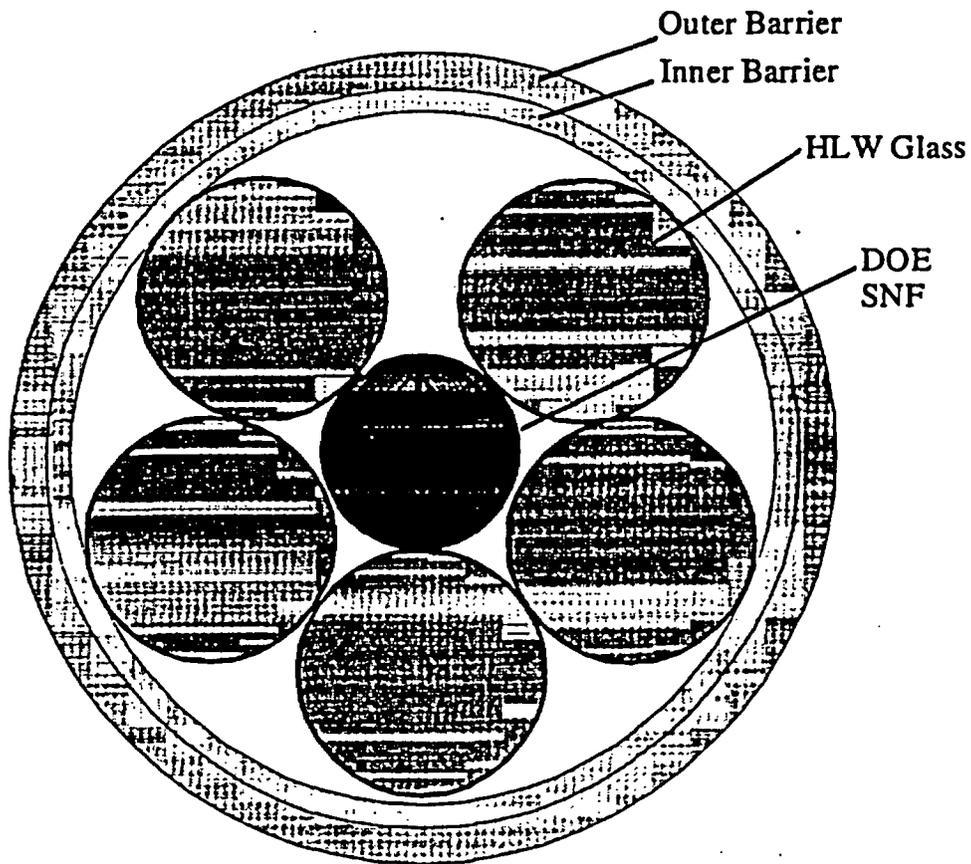


**Figure 6.2-2. Cross Section of Waste Package Showing the DOE SNF Canister in the Center  
Surrounded by HLW Canisters**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

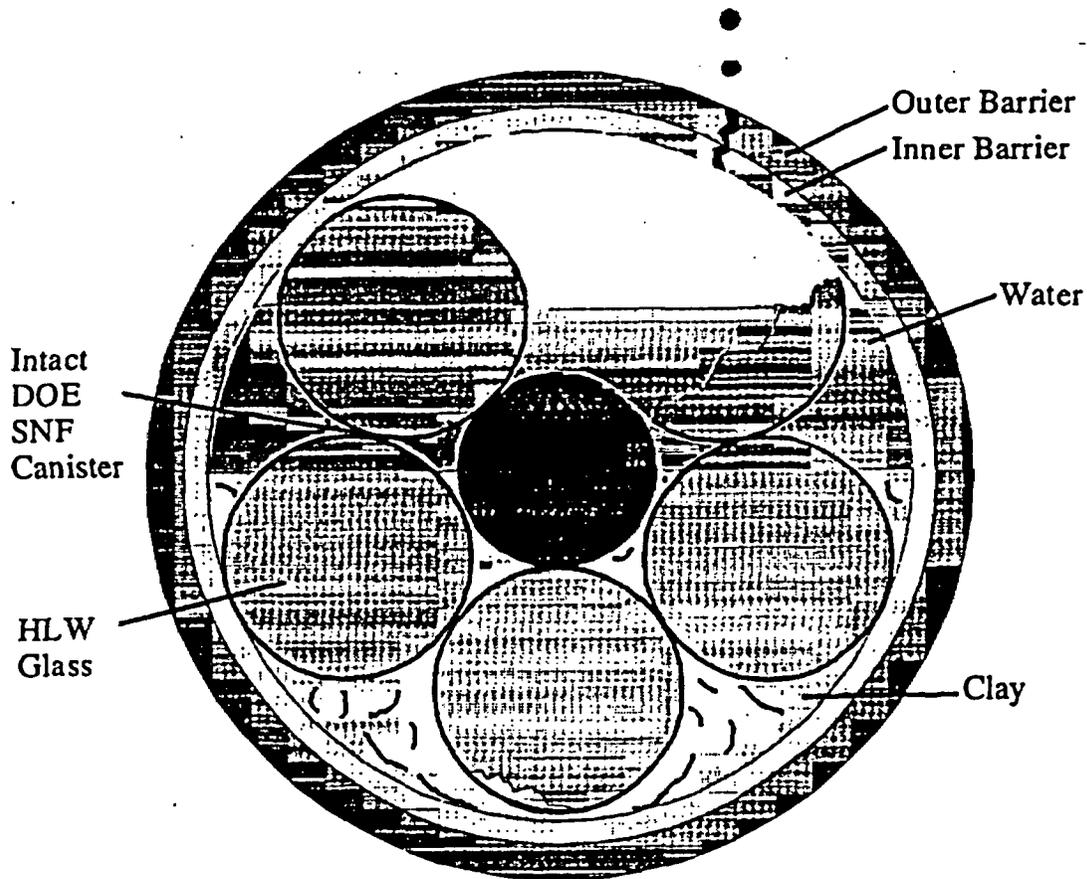


**Figure 6.2-3a. Early Stage of Degradation; No Holes in the Bottom; Some Ponding Water; No Penetration of the DOE SNF Canister; Most of the HLW Canister Degraded**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

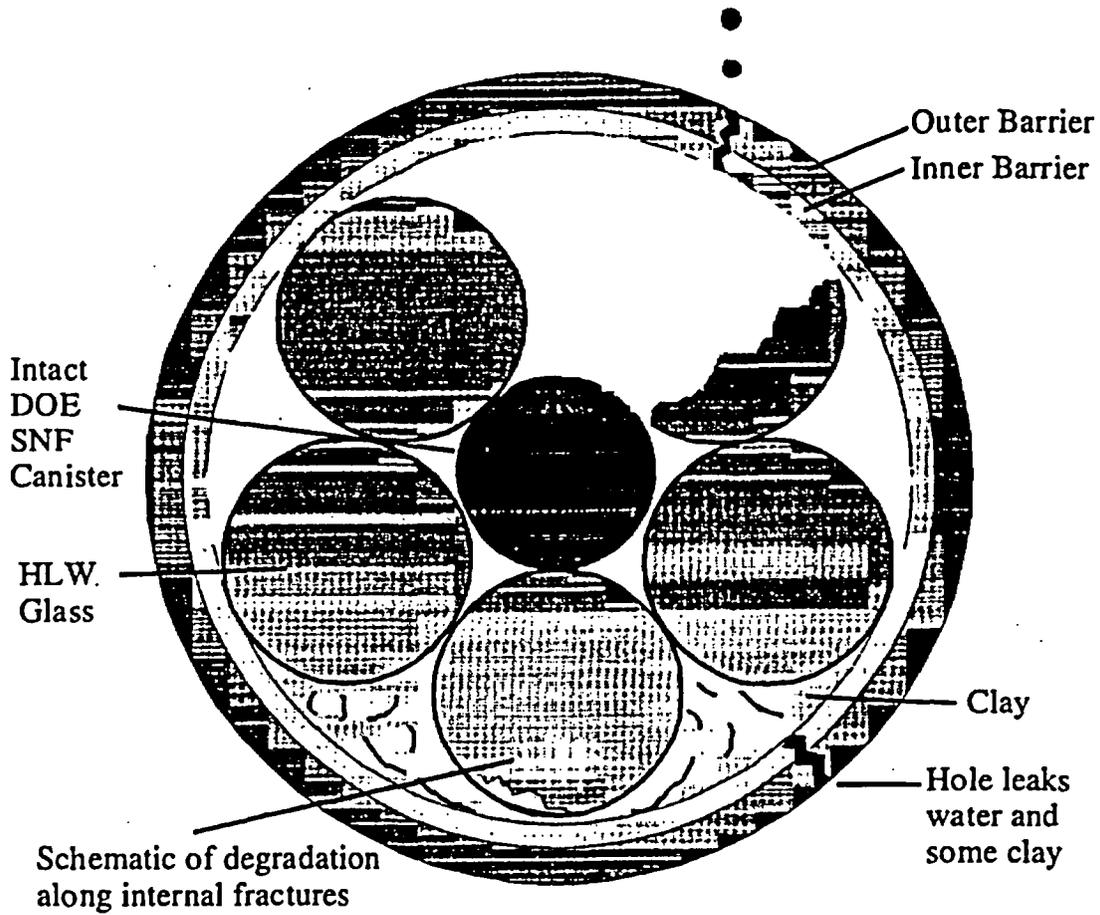


**Figure 6.2-3b. Alternative Early Stage of Degradation; Hole in the Bottom Which Drains Water and Some of the Clay; No Penetration of the DOE SNF Canister**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

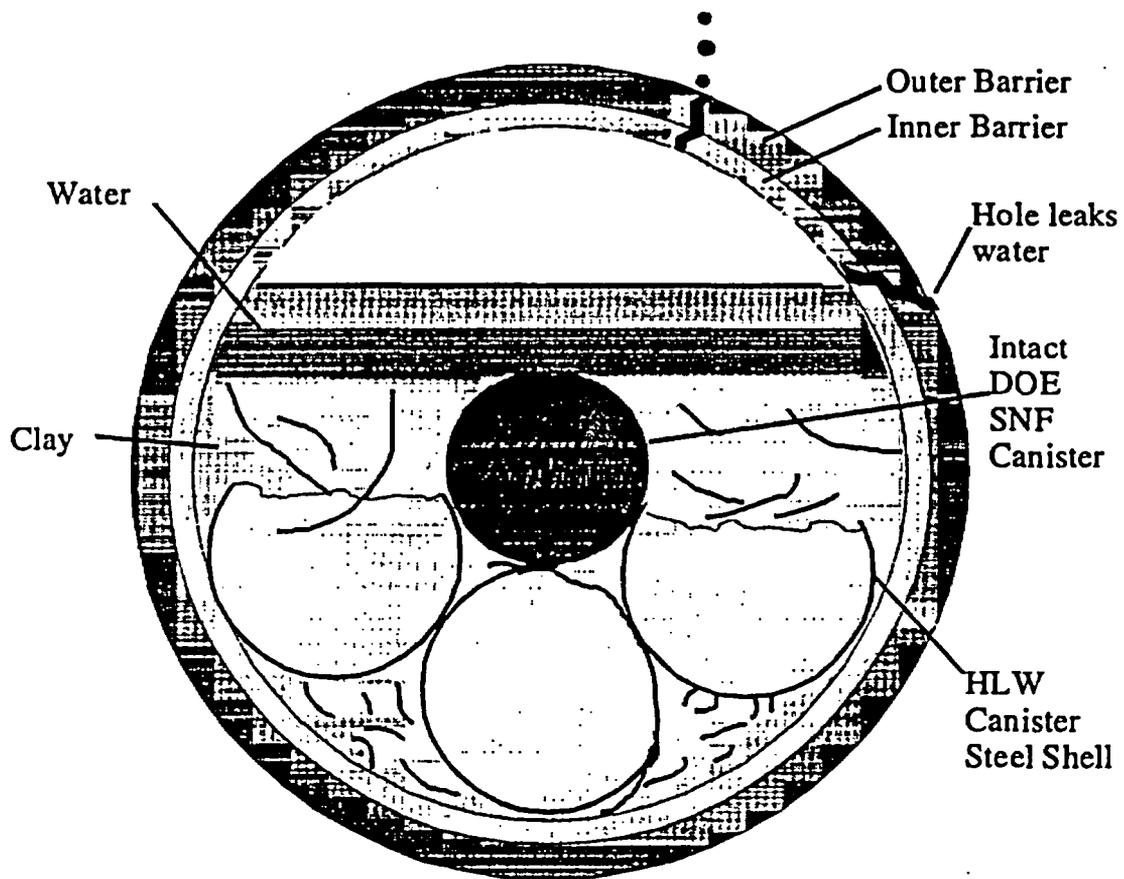


**Figure 6.2-4. HLW Glass Completely Degraded; But Some of the HLW Canister Steel Shells Intact and Supporting the Still-Intact DOE SNF Canister**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

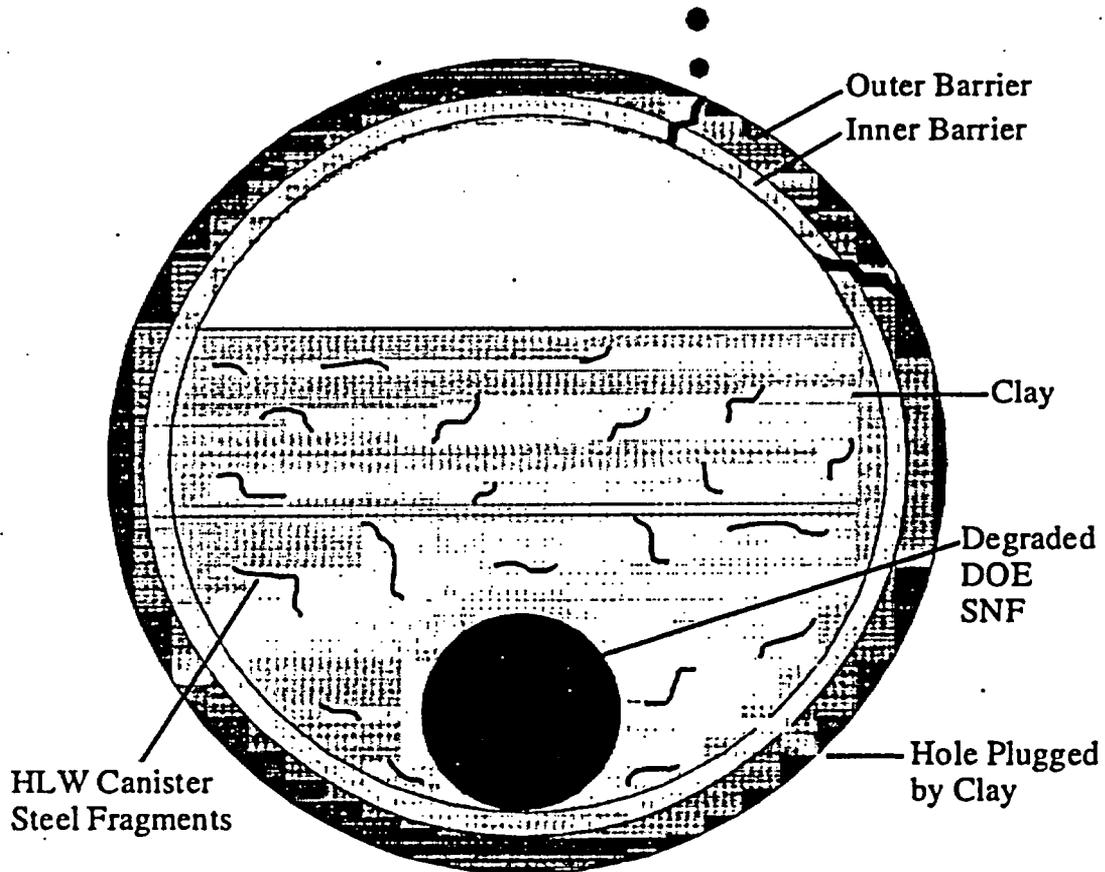


**Figure 6.2-5. Further Degradation Following Figure 6.2-4 Configuration; All Steel Shells have Broken, But some Fragments Remain Uncorroded; DOE SNF Canister Breached and Basket Degraded**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

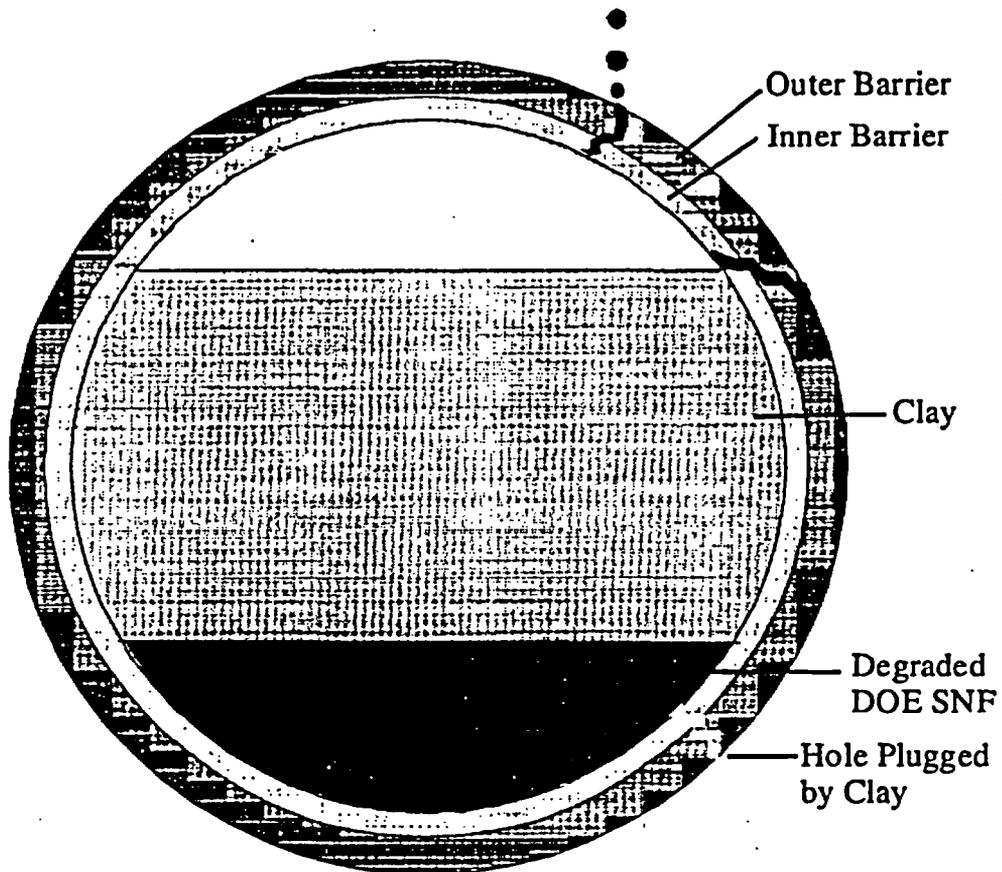


**Figure 6.2-6. Further Degradation Following Figure 6.2-5 Configuration; All Canister Contents and Shells have Completely Degraded**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

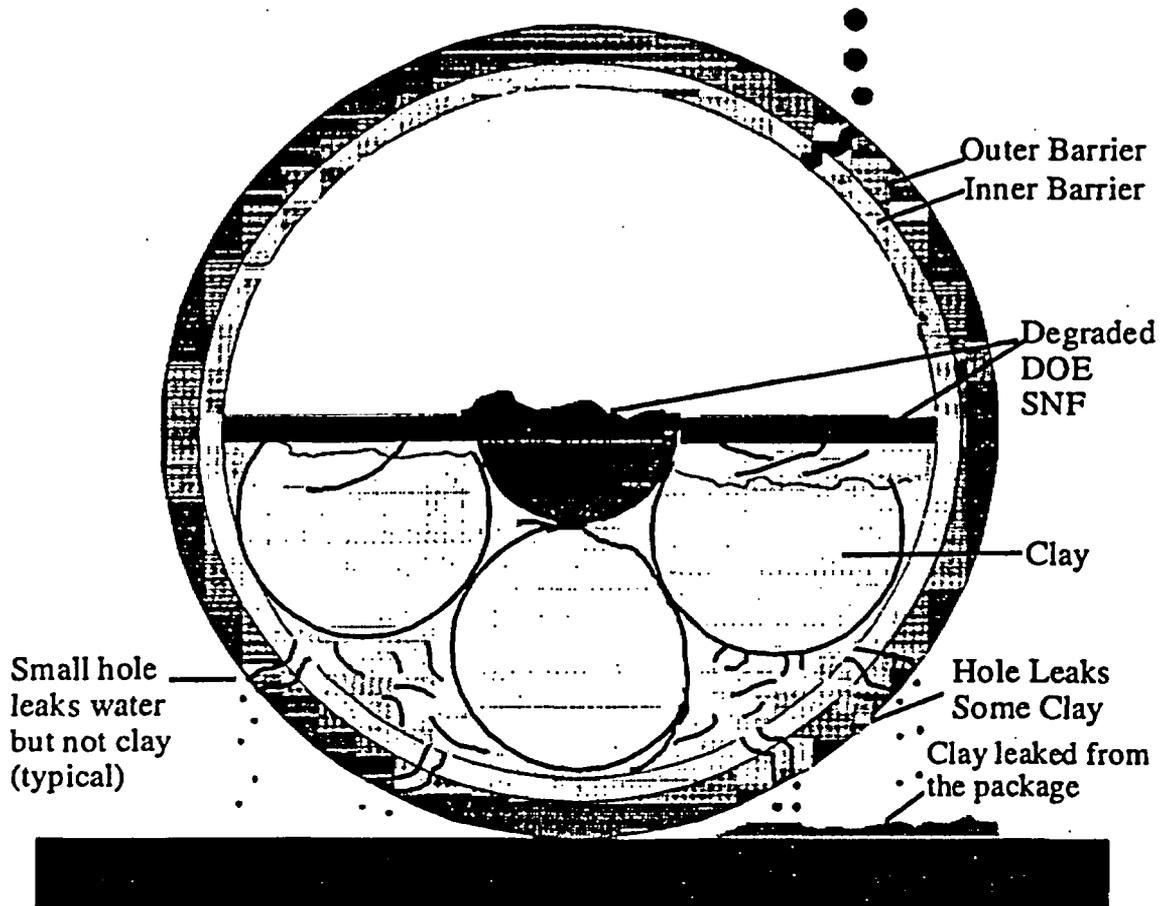

**Figure 6.2-7. Further Degradation Following Figure 6.2-4 Configuration; DOE SNF Canister Mostly Degraded but Still Supported on the Steel Shells of HLW Canisters; Holes in the Bottom have Drained Some Clay**

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

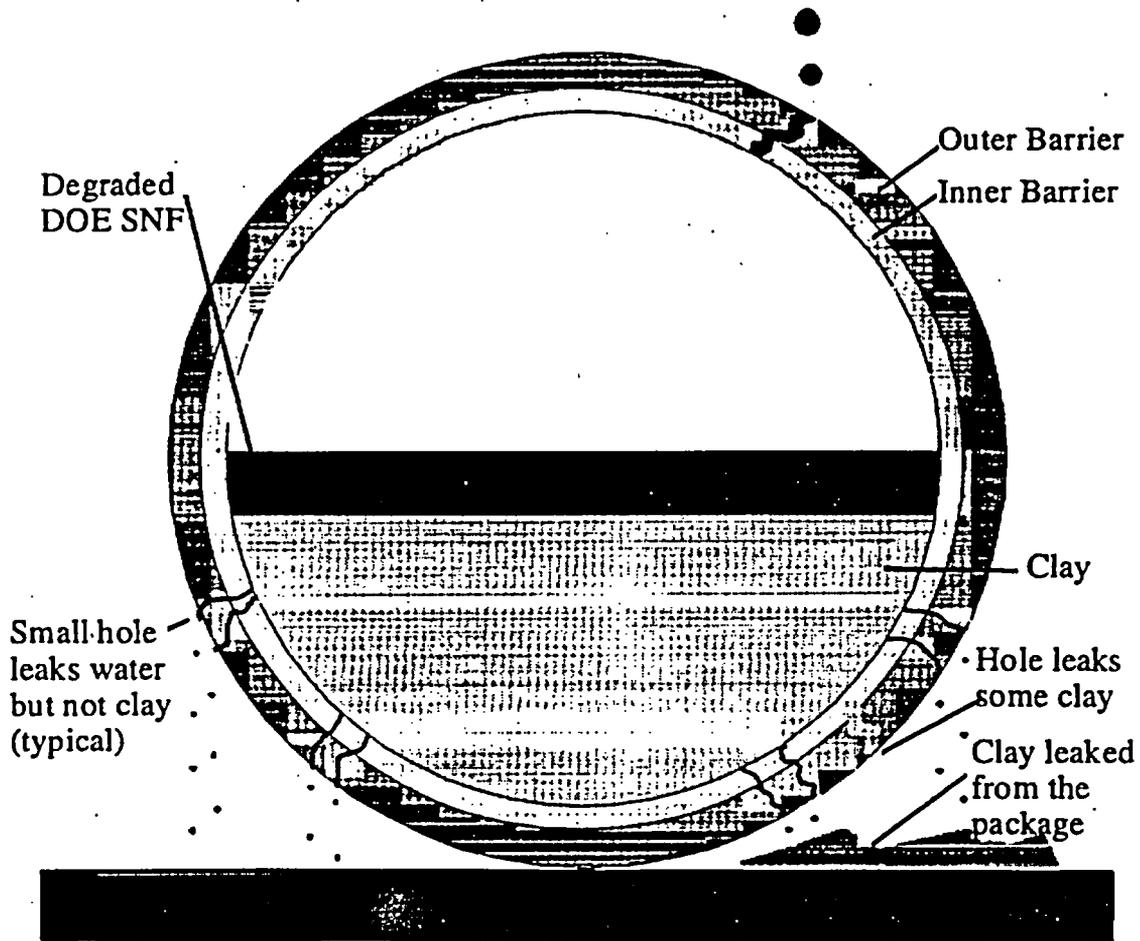

**Figure 6.2-8. Further Degradation Following Figure 6.2-7 Configuration; All Canister Contents and Shells have Completely Degraded**

Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality

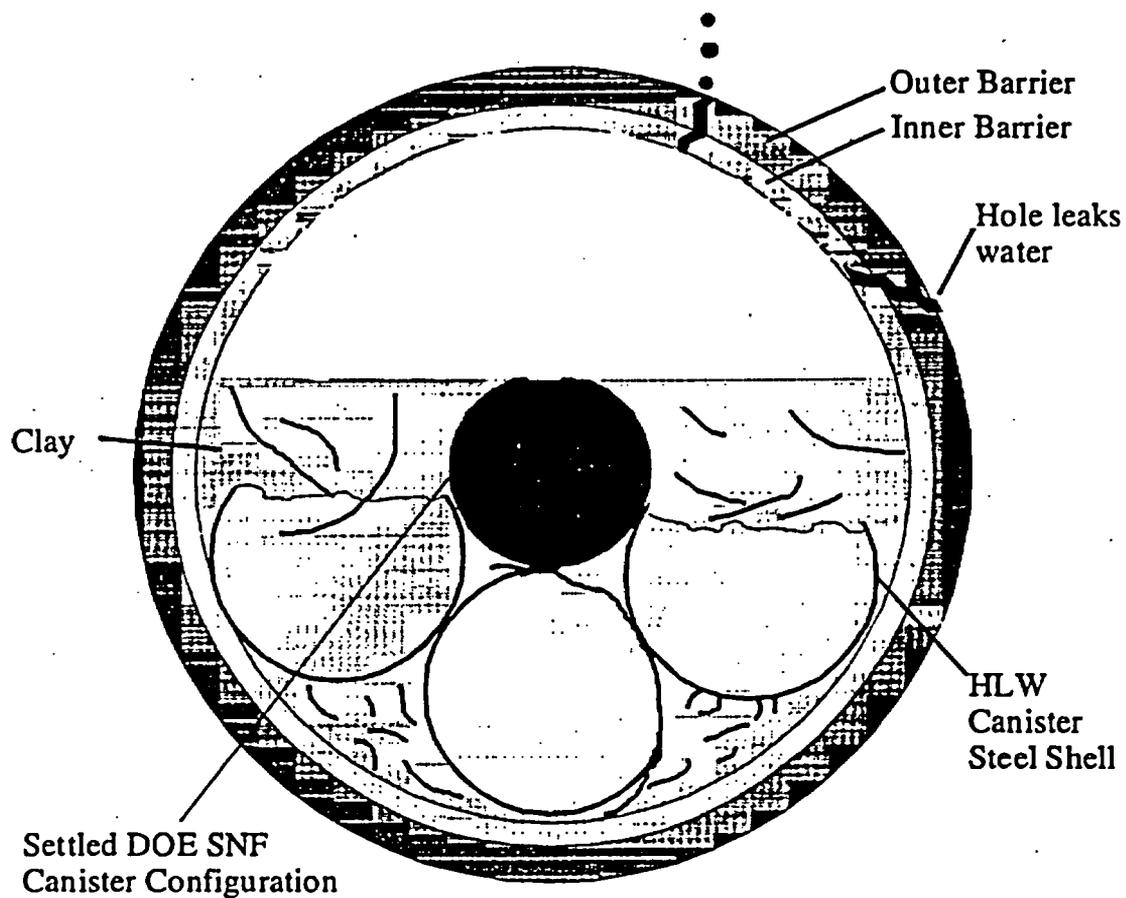


Figure 6.2-9. Extreme Stratification within the DOE SNF Canister: 78% of  $^{235}\text{U}$  in Lower Layer and 22% in Upper Layer

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**6.3 Geochemistry Calculations**

The degradation environment, in turn, is partly determined by other processes which are taking place simultaneously. In particular, the HLW glass degradation products will cause the pH to increase. If the SNF degrades in a high pH environment, most of the released uranium could go directly into solution. In contrast, when the SNF degrades in a near-neutral pH environment (characteristic of inflowing J-13 water) most of the released uranium will convert directly into precipitated solids. To provide some guidance in determining the appropriate environment, the estimated periods of degradation for the various basket materials, which were used for most of the computer simulations, are given in Table 6.3-1. References for the data are given in reference 25.

**Table 6.3-1. Typical Corrosion Periods/Lifetimes of Materials which Affect Criticality**

Material	Volume, cm <sup>3</sup>	Mass, g	Surface Area, cm <sup>2</sup>	Degradation Rate, gm/cm <sup>2</sup> /sec	Duration of Degradation, years since exposure	Total Lifetime <sup>A</sup> since WP Emplacement, yrs	Total Lifetime <sup>B</sup> Since WP Emplacement, yrs
316 SS	6.68e+04	5.31e+05	1.62e+05	2.52e-12	4.12e+04	4.62e+04	5.10e+04
XM-19	6.05e+04	4.77e+05	7.00e+04	3.76e-12	5.74e+04	6.24e+04	N.A. <sup>C</sup>
Al	4.04e+04	1.09e+05	3.65e+04	5.81e-09	1.63e+01	5.02e+03	9.78e+03
Fuel matrix	2.34e+04	5.12e+04	6.23e+05	2.60e-10	1.00e+01	5.01e+03	9.77e+03
304L	3.66e+05	2.89e+06	4.54e+05	3.76e-12	5.36e+04	5.86e+04	N.A.
Alloy 625	4.05e+05	3.42e+06	1.88e+05	2.66e-13	2.16e+06	2.17e+06	N.A.
Borated stainless steel	1.37e+04	1.06e+05	6.74e+04	1.97e-11	2.53e+03	7.53e+03	N.A.
A516 steel	1.37e+04	1.06e+05	6.74e+04	5.52e-10	9.03e+01	N.A.	9.85e+03
HLW glass	2.42e+06	6.89e+06	5.65e+06	3.23e-11	1.20e+03	6.20e+03	N.A.
HLW glass	2.42e+06	6.89e+06	5.65e+06	2.31e-13	1.67e+05	N.A.	1.77e+05

<sup>A</sup> Breach of the DOE SNF canister is assumed to occur 1000 years after exposure, which in turn is assumed to occur following breach of Alloy 625 at 4000 years after emplacement of the waste package. Thus, the entry in the 7th column, where applicable, is 5000 years greater than the time entered in the 6th column.

<sup>B</sup> Analyses of alternative corrosion periods. Breach of the DOE SNF canister is assumed to occur following degradation of the HLW and flushing out of the soluble products at 5756 years after breach of Alloy 625 at 4000 years after emplacement of the waste package. Thus, the entry in the 8th column, where applicable, is 9756 years greater than the time entered in the 6th column.

<sup>C</sup> N.A. - Not Applicable

For the geochemistry calculations it was assumed that, following breach of the outer barriers, the waste package is completely filled with water resembling that in well J-13 (Assumption 4.3.1 of reference 25). For some of the early scenarios shown in Section 6.2, which show some of the material uncovered, this represents a conservative simplification.

This assumption implies the further assumption that the water dripping into the waste package will not have been significantly influenced by interaction with the drift liner (Assumption 4.3.15).

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 6.3.1 Degradation of the HLW Glass

The water chemistry and degradation products generated during the HLW degradation phase were estimated with EQ6; the details are reported in reference 25. As indicated in Table 6.3-1, the duration of this degradation phase will be upwards of 1200 years, depending on the number of HLW canisters which are wetted simultaneously, and on the long-term dissolution rate of the HLW glass. The most immediately important parameter of this degradation period is pH, which the EQ6 modeling shows to have a time average ranging from 9.7 to 10.0, for drip rates ranging from 10.0 to 0.1 mm/yr. For these nominal runs, the partial pressure of CO<sub>2</sub> was taken to be atmospheric. For reasons given in reference 25, Assumption 4.3.12, uncertainty surrounding this parameter would permit partial pressures of CO<sub>2</sub> ten times atmospheric, which would lead to the slightly lower average pH range of 9.2 to 9.6.

The range of drip rates used here is the same as the range of infiltration rates given in TSPA-95 (reference 12); the range is lower than that given in the CDA (reference 15). The justification for this choice is given in Assumption 4.3.14, together with an explanation of the difference between drip rate and infiltration rate.

For purposes of verifying the general results the EQ6 calculations, it should be noted that the indicated EQ6 outputs for the degradation of HLW glass indicate the production mostly of smectite clays, whereas the experiments show clay and other silicate minerals forming after a considerable (a few years) initial delay. This comparison shows that the modeled and experimental results (see reference 25) differ only in respect to the model predicting immediate precipitation of secondary phases and the experiments finding a few years delay in the formation of very similar products. The differences in the products are small; in other words, the same elements are predicted to precipitate, and in nearly the same proportions. In the time frames of interest to the present analysis, a delay of a few years in the beginning of precipitation, as compared to model results, is of no consequence. This result is found to be relatively independent of whether degradation of the SNF is taking place simultaneously or following the degradation of the HLW and its corrosion products. This accords with expectations, since the SNF degradation products are only a small fraction of that of the HLW.

The geochemical simulation predicts the precipitation of much of the boron released from the glass as borax, which is well known to be moderately soluble in water. To evaluate the reliability of the simulation with respect to boron, a separate case was run for just solid borax plus pure water for comparison with the measured solubilities for this mineral. This yielded calculated results within 35% of the reported experimental results which was considered reasonable agreement given the uncertainty in activity coefficients (reference 25).

### 6.3.2 Degradation Products of Aluminum and Uranium Aluminide

The following is a summary of the discussion in reference 25, Section 6.1, relating to the validation of the EQ6 methodology for the degradation of aluminum containing solids. Experiments summarized in reference 26 show that, in tests lasting up to 400 hours, alkali feldspars (a common aluminum-containing mineral) first degrade to a gelatinous alumina layer, followed by crystallization to gibbsite and later to kaolinite in presence of the silica released from

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

the feldspar. These results lead to the conclusion that aluminum in the presence of J-13 water, which is high in silica, will produce crystalline hydroxides or oxides of aluminum or some clay mineral, as is appropriate to the chemistry of the system. The computer simulations show that initially most of the aluminum degrades to a smectite clay.

**6.3.2.1 SNF Degradation in a High pH Environment: Removal of Uranium and Boron**

The modeling results indicate that the uranium for this case initially mostly precipitates as the mineral soddyite,  $(\text{UO}_2)_2\text{SiO}_4 \cdot 2\text{H}_2\text{O}$ . At high pH, the uranium subsequently dissolves as a uranyl carbonate complex and is flushed from the waste package. This simple observation is verified by EQ6 calculations described in detail in reference 25. These are summarized in Table 6.3-2, which shows the time history of both uranium and boron concentrations in the waste package for an drip rate of 5 mm/yr. The calculations are also based on a fuel dissolution rate consistent with a lifetime of 10 years (Assumption3). Decreasing the fuel dissolution rate by as much as a factor of 50 would not change the overall results significantly. Most of both the uranium and boron come from the HLW glass.

Table 6.3-2. Selected Time History for Simultaneous Degradation of SNF and HLW  
(Initially High pH Environment)

Time, yrs	pH	Total U in solution, kg	<sup>235</sup> U in solution, kg	Total U in WP, kg	<sup>235</sup> U in WP, kg	Boron in solution, kg	Boron total in WP, kg
0	7.6	Trace	0	162	35.5	Trace	221
12.5	9.2	2.3	2.3	162	35.3	2.1	221
310	9.2	27.6	14.3	122	14.3	3.6	210
1001	9.9	13.5	3.38	34.2	3.4	7.3	177
1207	9.9	12.3	2.69	12.3	2.7	6.7	166
1999	8.8	0.03	5.6E-03	2.6E-02	5.6E-03	6.8	125
2996	8.8	1.1E-05	2.4E-06	1.1E-05	2.4E-06	7.2	67
4008	8.8	4.3E-09	9.4E-10	4.3E-09	9.4E-10	6.3	7.4
5006	7.8	1.9E-12	4.2E-13	1.9E-12	4.2E-13	3.4E-03	3.4E-03
6003	7.6	8.6E-16	1.9E-16	8.6E-16	1.9E-16	3.9E-04	3.9E-04

The following observations on these results are significant:

- The high pH phase is seen to last 1207 years, which corresponds to the minimum duration of the HLW glass degradation phase, as discussed in Section 6.3.1.
- Most of the uranium released from the waste initially precipitates as soddyite, which has redissolved by 310 years.
- The degradation of the HLW glass will release boron at a rate which initially overloads the solubility so much of it will precipitate as borax, but most of the borax will redissolve by 3992 years.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

- Most of the boron in the waste package is from the HLW glass (borosilicate). Only 1.37 kg is contributed by borated stainless steel.
- Almost all of the boron is gone at 5000 years; the boron from the borated stainless steel has been removed before 2996 years, but at only 1.37 kg total, it is too small to notice. A more specific view of the effects of borated stainless steel degradation is given in Table 6.3-3.
- At 4008 years, nearly all the boron left in the waste package is in solution, only waiting to be flushed out by the very slow drip rate (0.1 mm/yr). At 5006 years all the remaining boron is in solution.

**6.3.2.2 SNF Degradation in a Neutral pH Environment: Removal of Gd**

In this scenario, the uranium will be insoluble and remain in the DOE SNF canister or in the waste package. Initially the uranium precipitates out as  $UO_3 \cdot 2H_2O$  and slowly converts to soddyite as a function of the silicon availability. The principal criticality related chemistry issue is the removal of the neutron absorber. The removal of criticality control boron has already been touched upon in Section 6.3.2.1 above, and the worst case boron removal will be described in Section 6.7.

This section summarizes the chemistry leading to the possible removal of gadolinium, which has been described in greater detail in reference 25 (Section 7.2.2.2). This possibility arises because one of the principal Gd containing compounds,  $GdCO_3$ , is soluble at low pH (less than 5.8), which condition can be produced by the oxidation of chromium to chromate in the corrosion of stainless steel. If, however, there is sufficient phosphate in the system,  $GdPO_4$  will precipitate. This solid is almost completely insoluble at the lowest pH which could occur in the waste package.

If, on the other hand, there is no phosphate available for combination with the Gd, a pH of 5.8 will result in sufficient solubility of the Gd to permit flushing action to remove most of it from the waste package. This possibility is discussed quantitatively in Section 6.3.3.

**6.3.3 Worst Case Removal of Boron**

Since the high solubility of boron is well known, and since the reliance on borated stainless steel for criticality control is with respect to the slow corrosion of the stainless steel, only a few EQ6 runs were used to verify the rapid removal of the boron after the dissolution of the stainless steel basket. Those cases are described in detail in reference 25 and are summarized in Table 6.3-3. The time in this table is with respect to the breach of the waste package, and the time of the first line corresponds to the breach of the DOE SNF canister, which is the start of corrosion of the borated stainless steel.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**Table 6.3-3. Selected Time History of Boron Concentration in a Codisposal Waste Package  
Relying on Borated Stainless Steel for Criticality Control**

Time, yrs	pH	Uranium in solution, ppm	Uranium total in WP, kg	Boron in solution, ppm	Boron total In WP, kg
5755	7.75	2.1E-12	35.5	1.4E-01	1.37
5813	7.12	5.6E-03	35.5	8.38	1.37
6531	6.9	3.2E-03	35.5	22.5	1.02

The following observations on this table are significant:

- The small time difference between the first two lines has not permitted the reaction to show significant degradation of the borated stainless steel.
- The amount of boron remaining for the third line, 1.02 kg is approximately equal to a straight line decline from the initial value at 5755 years to zero 2500 years later (which would equal 0.93 kg).

The relatively rapid decline of the boron concentration with time shows that the borated stainless steel plates are not a completely effective criticality control technique, and that it will be necessary to evaluate less soluble neutron absorbers.

#### 6.3.4 Worst Case Removal of Gadolinium

The removal rate of gadolinium depends on its solubility, which in turn depends strongly on the pH and on certain ionic species that affect the solubility, particularly phosphate, fluoride, and carbonate. Over the pH range of interest, the pH strongly influences the concentrations of the free phosphate,  $\text{PO}_4^{3-}$ , and carbonate,  $\text{CO}_3^{2-}$ , i.e., phosphate or carbonate not bound to hydrogen or other ions as in  $\text{HPO}_4^{2-}$  and  $\text{HCO}_3^-$ . The following subsections show how the presence of sufficient phosphate will effect the solubility of Gd, and its long-term removal from the waste package.

##### 6.3.4.1 Gadolinium Added as $\text{Gd}_2\text{O}_3$

The simplest form for adding Gd is  $\text{Gd}_2\text{O}_3$ . However, this form must still be evaluated with respect to long term Gd solubility. The EQ6 analyses of this issue given in reference 25 show that under conditions of low pH (5.8), the amount of Gd retained in the waste package over the long term will be proportional to the amount of phosphate available to react with Gd. In particular, it is shown in Table 7.3-2 of reference 25 that even a few hundred grams of phosphate available to react with the Gd, when added to the Gd naturally present in the J-13 water, will be sufficient to maintain over 300 grams of Gd in the waste package for up to 60,000 years (provided the drip rate is only 0.1 mm/yr). Since 60,000 years is the maximum likely duration of stainless steel corrosion, which is also the duration of any acidic water caused by the complete chromate oxidation mechanism, the few hundred grams of phosphate will keep a like amount of Gd insoluble indefinitely.

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

However, there are several reasons why this amount of natural phosphate will be insufficient to retain the required amount of Gd:

- If the drip rate is significantly greater than 0.1 mm/yr, even the relatively small solubility of the Gd will permit flushing much of the Gd required for criticality control before the end of the stainless steel corrosion period.
- If the phosphate present in HLW glass and in steel forms some insoluble compound immediately upon degradation of those forms, it will be unable to react with the Gd to form insoluble  $GdPO_4$ .
- Even if the phosphate released from HLW glass or steel becomes soluble, it may be flushed from the waste package before it can react with the Gd.

If the phosphate form is used for implementing criticality control Gd in the DOE SNF canister, the problem of possible loss from the waste package will not arise, as is explained in Section 6.3.4.2.

### 6.3.4.2 Gadolinium Added as $GdPO_4$

The EQ6 cases with Gd added as phosphate, rather than as oxide, are summarized in reference 25, Section 7.3.2.2. Even at  $pH=5.79$  the solubility of Gd in the presence of solid  $GdPO_4$  is only  $0.2 \times 10^{-4}$  ppm. At the relatively high drip rate of 10 mm/yr, there can be 15 waste package flushings in 1000 years, so it will take  $2000/15 = 133 \times 1000$  years to remove only 1 gram of Gd. Therefore, it will take over 1 million years to remove a significant amount of Gd from the waste package. This estimate of Gd loss is consistent with the EQ6 case reported in Table 7.3-3 of reference 25, which shows much less than 0.1 gram Gd loss in 70,000 years at a drip rate of 0.1 mm/yr.

This low solubility of  $GdPO_4$  is consistent with the natural occurrences of the rare earth phosphates, monazite, and xenotime, which are widely distributed in small amounts in many rocks, indicates that  $GdPO_4$ , once formed, will not quickly be dissolved and transported in natural waters. This greatly bolsters confidence that this form of Gd, if added to a waste package, will persist for many thousands of years. The light rare earths are more concentrated in monazite and the heavy ones more so in xenotime. Both minerals survive for very long times during weathering and erosion as evidenced by their presence in river and beach sands, some reaching concentrations sufficient to serve as ores for the rare earth elements (reference 27, pp. 690-691 and 694-695). This is in keeping with their very low solubilities and their persistence as predicted by the EQ6 modeling.

### 6.3.5 Degradation Products of Uranium Silicide

The Oak Ridge Research reactor uses uranium silicide as the nuclear fuel. No corrosion rates for the uranium silicide are available in the literature. In the absence of such information, and in keeping with thermodynamic stabilities, it was assumed that the silicide would corrode at a rate approximating that for aluminum metal (Assumption 4.3.7 of reference 25). The uranium would react in a similar manner to uranium released from the uranium aluminide, specifically to form soddyite or some other uranyl silicate and, therefore, effectively was modeled by the simulations

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

for that compound. The silicon would oxidize to the tetravalent state and largely precipitate as insoluble silica minerals, such as quartz or chalcedony, and silicates. The amount of silicon in the fuel is small compared to the silica already in the system, arising from the HLW glass and from the rather high concentration in the J-13 water. Thus, in this case the relevant scenario was effectively bounded by the simulations for the uranium aluminide, except for the mass of uranium compared to other components. Consequently, no further modeling was required for this fuel and none was performed.

**6.3.6 Summary of Geochemistry Results for Borated Stainless Steel Neutron Absorber**

The geochemistry analyses for the alternatives using borated stainless steel as the criticality control material are summarized in Table 6.3-4.

Table 6.3-4. Summary of Geochemistry Results for DOE SNF Canister Using Borated Stainless Steel Absorber

Scenario	Removal of U from WP		Removal of B from WP	
	Time Required Since WP Breach, yrs	Cumulative Water Through WP m <sup>3</sup>	Time Required Since WP Breach, yrs	Cumulative Water Through WP, m <sup>3</sup>
Degradation of DOE SNF during degradation of HLW Glass, Degrading HLW Interacts with DOE SNF, Borated Stainless Steel Absorber, 5 mm/yr	2000	54	5000	134
DOE SNF degrades after HLW Glass, Degraded HLW Interacts with DOE SNF, Borated Stainless Steel Absorber, 5 mm/yr	Most Remains as Soddyite at 100,000 years		7000	189

If the degrading DOE SNF is exposed to the high pH solution produced while the HLW glass is degrading, the uranium may be removed from the waste package within 2000 years following breach of the waste package (allowing for breach of the DOE SNF canister within 1000 years following breach of the waste package).

**6.3.7 Summary of Geochemistry Results for Gd Neutron Absorber and Recommended Materials**

The gadolinium geochemistry results also have material selection implications. Unlike boron, gadolinium is basically insoluble, except for pH<6. Therefore, the corrosion resistant properties of stainless steel are not required and the benefits of carbon steel would make it the preferred alternative, not only for carrying the criticality control material (gadolinium), but also for the structural basket. The principal benefits of carbon steel in this regard are the following:

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

- 1) carbon steel has a significantly higher yield strength than stainless steel (260 MPa vs 172 MPa, (references 28 and 29),
- 2) carbon steel will yield a more uniform spatial distribution of iron oxide, because its faster general corrosion rate will result in more iron oxide being released in the initial basket position, rather than after falling to the bottom in plates, as would stainless steel, and
- 3) the production rate of iron oxide from the oxidation of carbon steel more nearly corresponds to the release rate of the uranium aluminide from the SNF.

Table 6.3-5. Summary of Geochemistry Results for DOE SNF Canister Using Gd Absorber

Scenario	Removal of U from WP		Removal of Gd from WP	
	Time Required Since WP Breach, Yrs	Cumulative Water Through WP, m <sup>3</sup>	Time Required Since WP Breach, yrs	Cumulative Water Through WP, m <sup>3</sup>
DOE SNF Degrades after HLW Glass, Degraded HLW Interacts with DOE SNF, Gd <sub>2</sub> O <sub>3</sub> Absorber, 0.1 mm/yr	Most Remains as Soddyite at 100,000 years		Most Remains as GdPO <sub>4</sub> at 100,000 years	
DOE SNF Degrades after HLW Glass, Degraded HLW does not Interact with DOE SNF, Gd <sub>2</sub> O <sub>3</sub> Absorber, 0.1 mm/yr	Most Remains as Soddyite at 100,000 years		20% Remains as GdPO <sub>4</sub> at 60,000 years	33% at 60,000 years
DOE SNF Degrades after HLW Glass, Degraded HLW does not Interact with DOE SNF, GdPO <sub>4</sub> Absorber, 0.1 mm/yr	Most Remains as Soddyite at 100,000 years		Most Remains as GdPO <sub>4</sub> at 100,000 years	

**6.4 Configurations Having Separation Between Uranium and the Neutron Absorber**

This section will summarize the scenarios and configurations likely to result in the separation of uranium from the neutron absorber material. The separations are with respect to the nominal waste package configuration having the following material locations:

- The bulk of the iron is in the structural basket plates.
- The added neutron absorber, boron or gadolinium, is in plates (which may be borated stainless steel or carbon steel, and which may or may not be part of the structural basket).
- The uranium is uniformly distributed in the water in the DOE SNF canister. This is a worst-case representation of the most likely configuration in which the uranium aluminide particles adhere to the surfaces of the remaining basket material. At the maximum degree of hydration possible for the uranium aluminides, adherence could be equivalent to uniform distribution throughout the water, and it is shown in reference 30 that the homogenization throughout the water in the DOE SNF canister is more reactive, with respect to criticality, than is the configuration with the uranium in a narrow layer about the basket plates.

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

### **6.4.1 Separation Mechanisms**

The separations between the uranium from the fuel and the neutron absorber placed in the basket of the DOE SNF canister for criticality control can arise from several mechanisms illustrated by the following:

- The uranium may become soluble and be removed from the waste package. This can only happen if the DOE SNF canister is breached while the HLW glass is degrading and causing a high pH, so that the uranium is sufficiently soluble that most of it is flushed out of the waste package by the action of the water which is causing the degradation of the HLW glass. The parameters of this case are summarized in Table 6.3-1. This case cannot lead to criticality within the waste package, and will, therefore, not be considered further in this study. It is however important for the consideration of the possibility of external criticality, and will be evaluated as part of that future study.
- The absorber may become soluble and be removed from the DOE SNF canister (and subsequently from the waste package), leaving the uranium behind. This is particularly likely for boron once it is released by corrosion of its borated stainless steel carrier matrix (as described in Section 6.3.3), but it is also possible for gadolinium to be removed if the pH becomes low and there is insufficient phosphate to precipitate the bulk of the gadolinium (as described in Section 6.3.4.1). For completeness, the more optimistic possibilities for retention of boron and gadolinium are considered in Sections 6.4.3 and 6.4.4.1, respectively.
- The uranium (which is released by the rapid corrosion of the SNF matrix) can settle to the bottom of the waste package and collect on the lowest available surface, which may be the bottom of the canister for some of the particles, while most of the neutron absorber remains in the undegraded portion of the basket. The maximum amount of separation by this mechanism is discussed in Section 6.4.4.2.
- The uranium may remain distributed throughout the canister while some of the steel breaks from the basket plates (as cutouts caused by pitting corrosion perforating the periphery). This breaking steel could fall into the bottom of the canister together with its complement of gadolinium, thereby taking some of the gadolinium out of the region in which it is most effective in controlling criticality by absorbing neutrons. This mechanism is applied in Section 6.4.4.2.

It should be noted that the neutron absorbers boron and gadolinium represent criticality control alternatives, and it is unlikely that any waste package design would utilize both. Both alternatives rely on the additional criticality control support from the insoluble iron oxide resulting from the corrosion of basket material. This iron oxide criticality control is particularly effective when carbon steel is used as basket material, because carbon steel corrodes much faster than borated stainless steel.

### **6.4.2 Evaluation of Differential Settling of Solid Particles of Different Densities**

This section is a condensation of the description given in Section 7.4.2 of reference 25, Section 7.4. It presents an application of mineral engineering practice to the question of the circumstances under which mineral particles of different sizes can settle at approximately the same velocity. It would be most desirable to calculate the different settling rates of particles of different density, but this requires a knowledge of the viscosity of the medium. As the uranium

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

aluminide degrades, it will initially produce an aluminous gel, which will have a very high, but unknown, viscosity. Later it would form a more crystalline sediment which would have yet another viscosity, most likely higher. Nevertheless, it is possible to utilize equations for hindered settling, which require only the average densities of the medium and its constituents to determine the size ratio of particles for equal settling rates (references 31 and 32, pp.186-198 and pp. 336-342, respectively). Since both objects have the same settling velocity, the effect of viscosity cancels out.

Specifically, the equation:

$$\frac{d_1}{d_2} = \frac{(\rho_2 - \rho_s)^{1/2}}{(\rho_1 - \rho_s)^{1/2}}$$

(where  $d_1$  and  $d_2$  refer to the diameter of particles of types 1 and 2, respectively;  $\rho_1$  and  $\rho_2$  refer to the densities of the particles, and  $\rho_s$  refers to the effective density of the slurry or suspension) gives the ratio of diameters for equal rates of settling of the particles (references 31 and 32, p. 192, equation VIII.31, and p. 338, equation 9.9, respectively). Whereas both the size and shape of the particles that will be produced are unknown, it seems certain that the sizes will be in the colloidal range, in view of the initial production of gelatinous alumina and generally fine grain size of individual particles in rust, and it is assumed that the shapes will be sufficiently similar that the shape effect will be small (Assumption 4.3.24 of reference 25). Details of the calculations are given in Attachment IV of reference 25.

At a water volume fraction of 0.6 with no admixed goethite (which contains the iron), the diameter ratio for gibbsite (which contains the aluminum) versus soddyite (which contains the uranium) is about 2, and at a volume fraction of 0.9 the diameter ratio is approximately 1.7. With admixed goethite and a volume fraction of 0.6, the diameter ratio for gibbsite versus soddyite is about 2.5 and for goethite versus soddyite is about 1.1; at a volume fraction of 0.9 these ratios are about 1.1 and about 1.07, respectively. The implications of these results are that the soddyite would tend to settle faster than gibbsite, thereby producing a modest separation.

However, this would occur early in the degradation and presumably the entire mass would collect on top of steel components of the DOE SNF basket structure. In such a case, the separation is of no importance to criticality because the fissile material would be adjacent to or mixed with the neutron absorber material. If borated stainless steel is used to absorb neutrons, the mass containing the soddyite would settle directly on top of it. If  $Gd_2O_3$  is added instead as the absorber, it would settle out somewhat faster (while it was soluble), because of its higher density,  $7.4 \text{ gm/cm}^3$  (reference 33, p. B-113) and thus lie on top of the steel basket structure mixed with or immediately below the soddyite.  $GdPO_4$ , density about  $4.8 \text{ gm/cm}^3$  (reference 32, pp. 413 and 679), if added, would also settle somewhat faster than the soddyite directly on the steel, and the rhabdophane,  $GdPO_4 \cdot H_2O$  that would likely form from reaction with  $Gd_2O_3$ , having a density about  $4 \text{ gm/cm}^3$  (reference 32, p. 516) would settle at about the same rate as the soddyite. Consequently, any separation that might occur between the degradation products of the aluminum and the fuel would be of no importance to criticality. As degradation of the DOE SNF canister continues with the corrosion of the steel, large quantities of iron oxides and hydroxides

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

would be produced, but, as shown above, the potential for separation from fissile material is small. Moreover, any gadolinium present should remain admixed.

These theoretical arguments are supported by geologic evidence. It is well known in nature that heavy minerals may to some degree become separated from lighter ones to form placer deposits. However, the degree of separation is not extreme in spite of the agitation and suspension in rivers and beaches responsible for the segregation. One might expect the greatest separation from very heavy minerals, such as gold, and much lighter common ones, such as quartz. The respective densities are 17 (reference 33, p. B-115) and 2.65 (reference 34, p. 504). Nevertheless, the percentage of gold in typical placers is very low. Without stream or wave action to promote the differential settling of the gold the degree of concentration would be even less. Moreover, this degree of separation occurs in sands and gravels, not in fine grained materials, such as clays. Apparently, there are no known placer deposits for clay beds or their rock equivalent, shales. Thus, these analogies also argue that the probability of significant separation of the fine grained degradation products in the waste package as a consequence of gravitational settling is extremely low. Specific locations for such geologic deposits are given in reference 25.

### **6.4.3 Worst Case Separation of the Neutron Absorber Boron from Uranium**

The analysis given in this section is a condensation from that given in reference 25. Calculations based on the assumed corrosion rate for borated stainless steel, and summarized in Table 6.3-1, show that this criticality control material will be completely corroded away in less than 10,000 years. It is expected that most of the boron released from the corrosion of borated stainless steel will be dissolved, because of the high solubility of boron, and this is verified by the EQ6 calculations summarized in Section 6.3.2.1. Because of this possible loss of criticality control material, the criticality control effectiveness of borated stainless steel is questionable.

On the other hand, it is possible for the waste package to degrade in such a way that the borated stainless steel in the DOE SNF canister is not contacted to a significant degree by circulating or flowing water. In such circumstances, the corrosion rate of the borated stainless steel is severely limited. As was shown in Table 6.3-1, the degradation of the HLW glass may occur in approximately 1200 years following breach of the waste package, HLW canister, and initial exposure of the HLW glass to water. However, all the canisters (HLW and codisposal) may not be contacted by water at once, and complete degradation of the HLW glass may take considerably longer.

With respect to the removal of boron, the fraction of the time for which the DOE SNF canister will be contacted by water is of primary importance. To approximate the process by which water dripping on the waste package is converted to flow and circulation through the waste package, it is assumed that the primary direction of the water movement within the waste package is downward, so that probability of a dripping flow contacting a mass within the package will be equal to the fraction of the horizontal cross section area occupied by that mass (Assumption 4.3.13 of reference 25). For the DOE SNF canister this fraction is 0.29.

This probability is not much less than one, and might be further increased by the following consideration. For any given waste package, the occurrence of a drip, and the location of that

## **Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality**

drip, might be independent of time, or might vary with time. In the latter case, the effect would be to convert the small probability of corrosion of borated stainless steel (0.29) to a certainty, but over a longer period of time. This longer period would be approximated by taking the nominal corrosion time of 2500 years (following breach of the DOE SNF canister) given in Table 6.3-1, and dividing by 0.29 to get 8600 years.

An additional conservative aspect of this analysis is that it neglects other configurations which have even stronger prevention of water contacting the borated stainless steel in the basket of the DOE SNF canister. For example, the configuration in which the clay covering the DOE SNF canister has insufficient permeability to permit any significant water flow over the borated stainless steel.

### **6.4.4 Separation of Gadolinium Absorber from Uranium**

As with boron, the principal probability of criticality arises from the removal of gadolinium from the waste package due to solubility. The analysis of Section 6.3.4.1 shows that gadolinium is only soluble at low pH, and then only if the amount of phosphate present in the system is severely limited. It is, therefore, useful to summarize the results in terms of the chemical form of the gadolinium used for criticality control.

#### **6.4.4.1 Maximum Separation of Gadolinium as $Gd_2O_3$**

The EQ6 simulations described in Section 7.3.2.1 of reference 25 show there is a possibility of low pH (as a result of complete oxidation of the chromium in stainless steel to chromate), and this low pH will be associated with a high solubility for gadolinium. In particular, Table 7.3-2 of reference 25 and Section 6.3.4.1 of this document both showed that the amount of gadolinium which is certain to be retained in the system is limited by the amount of phosphate present in the system when the gadolinium is released by the steel. Unless additional phosphate is added, the worst case gadolinium retention could be as low as 337 g. For this reason, the criticality control effectiveness of gadolinium can be said to be questionable.

This section evaluates the less conservative possibility that the solution having pH lowered by the corroding stainless steel is not in direct contact with the  $Gd_2O_3$  inside the DOE SNF canister. This is a summary of the discussion given in of reference 25 (specifically Section 7.4.4.1 and Attachment V). If the lowered pH solution does not contact the  $Gd_2O_3$ , the Gd will remain insoluble and not be lost from the waste package. Such a configuration could have the DOE SNF canister lying anywhere between the bottom of the waste package and the surface of the clay (or water), anything between the geometries shown in Figures 6.2-5 and 6.2-7.

The probability of the solution from the degrading stainless steel contacting the Gd in the DOE SNF canister (given that water has dripped into, and collected in, the waste package) is the product of the probability that the water will directly contact the DOE SNF canister within the waste package (estimated as 0.29 in Section 6.4.3, above), multiplied by the probability that the clay above the DOE SNF canister (or its remnant) will contain a significant amount of corroding stainless steel. To estimate this latter probability it is assumed that:

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

- 1) the average height of the clay surface above the waste package bottom is uniformly distributed between the diameter of the DOE SNF canister and the diameter of the waste package, and
- 2) the top of the DOE SNF canister (or that of its remnant) is uniformly distributed between the diameter of the DOE SNF canister and the height of the clay surface.

It is further assumed that the probability of the clay above the DOE SNF canister having a significant amount of corroding steel, is approximated by the ratio of the average depth of the DOE SNF canister divided by the maximum depth (which is the waste package diameter minus the DOE SNF canister diameter). (Assumption 4.3.17 of reference 25) This gives the double integral:

$$\frac{1}{D-d} \int_d^D dH \int_0^{H-d} \frac{hdh}{H-d}$$

where D is the diameter of the waste package and d is the diameter of the DOE SNF canister. This integral is normalized to (divided by) D-d, to give a value of  $(1/4)(D-d)/D = 0.19$ . Further details of this calculation are given in Attachment V of reference 25. When this factor is multiplied by the 0.29 calculated earlier, the resulting conditional probability of this process (which is necessary for criticality to occur) is 0.055, given the increased dripping on the individual waste package.

As with the analysis of boron removal in Section 6.3.4.1, above, the occurrence of a drip, and the location of that drip, might be independent of time, or might vary with time. In the latter case, the effect would be to convert the small probability of contacting the DOE SNF canister (0.29) to a certainty, but over a longer period of time, which would be approximated by taking the nominal time to lose most of the gadolinium, 60,000 years following breach of the DOE SNF canister given in Table 7.3-2, and dividing by 0.29 to get 210,000 years.

#### **6.4.4.2 Maximum Separation of Gadolinium as GdPO<sub>4</sub>**

It has been shown in Section 6.3.4.2 that gadolinium incorporated as GdPO<sub>4</sub> will be sufficiently insoluble that it will remain in the waste package for more than several hundred thousand years. Therefore, any internal criticality will require the physical separation of the GdPO<sub>4</sub> from the <sup>235</sup>U. Therefore, the following two scenarios, which have already been suggested as the last two separation mechanisms described in Section 6.4.1, are presented to represent the opposite extremes for generating a separation of neutron absorber from fissile material while both remain inside the DOE SNF canister:

- 1) a major fraction of the uranium particles settles to the bottom through holes in the remaining basket plates, and
- 2) a significant fraction of the gadolinium is trapped in the steel cutout from the plates as a result of random pitting corrosion of a periphery for each cutout; these cutouts will settle to the bottom through holes (pits and cutouts) in the remaining basket plates.

For calculation convenience it is assumed that the waste package is oriented such that the large

---

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

basket plates, shown horizontal in Figure 4.1.3, actually are horizontal and that the disposition of material from the plates which are angled to the large plates (also shown in Figure 4.1.3) will be the same as for the horizontal plates (Assumption 4.3.12).

The following analysis, summarized from Section 7.4.4.2 of reference 25 applies to both scenarios.

The geometry for this analysis is based on the waste package and DOE SNF canister for the highly enriched MIT SNF, shown in Figure 4.1-3. Most of the fuel (75%) is contained in the volume within the four longest plates of the DOE SNF canister. For purposes of defining the maximum cutout, a random distribution of pits was simulated over the maximum unsupported basket plate span (15 cm x 60 cm x 0.8 cm thick, where the 15 cm width is from the canister wall to the center diagonal brace between the two innermost plates). The pit penetrations at the surface were taken to be 0.8 cm square cells. This cell size approximates the volume corroded by a pit, by using a cube having dimension equal to the thickness of the basket plate. In this manner, the maximum unsupported plate is divided into a 19 x 75 rectangular array, as shown in Figure 7.4-4 of reference 25. It is assumed that this pit size is appropriate to carbon steel. For stainless steel, it is assumed that the pit cross section area is 1% of the carbon steel value, so that there are 100x as many square cells on the reference basket plate. For conservatism, the basket plates were assumed to be oriented horizontally, thus maximizing the available surface area.

Using the cutout analysis program, statistics for 100 realizations were generated for grid sizes representing both carbon steel (19 x 75) and stainless steel (190 x 750). The results are given in Tables 6.4-1a and 6.4-1b. In these tables, Pitfrac is the fraction of the cells that have pits; Cutfrac is the fraction of cells which are in cutouts; Sdcutfrac is the standard deviation of the fraction of cells which are in cutouts (Cutfrac); NumCutout is the number of distinct cutout areas; SDCutout is the standard deviation of NumCutout; Avarea is the average area of a cutout

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

Table 6.4-1a. Cutout Statistics for a 19 x 75 Grid (to model carbon steel)

Pitfrac	Cutfrac	SDcutfrac	NumCutout	SDCutout	Avarea
0.070	0.000	0.000	0	0.171	2.000
0.140	0.001	0.001	0	0.571	1.705
0.211	0.003	0.002	2	1.452	1.595
0.281	0.012	0.008	9	2.823	2.084
0.351	0.053	0.029	22	4.755	3.492
0.421	0.187	0.059	46	6.157	5.765
0.491	0.294	0.042	80	7.782	5.262
0.561	0.316	0.020	113	8.610	3.981
0.632	0.290	0.012	140	9.350	2.942
0.702	0.244	0.008	152	9.678	2.285
0.772	0.192	0.006	143	16.596	1.906

Table 6.4-1b. Cutout Statistics for a 190 x 750 Grid (to model stainless steel)

Pitfrac	Cutfrac	SDcutfrac	NumCutout	SDCutout	Avarea
0.070	0.000	0.000	3	1.767	1.060
0.140	0.000	0.000	51	6.463	1.078
0.211	0.002	0.000	251	15.586	1.229
0.281	0.009	0.001	828	26.889	1.585
0.351	0.052	0.005	2225	42.202	3.298
0.421	0.488	0.015	4989	65.385	13.940
0.491	0.484	0.002	8907	82.337	7.748
0.561	0.426	0.001	12998	92.380	4.668
0.632	0.360	0.000	16262	100.054	3.157
0.702	0.293	0.000	18033	99.501	2.313
0.772	0.224	0.000	17820	82.777	1.794

The rates of aqueous corrosion and dissolution for the various solid forms in the waste package are given in Table 4.1.1.3-3. The rates for glass are expressed in the standard intrinsic material units, gm/m<sup>2</sup>/day. The rates for the various types of steel are expressed in microns per year under the standard assumption that all plates have a thickness much less than length or width. It should, of course, be noted that the times to corrode the stainless steel may be up to 2 orders of magnitude greater than for the carbon steel. Nevertheless, the following comparisons are important:

- 1) The maximum cutout fraction for stainless steel is significantly greater than for carbon steel, as would be expected from the smaller pit size (finer resolution grid).
- 2) The maximum cutout fraction for stainless steel occurs at a lower pitting fraction than for carbon steel, increasing the importance of cutouts as a mechanism for removing material.
- 3) The ratio of standard deviation divided by the corresponding statistic (Cutfrac or NumCutout) is much smaller in Table 6.4-1b than in Table 6.4-1a. This is because the former involve much larger numbers of pits and cutouts, and this ratio is inversely proportional to the square root of the number of items. This ratio is a measure of the fractional error in the process and can be reduced by taking more realizations.

The remainder of this section is devoted to an estimate of the worst case separation of the Gd from the U.

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

For carbon steel, the percent of Gd trapped in cutouts is estimated to be one half the cutout fraction to account for the fact that by the time the pit penetrates the 0.8 cm plate thickness, 50% of the plate thickness will also have been removed by bulk corrosion. The reason for this factor is as follows: the pitting corrosion factor for carbon steel (the carrier metal of choice for the  $GdPO_4$  neutron absorber material) is 4 (reference 11, Section 5.4.4), which means that the pit penetration rate is 4 times the bulk corrosion rate; the bulk corrosion rate is then increased by a factor of 2 to account for corrosion from both surfaces, while the pit can only go from one surface at a time.

This analysis provides a lower bound for the amount of Gd which will be removed to the bottom; since the Gd precipitate remaining from corrosion of the steel is not significantly hydrolyzed, it is all likely to remain on top of the remaining thickness of uncorroded plate where it will all be available to fall through when the cutout develops. Furthermore, the Gd will not actually be emplaced in the basket structural steel, but rather in thinner plates (0.25 cm) fastened to the structural basket plates (mostly the horizontal plates of the basket in Figure 4.1.3). Such a thinner plate is likely to be completely corroded before the cutout appears in the plate to which it is attached. All the Gd is likely to be available to fall through any cutout which appears beneath it.

As explained above, the basket was approximated by the 4 largest plates, so that all the fuel is approximated as falling between these plates. Therefore, there are no cutouts or particulates falling through the top plate. Furthermore, the lowest plate approximates the bottom of the canister. Therefore, the probability of settling through the plates was estimated as the average of the probabilities of passing through 2 plates, 1 plate, and zero plates. For this calculation the probabilities of passing through the several numbers of plates is as follows: (1) zero plates, which requires no special conditions so the probability = 1, (2) one plate, probability = the sum of the fraction of area covered by pits plus the fraction cutout, and (3) two plates, probability is the square of the one plate pass-through.

This methodology is illustrated in Table 6.4-2, for the largest cutout fractions in Tables 6.4-1a and 6.4-1b (corresponding to Pitfracs 0.561 and 0.421, respectively). Note that the numbers in Table 6.4-2 are expressed as percentages while the numbers in Table 6.4-1 are expressed as fractions. Typical calculations to obtain the fourth and fifth columns of this table are given in the footnotes to the table, and further details are given in Attachment V of reference 25.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**Table 6.4-2. Worst Case (Maximum Cutout) Maximum U which can Settle to the Bottom  
and Minimum Gd which will Settle to the Bottom**

Material	% basket covered by pits	% cutout	Max % of U at bottom*	Min % of Gd at bottom†
Carbon steel	56	32	78	14‡
Stainless steel	42	49	83	45§

\*For max U at bottom, the min Gd at bottom is sufficient to prevent criticality.

†For min Gd at bottom, the remaining distributed GD will be sufficient to prevent criticality with all the U distributed.

‡ $(1+f+f^2) (0.32/2)/3$ , where  $f=0.56+0.32$

§ $(1+f+f^2) (0.49)/3$ , where  $f=0.42+0.49$

This approximation may overestimate the amount of material passing through the plates for the following reasons:

- 1) The pit holes might not actually be in sufficiently large contiguous groups to permit the passing of a large cutout falling from a plate above, and
- 2) If the plates are near horizontal, much of the wider plates' cutouts/pits will be over the canister wall, since the lowest plate is narrower. Therefore, much of the material overlying the wider plates will fall on the canister wall, rather than on the lowest plate.
- 3) In this approximation the package bottom and the lowest plate have been combined, thereby adding the corresponding accumulations, even though they are actually separated.

Observations on the results presented in Table 6.4-2 that are relevant to the definition of worst-case (but still physically realizable) configurations for criticality evaluation are the following:

- 1) The percentages of elements at the canister bottom (4<sup>th</sup> and 5<sup>th</sup> columns of the table) imply that the complementary percentage of the total element amount is distributed throughout the canister volume.
- 2) The maximum % of U at the bottom (4<sup>th</sup> column of the table) represents the fraction of the total U that could fall through the holes in the degraded plates. This maximum must still be distributed in a layer at the bottom that has a physically reasonable thickness, as is done in reference 35.
- 3) The minimum % Gd (5<sup>th</sup> column of the table) is nominally contained in steel, but could also occur as particulates remaining after the corrosion of the steel

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 6.5 Criticality Calculation Models and Results

Three major configurations were identified for criticality analysis with MCNP based on the degradation sequences described in Section 6.2 and the compositions described in Section 6.4. The scenario development, geochemistry analysis, and configuration identification provide general guidance for the criticality analysis. The mass of material, but not its volume distribution or location, is identified. Parameters such as the amount of water mixed with solids, the density and volume of fissile or absorber material in clay, etc. are not fixed. The criticality analysis involves parametric analyses of several factors in addition to the general geometry configurations described in the previous section. These parameters include water content,  $^{235}\text{U}$  volume distributions, absorber and  $\text{Fe}_2\text{O}_3$  distribution, material and reflector effects, and  $^{235}\text{U}$  mass available. The focus is on identifying the optimum conditions within the physical bounds of the parameters to find the highest achievable value of  $k_{\text{eff}}$ . A complete description of these criticality parametric analyses is provided in reference 35. The results required to identify limiting conditions and margins are presented in this report.

As part of an Engineered Barrier System for the containment of radionuclides, the codisposal waste package  $k_{\text{eff}}$  must not exceed 0.95 during the pre-closure phase. As discussed in Section 4.2 (Criteria), in addition to the 5% margin in  $k_{\text{eff}}$ , account of the bias and uncertainty must be taken. As discussed in Section 5, the bias and uncertainty is estimated to be 2% in  $k_{\text{eff}}$ . The calculated  $k_{\text{eff}}$  plus statistical uncertainty, therefore, must be less than 0.93 to meet the design criteria.

Criticality analyses of the MIT and ORR fuel types requires construction of MCNP4A geometry and material models. The development of the geometry models is summarized below. This analysis is documented with computer program output in reference 35. The base models were originally developed for the intact analysis documented in the Phase I report (reference 2). The structural materials of the waste package are ASME code materials and are hence well-defined, as is the water moderator (Assumption 4.3.4).

#### 6.5.1 Degraded MIT SNF Criticality Analysis

##### 6.5.1.1 Homogeneous Mixture of Degraded MIT SNF in DOE SNF Canister

These configurations consist of a DOE SNF canister situated among 5 HLW canisters (likely configuration at time of breach) or against the inner barrier of the waste package surrounded by the degraded remnants of the HLW glass (clayey material). There are 3 configurations within the DOE SNF canister for this scenario. The first two of these models, which are the more reactive configurations, are shown in Figures 6.5-1 and 6.5-2. The degraded DOE SNF is homogenized within a basket position or within the canister depending on the degree of degradation of the basket. Variations of the conditions outside the DOE SNF canister are run to demonstrate conservatism. The basket is modeled at various stages of degradation and with stainless steel or carbon steel as the material of fabrication. The third configuration is similar to that shown in Figure 6.2-9 and is based on accumulation of most of the degraded U-Al in the bottom of the canister with steel fragments.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

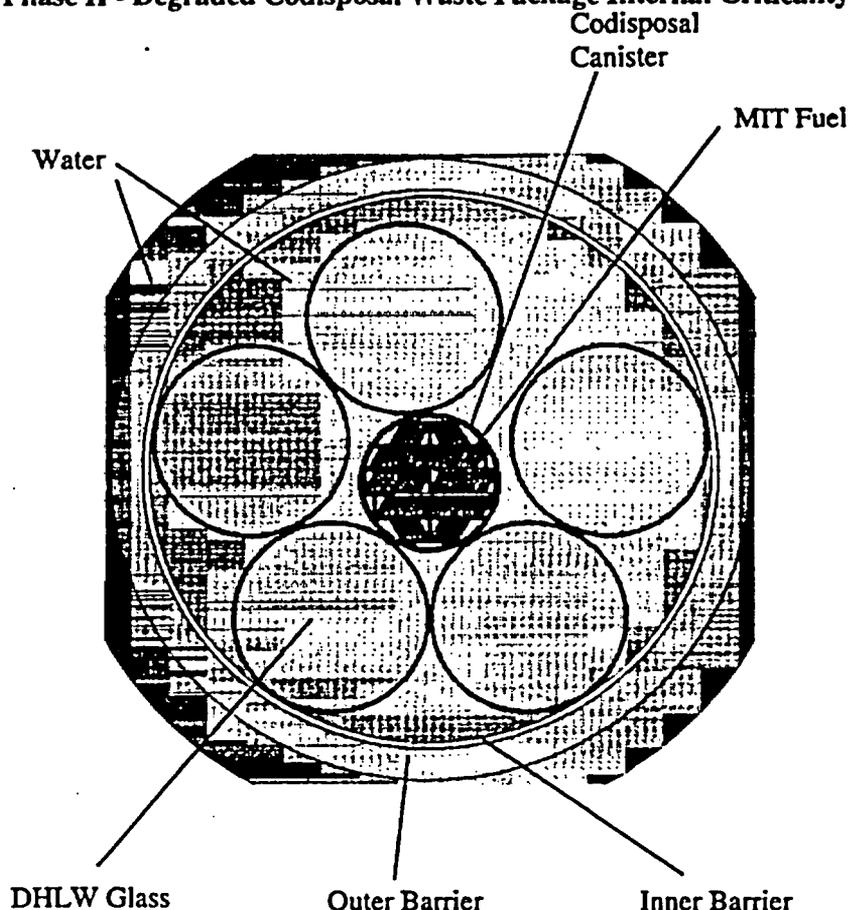


Figure 6.5-1. Degraded MIT SNF in an Intact Basket

The first set of calculations is based on degraded MIT SNF in an intact basket where the boron in borated stainless steel has been replaced by various amounts of Gd. The results are listed in Table 6.5.1.1-1. The configuration with degraded fuel filling the basket cells in an intact basket was identified as the most reactive configuration considered in the Phase I report (reference 2).

Table 6.5.1.1-1. Degraded MIT SNF in an Intact Stainless Steel Basket with Gd Absorber

Case Name	Mass Gd, kg	$H^{235}U$	AENCF, MeV	$k_{eff} \pm 2\sigma$
mitoz3g	0.25	113	0.0210	$0.9763 \pm 0.0027$
mitoz4g	0.50	113	0.0217	$0.9458 \pm 0.0032$
mitoz2g	0.75	113	0.0220	$0.9294 \pm 0.0027$
mitoz5g	1.00	113	0.0221	$0.9195 \pm 0.0030$
mitoz6g	1.50	113	0.0231	$0.9020 \pm 0.0024$

As indicated in Table 6.5.1.1-1, less than 1 kg of Gd is required in the intact basket where it is

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

least effective (self-shielded). This DOE SNF canister configuration with 1 kg of Gd was rerun with the canister positioned at the bottom of the degraded HLW mass against the inner barrier of the waste package to demonstrate reflector effects. The result is a  $k_{eff}$  of  $0.9187 \pm 0.0028$  (m5ghom) which statistically is the same result as that for the configuration among the HLW canisters (mitoz5g).

A case with intact MIT SNF and basket corresponding to case mitbz3 in the Phase I criticality report (reference 2) was run with 1.00 kg of Gd rather than B in the absorber plates to demonstrate the significant subcritical margin for intact fuel. The result is a  $k_{eff}$  of  $0.8148 \pm 0.0034$  (mitbzg1). The case with borated stainless steel (mitbz3, reference 2) has a value of  $k_{eff}$  of  $0.8101 \pm 0.0029$ .


In order to demonstrate the effects of replacing stainless steel with carbon steel, four cases were run as listed in Table 6.5.1.1-2. Note that  $k_{eff}$  increases only slightly for these cases indicating that carbon steel would be an acceptable alternative to stainless steel from a neutronics perspective.

Table 6.5.1.1-2. Check Cases - Carbon Steel Substitution for Stainless Steel in an Intact Basket

Case Name	Case Descriptions	H/ <sup>235</sup> U	AENCF, MeV	$k_{eff} \pm 2\sigma$
Mitoz8g	A516 Absorber Plates, 1.5 kg Gd	113	0.0226	$0.9062 \pm 0.0031$
Mitoz9g	A516 replacing all stainless steel in basket, 1.5 kg Gd	113	0.0230	$0.9126 \pm 0.0029$
Mitozyg	A516 replacing all stainless steel in basket, 1.25 kg Gd	113	0.0226	$0.9216 \pm 0.0029$
Mitozxcg	A516 replacing all stainless steel in basket, 1.0 kg Gd	113	0.0219	$0.9317 \pm 0.0032$

Analysis of the most reactive degraded fuel mixture in configuration 1 using MCNP indicates that approximately 1 kg of Gd is required to be distributed in the MIT fuel intact canister basket if stainless steel is used and 1.25 kg of Gd, if carbon steel is used. The focus of the calculations in the remaining subsections of Section 6.5.1 is to demonstrate that, based on the geochemistry analysis, there will always remain mixed with the degraded fuel enough Fe<sub>2</sub>O<sub>3</sub> and/or Gd to prevent criticality in the configurations attained after the basket degrades.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

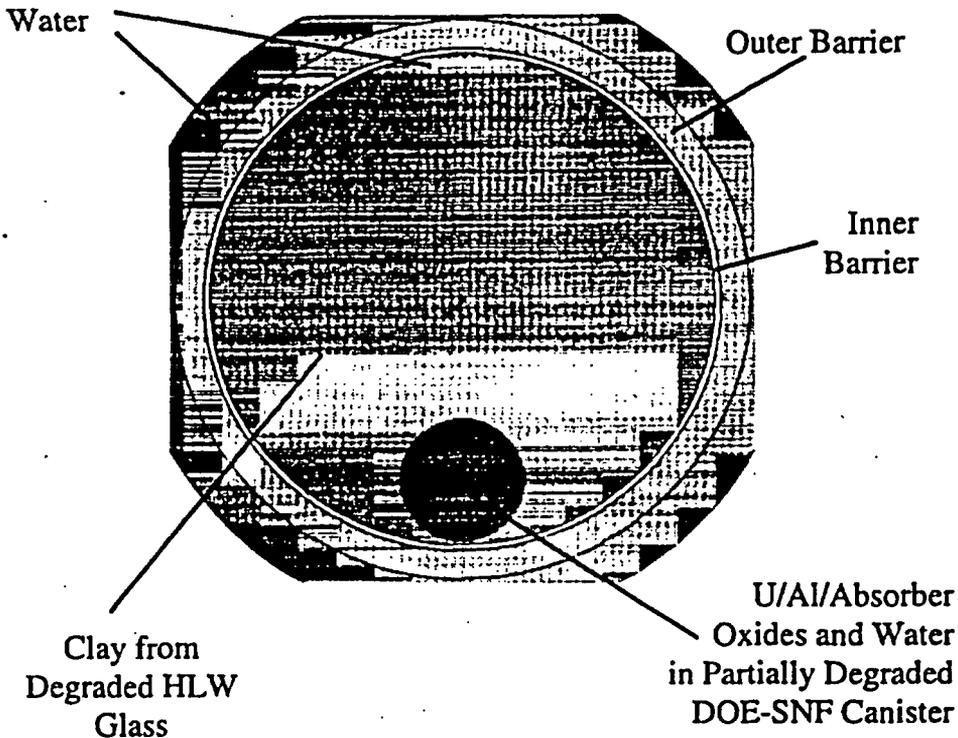

**Figure 6.5-2. Homogeneous Mixture of Degraded DOE SNF and Degraded Basket in a DOE SNF Canister**

The second set of calculations is based on a degraded basket configuration where the MIT SNF is homogenized into the canister volume with various amounts of iron oxide (from the basket) and Gd as illustrated in Figure 6.5-2. The canister wall is modeled as being thinned down to 0.5 cm thick from the initial thickness of 1.5 cm to represent a severely degraded state. The HLW clayey material is modeled with 25% free water fraction that nearly fills the waste package. The results for the degraded basket cases are provided in Table 6.5.1.1-3. The mass of iron oxide produced from the complete oxidation of the stainless steel basket structure in the baseline design corresponds to 590.5 kg of iron oxide. As discussed in Section 6.4, stainless steel would likely degrade to a mix of stainless steel pieces and iron oxide, with the ratio of pieces to oxide decreasing with time. The basket would likely collapse long before all of the iron had oxidized to provide moderator displacement. As indicated in Section 6.4, only half of the iron in stainless steel (295 kg  $\text{Fe}_2\text{O}_3$ ) can be accounted for in a severely degraded configuration because of this potential segregation mechanism.

If carbon steel were used for basket fabrication, then about 85% of the iron could be accounted for because it experiences general corrosion as discussed in Section 6.4. In addition, approximately 30% more iron would be available in the same volume of basket material. Therefore, for severely degraded configurations, carbon steel (uncoated, or zinc, nickel, or chromium plated) offers advantages over stainless steel. Note that with no credit for iron,

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

approximately 0.5 kg of Gd is required to remain mixed with the degraded fuel in the canister. With half the iron as oxide, 0.25 kg of Gd is sufficient and with all the iron as oxide accounted for, only about 0.11 kg of Gd must remain. If carbon steel is used for the basket material (767.66 kg Fe<sub>2</sub>O<sub>3</sub>), almost all of the Gd could be removed.

**Table 6.5.1.1-3. Degraded MIT SNF Homogenized with Iron Oxide and Gd**

Case Name	Mass Fe Oxide, kg	Mass Gd, kg	H/ <sup>235</sup> U	AENCF, MeV	k <sub>eff</sub> ± 2σ
Mithomi	767.66	0.00	103	0.0172	0.9307 ± 0.0019
Mithomf	590.51	0.10	145	0.0159	0.9395 ± 0.0020
Mithomg	590.51	0.12	145	0.0159	0.9178 ± 0.0020
Mithoml	295.25	0.00	190	0.0116	1.2265 ± 0.0024
Mithomh	295.25	0.15	190	0.0141	0.9933 ± 0.0022
Mithom4	295.25	0.25	190	0.0157	0.8964 ± 0.0022
Mithom3	295.25	0.50	190	0.0190	0.7379 ± 0.0020
Mithom2	295.25	1.00	190	0.0236	0.5791 ± 0.0014
Mithom5	0.0	0.0	235	0.0090	1.4689 ± 0.0025
Mithom6	0.0	0.25	235	0.0137	1.0043 ± 0.0022
Mithom0	0.0	0.50	235	0.0164	0.7942 ± 0.0027

Three check cases were run to demonstrate that the homogeneous model is conservative, as listed in Table 6.5.1.1-4. These cases correspond to case mithom4 in Table 6.5.1.1-3 with the modifications indicated. Note that all three cases are equivalent to (within 95% confidence interval) or are less reactive than the base model.

**Table 6.5.1.1-4. Check Cases - Degraded MIT SNF Homogenized with Iron Oxide and Gd**

Case Name	Case Descriptions	H/ <sup>235</sup> U	AENCF, MeV	k <sub>eff</sub> ± 2σ
Mithom7	1 cm thick degraded canister shell	190	0.0157	0.8982 ± 0.0024
Mithom8	80% Fill of the Canister - Total mass of components maintained	132	0.0198	0.8825 ± 0.0025
Mithom9	MIT SNF Canister Centered in Waste Package	190	0.0158	0.8948 ± 0.0023

For a degraded stainless steel basket, credit can be taken for 0.500 kg of Gd and 295 kg of Fe<sub>2</sub>O<sub>3</sub> mixed with the degraded fuel. For a degraded carbon steel basket, credit can be taken for 1.0625 kg of Gd and 650 kg of Fe<sub>2</sub>O<sub>3</sub> mixed with the degraded fuel. The results in Table 6.5.1.1-3 indicate that a degraded stainless steel basket with a GdPO<sub>4</sub> absorber (50% loss of Gd and Fe)

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

will have twice the Gd inventory required to meet criticality criteria. For a degraded carbon steel basket with GdPO<sub>4</sub> absorber (15% loss of Gd and Fe), more than 10 times the required Gd inventory will be present.

A variation of the degraded SNF and basket configuration would be accumulation of U and Al oxides as particulates accumulated at the bottom of the canister with the fragments of undegraded basket steel. The most severe case of settling which might be possible is for a MIT-SNF canister with a carbon steel basket (reference, Table 7.4-2). In this case, a maximum of 78% of the degraded fuel (U and Al oxides) and a minimum of 14% of the undegraded basket (with Gd) may collect in a layer at the bottom of the canister, with the degradation products of the remaining portions of the basket and fuel in an upper layer. To evaluate this configuration, two cases were run with the steel fragments and particulates distributed over 18 and 24 percent of the canister volume. The corresponding water volume fractions to fill out these canister volume percents are of 0.1 and 0.3, respectively. Gd was not included in the cases. The bottom layer composition is homogenized U and Al oxides, iron fragments, and water. The results for these cases in the first two rows of Table 6.5.1.1-5 demonstrate that the settled configurations are all well below 0.93, even without considering the effect of the Gd trapped in the undegraded portions of the basket. They also show that  $k_{eff}$  is lowered with further settling. To evaluate the more realistic effect of having some of the basket oxides distributed in the bottom layer as opposed to all in the upper layer, a final case was run. In this case, the height of the bottom layer was fixed at 12.5 cm (25% of the canister volume). As indicated above, the iron fragments and particulates were distributed in this volume, but this time the remaining degradation products were homogenized throughout the canister. The results indicate that the presence of the basket degradation products further reduces  $k_{eff}$  in the settled configuration.

Table 6.5.1.1-5. Degraded MIT SNF and Undegraded Basket Pieces Homogenized and Settled to Bottom of DOE-SNF Canister

Case Name	Bottom Layer Water Fraction	Height of Bottom Layer (cm) [% of Can Volume]	Bottom Layer H/ <sup>235</sup> U	Top Layer H/ <sup>235</sup> U	AENCF (MeV)	$k_{eff} \pm 2$
Mitcol2	0.1	10.2 [18%]	6.83	475.73	0.0417	0.6989 ± 0.0020
Mitcol1	0.3	12.2 [24%]	26.34	406.56	0.0366	0.8335 ± 0.0023
Mitcol4	0.32*	12.5 [25%]	13.45	499.94	0.0362	0.7304 ± 0.0018

\* - Water/U, Al, Fe Oxide Mixture

**6.5.1.2 Degraded MIT SNF on Top of Degraded HLW**

This model consists of a layer of hydrated oxides representing the degraded remnants of the DOE SNF canister and contents above a volume of clayey material from the degradation of HLW glass. This model is shown in Figure 6.5-3. This configuration is based on the degradation of the DOE SNF canister while resting on the surface of the clayey material. This configuration is judged unlikely, but was investigated in order for the most reactive configuration to be identified.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

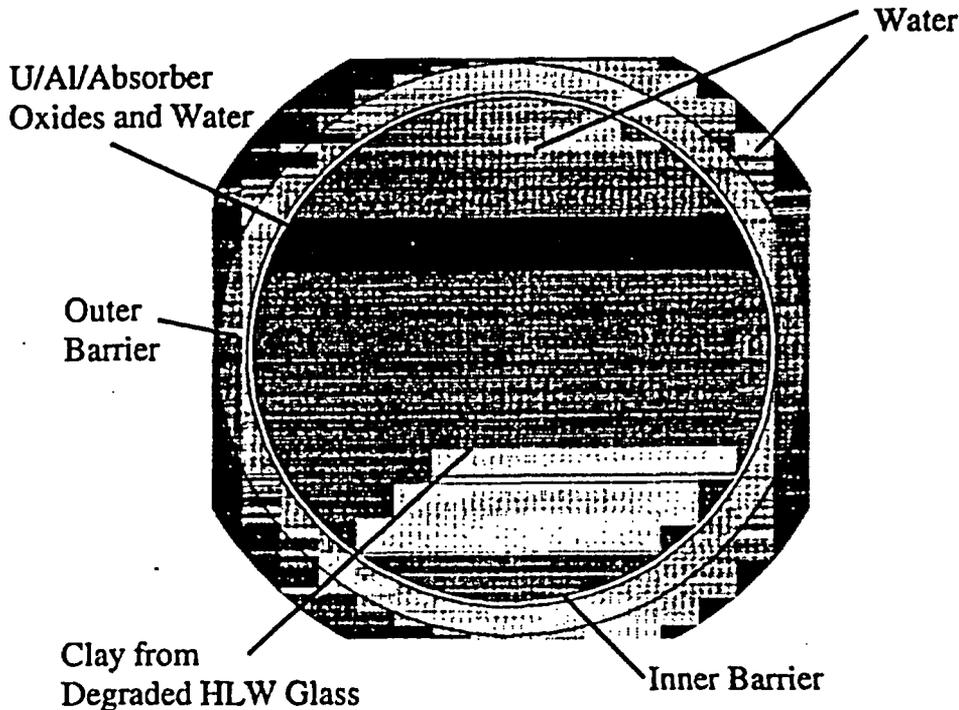


Figure 6.5-3. Degraded MIT SNF on Top of Degraded HLW

Cases were first run to identify the optimum moderator conditions with the full uranium loading (35.2 kg) and the results are provided in Table 6.5.1.2-1. The maximum  $k_{eff}$  is observed for the water fraction of 0.83 (solids density of 17%).

Table 6.5.1.2-1. Stratified Layers with Degraded MIT Fuel on Top

Case Name	Water Fraction	Fuel Slab Thickness, cm	$H^{235}U$	AENCF, MeV	$k_{eff} \pm 2\sigma$
Mit081	0.81	27.4765	675	0.0040	1.1581±0.0022
Mit082	0.82	27.4765	721	0.0038	1.1610±0.0017
Mit083	0.83	27.4765	773	0.0038	1.1617±0.0023
Mit084	0.84	27.4765	831	0.0036	1.1568±0.0019

Reduced volumes at this optimum moderator condition were also investigated to identify the minimum mass of U (93.5 % enriched) which could be critical under these conditions. 2.89 kg of U has a  $k_{eff}$  of  $0.9287 \pm 0.0024$ .

Cases were run with various masses of Gd and  $Fe_2O_3$  as indicated in Table 6.5.1.2-2. As indicated previously, about 300 kg of  $Fe_2O_3$  corresponds to a stainless steel basket, and about 600 kg to a carbon steel basket. Amounts in excess of 590.5 kg  $Fe_2O_3$  are obtained by assuming that part of the XM-19 fuel canister wall is also degraded. In order to achieve 900 kg  $Fe_2O_3$ ,

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

approximately 80% of XM-19 has to degrade with a stainless steel basket. However, if the stainless steel is replaced by carbon steel, 35% degradation in XM-19 would account for 900 kg Fe<sub>2</sub>O<sub>3</sub>.

Additional cases were run to determine the effects of reducing the uranium loading in the fuel layer. For a 75% U loading (26.4 kg), the configuration is subcritical with 60 gm of Gd with no credit for Fe<sub>2</sub>O<sub>3</sub> or with 25 gm of Gd with 295 kg of Fe<sub>2</sub>O<sub>3</sub> (reference 35, Tables 7.3.1.2-6, -7, -8). For a 50% U loading, the configuration is subcritical even without credit for Gd or Fe<sub>2</sub>O<sub>3</sub> (reference 35, Table 7.3.1.2-9).

Table 6.5.1.2-2. Stratified Layers with Degraded MIT Fuel on Top with Different Fe<sub>2</sub>O<sub>3</sub> and Gd Loadings

Case Name	Mass of Fe <sub>2</sub> O <sub>3</sub> , kg	Mass of Gd, kg	Fuel Slab Thickness, cm	H <sup>235</sup> U	AENCF, MeV	k <sub>eff</sub> ± 2σ
mitt10	0	0.10	21.4	633	0.0049	0.9792 ± 0.0020
mitt20	0	0.20	21.4	633	0.0056	0.8566 ± 0.0021
mitf10	300	0.10	28.1	810	0.0043	0.9388 ± 0.0019
mitf20	300	0.20	28.1	810	0.0049	0.8265 ± 0.0018
mitfe6k	600	0.0	35.7	993	0.0035	1.0155 ± 0.0016
mitf6g5	600	0.050	35.7	993	0.0038	0.9333 ± 0.0008
mitf6g6	600	0.060	35.7	993	0.0038	0.9166 ± 0.0009
mitfe9k	900	0.0	44.5	1174	0.0031	0.9460 ± 0.0014
mitf9g1	900	0.010	44.5	1174	0.0034	0.9277 ± 0.0009

For a degraded stainless steel basket, credit can be taken for 0.500 kg of Gd and 295 kg of Fe<sub>2</sub>O<sub>3</sub> mixed with the degraded fuel. For a degraded carbon steel basket, credit can be taken for 1.0625 kg of Gd and 650 kg of Fe<sub>2</sub>O<sub>3</sub> mixed with the degraded fuel. The results in Table 6.5.1.2-2 indicate that a degraded stainless steel basket with a GdPO<sub>4</sub> absorber (50% loss of Gd and Fe) will have 4 times the Gd inventory required to meet criticality criteria. For a degraded carbon steel basket with GdPO<sub>4</sub> absorber (15% loss of Gd and Fe), more than 17 times the required Gd inventory will be present. For a degraded carbon steel basket with GdPO<sub>4</sub> absorber (15% loss of Gd and Fe) and credit for the Fe<sub>2</sub>O<sub>3</sub> from the DOE SNF canister, more than 100 times the required Gd inventory will be present.

**6.5.1.3 Degraded MIT SNF Mixed With Degraded HLW**

This model consists of various fractions of the HLW clayey material mixed with the degraded DOE SNF accumulated starting in a layer below the unmixed fraction of HLW and proceeding until the DOE SNF and all the HLW clayey material are homogeneously mixed.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

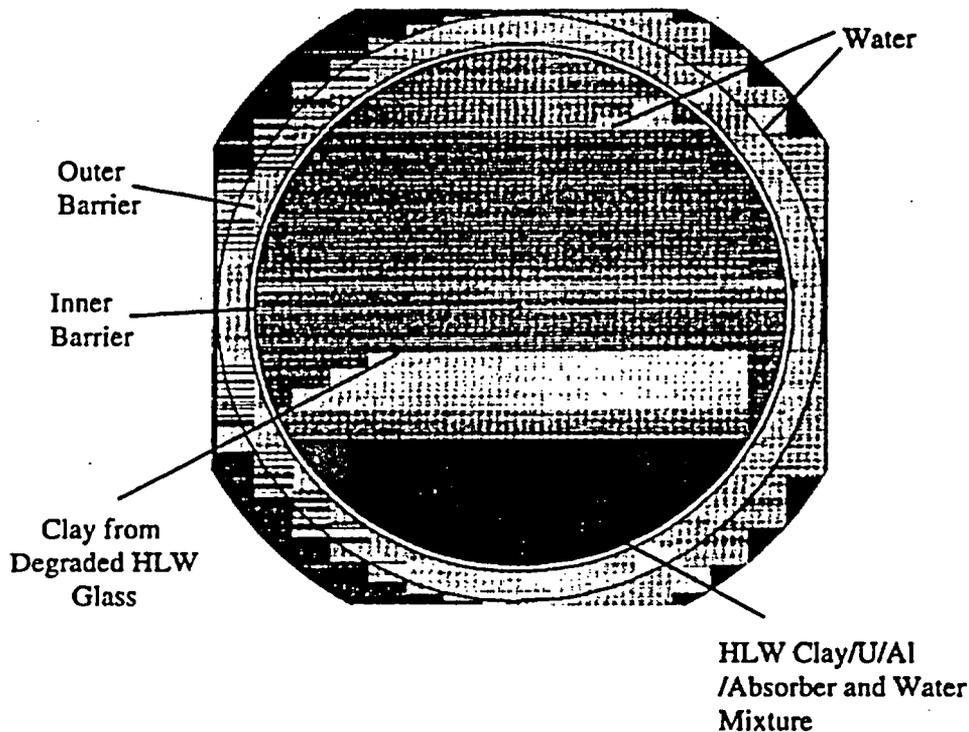


Figure 6.5-4. Degraded MIT SNF Mixed With Degraded HLW

This configuration is shown in Figure 6.5-4. This configuration is based on the degradation of the DOE SNF canister surrounded by the HLW clayey material. As the DOE SNF canister degrades, there will be some mixing of the HLW clayey material and the degraded MIT fuel forms. The water fraction is kept consistent in the bottom fuel/clay mixture and the HLW clayey material on the top. It is not credible to have a less dense mixture at the bottom. The water fraction and the amount of the HLW clayey material mixed with the degraded MIT fuel form are the two parameters varied in this configuration.

The fraction of clay into which degraded fuel was mixed was varied along with the water fraction in the clay to determine the most reactive composition for the full U loading without credit for  $\text{Fe}_2\text{O}_3$  or Gd. The clay fraction was varied from 0% (thin layer on bottom without clay) to 100% (homogeneous mixture of clay and degraded fuel). The water fraction was varied from 0.15 to 0.272 which corresponds to filling the waste package completely with degradation products and water. The peak  $k_{\text{eff}}$  was found for a 15% clay mix and a water fraction of 0.272. The cases necessary to identify this peak are listed in Table 6.5.1.3-1. The homogeneous mixture of all the clay and degraded fuel was identified to be subcritical without credit for any  $\text{Fe}_2\text{O}_3$  or Gd. Note that the fragments of stainless steel or the  $\text{Fe}_2\text{O}_3$  likely present from the degradation of the HLW canisters are not accounted for in these calculations.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**Table 6.5.1.3-1. Clay Mixed With Degraded MIT Fuel**

Case Name	Percent Clay	Water Fraction	H/ <sup>235</sup> U	AENCF, MeV	k <sub>eff</sub> ± 2σ
mitb520	10	0.20	160	0.012	0.9454 ± 0.0029
mitb525	10	0.25	206	0.0097	1.0170 ± 0.0030
mitb620	15	0.20	220	0.0089	0.9671 ± 0.0027
mitb625	15	0.25	283	0.0077	1.0262 ± 0.0025
mitb627	15	0.272	313	0.0070	1.0464 ± 0.0025
mitb720	20	0.20	280	0.0076	0.9727 ± 0.0027
mitb725	20	0.25	359	0.0064	1.0177 ± 0.0025

Cases were run with various masses of Gd and Fe<sub>2</sub>O<sub>3</sub> as indicated in Table 6.5.1.3-2 for the most reactive mix. These cases were run to provide an indication of the margin for the likely configuration. The presence of the Gd or Fe<sub>2</sub>O<sub>3</sub> could cause minor shifts in the water fraction or clay percent that is most reactive for a given mixture. These minor variations would have no effect on the conclusions drawn from these results.

**Table 6.5.1.3-2. Stratified Layers with Degraded MIT Fuel Mixed with 15% of HLW Glass Clay at bottom with Different Gd and Fe<sub>2</sub>O<sub>3</sub> Loadings**

Case Name	Gd Mass, kg	Fe <sub>2</sub> O <sub>3</sub> Mass, kg	H/ <sup>235</sup> U	AENCF, MeV	k <sub>eff</sub> ± 2σ
mitxgd5	0.05	0	313	0.0078	0.9621 ± 0.0025
mitxgd1	0.10	0	313	0.0082	0.8959 ± 0.0025
mitxfg2	0.02	295	312	0.0075	0.9537 ± 0.0022
mitxfg4	0.04	295	312	0.0077	0.9257 ± 0.0023
mitxfgx	0.00	590.5	312	0.0077	0.9257 ± 0.0023

Additional cases were run to determine the effects of reducing the uranium loading in the fuel layer. For a 75% U loading (26.4 kg), the configuration is subcritical with 20 gm of Gd with no credit for Fe<sub>2</sub>O<sub>3</sub> or with no Gd with 295 kg of Fe<sub>2</sub>O<sub>3</sub> (reference 35, Tables 7.3.1.3-11, -12, -13). For a 50% U loading, the configuration is subcritical even without credit for Gd or Fe<sub>2</sub>O<sub>3</sub> (reference 35, Table 7.3.1.3-14).

For a degraded stainless steel basket, credit can be taken for 0.500 kg of Gd and 295 kg of Fe<sub>2</sub>O<sub>3</sub> mixed with the degraded fuel. For a degraded carbon steel basket, credit can be taken for 1.0625 kg of Gd and 650 kg of Fe<sub>2</sub>O<sub>3</sub> mixed with the degraded fuel. The results in Table 6.5.1.3-2 indicate that a degraded stainless steel basket with a GdPO<sub>4</sub> absorber (50% loss of Gd and Fe) will have 12.5 times the Gd inventory required to meet criticality criteria. For a degraded carbon steel basket with greater than 590.5 kg Fe<sub>2</sub>O<sub>3</sub>, no Gd is required for the configuration to be

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

subcritical. Obviously, with credit for the  $\text{Fe}_2\text{O}_3$  from the DOE SNF canister, no Gd is required with either a carbon steel or stainless steel basket.

### 6.5.2 Degraded ORR SNF Criticality Analysis

#### 6.5.2.1 Homogeneous Mixture of Degraded ORR SNF in DOE SNF Canister

A description and illustration of this configuration is provided in Section 6.5.1.1.

As indicated in Section 4.1.3, the ORR canister basket does not include borated stainless steel absorber plates. The phase I analysis (reference 2, Table 6.5.1.2-3) showed that borated stainless steel between-layer plates were required to keep the configuration subcritical with degraded fuel and intact baskets. Based on the results for a carbon steel basket in a MIT SNF canister, a carbon steel basket was analyzed in an ORR SNF canister where the ORR fuel is homogenized with water and uniformly distributed throughout the basket cell. In addition to changing the basket material from Type 316 stainless steel to A516 carbon steel, the ORR fuel was also more realistically degraded to a mixture of soddyite ( $[\text{UO}_2]_2[\text{SiO}_4]:2\text{H}_2\text{O}$ ),  $\text{Al}_2\text{O}_3$ ,  $\text{SiO}_2$ , and water, rather than just homogenizing it throughout the cell as was done in the Phase I analysis (reference 2). The results of the criticality evaluation indicate that the  $k_{\text{eff}}$  in this degraded configuration is  $0.8861 \pm 0.0030$  (MCNP case "orroz4a"; AENCF = 0.0249 MeV), thus demonstrating the viability of the carbon steel basket option in the intact configuration.

The degraded fuel and basket configuration was analyzed providing the results shown in Table 6.5.2.1-1. The boron from the between-layer (axial) separator plates was assumed flushed out of the DOE SNF canister and was not considered (Assumption 4.3.3). Amounts of  $\text{Fe}_2\text{O}_3$  corresponding to that available from 50% (163.3 kg) and 100% (326.6 kg) of the stainless steel basket material were homogenized into the degraded ORR/water mixture. As with the MIT analysis, the DOE SNF canister is modeled at the bottom of the mass of degraded HLW glass clayey material to maximize neutron reflection into the DOE SNF canister. The HLW clayey material is modeled with 25% free water fraction, and nearly fills the waste package. If carbon steel were used in the basket then up to 490 kg of  $\text{Fe}_2\text{O}_3$  could be produced with credit being taken for about 417 kg (85% credit). A total of 380 kg of oxide would be sufficient to reduce  $k_{\text{eff}}$  below 0.93.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**Table 6.5.2.1-1. Degraded ORR Fuel Homogenized In DOE SNF Canister with Iron Oxide  
From Degraded Basket (No Boron Remaining; Canister Surrounded by Clay)**

Case Name	Mass of Fe <sub>2</sub> O <sub>3</sub> Remaining from Basket, kg	Mass of Gd, kg	Water Fraction	H/ <sup>235</sup> U	AENCF, MeV	k <sub>eff</sub> ± 2σ
Orrhom3	163	0	0.7058	535.8	0.01242	1.0440 ± 0.0022
Orrhom2	327	0	0.6272	477.2	0.01379	0.9521 ± 0.0022
Orrhom6	380	0	0.6015	458.0	0.01428	0.9262 ± 0.0021
Orrhom1	490	0	0.5486	418.6	0.01539	0.8673 ± 0.0023
Orrhom4	163	0.25	0.7058	535.8	0.02292	0.5513 ± 0.0015
Orrhom5	163	0.1	0.7058	535.8	0.01660	0.7550 ± 0.0020
Orrhom7	0	0.1	0.7844	594.4	0.01563	0.8060 ± 0.0022

**6.5.2.2 Degraded ORR SNF on Top of Degraded HLW**

This scenario is based on the HLW canister degrading before the codisposal canister and is described and illustrated in Section 6.5.1.2. The degraded ORR fuel will then form a layer on top of the clay if the DOE SNF canister rests on the surface of the degrading HLW canisters and glass. Criticality calculations were performed for this degraded configuration, with various water fractions in the degraded ORR layer, and above the layer for configurations which do not completely fill the waste package. For conservatism, no Fe<sub>2</sub>O<sub>3</sub> from degradation of the canisters or the ORR basket has been included. The degraded HLW clay at the bottom of the waste package is modeled with no free water. The results are provided in Table 6.5.2.2-1 and indicate that the k<sub>eff</sub> for this configuration is well below 0.93 for all amounts of water content, and therefore does not present a criticality concern.

**Table 6.5.2.2-1. Layer of Degraded ORR Fuel on Top of Degraded HLW Glass Clayey  
Material**

Case Name	ORR Water Fraction	Fuel Slab Thickness, cm	H/ <sup>235</sup> U Ratio	AENCF, MeV	k <sub>eff</sub> ± 2σ
Orr080	0.8	8.7	652.5	0.01079	0.7526 ± 0.0025
Orr085	0.85	11.8	920.4	0.00841	0.8018 ± 0.0020
Orr090	0.9	18.0	1456.1	0.00622	0.8172 ± 0.0019

**6.5.2.3 Degraded ORR SNF Mixed With Degraded HLW**

This scenario is described and illustrated in Section 6.5.1.3. To evaluate this scenario, criticality calculations have been performed for various mixtures of degraded ORR fuel and HLW clay at the bottom of the waste package, with various water fractions in both the mixed and unmixed layers (same fraction in both layers). For conservatism, no Fe<sub>2</sub>O<sub>3</sub> from degradation of the canisters or the ORR basket has been included. As with the previous cases, the region above the clayey material (in cases where the clay does not completely fill the waste package) and outside of the waste package is modeled as being filled with water to conservatively maximize neutron reflection. The results are provided in Table 6.5.2.3-1 and indicate that this configuration is well below k<sub>eff</sub> of 0.93 for all

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

water contents and combinations of HLW clay and ORR mix, and therefore does not present a criticality concern.

Table 6.5.2.3-1. Degraded ORR Fuel at the Bottom of Waste Package Mixed With Various Amounts of Clay From Degraded HLW Glass

Case Name	Fraction of Clay Mixed with ORR	Clay and ORR/Clay Water Fraction	H/ <sup>235</sup> U Ratio	AENCF, (MeV)	$k_{eff} \pm 2\sigma$
ob10v20	0.10	0.200	334.5	0.01802	0.6671 ± 0.0021
ob15v20	0.15	0.200	476.9	0.01441	0.6706 ± 0.0023
ob20v20	0.20	0.200	619.2	0.01197	0.6553 ± 0.0020
ob25v20	0.25	0.200	761.6	0.01056	0.6343 ± 0.0018
ob25v25	0.25	0.250	970.6	0.00922	0.6549 ± 0.0019
ob25v29	0.25	0.289	1155.4	0.00786	0.6611 ± 0.0017

The configuration with the degraded ORR fuel homogeneously mixed with 100% of the degraded HLW clayey material is subcritical with all moderator fractions (reference 35, Table 7.3.2.2-2).

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 6.6 Uncertain Parameters and Sensitivity

The sensitivity to uncertainties in the flow paths of water dripping into the waste package has already been discussed in Section 6.4.3 for boron, and Section 6.4.4.1 for Gd. The following uncertainties relate to frequently raised issues. In our present state of knowledge, they cannot be treated quantitatively.

- The geochemical analyses used a 10 year lifetime for the uranium aluminide fuel (MIT DOE SNF), based on previous studies discussed in reference 25. However, recent experimental data (unreported) suggests it might be as long as 1000 years. Such a long lifetime would decrease the chance that most of the SNF would degrade while there was still a high pH solution from the ongoing degradation of the HLW glass. Hence there would be much less chance of the uranium removal scenario. However, without overwhelming probability of that scenario, it must be found to be too non-conservative, and it has not been considered in the conclusions or recommendations (guidance) provided by this report.
- The long-term drip rate may be even less than the lowest used in this report (0.1 mm/yr). Such low drip rate would extend the time for removal of Gd in the unfavorable circumstance of no available phosphate, thereby increasing the time to earliest criticality beyond the 60,000 years estimated discussed in Section 6.3.4.1.
- It has been conjectured, based on some hydrologic models of Yucca Mountain, that episodic flow rates up to 20 m<sup>3</sup> onto a single waste package could occur within a one week time period (CDA Assumption TDSS 026). If such a deluge occurred after a slow dripping had degraded the criticality control material, but not necessarily removed it from the waste package, it could provide both the mechanism for removal of a soluble neutron absorber and the moderator which enables criticality. The probability of such a deluge has not been quantified because the frequency of such a deluge is completely unknown.
- As discussed in reference 25, the mechanism for acidification of waste package water, e.g., the complete oxidation of chromium to the chromate ion which produces chromic acid, is theoretically possible, but has not been observed experimentally. It is this uncertainty which makes questionable the effectiveness of Gd<sub>2</sub>O<sub>3</sub>.
- The results of this study are not very sensitive to the differential settling evaluated in Section 6.4.2. Table 6.4-2 shows that the worst case separation between uranium and a gadolinium neutron absorber could be viewed in two ways: (1) having 78% of the uranium in a layer on the bottom of the DOE SNF canister with only 14% of the gadolinium for criticality control (carbon steel case), or (2) having 100% of the uranium distributed throughout the canister (since the table only gives a maximum for uranium at the bottom, the minimum could be zero leaving 100% for distribution throughout the canister) with only 55% of the gadolinium remaining because 45% had settled to the bottom (stainless steel case). Both these cases have been bounded by the evaluations in Section 6.5, and found to be subcritical with a margin in Gd mass of at least a factor of two. Therefore, there is little sensitivity to this uncertainty in differential settling.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

**6.7 Probability of Criticality: Comparison of Alternatives**

This analysis is concerned with the occurrence of configurations which may be critical, and not with the actual occurrence of criticality per se. Nevertheless, the results of the calculations of configurations can be used, together with probabilities of water drip and water retention (for moderation), to compare probability of criticality for the three alternative criticality control materials. This comparison is given in Table 6.7-1 for criticality occurrence during a 60,000 year period, most likely near the end of the period. The first line of this table gives the conditional probabilities for the occurrence of a geometry and geochemistry which removes the neutron absorber which was calculated in Sections 6.4.3 and 6.4.4.1 for the first two columns. For purposes of illustration, the time period covered by these probabilities is taken to be 40,000 to 60,000 years. As explained in Section 6.4.3, for times greater than 8600 years, the conditional probability of boron loss, given the required dripping and collection of water in the DOE SNF canister, is conservatively estimated as 1. For Gd<sub>2</sub>O<sub>3</sub>, however, the 60,000 years coincides with the shortest time to achieve low pH and high Gd solubility, as given by the analysis in Section 6.4.4.1, so the probability that the low pH solution will contact the gadolinium remains as calculated in that section. The conditional probability of zero in the third column (GdPO<sub>4</sub>) reflects the analysis summarized in Section 6.4.4.2, and would hold for upwards of several hundred thousand years. The second line of Table 6.7-1 is an adaptation of probability calculations made in reference 36. The items in the third line are the products of the first two lines. The details of the calculation of the second line are given in Attachment V of reference 25.

Table 6.7-1. Probabilities (per waste package) of the Occurrence of Potentially Critical Configurations for Alternative Criticality Control Materials

Description of system element <sup>1</sup>	Alternative criticality control material		
	boron	Gd <sub>2</sub> O <sub>3</sub>	GdPO <sub>4</sub>
Conditional probability of a geometry and geochemistry which removes the indicated neutron absorber (given the required drip rate)	1.0	0.055	0
Probability of required drip rate (on any given package) and retention of sufficient water for moderator (same for all alternatives)	0.007	0.007	0.007
Combined probability of criticality	7x10 <sup>-3</sup>	3.9x10 <sup>-4</sup>	0

<sup>1</sup> These are very conservative estimates and should be used for comparison of alternatives only.

For purposes of making a very conservative estimate of the probability of criticality for the MIT SNF, it is assumed that if the amount of neutron absorber is reduced below the thresholds calculated in the criticality analyses of Section 6.5, and if there is sufficient water for moderation, then criticality will occur. This is equivalent to assuming that the contents of the waste package will always configure into the appropriate geometry. The justification for this assumption is that it is conservative. This assumption is used in Section 6.7.

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

### 7. Conclusions

As identified in Sections 2.0 and 4.0, this analysis is based on unqualified/unconfirmed input data, thus any data from this report that is used for input into CRWMS documents supporting construction, fabrication, or procurement is required to be controlled as TBV in accordance with the appropriate procedures. Based on the rationale that the conclusions derived by this analysis are for preliminary design and will not be used as input into documents supporting construction, fabrication, or procurement, a notation of TBV or TBD will not be carried to the conclusions of this analysis. Therefore, outputs of this analysis used as inputs into documents supporting construction, fabrication, or procurement are required to be controlled and tracked as TBV or TBD in accordance with NLP-3-15, *To Be Verified (TBV) and To Be Determined (TBD) Monitoring System*, or other appropriate procedures.

#### 7.1 Analysis Results

The criticality analyses performed show that the highly enriched MIT fuel can be disposed of within a DOE-SNF canister in the codisposal waste package, provided that certain criticality control measures are implemented. Similarly, a DOE-SNF canister containing moderately enriched ORR fuel can also be disposed of within the codisposal waste package provided that the canisters contain a carbon steel basket with borated stainless steel between-row separator plates. Evaluations of the neutronic behavior of the degraded fuel materials outside the codisposal waste package will be performed as part of Phase III analyses.

This analysis examined the degradation scenarios for the DOE-SNF canister and the HLW glass canisters and performed geochemistry and criticality analyses for the range of potential configurations which could occur inside of the waste package. The criticality analyses indicate that an insoluble neutron absorber material is needed to maintain criticality control for several of the degraded configurations evaluated for the HEU (MIT) aluminum based fuel type. Without the presence of an insoluble neutron absorber, the long-term action of infiltrating water can lead to a small, but significant, probability of postclosure criticality for the HEU SNF.

- The boron in borated stainless steel, initially used as the neutron absorber for the intact configuration, has the potential to be lost as the canister degrades. Preliminary corrosion testing indicates that the borides in the stainless steel matrix have a corrosion rate similar to that of the matrix, and are expected to degrade to a soluble form shortly after they are released from the stainless steel. The resulting boric acid is likely to be transported out of the waste package during the degradation process (Assumption 4.3.3).
- The degradation rate assumed for Al, U-Al, and U-Al-Si, does not have a significant impact on the configurations or compositions formed as long as these materials degrade before or in the same time frame as the basket materials. If the U-Al and U-Al-Si degrade much slower than the basket structure, then the settled configuration within the DOE-SNF canister is more probable and results in a less reactive configuration.
- If the DOE SNF canister is breached while the HLW glass is still degrading, it is likely that the highly alkaline solution from the degrading HLW may dissolve a significant fraction of

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

the uranium released by the degraded SNF. This dissolved uranium may be flushed from the waste package, thereby precluding the possibility of internal criticality (Section 6.3.2).

- The criticality analyses have demonstrated that the degraded configurations can meet the criticality control requirements for long-term disposal if the borated stainless steel is replaced with insoluble Gd phosphate (Section 6.5). Gadolinium phosphate appears to be insoluble over the entire range of pH possible in the waste package and in the DOE SNF canister (Section 6.3.4.2).
- The small difference in density between the uranium-containing particulates and the gadolinium-containing particulates in the degraded waste package will not result in significant stratification. This conclusion is based on a theoretical analysis using the range of possible settling velocities and on a review of the literature on the stratification in natural placer deposits (Section 6.4.2).
- With the progressive degradation of the basket of the DOE SNF canister, some of the steel and gadolinium can settle to the bottom in intact fragments of steel, but only while a significant fraction of the basket remains intact. The geometric hindrance of the remaining basket will limit the amount of steel and gadolinium that can settle by this mechanism to less than 15% of the total for a carbon steel basket and 45% of the total for a stainless steel basket (Section 6.4.4.2).
- The intact basket configurations with degraded fuel were shown to be limiting in regards to requirements for Gd mass to be subcritical. For the MIT canister containing 35.2 kg of 93.5% enriched uranium in the intact basket configuration, approximately 1 kg of Gd is required to be distributed in the basket in the locations originally designated for borated stainless steel if the basket is constructed of stainless steel and 1.25 kg of Gd is required if the basket is constructed of carbon steel. Lesser amounts of Gd were required to maintain criticality control in the degraded configurations (Section 6.5).
- Utilization of carbon steel for basket fabrication is also shown to have advantages over the use of stainless steel by maximizing the water displacement potential of the iron oxide resulting from degradation of the basket and maximizing the mixing of the fuel with the iron oxide from the degraded basket (Section 6.5). Because of the higher yield strength of carbon steel compared to stainless steel, carbon steel would also be superior from a structural perspective (Section 6.3.8).
- The results for degraded MIT SNF and basket materials within the canister indicate that a degraded stainless steel basket with a GdPO<sub>4</sub> absorber will have twice the Gd inventory required to meet criticality criteria. For a degraded carbon steel basket with GdPO<sub>4</sub> absorber, more than 10 times the required Gd inventory will be present (Section 6.5.1.1).
- The results for the configuration involving a layer of degraded SNF above the degraded HLW indicate that a degraded stainless steel basket with a GdPO<sub>4</sub> absorber will have 4 times the Gd inventory required to meet criticality criteria. For a degraded carbon steel basket with

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

GdPO<sub>4</sub> absorber, more than 17 times the required Gd inventory will be present. For a degraded carbon steel basket with GdPO<sub>4</sub> absorber and credit for the Fe<sub>2</sub>O<sub>3</sub> from the XM-19 DOE-SNF canister shell, more than 100 times the required Gd inventory will be present (Section 6.5.1.2).

- The results for the configuration with a mix of clayey material from degraded HLW and degraded MIT SNF indicate that a degraded stainless steel basket with a GdPO<sub>4</sub> absorber (50% loss of Gd and Fe) will have 12.5 times the Gd inventory required to meet criticality criteria. For a degraded carbon steel basket with greater than 590.5 kg Fe<sub>2</sub>O<sub>3</sub>, 0 kg Gd is required for the configuration to be subcritical. Obviously, with credit for the Fe<sub>2</sub>O<sub>3</sub> from the XM-19 DOE-SNF canister shell, 0 kg Gd is required with either a carbon steel or stainless steel basket (Section 6.5.1.3).
- The results for the configuration with degraded ORR SNF in an intact basket indicate that a carbon steel basket and borated stainless steel meet the criticality criteria (6.5.2.1).
- The results for the configuration with degraded ORR SNF and a degraded basket indicate that the iron oxide from a carbon steel basket provides sufficient water displacement and absorption to keep the configuration subcritical without additional absorbers. A degraded stainless steel basket would require about 0.10 kg of Gd to keep the configuration subcritical (Section 6.5.2.1).
- All degraded configurations involving degraded ORR fuel outside the DOE-SNF canister and in, above, or below the clay formed from the degradation of the HLW glass were below the threshold of concern for criticality, even without credit for Gd or iron oxide (Sections 6.5.2.2 and 6.5.2.3).

### 7.2 Guidance for the Codisposal Canister Design

The results of this study provide the following guidance to the designer and fabricator of the codisposal canisters for the MIT and ORR SNF, and for other DOE aluminum clad fuels having characteristics within the same envelope

- The  $k_{eff}$  must be less than 0.95 after allowance for bias and uncertainty (ANSI/ANS-8.17) for both intact and degraded configurations.
- A dispersed insoluble neutron must be utilized in the basket unless the insoluble degradation products from the basket can be demonstrated to provide sufficient water displacement and/or neutron absorption to prevent criticality within the canister.
- Carbon steel is preferred over stainless steel for the basket material, in order to minimize the presence of chromium (which may produce acidic conditions when oxidized); carbon steel also maximizes the water displacement potential of iron oxide and increases the mixing potential of the fuel with the degraded basket and neutron absorber materials.
- The neutron absorber and the degradation products from the basket must be insoluble over the pH range of 5 to 11.
- Gadolinium is preferred over boron, as the neutron absorber for criticality control,

## Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase II - Degraded Codisposal Waste Package Internal Criticality

- because it is much less soluble over the expected range of pH values.
- The selection of a Gd criticality control material should consider that Gd-phosphate is preferred over Gd-oxide because it is less soluble, particularly in the mildly acidic regime which could result from the corrosion of stainless steel

### 7.3 Future Plans

The degradation of aluminum clad fuel can result in the redistribution of uranium materials from the original location within the codisposal canister to areas outside the waste package. The potential of a critical event occurring due to fuel relocation outside the waste package will be evaluated in Phase III.

### 8. References

- 1 *Data Package from Savannah River Criticality Analysis of MIT & ORR SNF*, (including Appendix A data for MIT & ORR fuel, drawings R3F-3-2, R3F-1-4, M-11495-OR-001, M-11495-OR-003, and M-11495-OR-004), Records Batch # MOY-970605-02, Civilian Radioactive Waste Management System (CRWMS) Management and Operating Contractor (M&O), 1997.
- 2 *Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase I Intact Codisposal Canister*, Document Identifier Number (DI#): BBA000000-01717-5705-00011 REV 01, CRWMS M&O.
- 3 *Classification of the Preliminary MGDS Repository Design*, DI#: B00000000-01717-0200-00134 REV 00, CRWMS M&O.
- 4 *QAP-2-0 Activity Evaluations*, ID No. WP-30, Perform Criticality, Thermal, Structural, and Shielding Analyses as Required for DOE Spent Fuel Characterization, Dated 8/3/97, CRWMS M&O.
- 5 *Quality Assurance Requirements and Description*, DOE/RW-0333P REV 7, DOE Office of Civilian Radioactive Waste Management (OCRWM).
- 6 *Technical Document Preparation Plan For The Evaluation of Codisposal Viability for DOE-Owned Research Reactor Spent Fuel Reports*, DI#: BBA000000-01717-4600-00010 REV 01, CRWMS M&O.
- 7 *Nuclear Criticality Safety Guide*, LA12808, Los Alamos National Laboratory.
- 8 *Software Qualification Report for MCNP4A*, DI#: 30006-2003 REV 02, CRWMS M&O.
- 9 *Characteristics of Potential Repository Wastes*, DOE/RW-0184-R1; Volume 1, U.S. DOE OCRWM.
- 10 Harrar, J. E., Carley, J. F., Isherwood, W. F., and Raber, E., *Report of the Committee to*

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

---

- Review the Use of J-13 Well Water in Nevada Nuclear Waste Storage Investigations*, UCID-21867, 1990, Lawrence Livermore National Laboratory, Livermore, CA.
- 11 *Criticality Evaluation of Degraded Internal Configurations for the PWR AUCF WP Designs*, DI#: BBA000000-01717-0200-00056 REV 00, CRWMS M&O.
  - 12 *Total System Performance Assessment - 1995: An Evaluation of the Potential Yucca Mountain Repository*, DI#: B00000000-01717-2200-000136 REV 01, CRWMS M&O.
  - 13 Bates, J., Strachan, D., Ellison, A., Buck, E., Bibler, N., McGrail, B. P., Bourcier, W., Grambow, B., Sylvester, K., Wenzel, K., and Simonson, S., *Glass Corrosion and Irradiation Damage Performance, Plutonium Stabilization & Immobilization Workshop*, December 11-14, 1995, Washington, D. C.
  - 14 *Engineered Barrier Design Requirements Document*, YMP/CM-0024, REV 0, ICN 1, Yucca Mountain Site Characterization Project.
  - 15 *Controlled Design Assumptions Document*, DI#: B0000000-01717-4600-00032 REV 04 ICN 03, CRWMS M&O.
  - 16 *10CFR60; Disposal of High-Level Radioactive Wastes in Geologic Repositories; Design Basis Events; Final Rule*, U.S. Nuclear Regulatory Commission, Federal Register, Volume 61, Number 234, pp. 64257-64270, December 4, 1996.
  - 17 *Report of the U.S. Department of Energy Environmental Management Criticality Safety Workshop, February 24-26, 1997, National Spent Nuclear Fuel Program*, INEL/EXT-97-00543, Idaho National Engineering Laboratory/U. S. Department of Energy Office of Environmental Management, May 1997.
  - 18 *Criticality Abstraction/Testing Workshop Results*, DI#: B00000000-01717-2200-00187 REV 00, CRWMS M&O.
  - 19 *Immersion Studies on Candidate Container Alloys for the Tuff Repository*, 1991, Nuclear Regulatory Commission, NUREG/CR-5598.
  - 20 Roy, A. J., Fleming, D. L., and Lum, B. Y., *Stress Corrosion Cracking of Fe-Ni-Cr-Mo, Ni-Cr-Mo and Ti Alloys in 90 C Acidic Brine*, UCRL-JC-128477, Lawrence Livermore National Laboratory, 1997.
  - 21 *International Handbook of Evaluated Criticality Safety Benchmark Experiments*, NEA/NSC/DOC(95)03/I, Volume II.b, Nuclear Energy Agency, Organization for Economic Co-operation and Development, November 4, 1996 update.
  - 22 *Criticality Safety and Shielding Evaluation of the Codisposal Canister in the Five-Pack DHLW Waste Package*, DI#: BBA000000-01717-0200-00052 REV 01, CRWMS M&O.

**Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel:  
Phase II - Degraded Codisposal Waste Package Internal Criticality**

---

- 23 *MCNP Evaluation of Laboratory Critical Experiments: Homogeneous Mixture Criticals*, DI#: BBA000000-01717-0200-00045 REV 00, CRWMS M&O.
- 24 Wolery, Thomas J., *EQ3/6, A Software Package for Geochemical Modeling of Aqueous Systems: Package Overview and Installation Guide (Version 7.0)*, UCRL-MA-110662 PT I, Lawrence Livermore National Laboratory, 1992.
- 25 *Geochemical and Physical Analysis of Degradation Modes of HEU in a Codisposal Waste Package with HLW Canisters*, DI#: BBA000000-01717-0200-00059 REV 00, CRWMS M&O.
- 26 Wefers, K., and Misra, C., *Oxides and Hydroxides of Aluminum*, Alcoa Technical Paper, No. 19, Revised, 1987, Alcoa Laboratories.
- 27 Palache, C., Berman, H., and Frondel, C., *The System of Mineralogy*, 7th ed., vol. II, 1951, John Wiley & Sons, Inc.
- 28 *1995 ASME Boiler and Pressure Vessel Code, Section II*, American Society of Mechanical Engineers, 1995.
- 29 *Standard Specification for Pressure Vessel Plates, Carbon Steel, for Moderate-and-Lower-Temperature Service*, ASTM A516/A516M-90, American Society for Testing and Materials, Philadelphia, PA.
- 30 *Evaluation of Codisposal Viability for Aluminum-Clad DOE-Owned Spent Fuel: Phase I Intact Codisposal Canister*, DI#: BBA000000-01717-5705-00011 REV 01, CRWMS M&O.
- 31 Gaudin, A. M., *Principles of Mineral Dressing*, 1939, McGraw-Hill Book, Co.
- 32 Wills, B. A., *Mineral Processing Technology*, 4th ed., 1988, Pergamon Press.
- 33 Weast, R. C., ed., *CRC Handbook of Chemistry and Physics, 58th Ed.*, 1977, CRC Press, Inc., Cleveland, OH.
- 34 Roberts, W. L., Jr., Rapp, G. R., Jr., and Weber, J., *Encyclopedia of Minerals*, 1974, van Nostrand Reinhold Co.
- 35 *Disposal Criticality Analysis for Aluminum-based Fuel in a Codisposal Waste Package ORR and MIT SNF - Phase II*, DI#: BBA000000-01717-0200-00060 REV 00, CRWMS M&O.
- 36 *Initial Waste Package Probabilistic Criticality Analysis*, DI#: B00000000-01717-2200-00079 REV 01, CRWMS M&O.