

CRWMS/M&amp;O

**Calculation Cover Sheet**

MOL.19990607.0239

1. QA: L

Page: 1

Of: 49

<b>2. Calculation Title</b> Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister			
<b>3. Document Identifier (including Revision Number)</b> BBA000000-01717-0210-00033 REV 01		<b>4. Total Pages</b> 49	
<b>5. Total Attachments</b> 10	<b>6. Attachment Numbers - Number of pages in each</b> I-5, II-5, III-29, IV-32, V-54, VI-62, VII-6, VIII-1, IX-3		
	Print Name	Signature	Date
7. Originator	Laetitia G. Angers		06/04/99
8. Checker	Sedat Goluglu		06/04/99
9. Lead	J. Wesley Davis		6/7/99
<b>10. Remarks</b> Attachments I through IX are contained on Disc (CD ROM). For Attachments I and II, the page numbers shown in box 6 refer to the number of pages in the hard-copy listing of each files content on disc. Attachment X is an electronic attachment and has been moved to reference 7.14			
<b>Revision History</b>			
<b>11. Revision No.</b>	<b>12. Description of Revision</b>		
REV 00	Initial Issue.		
REV 01	Sections 5.5 and 6.4 were added to evaluate the effects of plutonium decay. List of Figures and List of Tables were also added. Editorial changes were made to the attachments. Editorial changes were also made to the body of the document to comply with the procedure.		

## CONTENTS

	Page
LIST OF FIGURES .....	4
LIST OF TABLES .....	5
1. PURPOSE.....	7
2. METHOD .....	7
3. ASSUMPTIONS.....	7
4. USE OF COMPUTER SOFTWARE AND MODELS .....	8
4.1 SOFTWARE APPROVED FOR QA WORK.....	8
4.1.1 MCNP .....	8
4.2 SOFTWARE ROUTINES.....	8
4.2.1 Excel.....	8
5. CALCULATION .....	9
5.1 INTACT WP.....	9
5.1.1 Co-disposal Waste Package .....	9
5.1.2 HLW Glass Pour Canisters .....	11
5.1.3 DOE SNF Canister.....	11
5.1.4 DOE FFTF SNF .....	13
5.1.5 Materials.....	15
5.2 DEGRADED FFTF FUEL INSIDE AN INTACT DOE SNF CANISTER SURROUNDED BY DEGRADED HLW .....	18
5.2.1 FFTF Mixture in a Flooded DOE SNF Canister.....	21
5.2.2 FFTF Fuel Mixed with Different Volume of Water in a Flooded DOE SNF Canister .....	22
5.2.3 Change in $k_{eff}$ Due to the Absorber.....	23
5.3 DEGRADED SNF CANISTER SETTLED ABOVE THE HLW GLASS CLAY....	24
5.4 DEGRADED SNF CANISTER SETTLED IN THE BOTTOM OF THE WP, THE HLW CLAYEY MATERIAL ABOVE.....	32
5.5 EFFECTS OF PLUTONIUM DECAY .....	35

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 3 of 49

6. RESULTS .....	36
6.1 DEGRADED FFTF FUEL IN AN INTACT DOE SNF CANISTER .....	36
6.2 DEGRADED SNF CANISTER SETTLED ABOVE THE HLW GLASS CLAY ....	39
6.3 DEGRADED SNF CANISTER SETTLED AT THE BOTTOM OF THE WP, THE HLW GLASS CLAY LAYER ABOVE .....	43
6.4 EFFECTS OF PLUTONIUM DECAY .....	44
6.5 VARIATION OF THE CHEMICAL COMPOSITION OF TYPE 316L STAINLESS STEEL .....	46
7. REFERENCES .....	47
8. ATTACHMENTS.....	49

**LIST OF FIGURES**

	Page
Figure 5.1.1-1. 5-DHLW/DOE Spent Fuel-Long Disposal Container .....	10
Figure 5.1.3-1. Plan View of the Proposed 18 in. DOE SNF Canister.....	12
Figure 5.1.3-2. Cross-sectional View of the FFTF DOE SNF Canister .....	13
Figure 5.2-1. Cross-sectional View of the DOE SNF Canister Settled in the Middle of the WP	19
Figure 5.2-2. Cross-sectional View of the DOE SNF Canister on the Bottom of the WP .....	19
Figure 5.2-3. Cross-sectional View of the DOE SNF Canister with FFTF SNF Settled on the Bottom.....	20
Figure 5.2-4. Cross-sectional View of the DOE SNF Canister with FFTF SNF Homogenized over the Entire Volume .....	20
Figure 5.2-5. Dimensions of the WP and the DOE SNF Canister in cm (not to scale) .....	21
Figure 5.3-1. Degraded DOE SNF on Top of the Degraded HLW Glass Clay .....	25
Figure 5.3-2. WP Filled with HLW Clay Material Layer and FFTF SNF Layer .....	27
Figure 5.3-3a. Layer of Fuel Partially Mixed with the Layer of HLW Clay .....	29
Figure 5.3-3b. Layer of Fuel Totally Mixed with the Layer of HLW Clay.....	29
Figure 5.4-1. Degraded DOE SNF Mixed with HLW Glass Clay at the Bottom of the WP.....	33

**LIST OF TABLES**

	Page
Table 5.1.4-1. Uranium and Plutonium Content of a Fresh DFA (Ref. 7.6, p. 5) .....	15
Table 5.1.5-1. Chemical Composition of Alloy 22 (Ref. 7.7, p. 10) .....	15
Table 5.1.5-2. Chemical Composition of ASTM A 516 Grade 70 (Ref. 7.8, p. 2).....	16
Table 5.1.5-3. Chemical Composition of Inconel Alloy 600 (Ref. 7.10, p. 9) .....	16
Table 5.1.5-4. Chemical Composition of Type 304L Stainless Steel (Ref. 7.7, p. 13) .....	16
Table 5.1.5-5. Chemical Composition of Type 316L Stainless Steel (Ref. 7.7, p. 14) .....	17
Table 5.1.5-6. Chemical Composition of Degraded HLW Glass (Ref. 7.2, Table 5.14).....	17
Table 5.1.5-7 Chemical Composition of Degraded HLW Glass Used in this Calculation.....	17
Table 5.2.1-1. Degraded Dry FFTF SNF in an Intact DOE SNF Canister Surrounded by HLW Clayey Material.....	22
Table 5.2.2-1. Degraded FFTF Fuel Mixed with Water in an Intact DOE SNF Canister Surrounded by Dry HLW Clay .....	23
Table 5.2.3-1. Cases Considering the Loss of Absorber.....	24
Table 5.3-1. Stratified Layer of Degraded Dry FFTF SNF on Top of the HLW Glass Clay .....	25
Table 5.3-2. Stratified Layers with Degraded FFTF Fuel on the Top of Dry Clay .....	26
Table 5.3-3. Stratified Layer with Degraded FFTF SNF Diluted with Different Density of Water .....	28
Table 5.3-4. Layer of FFTF Fuel Mixed with Layer of HLW Clayey Material .....	30
Table 5.3-5. Homogenized FFTF SNF and HLW Clayey Material .....	31
Table 5.3-5. Stratified Layer with Degraded FFTF Fuel on Top with Different Loadings of Neutron Absorber.....	32
Table 5.4-1. Stratified Layer, FFTF SNF Layer at the Bottom of the WP .....	33
Table 5.4-2. Stratified Layers of FFTF SNF and HLW Clayey Material with Different Loading of Neutron Absorber .....	34
Table 5.5-1. List of the Cases Studied .....	35

Waste Package Operations	Calculation
Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister	.....
Document Identifier: BBA000000-01717-0210-00033 REV 01	Page 6 of 49

Table 6.1-1. Degraded Dry FFTF Fuel in a WP Containing HLW Clay.....	36
Table 6.1-2. Degraded FFTF Fuel in a Flooded WP Containing Dry HLW Clay.....	37
Table 6.1-3. Degraded FFTF SNF with Different Loadings of Neutron Absorber .....	38
Table 6.2-1. Degraded Layer of Dry FFTF Fuel on the Top of a HLW Clay Layer .....	39
Table 6.2-2. Degraded Layer of FFTF Fuel on the Top of a Dry HLW Clay Layer .....	39
Table 6.2-3. Layers of FFTF SNF and HLW Glass Diluted with Water of Variable Density ....	40
Table 6.2-4. Stratified Layer with Degraded FFTF Fuel on the Top.....	41
Table 6.2-5. $k_{eff}$ of a WP with Homogenized Mixture of FFTF SNF and HLW Clay Inside.....	42
Table 6.2-6. Loss of Absorber in a WP with Stratified Layer of Fuel and HLW Glass Clay .....	42
Table 6.3-1. $k_{eff}$ for WP Containing Degraded FFTF SNF Layer Beneath a HLW Clayey Material Layer.....	43
Table 6.3-2. Stratified Layers of FFTF SNF and HLW Clayey Material with Different Loading of Neutron Absorber .....	44
Table 6.4-1. Plutonium Decays Effects .....	45
Table 6.5-1. Variation of the Weight Percent of Mn in the Type 316L Stainless Steel Material	46
Table 8-1. List of Attachments .....	49

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 7 of 49

## 1. PURPOSE

The objective of this calculation is to characterize the criticality aspect of a Department of Energy Spent Nuclear Fuel (DOE SNF) canister containing 5 Fast Flux Test Facility (FFTF) assemblies in a Five-Pack defense High-Level Waste (HLW) waste package. The purpose of this calculation is to investigate the criticality issues for the waste package (WP) containing HLW and DOE SNF canisters in various stages of degradation.

## 2. METHOD

The calculational method used to perform the criticality calculations consisted of using the MCNP Version 4B2 code (Ref. 7.1) to calculate the effective neutron multiplication factor ( $k_{\text{eff}}$ ) of the system. The calculations were performed using continuous energy cross section libraries from Evaluated Nuclear Data File (ENDF). All calculations were performed with the fresh fuel isotopes (Assumption 3.1). The HLW degraded composition was given in Table 5-14 of Reference 7.2.

## 3. ASSUMPTIONS

- 3.1 It is assumed that all fuel is fresh and unburned for the criticality calculations; i.e., there is no credit for burnup. The basis for this assumption is that it is conservative, because fresh fuel is more neutronically reactive than spent fuel. This assumption is used throughout Section 5.
- 3.2 It is assumed that various amounts of mixing of HLW clayey material and degraded DOE SNF, and various degrees of hydration (i.e., water fraction) of the resulting mixtures, are possible up to a point that the available volume is filled (DOE SNF canister or codisposal waste package depending on the configuration being evaluated). The basis for this assumption is that there is a great deal of uncertainty in these parameters, and therefore, it is conservative to evaluate the entire range to find the set of parameters that produce the peak  $k_{\text{eff}}$  for a given configuration. This assumption is used throughout Section 5.
- 3.3 It is assumed that the mass of gadolinium (Gd) present in the WP is 2% of the mass of the basket. The basis of this assumption is that up to 6% of Gd may be included in the basket as a result of intact criticality calculation. It is conservative to underestimate the amount of Gd in the WP. This assumption is used throughout Section 5.
- 3.4 It is assumed that after two half lives ( $T_{1/2}$ ) of Pu-239 (48,200 years), the Pu-240 (half life 6560 years) has all decayed. The basis of this assumption is that it is conservative since the Pu-240 will decay to U-236 and that the absorption cross of Pu-240 is higher than the absorption cross section of U-236. This assumption is used in Section 5.5.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 8 of 49

#### 4. USE OF COMPUTER SOFTWARE AND MODELS

##### 4.1 SOFTWARE APPROVED FOR QA WORK

###### 4.1.1 MCNP

The MCNP code was used to calculate the  $k_{eff}$  of the codisposal waste package. The software specifications are as follow:

- Program Name: MCNP
- Version/Revision Number: Version 4B2
- CSCI Number: 30033 V4B2LV
- Computer Type: Hewlett Packard (HP) 9000 Series Workstations
- Software is installed on the Civilian Radioactive Waste Management System (CRWMS) Management and Operating (M&O) workstation "bloom" whose CRWMS M&O Tag number is 700887

The input and output files for the various MCNP calculations are documented in Attachments I and II (the electronic Attachment has been moved to Reference 7.14). The calculation files described in Sections 5 and 6 are such that an independent repetition of the software use may be performed. The MCNP software used was: (a) appropriate for the application of research reactor  $k_{eff}$  calculations, (b) used only within the range of validation as documented in Reference 7.3, (c) obtained from the Software Configuration Manager in accordance with appropriate procedures.

##### 4.2 SOFTWARE ROUTINES

###### 4.2.1 Excel

- Title: Excel
- Version/Revision Number: Microsoft® Excel 97

The Excel spreadsheet programs were used to calculate the isotopic composition of the materials in the WP as documented in Section 5 of this calculation file, (see Attachments III through IX). The user-defined formulas, inputs, and results were documented in sufficient detail in Section 5 or in relevant attachments to allow an independent repetition of computations. This software is installed on a personal computer running Microsoft Windows 95 with CRMWS M&O Tag number 115769.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 9 of 49

## 5. CALCULATION

This section describes the calculations performed to calculate the  $k_{\text{eff}}$  of a degraded WP that contains HLW clayey material and FFTF SNF enclosed in a DOE SNF canister. The criticality calculations are detailed calculations of the neutron multiplication factor ( $k_{\text{eff}}$ ). Section 5.1 gives a description of the intact WP. The  $k_{\text{eff}}$  of different configurations of a degraded WP is investigated in Sections 5.2, 5.3, and 5.4. Section 5.2 describes calculations performed assuming the HLW glass and the FFTF fuel, enclosed in the DOE SNF canister, degraded. In Section 5.2, the DOE SNF canister remains intact. In Section 5.3, the DOE SNF canister is fully degraded and the FFTF fuel is above the HLW clayey layer. Section 5.4 describes calculations assuming that the degraded FFTF fuel is settled on the bottom of the WP with the HLW clayey material above. In Section 5.5, effect of plutonium is calculated. The MCNP input decks are presented in Attachment I (the electronic Attachment has been moved to Reference 7.14). The MCNP output decks are presented in Attachment II (the electronic Attachment has been moved to Reference 7.14). The results ( $k_{\text{eff}}$ ) for each calculation are presented in Section 6.

The description of the FFTF fuel is from the FFTF description document, Ref. 7.6 (pp. 1-5). All fuel related information is from this reference unless otherwise noted. Compositions for structural and other nonfuel related materials are from References 7.7 through 7.11. The material compositions that were obtained from References 7.7 through 7.11 are considered accepted data. These references are standard handbooks, and due to the nature of these sources, the data in it are established fact and are therefore considered accepted. The high-level waste degraded composition is from Ref. 7.2 (TBV). Avogadro's number and atomic weights are from Ref. 7.13, and are considered accepted due to the nature of the references cited therein. The data from References 7.4, 7.5 and 7.6 are considered qualified data. The number of digits cited for values converted from English to metric units does not indicate the accuracy; it is an artifact of the conversion process. This calculation is based in part on existing data; therefore, use of any results from this calculation for input into document supporting procurement, fabrication, or construction is required to be identified and tracked as TBV (to be verified) in accordance with appropriate procedures.

### 5.1 INTACT WP

This section provides the dimensions of the intact WP. The WP is composed of:

- A codisposal waste package,
- 5 HLW glass canisters,
- A DOE SNF canister.

#### 5.1.1 Co-disposal Waste Package

The codisposal waste package contains 5 HLW canisters surrounding a DOE SNF codisposal canister. The waste container barrier materials are typical of those used for commercial SNF

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 10 of 49

waste packages. The inner barrier is composed of 20 mm of high-nickel alloy ASTM B 575 (Alloy 22) and serves as a corrosion resistant material. The outer barrier is composed of a 100 mm of carbon steel (ASTM A 516 Grade 70) and serves as a corrosion allowance material (Ref. 7.4, pages 56 and 72). The outside diameter of the waste package is 2120 mm and the inside cavity length is 4617 mm. The inner barrier lids are 25 mm thick and the outer barrier lids are 110 mm thick. There is a 30 mm closure lid gap between the upper inner and outer barrier lids. There is a 225 mm skirt at each end of the container.

The codisposal canister is placed in a 31.75 mm thick carbon steel (ASTM A 516 Grade 70) support tube with 565 mm nominal outer diameter. The support tube is connected to the inside wall of the waste package by web-like carbon steel (ASTM A 516 Grade 70) plates to allow emplacement of five equally spaced HLW canisters as shown in Figure 5.1.1-1. The support tube and plates are each 4597 mm long.

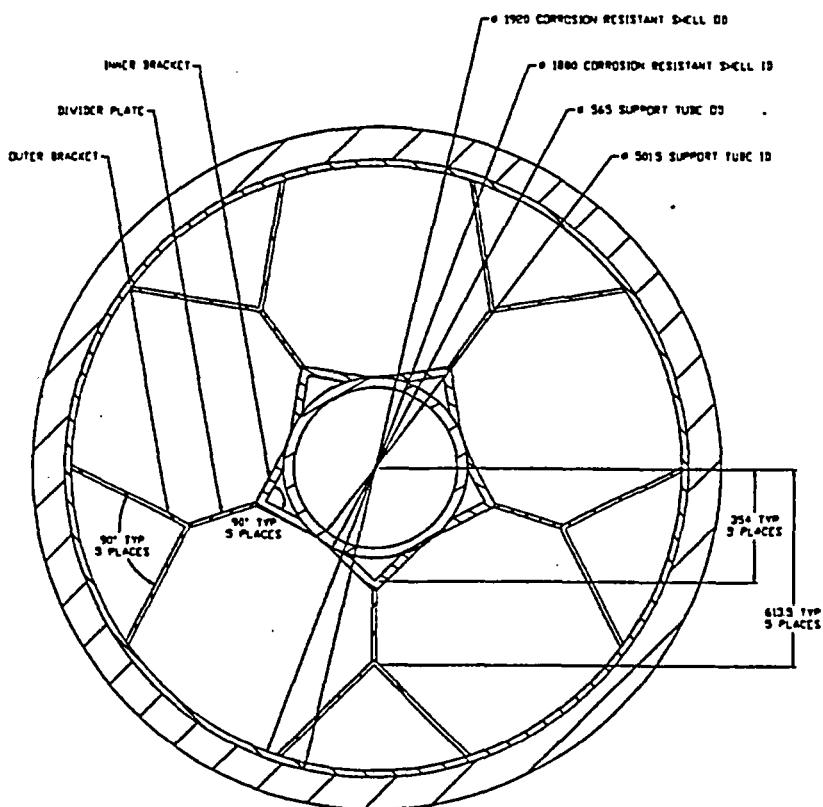


Figure 5.1.1-1. 5-DHLW/DOE Spent Fuel-Long Disposal Container

---

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 11 of 49

---

### 5.1.2 HLW Glass Pour Canisters

The Hanford fifteen feet HLW canister is a cylindrical stainless steel (Type 304L) shell with an outer diameter of approximately 610 mm (24.00 in.) (Ref. 7.5, p. 3.3-4), a wall thickness of 10.5 mm, and a nominal length of 4572 mm (15 ft). HLW glass occupies 87% of the canister's volume. The maximum loaded canister weight is 4200 kg. The nominal dimensions of the canister are used for analyses. In this calculation, the HLW canisters are degraded. The composition of the clayey material resulting from this degradation is given in Table 5.1.5-6 (Ref. 7.2, Table 5.14). The composition of the clayey material used in this calculation is given in Table 5.1.5-7. As shown in Table 6.1-4,  $k_{eff}$  is not affected by the fact that the atomic densities of sodium, calcium, and potassium used are different from the ones that are given in the geochemistry calculation (Ref. 7.2, Table 5.14).

### 5.1.3 DOE SNF Canister

The following information is taken from Reference 7.6, pages 5, 6, and 7. The DOE SNF canister is a right circular cylinder of stainless steel (Type 316L) that contains a stainless steel (Type 316L) basket. The basket serves as a criticality control material and a guide for assemblies during loading. The dimensions for the DOE SNF canister are a 457.2 mm (18.00 in.) outer diameter with a 9.525 mm (0.375 in.) wall thickness. The nominal internal length of the canister is 4145 mm and the nominal overall length is 4569 mm (179.87 in.). There is a curved bottom carbon steel rupture disk that varies in thickness from 15.24 mm to 50.8 mm at the top and bottom boundaries of the canister. In addition, there is a 12.7 mm thick curved plate and a 12.7 mm flat plate in each end of the canister. The plan view of the canister is shown in Figure 5.1.3-1. The DOE SNF canister contains basket locations for 5 Fast Flux Test Facility (FFTF) assemblies surrounding one Ident-69 pin container. Maximum loaded weight of the canister is 3400 kg. The DOE SNF canister containing 5 FFTF assemblies and an Ident-69 pin container is shown in Figure 5.1.3-2.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF  
Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 12 of 49


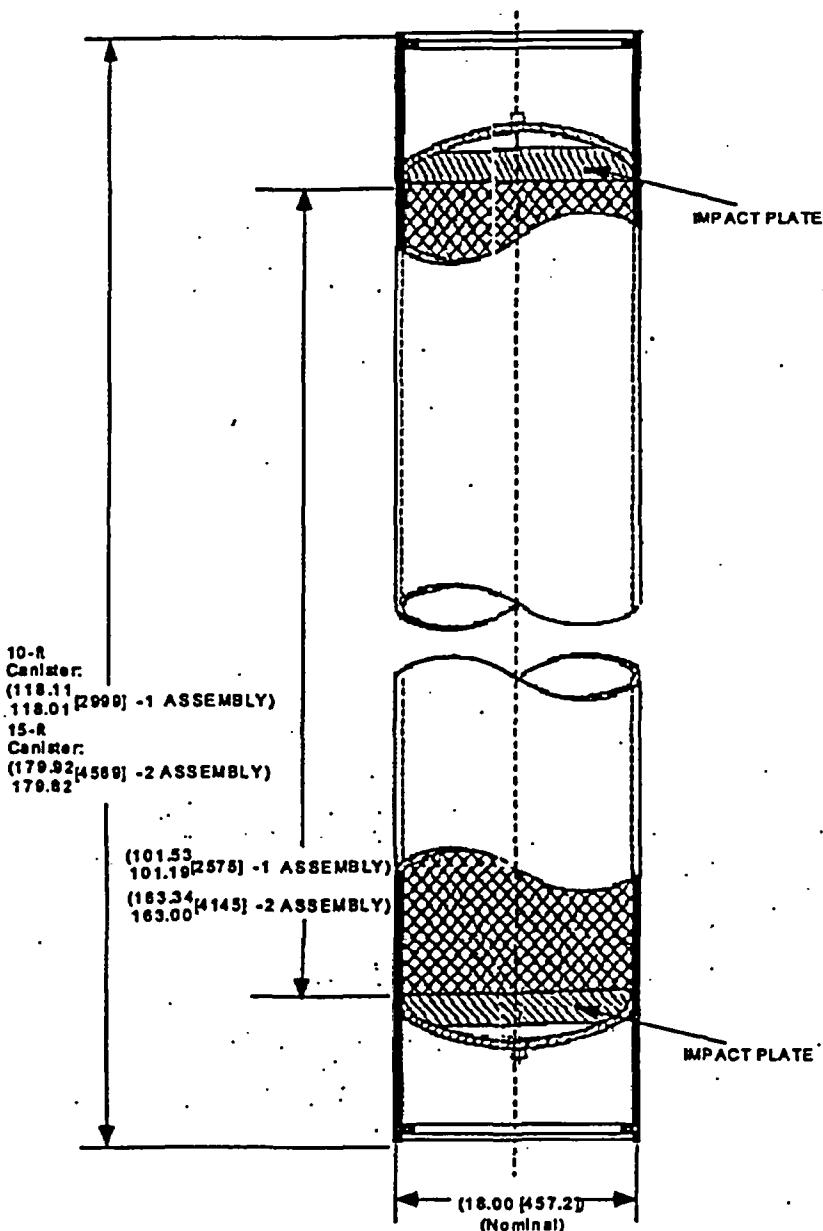


Figure 5.1.3-1. Plan View of the Proposed 18 in. DOE SNF Canister

The basket assembly consists of a cylindrical center tube and 5 divider plates extending radially from center tube to the DOE SNF canister wall. The center tube is stainless steel (Type 316L)

with 153.0 mm inside diameter and 10 mm wall thickness. The divider plates are also stainless steel (Type 316L) with a 10 mm thickness. The basket length is 4125 mm.

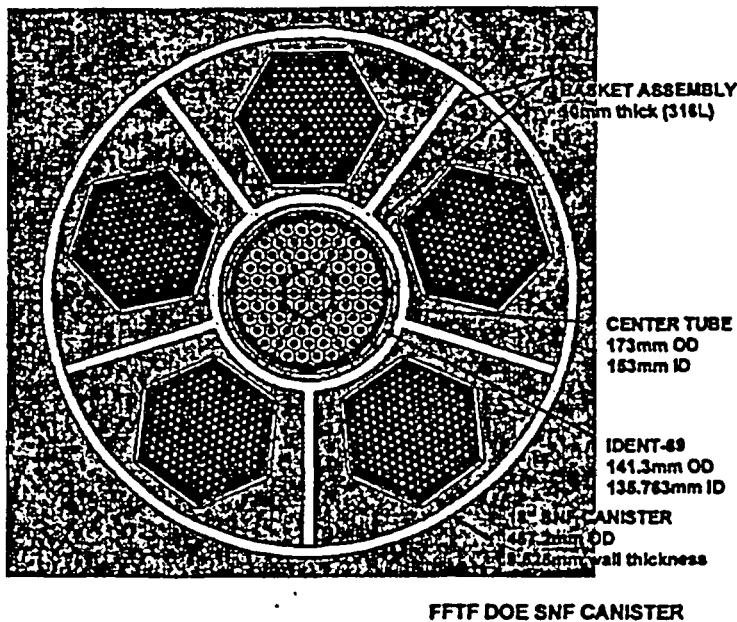

FFTF DOE SNF CANISTER

Figure 5.1.3-2. Cross-sectional View of the FFTF DOE SNF Canister

#### 5.1.4 DOE FFTF SNF

The following dimensions are from Reference 7.6, pages 1 through 5. The FFTF standard driver fuel assembly is hexagonally shaped and contains 217 cylindrical fuel pins. The assembly is 3657.6 mm long. The overall length of a fuel pin is 2372.36 mm for Type 3.1 and 4.1 fuels, and 2377.44 mm for Type 3.2 and 4.2 fuels. The cladding is 0.381 mm (0.015 in.) thick stainless steel (Type 316). The inner and outer diameters of the cladding are 5.08 mm (0.200 in.) and 5.842 mm (0.230 in.), respectively. Each fuel pin has 914.4 mm (36.0 in.) long fuel region with fuel pellet outer diameter of 4.9403 mm (0.1945 in.). The fuel region is centered 1663.7 mm (65.5 in.) from the bottom of the assembly. Each fuel pin is helically wrapped with a 1.4224 mm (0.056 in.) diameter Type 316 stainless steel wire to provide lateral spacing along its length. The wire pitch is 304.8 mm (12.0 in.). The fuel pins are arranged in a triangular pitch within the hexagonal duct. The fuel density is reported as 90.4% of the theoretical density. This corresponds to 10.02 g/cm<sup>3</sup> fuel meat density. The mixed oxide (MOX – UO<sub>1.96</sub> and PuO<sub>1.96</sub>) fuel region is followed by 20.32 mm (0.80 in.) of natural UO<sub>2</sub> insulator pellets and 144.78 mm (5.70 in.) of Inconel 600 reflector on each end. The density of natural uranium insulator pellets is 10.42 ± 0.22 g/cm<sup>3</sup>. The reflector outer diameter is 4.8133 mm (0.1895 in.). Above the top reflector is a 125.5 mm long region with a 0.8052 mm diameter Type 302 stainless steel spring.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 14 of 49

and 862.1 mm long stainless steel plenum (Type 316) with 4.9022 mm outer diameter and 0.1397 mm wall thickness. The maximum stainless steel spring volume is 2.7264 cm<sup>3</sup>. The fuel pin is closed with 5.842 mm diameter 104.6 mm and 35.6 mm long top and bottom caps, respectively. The bottom cap length for Type 3.2 and 4.2 fuels is 40.6 mm. Each fuel pin weighs 0.455 kg (1.0 lb). The fuel enrichments and isotopic fractions for all four types of fuel are given in Table 5.1.4-1.

The driver fuel assembly consists of a hexagonal duct that surrounds the fuel pins, discriminator, inlet nozzle, neutron shield and flow orifice region, load pads, and handling socket. The duct is Type 316 stainless steel with a wall thickness of 3.048 mm (0.12 in.). The duct tube outer dimension is 116.205 mm (4.575 in.) across the hexagon flats, and 131.064 mm (5.16 in.) across the opposite hexagon points. The fuel pin pitch is 7.2644 mm (0.286 in.). The maximum assembly width is determined by the load pads, which are 138.1125 mm (5.4375 in.), wide across the opposite hexagon points. The assembly length is 3657.6 mm (144 in.). Total weight of a Driver Fuel Assembly (DFA) is 172.819 kg (381 lb).

Some of the fuel assemblies have been disassembled and the fuel pins were placed in pin containers named Ident-69. Although there are several types of pins container, the most reactive pin container has been found to be the compartmented model, which can contain up to 217 fuel pins. The total container length is 3657.6 mm (144 in.). The Ident-69's are made with a 5 in. stainless steel Type 304L pipe (actual outer diameter is 5.563 in., or 141.30 mm) with a transition to 2.5 in. pipe (actual outer diameter is 2.875 in., or 73.02 mm) at 431.8 mm (17.0 in.) from the bottom. Inside diameter of the pin container is 135.763 mm (5.345 in.). The fuel pins are supported on a grid plate with 1.5875 mm (1/16 in.) holes. The central compartment has inside and outside radius of 20.701 mm (0.815 in.) and 22.225 mm (0.875 in.), respectively. Empty weight of an Ident-69 container is 59.09 kg (130 lb). The pin container inventory shows that the highest loading for an Ident-69 pin container is 154 pins of Type 4.2, 109 pins of Type 3.1, and 131 pins of Type 4.1 and 4.2 mixed together.

In this calculation, materials inside the DOE SNF canister are homogenized.

Table 5.1.4-1. Uranium and Plutonium Content of a Fresh DFA (Ref. 7.6, p. 5)

		Driver Fuel Type			
		3.1	3.2	4.1	4.2
Plutonium					
Enrichment %Pu/(Pu+U)	27.37	22.43	29.28	25.14	
	Assembly content (kg)	9.071	7.421	9.722	8.333
	Fuel pin content (g)	41.8	34.2	44.8	38.4
	Isotopic fraction				
	Pu-239	0.8696	0.8696	0.8711	0.8711
	Pu-240	0.1173	0.1173	0.1163	0.1163
	Pu-241	0.0104	0.0104	0.0102	0.0102
Uranium					
Enrichment %U/(Pu+U)	72.63	77.57	70.72	74.86	
	Assembly content (kg)	24.070	25.666	23.481	24.813 -
	Fuel pin content (g)	110.9	118.3	108.2	114.3
	Isotopic fraction				
	U-235	0.007	0.007	0.002	0.002
	U-238	0.993	0.993	0.998	0.998

Note: Each assembly contains nominally 1.5 kg of uranium in insulator pellets.

## 5.1.5 Materials

Table 5.1.5-1. Chemical Composition of Alloy 22 (Ref. 7.7, p. 10)

Element	Weight Percent Range	Value Used
Carbon	0.010 (max)	0.010
Manganese	0.50 (max)	0.50
Silicon	0.08 (max)	0.08
Chromium	22.00	22.00
Nickel	56.00	56.00
Molybdenum	13.00	13.00
Cobalt	2.50 (max)	2.060
Tungsten	3.00	3.00
Vanadium	0.35 (max)	0.35
Iron	3.00	3.00
Density = 8.69 g/cm <sup>3</sup>		

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 16 of 49

**Table 5.1.5-2. Chemical Composition of ASTM A 516 Grade 70 (Ref. 7.8, p. 2)**

Element	Weight Percent Range	Value Used
Carbon	0.30 (max)	0.30
Manganese	0.85 - 1.20	1.025
Phosphorus	0.035 (max)	0.035
Sulfur	0.035 (max)	0.035
Silicon	0.15 - 0.40	0.275
Iron	Balance	98.33

Density = 7.832 g/cm<sup>3</sup>

Density of this material is given as 7.850 g/cm<sup>3</sup> in Reference 7.9, page 7.

**Table 5.1.5-3. Chemical Composition of Inconel Alloy 600 (Ref. 7.10, p. 9)**

Element	Weight Percent Range	Value Used
Nickel	72.00 (min)	74.335
Chromium	14.0 - 17.0	15.5
Iron	6.0 - 10.0	8.0
Carbon	0.15 (max)	0.15
Manganese	1.0 (max)	1.0
Sulfur	0.015 (max)	0.015
Silicon	0.5 (max)	0.5
Copper	0.5 (max)	0.5

Density = 8.47 g/cm<sup>3</sup>

**Table 5.1.5-4. Chemical Composition of Type 304L Stainless Steel (Ref. 7.7, p. 13)**

Element	Weight Percent Range	Value Used
Carbon	0.03 (max)	0.03
Manganese	2.00 (max)	2.00
Phosphorus	0.045 (max)	0.045
Sulfur	0.03 (max)	0.03
Silicon	0.75 (max)	0.75
Chromium	18.00 - 20.00	19.00
Nickel	8.00 - 12.00	10.00
Nitrogen	0.10 (max)	0.10
Iron	Balance	68.045

Density = 7.90 g/cm<sup>3</sup>

Density of this material is given as 7.94 g/cm<sup>3</sup> in Reference 7.9, page 7 and as 8.0 g/cm<sup>3</sup> in Reference 7.11, page 871.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF

Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 17 of 49

**Table 5.1.5-5. Chemical Composition of Type 316L Stainless Steel (Ref. 7.7, p. 14)**

Element	Weight Percent Range	Value Used
Carbon	0.03 (max)	0.03
Manganese	2.00 (max)	2.00
Phosphorus	0.045 (max)	0.045
Sulfur	0.03 (max)	0.03
Silicon	0.75 (max)	0.75
Chromium	16.00 - 18.00	17.00
Nickel	10.00 - 14.00	12.00
Molybdenum	2.00 - 3.00	2.50
Nitrogen	0.10 (max)	0.10
Iron	Balance	65.545

Density = 7.9497 g/cm<sup>3</sup>Density of this material is given as 7.98 g/cm<sup>3</sup> in Reference 7.9, page 7 and as 8.0 g/cm<sup>3</sup> in Reference 7.11, page 871.**Table 5.1.5-6. Chemical Composition of Degraded HLW Glass (Ref. 7.2, Table 5.14)**

Element	Mole Percent	Element	Mole Percent
H	6.455	K	0.105
C	0.0002	Ti	0.1819
O	59.80	Mn	0.7144
Na	0.0291	Fe	18.84
Al	1.139	Ni	0.3249
Si	11.89	Cu	0.0123
Ca	0.1994	Gd	0.0020

Density at 25°C = 3.892 g/cm<sup>3</sup>**Table 5.1.5-7. Chemical Composition of Degraded HLW Glass Used in this Calculation**

Element	Mole Percent	Element	Mole Percent
H	6.4551	K	0.3872
C	0.0002	Ti	0.1819
O	59.7993	Mn	0.7144
Na	0.0761	Fe	18.8429
Al	1.1394	Ni	0.2200
Si	11.8930	Cu	0.0123
Ca	0.2762	Gd	0.0020

Density at 25°C = 3.892 g/cm<sup>3</sup>

## 5.2 DEGRADED FFTF FUEL INSIDE AN INTACT DOE SNF CANISTER SURROUNDED BY DEGRADED HLW

This section describes the calculation performed assuming a DOE SNF canister either located among 5 degraded HLW canisters or against the inner barrier of the waste package surrounded by the remnants of the HLW glass (HLW clayey material). These configurations are shown in Figures 5.2-1 and 5.2-2, respectively. The degraded FFTF fuel either sits on the bottom of the DOE SNF canister (in this case the DOE SNF canister is flooded with water – see Figure 5.2-3) or is homogenized within the DOE SNF canister volume as shown in Figure 5.2-4. The dimensions used to represent the WP and the DOE SNF canister are shown in Figure 5.2-5. Material volumes and densities used to generate the number densities are provided in the spreadsheet scenario1.xls (see Attachments III) for the degraded FFTF SNF and for the HLW clayey material. The equation used to calculate the number density values throughout Section 5.4 is shown below:

$$N = (m/V) \times N_a / M$$

where:  
 m is the mass in grams  
 V is the volume  
 $N_a$  is Avogadro's number (6.022 E+23 atoms/mole, Ref. 7.13, p. 59)  
 M is the atomic weight in gram/mole.

The volume of a cylinder segment is also calculated in the spreadsheet named x% water in clay and "snfhomo0" in the Excel file scenario1.xls (Attachments III). The equation for the volume of a cylinder segment is shown below (Ref. 7.12, p. 19):

$$\text{Cylinder Segment Volume} = L \left( R^2 \cos^{-1} \left( \frac{R-h}{R} \right) - (R-h)\sqrt{2Rh-h^2} \right)$$

where:  
 L is the cylinder length  
 R is the cylinder radius  
 h is the height of the segment.

The MCNP input decks developed for this section are presented in Attachment I (the electronic Attachment has been moved to Reference 7.14). The MCNP output decks are presented in Attachment III (the electronic Attachment has been moved to Reference 7.14).

In this calculation, the terms "fraction of water" or "percent of water" refer to a volume fraction or to a percentage of volume.

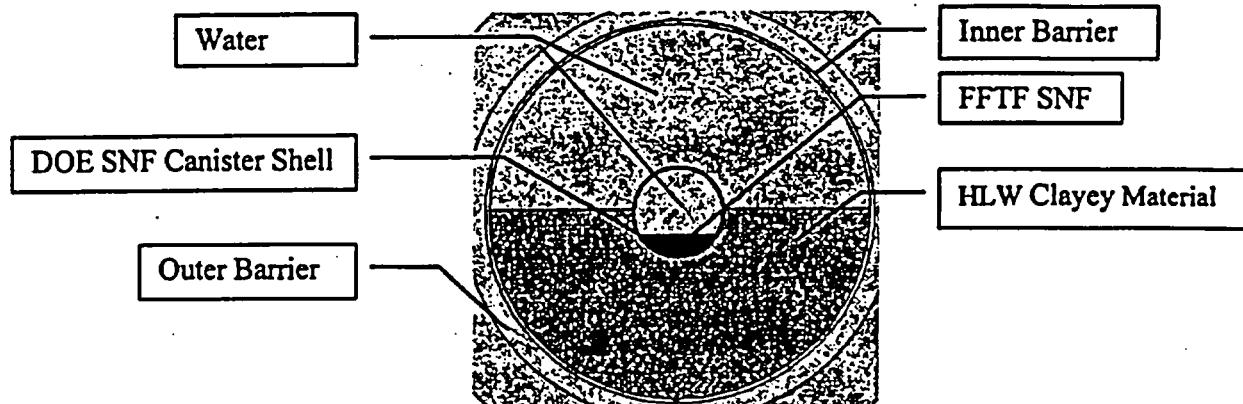


Figure 5.2-1. Cross-sectional View of the DOE SNF Canister Settled in the Middle of the WP

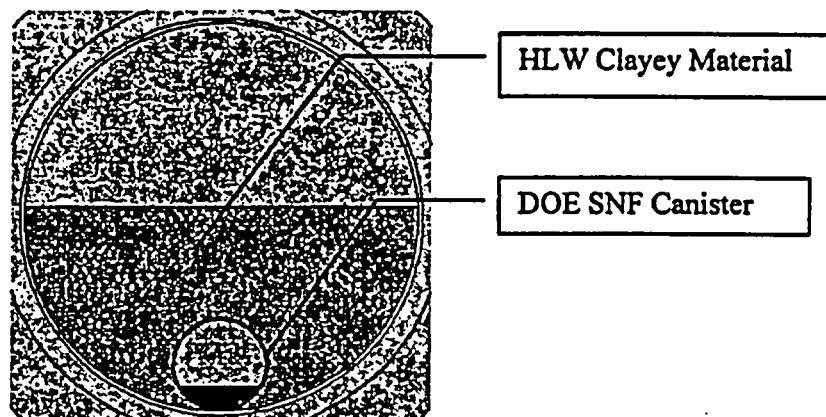


Figure 5.2-2. Cross-sectional View of the DOE SNF Canister on the Bottom of the WP

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF

Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 20 of 49

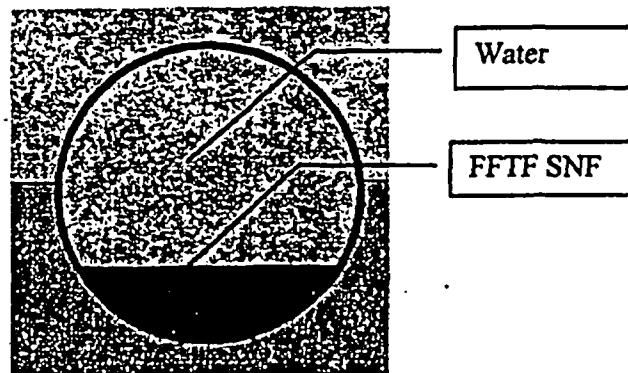


Figure 5.2-3. Cross-sectional View of the DOE SNF Canister with FFTF SNF Settled on the Bottom

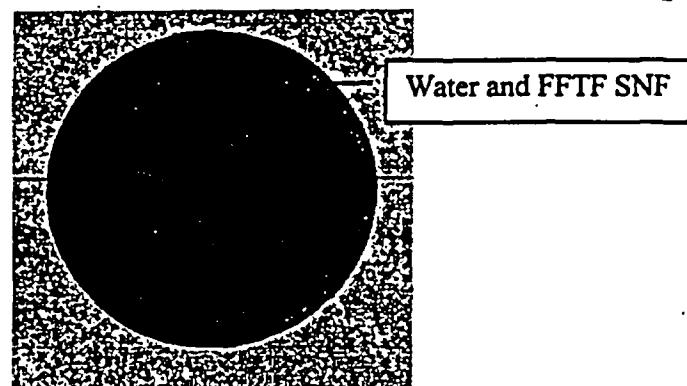


Figure 5.2-4. Cross-sectional View of the DOE SNF Canister with FFTF SNF Homogenized over the Entire Volume

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF

Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 21 of 49

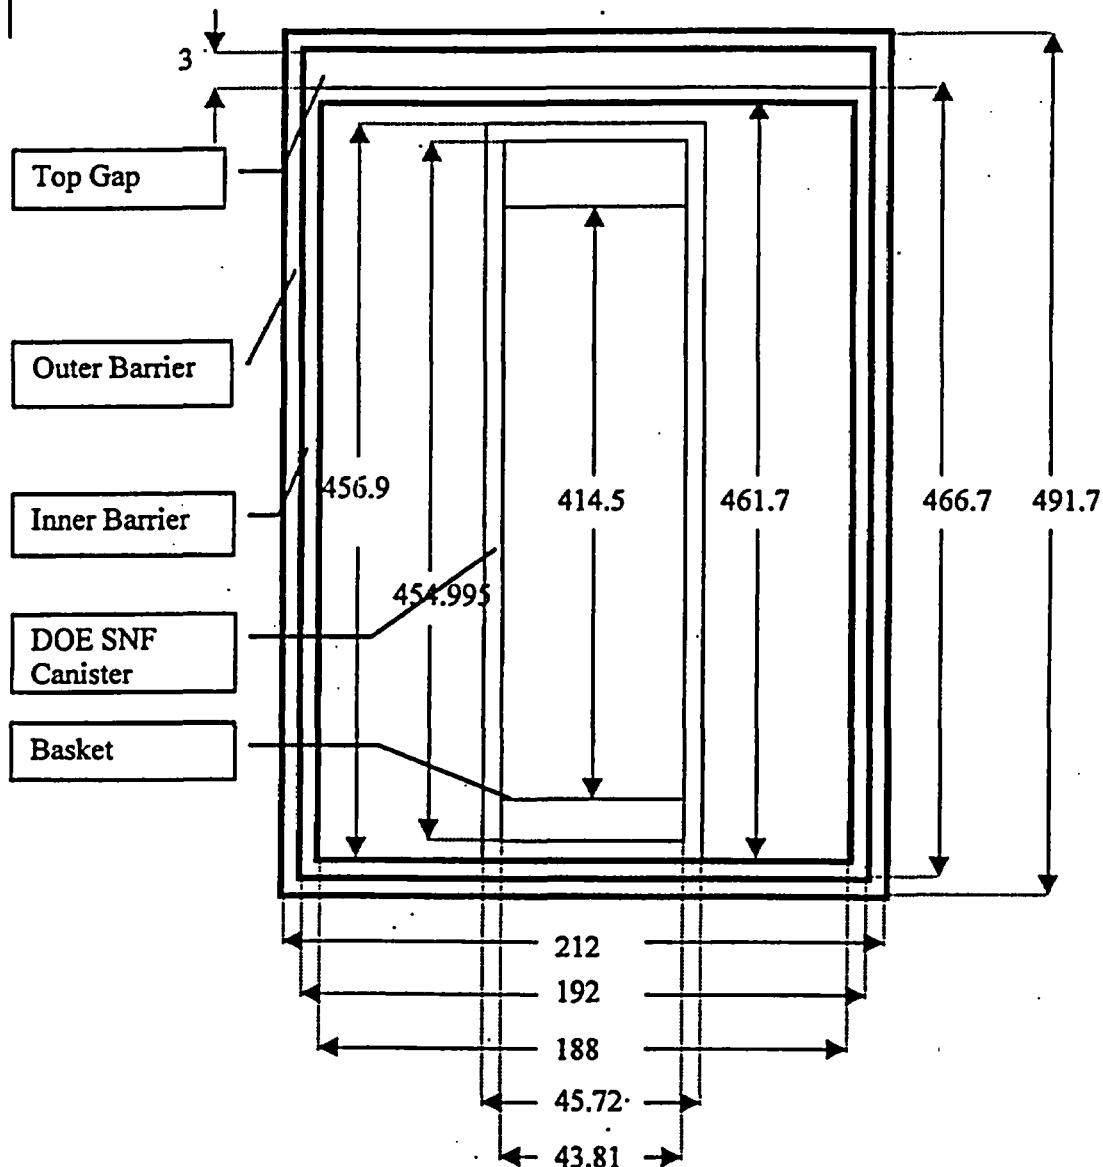


Figure 5.2-5. Dimensions of the WP and the DOE SNF Canister in cm (not to scale)

### 5.2.1 FFTF Mixture in a Flooded DOE SNF Canister

This scenario is based on an intact DOE SNF canister with the FFTF fuel settled on the bottom of this flooded canister (Figure 5.2-3). The volume and the atomic density of the FFTF mixture enclosed in the DOE SNF canister is calculated in the spreadsheet "clay" in the Excel file

**Title:** Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

**Document Identifier:** BBA000000-01717-0210-00033 REV 01

**Page 22 of 49**

scenario1.xls (Attachment III). Variations of this scenario are listed in Table 5.2.1-1. First the percentage of water in the clay is increased (along with the volume of clay). Then the position of the DOE SNF canister is varied in the WP (see Figures 5.2-1 and 5.2-2).

**Table 5.2.1-1. Degraded Dry FFTF SNF in an Intact DOE SNF Canister Surrounded by HLW Clayey Material**

Case Name	$y_1^*$ (cm)	$y_2^{**}$ (cm)	Description
m00f0c	1.710471	-12.138	DOE SNF canister shell intact in the middle of the WP, FFTF fuel degraded. Dry clay. WP and DOE SNF void spaces are flooded with water.
m00f20	23.57083	-12.138	DOE SNF canister shell intact in the middle of the WP, FFTF fuel degraded. 20% water in the clay. WP and DOE SNF void spaces are flooded with water.
m00f49	94 (1 inner radius)	-12.138	DOE SNF canister shell intact in the middle of the WP, FFTF fuel degraded. Mixture of clay and water flooding the WP. DOE SNF void space is flooded with water.
t00f0c	5.62338	-12.138	DOE SNF canister shell intact on the bottom of the WP, FFTF fuel degraded. Dry clay. WP and DOE SNF void spaces are flooded with water.
t00f20	23.57083	-12.138	DOE SNF canister shell intact on the bottom of the WP, FFTF fuel degraded. 20% water in the clay. WP and DOE SNF void spaces are flooded with water.
t00f49	94 (1 inner radius)	-12.138	DOE SNF canister shell intact on the bottom of the WP, FFTF fuel degraded. Mixture of clay and water flooding the WP. DOE SNF void space is flooded with water.

\*  $y_1$  is the distance from the WP centerline to the top of the clay layer.

\*\*  $y_2$  is the distance from the DOE SNF canister centerline to the top of the fuel layer.

## 5.2.2 FFTF Fuel Mixed with Different Volume of Water in a Flooded DOE SNF Canister

This scenario is based on an intact DOE SNF canister located in the center of the WP. The FFTF fuel is mixed with different volumes of water. Variations of this scenario are listed in Table 5.2.2-1. The hematite (product resulting from the iron degradation) is a porous media and therefore can retain an unknown volume of water. The  $k_{eff}$  of a degraded WP as a function of the amount of water trapped in the hematite (which is also noted as  $Fe_2O_3$  in this calculation) is also investigated (Table 5.2.2-1). In all of these cases, the clay was not diluted.

**Table 5.2.2-1. Degraded FFTF Fuel Mixed with Water in an Intact DOE SNF Canister Surrounded by Dry HLW Clay**

Case Name	% of the Fe <sub>2</sub> O <sub>3</sub> Volume Occupied by Water	% of Water in the Fuel	y <sub>1</sub> * (cm)	y <sub>2</sub> ** (cm)
m50f0c	0	50	1.710	-5.833
m80f0c	0	83.374	1.710	21.901 (1 inner radius)
m53f0c	30	50	1.710	-5.833
m83f0c	30	83.374	1.710	21.901 (1 inner radius)
m56f0c	60	50	1.710	-5.833***
m86f0c	60	83.374	1.710	21.901 (1 inner radius)
m60f0c	0	65	1.710	-0.860
m63f0c	30	65	1.710	-0.860
m66f0c	60	65	1.710	-0.86
m20f0c	0	25	1.710	-9.929
m23f0c	30	25	1.710	-9.929
m26f0c	60	25	1.710	-9.929
m03f0c	30	0	1.710	-12.138
m06f0c	60	0	1.710	-12.138

\* y<sub>1</sub> is the distance from the WP centerline to the top of the clay layer.

\*\* y<sub>2</sub> is the distance from the DOE SNF canister centerline to the top of the fuel layer.

\*\*\* A similar case (called n\_clay) was developed using the clay composition given in Table 5.1.5-6 (the atomic densities are calculated in the spreadsheet n\_clay.xls, Attachment VIII).

### 5.2.3 Change in k<sub>eff</sub> Due to the Absorber

If the main absorbers (Gd and Fe<sub>2</sub>O<sub>3</sub>) are lost, k<sub>eff</sub> of the WP will increase. Cases reflecting such events are described in Table 5.2.3-1. The total mass of Gd in the canister is assumed to be 7.7353 kg (see Assumption 3.3 and spreadsheet "gd" of Attachment III).

Table 5.2.3-1. Cases Considering the Loss of Absorber

Cases Name	Mass of Gd (kg) in the DOE SNF Canister	% of Fe <sub>2</sub> O <sub>3</sub> Removed from the Canister	Description
nogd56	0	0	DOE SNF canister shell intact in the middle, fuel degraded, dry clay, 60% of the hematite volume is occupied by clay, 50% of water in the fuel. WP and DOE SNF void spaces are flooded. All Gd removed from the FFTF fuel.*
10gd56	0.77353	0	DOE SNF canister shell intact in the middle, fuel degraded, dry clay, 60% of the hematite volume is occupied by clay, 50% of water in the fuel. WP and DOE SNF void spaces are flooded. 90% of the volume of Gd has been removed.
05gd56	0.3868	0	DOE SNF canister shell intact in the middle, fuel degraded, dry clay, 60% of the hematite volume is occupied by clay, 50% of water in the fuel. WP and DOE SNF void spaces are flooded. 95% of the volume of Gd has been removed.
nofe56	7.7353	100	DOE SNF canister shell intact in the middle, fuel degraded, dry clay, 60% of the hematite volume is occupied by clay, 50% of water in the fuel. WP and DOE SNF void spaces are flooded. 100% of the hematite has been removed from the canister.
06gd56	0.4641	0	DOE SNF canister shell intact in the middle, fuel degraded, dry clay, 60% of the hematite volume is occupied by clay, 50% of water in the fuel. WP and DOE SNF void spaces are flooded. 94% of the Gd has been removed from the canister.

\* A similar case (called nogdcl) was developed using the clay composition given in Table 5.1.5-6 (the atomic densities are calculated in the spreadsheet n\_clay.xls, Attachment VIII).

### 5.3 DEGRADED SNF CANISTER SETTLED ABOVE THE HLW GLASS CLAY

This section describes the calculations performed assuming the HLW canister degrades before the DOE SNF canister. The degraded HLW clayey material is assumed to be collected at the bottom of the WP, and the degraded FFTF SNF settles at the top of the clayey material as shown

in Figure 5.3-1. Material volumes and densities used to generate the number densities for the MCNP cases are provided in the spreadsheets scenario2a.xls and scenario2b.xls (see Attachments IV and V). The water density used is 1 g/cm<sup>3</sup> unless otherwise specified. The  $k_{eff}$  of the WP for different degrees of hydration of both the FFTF SNF and the HLW clayey material layers is investigated in this section. Descriptions of such configurations are given in Table 5.3-1 through Table 5.3-5. The cases described in Table 5.3-6 were developed to investigate the impact of a loss of absorber. The MCNP input decks developed for this section are presented in Attachment I (the electronic Attachment has been moved to Reference 7.14. The MCNP output decks are presented in Attachment II (the electronic Attachment has been moved to Reference 7.14).

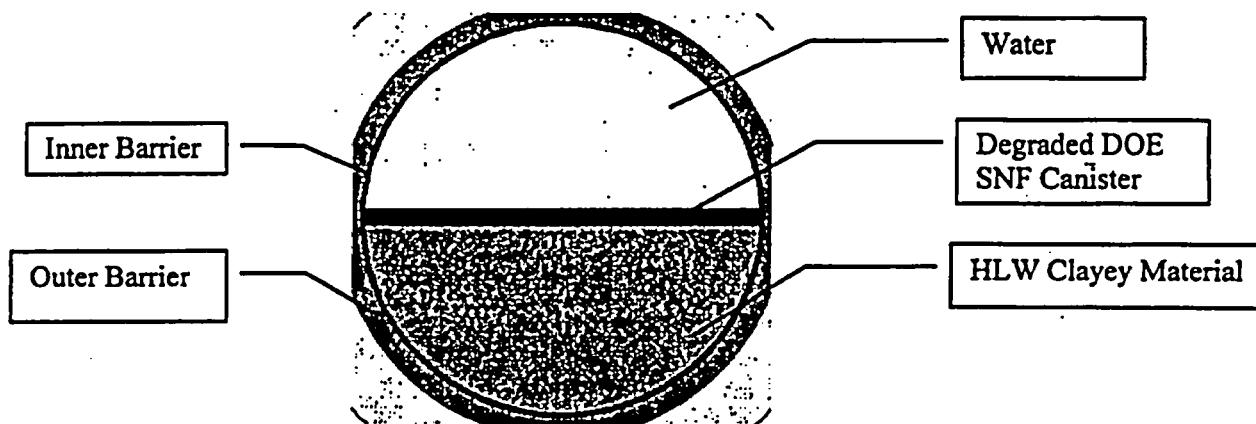


Figure 5.3-1. Degraded DOE SNF on Top of the Degraded HLW Glass Clay

The atomic densities of the clay and of the fuel used for the calculations presented in the two following tables are described in the Excel file scenario2a.xls in the spreadsheets named "clay" and "fuel", respectively.

Table 5.3-1. Stratified Layer of Degraded Dry FFTF SNF on Top of the HLW Glass Clay

Case Name	$y_1^*$ (cm)	$y_2^{**}$ (cm)	Fraction of Water in the HLW Clay	Description
ft00	-3.022	-1.087	0	Dry clay. Dry FFTF fuel sits on the top of the clay. The void space in the WP is flooded with water.
ft25	20.750	22.739	0.25	25% of water in the clay. Dry FFTF fuel sits on the top of the clay. The void space in the WP is flooded with water.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 26 of 49

**Table 5.3-1. Stratified Layer of Degraded Dry FFTF SNF on Top of the HLW Glass Clay**

Case Name	$y_1^*$ (cm)	$y_2^{**}$ (cm)	Fraction of Water in the HLW Clay	Description
ft50	86.597	94 (1 inner radius)	0.5141	51.41% of water in the clay. Dry FFTF fuel sits on the top of the clay.

\*  $y_1$  is the distance from the centerline of the WP to the top of the HLW clay layer.

\*\*  $y_2$  is the distance from the centerline of the WP to the top of the FFTF SNF layer.

In the calculations described in Table 5.3-2, the amount of water in the FFTF SNF layer varies. The HLW clayey material is modeled with no free water fraction (however, it contains some hydrogen in the form of hydrates) in order to maximize the potential volume of the degraded FFTF fuel in the layer above the HLW glass clay.

**Table 5.3-2. Stratified Layers with Degraded FFTF Fuel on the Top of Dry Clay**

Case Name	$y_1^*$ (cm)	$y_2^{**}$ (cm)	Fraction of Water in FFTF Fuel	% of $\text{Fe}_2\text{O}_3$ Filled with Water	Description
f25t00	-3.022	-0.441	0.25	0	Dry clay. 25% of water in the FFTF fuel layer. Void space of the WP filled with water.
f50t00	-3.022	0.849	0.50	0	Dry clay. 50% of water in the FFTF fuel layer. Void space of the WP filled with water.
f75t00	-3.022	4.721	0.75	0	Dry clay. 75% of water in the FFTF fuel layer. Void space of the WP filled with water.
f97t00	-3.022	94 (1 inner radius)	0.975	0	Dry clay. 97.48% of water in the FFTF fuel layer (entire space filled with a mixture of water and fuel except the clay layer).
f75t30	-3.022	4.721	0.75	30	Dry clay. 75% of water in the FFTF fuel layer. Void space of the WP filled with water.


**Table 5.3-2. Stratified Layers with Degraded FFTF Fuel on the Top of Dry Clay**

Case Name	$y_1^*$ (cm)	$y_2^{**}$ (cm)	Fraction of Water in FFTF Fuel	% of $\text{Fe}_2\text{O}_3$ Filled with Water	Description
f75t60	-3.022	4.721	0.75	60	Dry clay. 75% of water in the FFTF fuel layer. Void space of the WP filled with water.

\*  $y_1$  is the distance from the centerline of the WP to the top of the HLW clay layer.

\*\*  $y_2$  is the distance from the centerline of the WP to the top of the FFTF SNF layer.

In the previous configuration, the WP was flooded with water. In the next configuration, the HLW glass clay and the fuel layer fill the entire WP, there is no void space (see Figure 5.3-2). Table 5.3-3 lists the different cases developed. To find the most reactive case, the density of the water mixed with the clay and/or the fuel is varied.

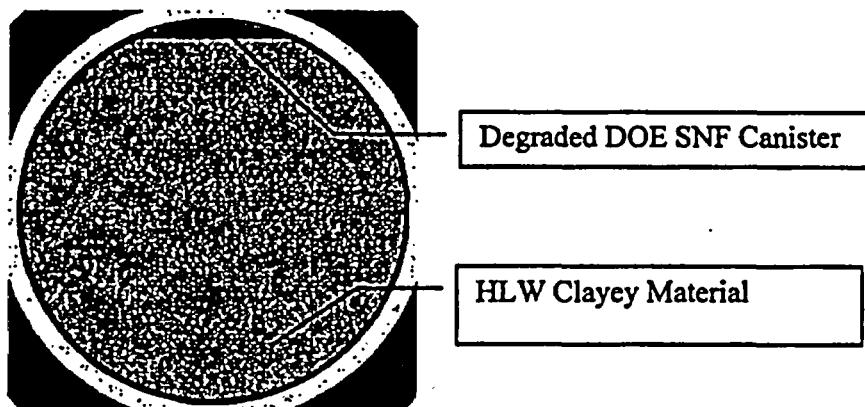**Figure 5.3-2. WP Filled with HLW Clay Material Layer and FFTF SNF Layer**

The atomic densities of the clay and of the fuel used for the calculations presented in the two following tables are described in the Excel file scenario2b00.xls in the spreadsheets named "clay" and "fuel", respectively.

**Table 5.3-3. Stratified Layer with Degraded FFTF SNF Diluted with Different Density of Water**

Case Name	y* (cm)	Density of the Water in the FFTF SNF (g/cm <sup>3</sup> )	Density of the Water in the HLW Clayey Material (g/cm <sup>3</sup> )
<b>51.41% of Water in the HLW Clayey Material, Dry FFTF SNF</b>			
01ft50	86.597	N/A**	0.1
05ft50	86.597	N/A	0.5
08ft50	86.597	N/A	0.8
ft50***	86.597	N/A	1.0
<b>Dry HLW Clayey Material, 97.48% of Water in the FFTF SNF</b>			
f97t01	-3.022	0.1	N/A
f97t05	-3.022	0.5	N/A
f97t08	-3.022	0.8	N/A
f97t00****	-3.022	1.0	N/A
<b>25% of Water in the HLW Clayey Material, 96.37% of Water in the FFTF SNF</b>			
01ft25	20.750	1.0	0.1
05ft25	20.750	1.0	0.5
08ft25	20.750	1.0	0.8
10ft25	20.750	1.0	1.0
960125	20.750	0.1	1.0
960525	20.750	0.5	1.0
960825	20.750	0.8	1.0
<b>45% of Water in the HLW Clayey Material, 89.77% of Water in the FFTF SNF</b>			
894501	59.068	1.0	0.1
894505	59.068	1.0	0.5
894508	59.068	1.0	0.8
894510	59.068	1.0	1.0
<b>49.39% of Water in the HLW Clayey Material, 75% of Water in the FFTF SNF</b>			
754901	75.106	1.0	0.1
754905	75.106	1.0	0.5
754908	75.106	1.0	0.8
754910	75.106	1.0	1.0
750149	75.106	0.1	1.0
750549	75.106	0.5	1.0
750849	75.106	0.8	1.0
750105	75.106	0.1	0.5
750505	75.106	0.5	0.5
750805	75.106	0.8	0.5

**Table 5.3-3. Stratified Layer with Degraded FFTF SNF Diluted with Different Density of Water**

Case Name	y* (cm)	Density of the Water in the FFTF SNF ( $\text{g/cm}^3$ )	Density of the Water in the HLW Clayey Material ( $\text{g/cm}^3$ )
<b>50% of Water in the HLW Clayey Material, 67.98% of Water in the FFTF SNF</b>			
695001	78.033	1.0	0.1
695005	78.033	1.0	0.5
695008	78.033	1.0	0.8
695010	78.033	1.0	1.0
690101	78.033	0.1	0.1
690501	78.033	0.5	0.1
690801	78.033	0.8	0.1

\* y is the distance from the centerline of the WP to the top of the clayey material layer.

\*\* Not Applicable (N/A).

\*\*\* See Table 5.3-1.

\*\*\*\* See Table 5.3-2.

In the configurations described in the following table, the layer of fuel and the layer of HLW glass are mixed partially or totally as shown in Figures 5.3-3a and 5.3-3b, respectively. Any available void space in the WP is flooded with water.

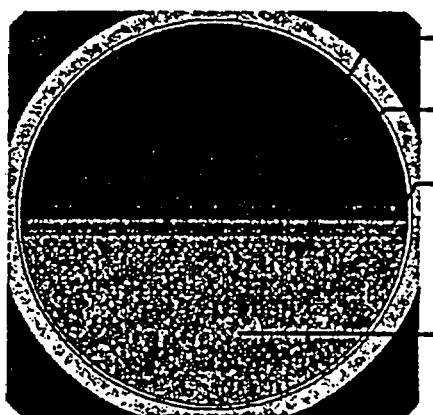


Figure 5.3-3a. Layer of Fuel Partially Mixed with the Layer of HLW Clay

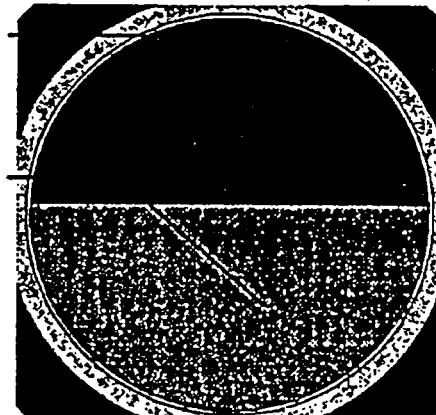



Figure 5.3-3b. Layer of Fuel Totally Mixed with the Layer of HLW Clay

Table 5.3-4. Layer of FFTF Fuel Mixed with Layer of HLW Clayey Material

Case Name	$y_1^*$ (cm)	$y_2^{**}$ (cm)	$y_3^{***}$ (cm)	Fraction of Water in the Fuel	Fraction of Water in the Clay	Description
mixt10	-10.12	-2.25	4.72	0.75	0	90% of the clay is settled on the bottom. A mix composed of 10% of the clay and 10% of the fuel sits on the top of the clay layer followed by 90% of the fuel. The void space in WP is filled with water (see Attachment IV spreadsheet mix).
mixt25	-20.90	-1.09	4.72	0.75	0	75% of the clay is settled on the bottom. A mix composed of 25% of the clay and 25% of the fuel sits on the top of the clay layer followed by 75% of the fuel. The void space in WP is filled with water (see attachment IV spreadsheet mix).
mixt60	-47.63	1.62	4.72	0.75	0	40% of the clay is settled on the bottom. A mix composed of 60% of the clay and 60% of the fuel sits on the top of the clay layer followed by 40% of the fuel. The void space in WP is filled with water (see Attachment IV spreadsheet mix).
mix100	N/A	4.72	N/A	0.75	0	The clay and the fuel are mixed together. The void space in WP is filled with water (see Attachment IV spreadsheet mix).
mx6910	57.43	79.13	94 (1 inner radius)	0.6798	50	10% of the clay and 10% of the fuel are mixed together. Density of the water in the clay is 0.1 g/cm <sup>3</sup> (see Attachment V spreadsheet mix).

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 31 of 49

**Table 5.3-4. Layer of FFTF Fuel Mixed with Layer of HLW Clayey Material**

Case Name	y <sub>1</sub> * (cm)	y <sub>2</sub> ** (cm)	y <sub>3</sub> *** (cm)	Fraction of Water in the Fuel	Fraction of Water in the Clay	Description
mx6925	33.08	80.86	94 (1 inner radius)	0.6798	50	25% of the clay and 25% the fuel are mixed together. Density of the water in the clay is 0.1 g/cm <sup>3</sup> (see Attachment V spreadsheet mix).
mx6960	-17.28	85.42	94 (1 inner radius)	0.6798	50	The clay and the fuel are mixed together. Density of the water in the clay is 0.1 g/cm <sup>3</sup> (see Attachment V spreadsheet mix).

\* y<sub>1</sub> is the distance from the centerline of the WP to the top of the HLW clay layer.

\*\* y<sub>2</sub> is the distance from the centerline of the WP to the top of the mix layer.

\*\*\* y<sub>3</sub> is the distance from the centerline of the WP to the top of the fuel layer.

In the next calculation, the WP contains a mixture of FFTF SNF, HLW, and water such that the inner volume of the WP is filled. Detailed description of the densities used is given in Attachment V spreadsheet mix.

**Table 5.3-5. Homogenized FFTF SNF and HLW Clayey Material**

Case Name	Density of the Water Needed to Flood the WP (g/cm <sup>3</sup> )
homo	1.0
homo08	0.8
homo05	0.5
homo01	0.1

In the previous configurations, the mass of Gd (neutron absorber) present in the WP is 7.7353 kg (see Assumption 3.3). To determine the minimum amount of absorber needed to prevent criticality in the WP, cases described in Table 5.3-6 are developed.

**Table 5.3-6. Stratified Layer with Degraded FFTF Fuel on Top with Different Loadings of Neutron Absorber**

Case Name	Mass of Gd (kg) in the WP	% Fe <sub>2</sub> O <sub>3</sub> Removed from the WP	Fraction of Water in FFTF	Fraction of Water in HLW	Description
nogd75	0	0	0.75	0	No Gd in the fuel layer, WP flooded (see Attachment IV spreadsheet fuel).
nogdfe	0	100	0.75	0	No Gd or hematite in the fuel layer, WP flooded (see Attachment IV spreadsheet fuel).
nogdal	0	0	0.75	0	No Gd in the fuel and clay layer, WP flooded (see Attachment IV spreadsheet fuel).
nogfal	0	100	0.75	0	Neither Gd nor hematite in either the fuel layer or the clay layer, WP flooded (see Attachment IV spreadsheet fuel).
69nogd	0	0	0.6798	0.50	No Gd in the fuel layer (see Attachment V spreadsheet fuel).
69nofe	7.7353	100	0.6798	0.50	No Fe <sub>2</sub> O <sub>3</sub> in the fuel layer (see Attachment V spreadsheet fuel).
69nogf	0	100	0.6798	0.50	Neither Gd nor Fe <sub>2</sub> O <sub>3</sub> in the fuel layer (see Attachment V spreadsheet fuel).
01gd50	0	0	0	51.41	No Gd in the fuel layer (see Attachment V spreadsheet fuel).
01fe50	7.7353	100	0	51.41	No Fe in the fuel layer (see Attachment V spreadsheet fuel).
01gf50	0	100	0	51.41	Neither Gd nor Fe <sub>2</sub> O <sub>3</sub> in the fuel layer (see Attachment V spreadsheet fuel).

#### 5.4 DEGRADED SNF CANISTER SETTLED IN THE BOTTOM OF THE WP, THE HLW CLAYEY MATERIAL ABOVE

This section describes the calculation performed assuming the DOE SNF canister sinks to the bottom of the degraded HLW clay during the degradation process. As the DOE SNF canister degrades, there will be some mixing of the HLW clayey material and the FFTF SNF as shown in

Figure 5.4-1. It is assumed that the water fraction in the bottom layer is the same as the water fraction in the clayey material. Descriptions of the calculations for this scenario are provided in Table 5.4-1. Material volumes and densities used to generate the number densities for the MCNP cases are provided in the spreadsheet "mix" of the Excel file scenario3.xls (see Attachment VI). The MCNP input decks developed for these cases are presented in Attachment I (the electronic Attachment has been moved to Reference 7.14). The MCNP output decks are presented in Attachment II (the electronic Attachment has been moved to Reference 7.14).

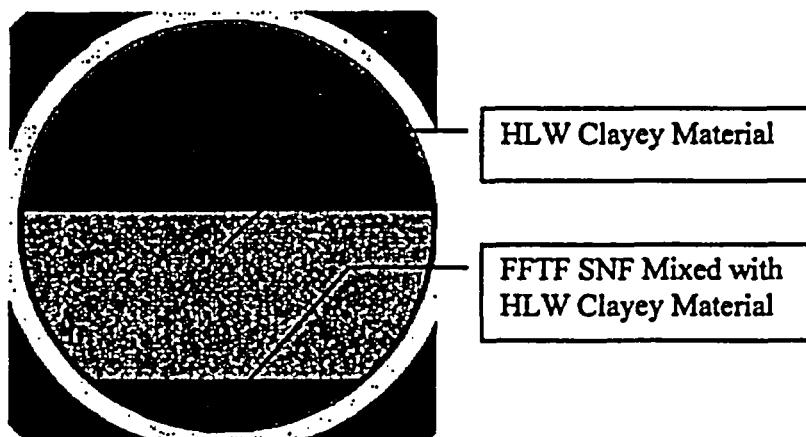


Figure 5.4-1. Degraded DOE SNF Mixed with HLW Glass Clay at the Bottom of the WP

Table 5.4-1. Stratified Layer, FFTF SNF Layer at the Bottom of the WP

Case Name	Water Fraction of the Clay and of the FFTF SNF	% of HLW Mixed With Degraded FFTF SNF	$y_1^*$ (cm)	$y_2^{**}$ (cm)
w00h00	0.0	00	-86.597	-1.087
w00h10	0.0	10	-73.035	-1.087
w00h20	0.0	20	-62.773	-1.087
w00h30	0.0	30	-53.741	-1.087
w10h00	0.1	00	-86.054	7.002
w10h10	0.1	10	-71.469	7.002
w10h20	0.1	20	-60.406	7.002
w10h30	0.1	30	-50.645	7.002
w20h00	0.2	00	-85.399	17.196
w20h10	0.2	10	-69.575	17.196
w20h20	0.2	20	-57.534	17.196
w20h30	0.2	30	-46.879	17.196
w30h00	0.3	00	-84.589	30.639

**Title:** Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

**Document Identifier:** BBA000000-01717-0210-00033 REV 01

**Page 34 of 49**

**Table 5.4-1. Stratified Layer, FFTF SNF Layer at the Bottom of the WP**

Case Name	Water Fraction of the Clay and of the FFTF SNF	% of HLW Mixed With Degraded FFTF SNF	y <sub>1</sub> * (cm)	y <sub>2</sub> ** (cm)
w30h10	0.3	10	-67.227	30.639
w30h20	0.3	20	-53.965	30.639
w30h30	0.3	30	-42.179	30.639
w40h00	0.4	00	-83.559	49.853
w40h10	0.4	10	-64.224	49.853
w40h20	0.4	20	-49.375	49.853
w40h30	0.4	30	-36.108	49.853
w50h00	0.5	00	-82.073	94 (WP filled)
w50h10	0.5	10	-59.864	94 (WP filled)
w50h20	0.5	20	-42.667	94 (WP filled)
w50h30	0.5	30	-27.164	94 (WP filled)

\* y<sub>1</sub> is the distance from the centerline of the WP to the top of the FFTF SNF layer.

\*\* y<sub>2</sub> is the distance from the centerline of the WP to the top of the HLW Clayey Material.

Table 5.4-2 describes the calculation developed to predict k<sub>eff</sub> in case of total loss of the absorber Gd and total loss of the hematite.

**Table 5.4-2. Stratified Layers of FFTF SNF and HLW Clayey Material with Different Loading of Neutron Absorber**

Case Name	Water Fraction of the Clay and of the FFTF SNF	% of HLW Mixed with Degraded FFTF SNF	Mass of Gd in the Mix Layer (g)	Fraction of Fe <sub>2</sub> O <sub>3</sub> from the FFTF SNF Removed from the Mix Layer
nogd30	0.30	10	304.584	0
nogf30	0.30	10	304.584	1
ngd30b	0.30	10	0	0
ngf30b	0.30	10	0	1
nogd50	0.507358	00	0	0
nogf50	0.507358	00	0	1

**5.5 EFFECTS OF PLUTONIUM DECAY**

In this section, the decay of the following materials is studied: Pu-239, Pu-240, and Pu-241. Pu-239 and Pu-240 are alpha emitters and will decay to U-235 and U-236 respectively (see Ref. 7.13, p. 48). Pu-241 is a  $\beta^-$  emitter and will decay to Am-241. Am-241 is an alpha emitter and decays to Np-237 (see Ref. 7.13, p. 48).

The atomic density of an element/isotope at a time  $t$  is given by Equation 5.1:

$$N_x(t) = N_{o_x} * \exp\left(\frac{-\ln 2 * t}{T_{1/2x}}\right) \quad \text{Equation 5.1.}$$

where :  $t$  is the time,

$N_x(t)$  is the atomic density of the isotope X at time  $t$ ,

$N_{o_x}$  is the atomic density of the isotope X at time zero,

$T_{1/2x}$  is the half-life of the isotope X

In this calculation,  $k_{eff}$  is evaluated at 4 different times:

- $t = 0$  : decays as not started.
- $t = T_{1/2_{Pu-239}} = 2.41E4$  years (Ref. 7.13, p. 48).
- $t = 2 * T_{1/2_{Pu-239}} = 4.82E4$  years. At this time, practically all Pu-241 has decayed to Np-237 and more than 99% of the Pu-240 has decayed to U-236.
- $t = \text{Final}$ . The time "final" refers to the time at which all plutonium isotopes have decayed (e.g., at ten half-lives of Pu-239, more than 99.9% of Pu-239 has decayed to U-235 and all other plutonium isotopes are essentially zero).

Table 5.5-1 gives a list of the cases listed in previous sections that are studied in Section 5.5. Those particular cases were selected because their reactivity is high.

The atomic densities of each fissile material at times of interest are given in Attachment IX.

**Table 5.5-1. List of the Cases Studied**

Case Name	Case Name
69nogd	mx6925
69nogf	nofe56
754905	nogd56
894508	nogf50
m06f0c	t00f20
m56f0c	w50h00

**Title:** Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

**Document Identifier:** BBA000000-01717-0210-00033 REV 01

**Page 36 of 49**

## 6. RESULTS

This calculation file documents the criticality evaluations that were performed for a Five-Pack defense HLW waste package containing FFTF fuel in the DOE SNF canister. Sections 6.1 through 6.4 present the  $k_{\text{eff}}$  results for each of the scenarios depicted in Sections 5.2 through 5.5. The  $k_{\text{eff}}$  results represent the average combined collision, absorption, and track-length estimator from the MCNP calculations. The standard deviation represents the standard deviation of  $k_{\text{eff}}$  about the average combined collision, absorption, and track-length estimate due to the Monte Carlo calculation statistics. The estimated  $k_{\text{eff}}$  with 99% confidence are calculated in the spread sheet plot.xls (Attachment VII).

These results are based in part on existing data; therefore, use of any results from this calculation for input into document supporting procurement, fabrication, or construction is required to be identified and tracked as TBV in accordance with appropriate procedures.

### 6.1 DEGRADED FFTF FUEL IN AN INTACT DOE SNF CANISTER

Table 6.1-1 presents the result for the MCNP calculation described in Section 5.2.1. Results reported in this table show that the most reactive case occur for dry HLW clay and if the DOE SNF canister is located in the middle of the codisposal waste canister. Table 6.1-2 illustrates the results for the MCNP calculation performed using this configuration of the WP and using the configurations of the DOE SNF canister described in Section 5.2.2.

**Table 6.1-1. Degraded Dry FFTF Fuel in a WP Containing HLW Clay**

Description	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}} +2\sigma$	H/X Ratio *	AENCF (MeV) **	MCNP Output File Name
DOE SNF canister shell intact in the middle of the WP, FFTF fuel degraded. Dry clay. WP and DOE SNF void spaces are flooded with water.	0.2824	0.0008	0.2840	0	0.5756	m00f0c.O
DOE SNF canister shell intact in the middle of the WP, FFTF fuel degraded. 20% water in the clay. WP and DOE SNF void spaces are flooded with water.	0.2674	0.0009	0.2691	0	0.6012	m00f20.O

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 37 of 49

Table 6.1-1. Degraded Dry FFTF Fuel in a WP Containing HLW Clay

Description	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}} + 2\sigma$	H/X Ratio *	AENCF (MeV) **	MCNP Output File Name
DOE SNF canister shell intact in the middle of the WP, FFTF fuel degraded. Mixture of clay and water flooding the WP. DOE SNF void space is flooded with water.	0.2590	0.0008	0.2606	0	0.6095	m00f49.O
DOE SNF canister shell intact on the bottom of the WP, FFTF fuel degraded. Dry clay. WP and DOE SNF void spaces are flooded with water.	0.2695	0.0007	0.2709	0	0.6067	t00f0c.O
DOE SNF canister shell intact on the bottom of the WP, FFTF fuel degraded. 20% water in the clay. WP and DOE SNF void spaces are flooded with water.	0.2720	0.0008	0.2736	0	0.5955	t00f20.O
DOE SNF canister shell intact on the bottom of the WP, FFTF fuel degraded. Mixture of clay and water flooding the WP. DOE SNF void space is flooded with water.	0.2692	0.0009	0.2709	0	0.5938	t00f49.O

\* H/X: ratio of hydrogen to fissile material ( $U^{235} + Pu^{239}$ ).

\*\* AENCF: average energy neutron causing fission.

Table 6.1-2. Degraded FFTF Fuel in a Flooded WP Containing Dry HLW Clay

Description		Results					
% of $Fe_2O_3$ Occupied by Water	% of Water in the Fuel	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}} + 2\sigma$	H/X Ratio	AENCF (MeV)	MCNP Output File Name
30	0	0.4471	0.0011	0.4494	20.2	0.3045	m03f0c.O
60	0	0.5383	0.0015	0.5413	40.2	0.2157	m06f0c.O
0	50	0.5245	0.0012	0.5270	61.6	0.1751	m50f0c.O
0	83.374	0.5307	0.0010	0.5327	309.0	0.0675	m80f0c.O
30	50	0.5794	0.0013	0.5820	102.1	0.1286	m53f0c.O

**Title:** Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

**Document Identifier:** BBA000000-01717-0210-00033 REV 01

**Page 38 of 49**

**Table 6.1-2. Degraded FFTF Fuel in a Flooded WP Containing Dry HLW Clay**

Description		Results					
% of $\text{Fe}_2\text{O}_3$ Occupied by Water	% of Water in the Fuel	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}}+2\sigma$	H/X Ratio	AENCF (MeV)	MCNP Output File Name
30	83.374	0.5042	0.0009	0.5060	430.6	0.0570	m83f0c.O
60	50	0.5978	0.0013	0.6004	142.5	0.1057	m56f0c.O*
60	83.374	0.4767	0.0008	0.4783	552.3	0.0494	m86f0c.O
0	65	0.5646	0.0012	0.5669	114.4	0.1196	m60f0c.O
30	65	0.5837	0.0013	0.5863	172.2	0.0944	m63f0c.O
60	65	0.5774	0.0011	0.5796	230.0	0.0795	m66f0c.O
0	25	0.4211	0.0011	0.4232	20.5	0.3106	m20f0c.O
30	25	0.5294	0.0013	0.5320	47.5	0.2004	m23f0c.O
60	25	0.5843	0.0014	0.5871	74.5	0.1574	m26f0c.O

\* The  $k_{\text{eff}}$  obtained for the case n\_clay (similar to m56f0c except the clay composition) is 0.6006, the standard deviation is 0.0009 (see n\_clay.O). Therefore the two cases (m56f0c and n\_clay) are statistically identical.

Table 6.1-3 shows the  $k_{\text{eff}}$  in the WP assuming that some of the principal absorbers have been removed from the WP and that the water fraction in the fuel is 0.50. A detailed description of the different cases studied is given in Table 5.2.3-1.

**Table 6.1-3. Degraded FFTF SNF with Different Loadings of Neutron Absorber**

Description		Results					
Mass of Gd (kg) in the DOE SNF Canister	% of $\text{Fe}_2\text{O}_3$ Removed from the Canister	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}}+2\sigma$	H/X Ratio	AENCF (MeV)	MCNP Output File Name
0	0	1.0415	0.0012	1.0439	142.5	0.0604	nogd56.O*
0.3868	0	0.9185	0.0016	0.9217	142.5	0.0700	05gd56.O
0.4641	0	0.9053	0.0016	0.9084	142.5	0.0697	06gd56.O
0.77353	0	0.8518	0.0015	0.8547	142.5	0.0739	10gd56.O
7.7353	100	0.6270	0.0009	0.6288	142.5	0.1211	nofe56.O

\* The  $k_{\text{eff}}$  obtained for the case nogdcl (similar to nogd56 except the clay composition) is 1.0438, the standard deviation is 0.0012 (see nogdcl.O). Therefore the two cases (nogd56 and nogdcl) are statistically identical.

**6.2 DEGRADED SNF CANISTER SETTLED ABOVE THE HLW GLASS CLAY**

The following presents the results of the calculations described in Section 5.3.

**Table 6.2-1. Degraded Layer of Dry FFTF Fuel on the Top of a HLW Clay Layer**

Fraction of Water in the HLW Clay	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}}+2\sigma$	H/X Ratio in the Fuel Section	AENCF (MeV)	MCNP Output File Name
0	0.1561	0.0006	0.1574	0	0.2828	f00.O
0.25	0.1491	0.0007	0.1505	0	0.2941	f20.O
0.5141 (WP filled)	0.1969	0.0008	0.1984	0	0.4870	f50.O

**Table 6.2-2. Degraded Layer of FFTF Fuel on the Top of a Dry HLW Clay Layer**

Description		Results					
Fraction of Water in the FFTF Fuel	% of the $\text{Fe}_2\text{O}_3$ Volume Filled with Water	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}}+2\sigma$	H/X Ratio in the Fuel Section	AENCF (MeV)	MCNP Output File Name
0.25	0	0.1930	0.0008	0.1946	33.2	0.2086	f25t00.O
0.50	0	0.2586	0.0009	0.2604	99.6	0.1309	f50t00.O
0.75	0	0.3463	0.0009	0.3481	298.8	0.0670	f75t00.O
0.975	0	0.2310	0.0004	0.2318	3855.7	0.0180	f97t00.O
0.75	30	0.3516	0.0010	0.3535	335.2	0.0629	f75t30.O
0.75	60	0.3562	0.0008	0.3578	371.6	0.0596	f75t60.O

Table 6.2-3 lists the  $k_{\text{eff}}$  of the configuration developed assuming the density of the water in either the clay or the fuel is variable.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 40 of 49

Table 6.2-3. Layers of FFTF SNF and HLW Glass Diluted with Water of Variable Density

Description		Results					
Density of the Water in the FFTF SNF (g/cm <sup>3</sup> )	Density of the Water in the HLW Clay (g/cm <sup>3</sup> )	k <sub>eff</sub>	σ	k <sub>eff</sub> +2σ	AENCF (MeV)	H/X Ratio in the Fuel Section	MCNP Output File Name
<b>51.41% of Water in the HLW Clayey Material, Dry FFTF SNF</b>							
N/A	0.1	0.2107	0.0007	0.2121	0.4756	0	01ft50.O
N/A	0.5	0.1977	0.0006	0.1989	0.4956	0	05ft50.O
N/A	0.8	0.1972	0.0007	0.1986	0.4957	0	08ft50.O
N/A	1.0	0.1969	0.0008	0.1984	0.4870	0	ft50.O
<b>Dry HLW Clayey Material, 97.48% of Water in the FFTF SNF</b>							
0.1	N/A	0.3434	0.0008	0.3450	0.0580	385.6	f97t01.O
0.5	N/A	0.2840	0.0005	0.2850	0.0253	1927.9	f97t05.O
0.8	N/A	0.2476	0.0004	0.2484	0.0198	3084.6	f97t08.O
1.0	N/A	0.2310	0.0004	0.2318	0.0180	3855.7	f97t00.O
<b>25% of Water in the HLW Clayey Material, 96.37% of Water in the FFTF SNF</b>							
1.0	0.1	0.2622	0.0005	0.2631	0.0206	2641	01ft25.O
1.0	0.5	0.2610	0.0004	0.2618	0.0210	2641	05ft25.O
1.0	0.8	0.2624	0.0004	0.2632	0.0199	2641	08ft25.O
1.0	1.0	0.2617	0.0004	0.2625	0.0213	2641	10ft25.O
0.1	1.0	0.3305	0.0011	0.3327	0.0742	264.1	960125.O
0.5	1.0	0.3189	0.0006	0.3201	0.0301	1320.5	960525.O
0.8	1.0	0.2806	0.0004	0.2813	0.0228	2112.8	960825.O
<b>45% of Water in the HLW Clayey Material, 89.77% of Water in the FFTF SNF</b>							
1.0	0.1	0.3775	0.0007	0.3788	0.0377	874.0	894501.O
1.0	0.5	0.3758	0.0007	0.3771	0.0374	874.0	894505.O
1.0	0.8	0.3739	0.0007	0.3752	0.0373	874.0	894508.O
1.0	1.0	0.3739	0.0007	0.3752	0.0376	874.0	894510.O
<b>49.39% of Water in the HLW Clayey Material, 75% of Water in the FFTF SNF</b>							
1.0	0.1	0.4555	0.0009	0.4574	0.0570	298.8	754901.O
1.0	0.5	0.4726	0.0011	0.4748	0.0648	298.8	754905.O
1.0	0.8	0.4700	0.0009	0.4718	0.0664	298.8	754908.O
1.0	1.0	0.4675	0.0011	0.4696	0.0666	298.8	754910.O
0.1	1.0	0.4198	0.0011	0.4222	0.2243	29.9	750149.O
0.5	1.0	0.4865	0.0012	0.4890	0.0958	149.4	750549.O
0.8	1.0	0.4633	0.0010	0.4653	0.0750	239	750849.O
0.1	0.5	0.2450	0.0008	0.2466	0.2585	29.9	750105.O
0.5	0.5	0.4368	0.0011	0.4390	0.0993	149.4	750505.O

Table 6.2-3. Layers of FFTF SNF and HLW Glass Diluted with Water of Variable Density

Description		Results					
Density of the Water in the FFTF SNF (g/cm <sup>3</sup> )	Density of the Water in the HLW Clay (g/cm <sup>3</sup> )	k <sub>eff</sub>	σ	k <sub>eff</sub> +2σ	AENCF (MeV)	H/X Ratio in the Fuel Section	MCNP Output File Name
0.8	0.5	0.4676	0.0013	0.4701	0.0767	239	750805.O
<b>50% of Water in the HLW Clayey Material, 67.98% of Water in the FFTF SNF</b>							
1.0	0.1	0.4910	0.0011	0.4932	0.0766	211.4	695001.O
1.0	0.5	0.4788	0.0013	0.4814	0.0782	211.4	695005.O
1.0	0.8	0.4756	0.0010	0.4776	0.0822	211.4	695008.O
1.0	1.0	0.4754	0.0010	0.4775	0.0796	211.4	695010.O
0.1	0.1	0.2503	0.0009	0.2521	0.2866	21.1	690101.O
0.5	0.1	0.4362	0.0012	0.4385	0.1174	105.7	690501.O
0.8	0.1	0.4794	0.0012	0.4818	0.0895	169.2	690801.O

The following table describes the k<sub>eff</sub> of a WP if one assumes the fuel and the clay layer is mixed.

Table 6.2-4. Stratified Layer with Degraded FFTF Fuel on the Top

Description			Results					
% of Water in the Fuel	% of Water in the Clay	% of Fuel and Clay Mixed	k <sub>eff</sub>	σ	k <sub>eff</sub> +2σ	H/X Ratio in the Mix	AENCF (MeV)	MCNP Output File Name
0.75	0	10	0.3481	0.0009	0.3498	632.6	0.0619	mixt10.O
0.75	0	25	0.3341	0.0009	0.3359	632.6	0.0574	mixt25.O
0.75	0	60	0.2913	0.0007	0.2927	632.6	0.0362	mixt60.O
0.75	0	100	0.2929	0.0005	0.2940	632.6	0.0234	mix100.O
0.6798	50	10	0.4876	0.0012	0.4899	909.7	0.0745	mx6910.O
0.6798	50	25	0.4704	0.0010	0.4725	909.7	0.0691	mx6925.O
0.6798	50	60	0.3997	0.0009	0.4016	909.7	0.0645	mx6960.O

:

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF

Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 42 of 49

**Table 6.2-5.  $k_{\text{eff}}$  of a WP with Homogenized Mixture of FFTF SNF and HLW Clay Inside**

Density of the Water Mixed with the Dry Clay and the Dry Fuel ( $\text{g/cm}^3$ )	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}}+2\sigma$	H/X Ratio	AENCF (MeV)	MCNP Output File Name
1.0	0.1654	0.0002	0.1659	4189.6	0.0149	homo.O
0.8	0.1766	0.0003	0.1772	3418.4	0.0168	homo08.O
0.5	0.2029	0.0003	0.2035	2261.7	0.0172	homo05.O
0.1	0.2744	0.0006	0.2755	719.4	0.0245	homo01.O

Tables 6.2-4 and 6.2-5 show that criticality of the WP will not occur if the layer of degraded fuel and degraded clayey material are mixed. However, one knows that the loss of neutron absorber increases the  $k_{\text{eff}}$ . Table 6.2-6 presents the results of calculations performed assuming loss of Gd and  $\text{Fe}_2\text{O}_3$ .

**Table 6.2-6. Loss of Absorber in a WP with Stratified Layer of Fuel and HLW Glass Clay**

Description				Results					
Mass of Gd (kg) in the WP	% of $\text{Fe}_2\text{O}_3$ Removed from the WP	% of Water in FFTF	% of Water in HLW	$k_{\text{eff}}$	$\sigma$	$k_{\text{eff}}+2\sigma$	H/X Ratio	AENCF (MeV)	MCNP Output File Name
3.046*	0	75	0	0.7987	0.0016	0.8018	371.6	0.0269	nogd75.O
3.046*	100	75	0	0.8500	0.0017	0.8534	371.6	0.0274	nogdfe.O
0	0	75	0	0.8031	0.0016	0.8062	371.6	0.0264	nogdal.O
0	100	75	0	0.8539	0.0015	0.8569	371.6	0.0272	nogfal.O
0	0	67.98	50	0.8848	0.0016	0.8881	211.4	0.0438	69nogd.O
10.78**	100	67.98	50	0.4845	0.0011	0.4866	211.4	0.0927	69nofe.O
0	100	67.98	50	0.9213	0.0017	0.9247	211.4	0.0489	69nogf.O
0	0	0	51.41	0.2470	0.0009	0.2488	0	0.4043	01gd50.O
10.78**	100	0	51.41	0.1964	0.0008	0.1979	0	0.7657	01fe50.O
0	100	0	51.41	0.2273	0.0008	0.2290	0	0.6551	01gf50.O

\* Mass of Gd in the Clay.

\*\* Mass of Gd in the Clay and the FFTF SNF.

**Title:** Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

**Document Identifier:** BBA000000-01717-0210-00033 REV 01

**Page 43 of 49**

### 6.3 DEGRADED SNF CANISTER SETTLED AT THE BOTTOM OF THE WP, THE HLW GLASS CLAY LAYER ABOVE

The following Tables present the results of the calculations described in Section 5.4.

**Table 6.3-1.  $k_{eff}$  for WP Containing Degraded FFTF SNF Layer Beneath a HLW Clayey Material Layer**

Description		Results					
Water Fraction in the Clay and in the FFTF SNF	% of HLW Mixed With Degraded FFTF SNF	$k_{eff}$	$\sigma$	$k_{eff}+2\sigma$	AENCF (MeV)	H/X Ratio in the Mix	MCNP Output File Name
0	00	0.2239	0.0007	0.2253	0.4655	0.0	w00h00.O
0	10	0.3221	0.0010	0.3241	0.1421	0.6	w00h10.O
0	20	0.3598	0.0011	0.3619	0.0841	0.6	w00h20.O
0	30	0.3743	0.0009	0.3761	0.0591	0.7	w00h30.O
0.1	00	0.2803	0.0009	0.2822	0.3323	0.8	w10h00.O
0.1	10	0.4001	0.0010	0.4021	0.0944	1.3	w10h10.O
0.1	20	0.4117	0.0009	0.4135	0.0593	1.4	w10h20.O
0.1	30	0.4060	0.0010	0.4079	0.0452	1.4	w10h30.O
0.2	00	0.3284	0.0010	0.3304	0.2530	1.6	w20h00.O
0.2	10	0.4329	0.0011	0.4350	0.0748	2.0	w20h10.O
0.2	20	0.4227	0.0010	0.4247	0.0484	2.1	w20h20.O
0.2	30	0.3936	0.0009	0.3953	0.0392	2.1	w20h30.O
0.3	00	0.3698	0.0011	0.3720	0.1968	2.4	w30h00.O
0.3	10	0.4438	0.0012	0.4461	0.0633	2.8	w30h10.O
0.3	20	0.4084	0.0009	0.4102	0.0406	2.8	w30h20.O
0.3	30	0.3664	0.0007	0.3679	0.0336	2.8	w30h30.O
0.4	00	0.4109	0.0012	0.4134	0.1551	3.1	w40h00.O
0.4	10	0.4356	0.0008	0.4372	0.0515	3.5	w40h10.O
0.4	20	0.3791	0.0007	0.3805	0.0374	3.5	w40h20.O
0.4	30	0.3335	0.0007	0.3348	0.0309	3.5	w40h30.O
0.5	00	0.4468	0.0011	0.4490	0.1234	4.0	w50h00.O
0.5	10	0.4103	0.0008	0.4119	0.0440	4.3	w50h10.O
0.5	20	0.3418	0.0007	0.3432	0.0327	4.3	w50h20.O
0.5	30	0.2960	0.0005	0.2970	0.0255	4.3	w50h30.O

**Table 6.3-2. Stratified Layers of FFTF SNF and HLW Clayey Material with Different Loading of Neutron Absorber**

Description				Results					
% of Water in the Clay and in the Fuel	% of HLW Mixed With FFTF SNF	Mass of Gd in the Mix Layer (g)	% of Fe <sub>2</sub> O <sub>3</sub> in the Fuel	k <sub>eff</sub>	$\sigma$	k <sub>eff</sub> +2 $\sigma$	AENCF (MeV)	H/X Ratio in the Mix	MCNP Output File Name
30	10	304.58	100	0.7072	0.0016	0.7103	0.0387	2.8	nogd30.O
30	10	304.58	0	0.6944	0.0014	0.6972	0.0410	2.8	nogf30.O
30	10	0	100	0.7650	0.0018	0.7685	0.0351	2.8	ngd30b.O
30	10	0	0	0.7640	0.0015	0.7670	0.0377	2.8	ngf30b.O
50.74	00	0	100	0.6175	0.0014	0.6202	0.0808	4.0	nogd50.O
50.74	00	0	0	0.8506	0.0018	0.8542	0.0921	4.0	nogf50.O

#### 6.4 EFFECTS OF PLUTONIUM DECAY

In this section, effect of plutonium decay is calculated. Results of the calculations which are described in Section 5.5 are given in Table 6.4-1.

Table 6.4-1. Plutonium Decays Effects

t=0				t=T % Pu-239				t=2*T % Pu-239				t=Final			
File Name	k <sub>eff</sub>	k <sub>eff</sub> +2σ	AENCF (MeV)	File Name	k <sub>eff</sub>	k <sub>eff</sub> +2σ	AENCF (MeV)	File Name	k <sub>eff</sub>	k <sub>eff</sub> +2σ	AENCF (MeV)	File Name	k <sub>eff</sub>	k <sub>eff</sub> +2σ	AENCF (MeV)
69nogd <sup>1</sup>	0.8848	0.8881	0.0438	69ng.S	0.8995	0.9025	0.0352	69ng.7	0.8645	0.8677	0.0334	69ngal	0.7872	0.7900	0.0313
69nogd <sup>1</sup>	0.9213	0.9247	0.0489	69no.S	0.9637	0.9670	0.0369	69no.7	0.9444	0.9477	0.0347	69noal	0.8915	0.8947	0.0318
75490S <sup>2</sup>	0.4726	0.4748	0.648	7549.S	0.3844	0.3860	0.0687	7549.7	0.3094	0.3106	0.0776	7549al	0.2053	0.2059	0.0980
894508 <sup>3</sup>	0.3739	0.3752	0.0373	8945.S	0.2810	0.2818	0.0442	8945.7	0.2223	0.2231	0.0499	8945al	0.1540	0.1545	0.06425
m06f0c <sup>3</sup>	0.5383	0.5413	0.2157	m06f.S	0.5211	0.5233	0.1852	m06f.7	0.4876	0.4901	0.1808	m06fal	0.3951	0.3966	0.1930
m56f0c <sup>3</sup>	0.5978	0.6004	0.1057	m56.S	0.5313	0.5334	0.0975	m56.7	0.4502	0.4517	0.1073	m56al	0.3107	0.3116	0.1302
mx6925 <sup>4</sup>	0.4704	0.4725	0.0691	mx69.S	0.4020	0.4038	0.0659	mx69.7	0.3352	0.3364	0.0726	mx69al	0.2441	0.2450	0.0713
nofe56 <sup>5</sup>	0.6270	0.6288	0.1211	nofe.S	0.5591	0.5606	0.1140	nofe.7	0.4783	0.4749	0.1233	nofeal	0.3272	0.3280	0.1505
nogd56 <sup>3</sup>	1.0415	1.0439	0.0604	nogd.S	1.1098	1.1122	0.0472	nogd.7	1.0998	1.1021	0.0426	nogdal	1.0453	1.0477	0.0390
nogf30 <sup>6</sup>	0.8506	0.8542	0.0921	nogf.S	0.9111	0.9145	0.0716	nogf.7	0.9096	0.9131	0.0646	nogfal	0.8667	0.8698	0.577
t00f20 <sup>7</sup>	0.2720	0.2736	0.5955	t00f.S	0.2495	0.2511	0.5251	t00f.7	0.2399	0.2415	0.4972	t00fal	0.2209	0.2224	0.4953
w50h00 <sup>8</sup>	0.4468	0.4490	0.1234	w50h.S	0.4062	0.4080	0.1136	w50h.7	0.3514	0.3531	0.1208	w50hal	0.2517	0.2528	0.1418

1 H/X ratio=211.4  
 2 H/X ratio=298.8  
 3 H/X ratio=40.2  
 4 H/X ratio=909.7  
 5 H/X ratio=142.5

6 H/X ratio=4.0  
 7 H/X ratio=0  
 8 H/X ratio=4.0  
 9 H/X ratio=874.0

## 6.5 VARIATION OF THE CHEMICAL COMPOSITION OF TYPE 316L STAINLESS STEEL

In the previous cases, the weight percent of Mn in the chemical composition of stainless steel 316L is 2, which is the maximum value allowed (see Table 5.1.5-5). However, Mn is an absorber. Therefore, the following cases were run to investigate the sensitivity of  $k_{eff}$  to percentage of Mn in the composition of stainless steel 316L. These cases are based on the most reactive cases developed: m56f0c and nogd56. In these cases, the weight percent of Mn in the composition of stainless steel 316L was modified. The results are given in Table 6.5-1. The input and output files are presented in Attachment I and II (the electronic Attachment has been moved to Reference 7.14).

**Table 6.5-1. Variation of the Weight Percent of Mn in the Type 316L Stainless Steel Material**

Weight Percent of Mn in the Type 316L Stainless Steel	Case Name	$k_{eff}$	$\sigma$	$k_{eff}+2\sigma$	AENCF (MeV)	H/X Ratio	MCNP Output File Name
1	m56f01*	0.5979	0.0012	0.6002	0.1057	142.5	m56f01.O
0	m56f00*	0.6001	0.0013	0.6026	0.1056	142.5	m56f00.O
1	nogd01**	1.0414	0.0013	1.0440	0.0596	142.5	nogd01.O
0	nogd00**	1.0430	0.0013	1.0455	0.0601	142.5	nogd00.O

\* Case based on m56f0c.

\*\* Case based on nogd56.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 47 of 49

## 7. REFERENCES

- 7.1 Los Alamos National Laboratory (LANL) 1997. *MCNP - A General Monte Carlo N-Particle Transport Code*. Los Alamos, New Mexico: LANL. LA-12625-M. TIC: 241044.
- 7.2 Civilian Radioactive Waste Management System Management and Operating Contractor (CRWMS M&O) 1998. *EQ6 Calculations for Chemical Degradation of Fast Flux Test Facility (FFTF) Waste Packages*. BBA000000-01717-0210-00028 REV 00. Las Vegas, Nevada: M&O. ACC: MOL.19981229.0081.
- 7.3 CRWMS M&O 1998. *Software Qualification Report for MCNP Version 4B2, A General Monte Carlo N-Particle Transport Code*. 30033-2003 REV 01. Las Vegas, Nevada: M&O. ACC: MOL.19980622.0637.
- 7.4 CRWMS M&O 1997. *Waste Package Materials Selection Analysis*. BBA000000-01717-0200-00020 REV 01. Las Vegas, Nevada: M&O. ACC: MOL.19980324.0242.
- 7.5 Oak Ridge National Laboratory (ORNL) 1992. *Characteristics of Potential Repository Wastes*. DOE/RW-0184-R1 Volume 1. Oak Ridge, Tennessee: ORNL. TIC: 5890.
- 7.6 Idaho National Engineering and Environmental Laboratory (INEEL) 1998. *FFTF (MOX) Fuel Characteristics for Disposal Criticality Analysis*. DOE/SNF/REP-032 Rev 00. Idaho Falls, Idaho: INEEL. TIC: 241492.
- 7.7 CRWMS M&O 1996. *Material Compositions and Number Densities for Neutronics Calculations*. BBA000000-01717-0200-00002 REV 00. Las Vegas, Nevada: M&O. ACC: MOL.19960624.0023.
- 7.8 American Society for Testing and Materials (ASTM) 1990. *Standard Specification for Pressure Vessel Plates, Carbon Steel, for Moderate- and Lower-Temperature Service*. ASTM A 516/A 516M-90. Philadelphia, Pennsylvania: ASTM. TIC: 237681.
- 7.9 ASTM 1994. *Standard Practice for Preparing, Cleaning, and Evaluating Corrosion Test Specimens*. ASTM G 1-90. Philadelphia, Pennsylvania: ASTM. TIC: 238771.
- 7.10 Inco Alloys International 1988. *Inco Alloys International Literature on Inconel Alloy 600*. Huntington, West Virginia: Inco Alloys International, Inc. TIC: 239841.
- 7.11 American Society for Metals (ASM) 1990. *Metals Handbook Tenth Edition, Volume 1, Properties and Selection: Irons, Steels, and High-Performance Alloys*. Metals Park, Ohio: ASM. TIC: 241248.
- 7.12 CRWMS M&O 1997. *Disposal Criticality Analysis for Aluminum-based Fuel in a Credisposal Waste Package – ORR and MIT SNF Phase II*. BBA000000-01717-0200-00060 REV 00. Las Vegas, Nevada: M&O. ACC: MOL.19980224.0670.

Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister

Document Identifier: BBA000000-01717-0210-00033 REV 01

Page 48 of 49

- 7.13 Parrington, J.R. and Knox, H.D. 1996. *Nuclides and Isotopes 15th Edition*. San Jose, California: General Electric Co. & Kapl, Inc. TIC: 233705.
- 7.14 CRWMS M&O 1999. *Electronic Attachments for BBA000000-01717-0210-00033 REV 01, Compact Disc*. Las Vegas, Nevada: M&O. ACC: MOL.19990601.0234.

**8. ATTACHMENTS**

Attachments to these calculations are listed in Table 8-1 below.

**Table 8-1. List of Attachments**

Attachment Number	Description	Pages	Date
I	MCNP input decks	5 (Hard Copy listing of the Tape Content)	05/29/99
II	MCNP output decks	5 (Hard Copy listing of the Tape Content)	05/29/99
III	Excel spreadsheet scenario1.xls	29	05/29/99
IV	Excel spreadsheets scenario2a.xls	32	05/29/99
V	Excel spreadsheets scenario2b.xls	54	05/29/99
VI	Excel spreadsheets scenario3.xls	62	05/29/99
VII	Excel spreadsheets plots.xls	6	05/29/99
VIII	Excel spreadsheet n_clay.xls	1	05/29/99
IX	Excel Spreadsheet minedecay.xls	3	05/29/99
X	Electronic attachments moved to Reference 7.14	N/A	05/18/99

The following is the list of the files in electronic attachments on a Compact Disc (CD). The disc has been moved to Reference 7.14. The CD contains all the cases from REV 00 (without any changes) and all new cases.

INPUTS	<DIR>	05-18-99	10:37a	inputs
INPUTS~8 DOC	32,256	05-29-99	2:51p	inputsatta.doc
MINED~10 XLS	28,672	05-29-99	2:06p	minedecay.xls
N_CLAY XLS	39,936	05-29-99	2:07p	n_clay.xls
OUPUT~14 DOC	36,352	05-29-99	2:51p	ouputsatta.doc
OUTPUTS	<DIR>	05-18-99	10:37a	outputs
PLOTS XLS	44,032	05-29-99	2:42p	plots.xls
SCENA~22 XLS	117,760	05-29-99	1:54p	scenario1.xls
SCENA~24 XLS	176,640	05-29-99	1:56p	scenario2a.xls
SCENA~26 XLS	275,968	05-29-99	2:10p	scenario2b.xls
SCENA~28 XLS	279,552	05-29-99	2:09p	scenario3.xls

**Waste Package Operations****Calculation**

---

**Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister**  
**Document Identifier: BBA000000-01717-0210-00033 REV 01**

---

**Attachment I, Page 1 of 5**

---

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fftf\rev01\inputs\inpscenario1

.	<DIR>	05-17-99	1:45p .
.	<DIR>	05-17-99	1:45p ..
05GD56	4,583	05-17-99	1:25p 05gd56
06GD56	4,583	05-17-99	1:25p 06gd56
10GD56	4,584	05-17-99	1:25p 10gd56
M00F0C	4,506	05-17-99	1:25p m00f0c
M00F20	4,540	05-17-99	1:25p m00f20
M00F49	4,542	05-17-99	1:25p m00f49
M03F0C	4,523	05-17-99	1:25p m03f0c
M06F0C	4,523	05-17-99	1:25p m06f0c
M20F0C	4,577	05-17-99	1:25p m20f0c
M23F0C	4,575	05-17-99	1:25p m23f0c
M26F0C	4,575	05-17-99	1:25p m26f0c
M50F0C	4,577	05-17-99	1:25p m50f0c
M53F0C	4,577	05-17-99	1:25p m53f0c
M56F00	4,548	05-17-99	1:25p m56f00
M56F01	4,577	05-17-99	1:25p m56f01
M56F0C	4,577	05-17-99	1:25p m56f0c
M60F0C	4,579	05-17-99	1:25p m60f0c
M63F0C	4,577	05-17-99	1:25p m63f0c
M66F0C	4,577	05-17-99	1:25p m66f0c
M80F0C	4,580	05-17-99	1:25p m80f0c
M83F0C	4,577	05-17-99	1:25p m83f0c
M86F0C	4,577	05-17-99	1:25p m86f0c
NOFE56	4,570	05-17-99	1:25p nofe56
NOGD00	4,552	05-17-99	1:25p nogd00
NOGD01	4,581	05-17-99	1:25p nogd01
NOGD56	4,581	05-17-99	1:25p nogd56
NOGDCL	4,703	05-17-99	1:25p nogdcl
N_CLAY	4,700	05-17-99	1:25p n_clay
T00F0C	4,540	05-17-99	1:25p t00f0c
T00F20	4,542	05-17-99	1:25p t00f20
T00F49	4,544	05-17-99	1:25p t00f49

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fftf\rev01\inputs\inpscenario2

**Waste Package Operations****Calculation**

**Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF  
Canister**  
**Document Identifier: BBA000000-01717-0210-00033 REV 01**      **Attachment I, Page 2 of 5**

	<DIR>	05-17-99	1:45p ..
..	<DIR>	05-17-99	1:45p ..
01FE50	3,351	05-17-99	1:26p 01fe50
01FT25	3,328	05-17-99	1:26p 01ft25
01FT50	3,354	05-17-99	1:26p 01ft50
01GD50	3,354	05-17-99	1:26p 01gd50
01GF50	3,352	05-17-99	1:26p 01gf50
05FT25	3,328	05-17-99	1:26p 05ft25
05FT50	3,354	05-17-99	1:26p 05ft50
08FT25	3,328	05-17-99	1:26p 08ft25
08FT50	3,354	05-17-99	1:26p 08ft50
10FT25	3,328	05-17-99	1:26p 10ft25
690101	3,368	05-17-99	1:26p 690101
690501	3,368	05-17-99	1:26p 690501
690801	3,368	05-17-99	1:26p 690801
695001	3,368	05-17-99	1:26p 695001
695005	3,368	05-17-99	1:26p 695005
695008	3,368	05-17-99	1:26p 695008
695010	3,368	05-17-99	1:26p 695010
69NOFE	3,367	05-17-99	1:26p 69nofe
69NOGD	3,367	05-17-99	1:26p 69nogd
750105	3,395	05-17-99	1:26p 750105
750149	3,366	05-17-99	1:26p 750149
750505	3,395	05-17-99	1:26p 750505
750549	3,366	05-17-99	1:26p 750549
750805	3,395	05-17-99	1:26p 750805
750849	3,366	05-17-99	1:26p 750849
754901	3,395	05-17-99	1:26p 754901
754905	3,395	05-17-99	1:26p 754905
754908	3,395	05-17-99	1:26p 754908
754910	3,366	05-17-99	1:26p 754910
894501	3,369	05-17-99	1:26p 894501
894505	3,369	05-17-99	1:26p 894505
894508	3,369	05-17-99	1:26p 894508
894510	3,369	05-17-99	1:26p 894510
960125	3,327	05-17-99	1:26p 960125
960525	3,327	05-17-99	1:26p 960525
960825	3,327	05-17-99	1:26p 960825
F25T00	3,367	05-17-99	1:26p f25t00
F50T00	3,365	05-17-99	1:26p f50t00
F75T00	3,365	05-17-99	1:26p f75t00

**Waste Package Operations****Calculation**

**Title:** Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister  
**Document Identifier:** BBA000000-01717-0210-00033 REV 01      **Attachment I, Page 3 of 5**

F75T30	3,366	05-17-99	1:26p f75t30
F75T60	3,366	05-17-99	1:26p f75t60
F97T00	3,366	05-17-99	1:26p f97t00
F97T01	3,366	05-17-99	1:26p f97t01
F97T05	3,366	05-17-99	1:26p f97t05
F97T08	3,366	05-17-99	1:26p f97t08
FT00	3,349	05-17-99	1:26p ft00
FT25	3,350	05-17-99	1:26p ft25
FT50	3,354	05-17-99	1:26p ft50
HOMO	4,154	05-17-99	1:26p homo
HOMO01	4,154	05-17-99	1:26p homo01
HOMO05	4,154	05-17-99	1:26p homo05
HOMO08	4,154	05-17-99	1:26p homo08
MIX100	4,153	05-17-99	1:26p mix100
MIXT10	4,145	05-17-99	1:26p mixt10
MIXT25	4,154	05-17-99	1:26p mixt25
MIXT60	4,147	05-17-99	1:26p mixt60
MX6910	4,022	05-17-99	1:26p mx6910
MX6925	4,022	05-17-99	1:26p mx6925
MX6960	4,023	05-17-99	1:26p mx6960
NOGD75	3,365	05-17-99	1:26p nogd75
NOGDAL	3,366	05-17-99	1:26p nogdal
NOGDFE	3,378	05-17-99	1:26p nogdfe
NOGFAL	3,380	05-17-99	1:26p nogfal

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fftf\rev01\inputs\inpscenario3

.	<DIR>	05-17-99	1:46p .
..	<DIR>	05-17-99	1:46p ..
NGD30B	3,452	05-17-99	1:26p ngd30b
NGF30B	3,453	05-17-99	1:26p ngf30b
NOGD30	3,451	05-17-99	1:26p nogd30
NOGD50	3,444	05-17-99	1:26p nogd50
NOGF30	3,452	05-17-99	1:26p nogf30
NOGF50	3,445	05-17-99	1:26p nogf50
W00H00	3,465	05-17-99	1:26p w00h00
W00H10	3,480	05-17-99	1:26p w00h10
W00H20	3,482	05-17-99	1:26p w00h20
W00H30	3,482	05-17-99	1:26p w00h30

**Waste Package Operations****Calculation****Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF****Canister****Document Identifier: BBA000000-01717-0210-00033 REV 01****Attachment I, Page 4 of 5**

W10H00	3,462	05-17-99	1:26p	w10h00
W10H10	3,457	05-17-99	1:26p	w10h10
W10H20	3,436	05-17-99	1:26p	w10h20
W10H30	3,458	05-17-99	1:26p	w10h30
W20H00	3,455	05-17-99	1:26p	w20h00
W20H10	3,475	05-17-99	1:26p	w20h10
W20H20	3,474	05-17-99	1:26p	w20h20
W20H30	3,473	05-17-99	1:26p	w20h30
W30H00	3,454	05-17-99	1:26p	w30h00
W30H10	3,451	05-17-99	1:26p	w30h10
W30H20	3,453	05-17-99	1:26p	w30h20
W30H30	3,453	05-17-99	1:26p	w30h30
W40H00	3,440	05-17-99	1:26p	w40h00
W40H10	3,435	05-17-99	1:26p	w40h10
W40H20	3,437	05-17-99	1:26p	w40h20
W40H30	3,431	05-17-99	1:26p	w40h30
W50H00	3,443	05-17-99	1:26p	w50h00
W50H10	3,448	05-17-99	1:26p	w50h10
W50H20	3,448	05-17-99	1:26p	w50h20
W50H30	3,448	05-17-99	1:26p	w50h30

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fftf\rev01\inputs\inputrev01

.	<DIR>	05-17-99	1:46p	.
..	<DIR>	05-17-99	1:46p	..
69NG 5	3,630	05-17-99	1:56p	69ng.5
69NG 7	3,565	05-17-99	1:56p	69ng.7
69NGAL	3,513	05-17-99	1:56p	69ngal
69NO 5	3,631	05-17-99	1:56p	69no.5
69NO 7	3,566	05-17-99	1:56p	69no.7
69NOAL	3,514	05-17-99	1:56p	69noal
69NOGD	3,367	05-17-99	1:56p	69nogd
69NOGF	3,368	05-17-99	1:56p	69nogf
7549 5	3,661	05-17-99	1:56p	7549.5
7549 7	3,594	05-17-99	1:56p	7549.7
754905	3,395	05-17-99	1:56p	754905
7549AL	3,541	05-17-99	1:56p	7549al
8945 5	3,635	05-17-99	1:56p	8945.5
8945 7	3,568	05-17-99	1:56p	8945.7

**Waste Package Operations****Calculation**

**Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation: Degraded SNF Canister**

**Document Identifier: BBA000000-01717-0210-00033 REV 01**

**Attachment I, Page 5 of 5**

894508	3,369	05-17-99	1:56p 894508
8945AL	3,515	05-17-99	1:56p 8945al
M06F 5	4,779	05-17-99	1:56p m06f.5
M06F 7	4,715	05-17-99	1:56p m06f.7
M06F0C	4,523	05-17-99	1:56p m06f0c
M06FAL	4,664	05-17-99	1:56p m06fal
M56 5	4,842	05-17-99	1:56p m56.5
M56 7	4,776	05-17-99	1:56p m56.7
M56AL	4,724	05-17-99	1:56p m56al
M56F0C	4,577	05-17-99	1:56p m56f0c
MX69 5	4,291	05-17-99	1:56p mx69.5
MX69 7	4,225	05-17-99	1:56p mx69.7
MX6925	4,022	05-17-99	1:56p mx6925
MX69AL	4,171	05-17-99	1:56p mx69al
NOFE 5	4,834	05-17-99	1:56p nofe.5
NOFE 7	4,767	05-17-99	1:56p nofe.7
NOFE56	4,570	05-17-99	1:56p nofe56
NOFEAL	4,716	05-17-99	1:56p nofeal
NOGD 5	4,845	05-17-99	1:56p nogd.5
NOGD 7	4,780	05-17-99	1:56p nogd.7
NOGD56	4,581	05-17-99	1:56p nogd56
NOGDAL	4,726	05-17-99	1:56p nogdal
NOGF 5	3,718	05-17-99	1:56p nogf.5
NOGF 7	3,651	05-17-99	1:56p nogf.7
NOGF50	3,445	05-17-99	1:56p nogf50
NOGFAL	3,598	05-17-99	1:56p nogfal
T00F 5	4,798	05-17-99	1:56p t00f.5
T00F 7	4,734	05-17-99	1:56p t00f.7
T00F20	4,542	05-17-99	1:56p t00f20
T00FAL	4,683	05-17-99	1:56p t00fal
W50H 5	3,716	05-17-99	1:56p w50h.5
W50H 7	3,650	05-17-99	1:57p w50h.7
W50H00	3,443	05-17-99	1:57p w50h00
W50HAL	3,597	05-17-99	1:57p w50hal

49 file(s) 196,135 bytes

2 dir(s) 630,489,088 bytes free

**Waste Package Operations****Calculation****Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation:****Degraded SNF Canister****Document Identifier: BBA000000-01717-0210-00033 REV 01****Attachment II, Page 1 of 5**

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fft\rev01\outputs\outscenario1

	<DIR>	05-17-99	1:46p .
	<DIR>	05-17-99	1:46p ..
05GD56 O	233,274	05-17-99	1:33p
05gd56.O			
06GD56 O	233,238	05-17-99	1:33p
06gd56.O			
10GD56 O	233,425	05-17-99	1:33p
10gd56.O			
M00F0C O	232,590	05-17-99	1:33p
m00f0c.O			
M00F20 O	233,074	05-17-99	1:33p m00f20.O
M00F49 O	232,343	05-17-99	1:33p m00f49.O
M03F0C O	233,596	05-17-99	1:33p m03f0c.O
M06F0C O	233,548	05-17-99	1:33p m06f0c.O
M20F0C O	232,566	05-17-99	1:33p m20f0c.O
M23F0C O	233,499	05-17-99	1:33p m23f0c.O
M26F0C O	233,537	05-17-99	1:33p m26f0c.O
M50F0C O	233,279	05-17-99	1:33p m50f0c.O
M53F0C O	233,327	05-17-99	1:33p m53f0c.O
MS6F00 O	233,329	05-17-99	1:33p m56f00.O
M56F01 O	233,440	05-17-99	1:33p m56f01.O
M56F0C O	233,537	05-17-99	1:33p m56f0c.O
M60F0C O	233,327	05-17-99	1:33p m60f0c.O
M63F0C O	233,341	05-17-99	1:33p m63f0c.O
M66F0C O	233,474	05-17-99	1:33p m66f0c.O
M80F0C O	232,388	05-17-99	1:33p m80f0c.O
M83F0C O	232,437	05-17-99	1:33p m83f0c.O
M86F0C O	232,500	05-17-99	1:33p m86f0c.O
NOFE56 O	306,252	05-17-99	1:33p nofe56.O
NOGD00 O	305,998	05-17-99	1:33p nogd00.O
NOGD01 O	306,154	05-17-99	1:33p nogd01.O
NOGD56 O	306,301	05-17-99	1:33p nogd56.O
NOGDCL O	306,805	05-17-99	1:33p nogdcl.O
N_CLAY O	306,961	05-17-99	1:33p n_clay.O
T00F0C O	233,112	05-17-99	1:33p t00f0c.O
T00F20 O	233,161	05-17-99	1:33p t00f20.O
T00F49 O	232,179	05-17-99	1:33p t00f49.O

**Waste Package Operations****Calculation****Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation:****Degraded SNF Canister****Document Identifier: BBA000000-01717-0210-00033 REV 01****Attachment II, Page 2 of 5**

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fftf\rev01\outputs\outscenario2

	<DIR>	05-17-99	1:46p .
..	<DIR>	05-17-99	1:46p ..
01FE50 O	215,501	05-17-99	1:33p 01fe50.O
01FT25 O	214,596	05-17-99	1:33p 01ft25.O
01FT50 O	214,459	05-17-99	1:33p 01ft50.O
01GD50 O	214,105	05-17-99	1:33p 01gd50.O
01GF50 O	215,279	05-17-99	1:33p 01gf50.O
05FT25 O	215,134	05-17-99	1:33p 05ft25.O
05FT50 O	215,560	05-17-99	1:33p 05ft50.O
08FT25 O	216,153	05-17-99	1:33p 08ft25.O
08FT50 O	215,560	05-17-99	1:33p 08ft50.O
10FT25 O	216,097	05-17-99	1:33p 10ft25.O
690101 O	213,741	05-17-99	1:34p 690101.O
690501 O	214,536	05-17-99	1:34p 690501.O
690801 O	216,167	05-17-99	1:34p 690801.O
695001 O	215,917	05-17-99	1:34p 695001.O
695005 O	215,629	05-17-99	1:34p 695005.O
695008 O	216,167	05-17-99	1:34p 695008.O
695010 O	216,167	05-17-99	1:34p 695010.O
69NOFE O	215,407	05-17-99	1:34p 69nofe.O
69NOGD O	215,367	05-17-99	1:34p 69nogd.O
750105 O	215,566	05-17-99	1:34p 750105.O
750149 O	214,980	05-17-99	1:34p 750149.O
750505 O	214,536	05-17-99	1:34p 750505.O
750549 O	214,847	05-17-99	1:34p 750549.O
750805 O	215,566	05-17-99	1:34p 750805.O
750849 O	214,330	05-17-99	1:34p 750849.O
754901 O	216,167	05-17-99	1:34p 754901.O
754905 O	214,868	05-17-99	1:34p 754905.O
754908 O	214,868	05-17-99	1:34p 754908.O
754910 O	216,104	05-17-99	1:34p 754910.O
894501 O	215,003	05-17-99	1:34p 894501.O
894505 O	216,070	05-17-99	1:34p 894505.O
894508 O	216,214	05-17-99	1:34p 894508.O
894510 O	215,197	05-17-99	1:34p 894510.O
960125 O	215,613	05-17-99	1:34p 960125.O
960525 O	215,629	05-17-99	1:34p 960525.O

**Waste Package Operations****Calculation****Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation:****Degraded SNF Canister****Document Identifier: BBA000000-01717-0210-00033 REV 01****Attachment II, Page 3 of 5**

960825 O	215,566	05-17-99	1:34p	960825.O
F25T00 O	217,471	05-17-99	1:34p	f25t00.O
F50T00 O	217,374	05-17-99	1:34p	f50t00.O
F75T00 O	216,943	05-17-99	1:34p	f75t00.O
F75T30 O	217,006	05-17-99	1:34p	f75t30.O
F75T60 O	215,585	05-17-99	1:34p	f75t60.O
F97T00 O	214,940	05-17-99	1:34p	f97t00.O
F97T01 O	215,566	05-17-99	1:34p	f97t01.O
F97T05 O	214,314	05-17-99	1:34p	f97t05.O
F97T08 O	216,104	05-17-99	1:34p	f97t08.O
FT00 O	217,080	05-17-99	1:34p	ft00.O
FT25 O	217,227	05-17-99	1:34p	ft25.O
FT50 O	216,094	05-17-99	1:34p	ft50.O
HOMO O	217,015	05-17-99	1:34p	homo.O
HOMO01 O	216,540	05-17-99	1:34p	homo01.O
HOMO05 O	216,540	05-17-99	1:34p	homo05.O
HOMO08 O	216,477	05-17-99	1:34p	homo08.O
MIX100 O	217,463	05-17-99	1:34p	mix100.O
MIXT10 O	224,603	05-17-99	1:34p	mixt10.O
MIXT25 O	224,922	05-17-99	1:34p	mixt25.O
MIXT60 O	223,366	05-17-99	1:34p	mixt60.O
MX6910 O	223,393	05-17-99	1:34p	mx6910.O
MX6925 O	221,863	05-17-99	1:34p	mx6925.O
MX6960 O	223,320	05-17-99	1:34p	mx6960.O
NOGD75 O	216,834	05-17-99	1:34p	nogd75.O
NOGDAL O	216,253	05-17-99	1:34p	nogdal.O
NOGDFE O	216,271	05-17-99	1:34p	nogdfe.O
NOGFAL O	215,862	05-17-99	1:34p	nogfal.O

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fftf\rev01\outputs\outscenario3

	<DIR>	05-17-99	1:47p	.
	<DIR>	05-17-99	1:47p	..
NGD30B O	218,453	05-17-99	1:35p	ngd30b.O
NGF30B O	218,523	05-17-99	1:35p	ngf30b.O
NOGD30 O	218,975	05-17-99	1:35p	nogd30.O
NOGD50 O	214,723	05-17-99	1:35p	nogd50.O
NOGF30 O	218,779	05-17-99	1:35p	ngf30.O
NOGF50 O	216,003	05-17-99	1:35p	nogf50.O

**Waste Package Operations****Calculation**

**Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation:  
Degraded SNF Canister**

**Document Identifier: BBA000000-01717-0210-00033 REV 01**

**Attachment II, Page 4 of 5**

W00H00 O	216,989	05-17-99	1:35p w00h00.O
W00H10 O	218,196	05-17-99	1:35p w00h10.O
W00H20 O	217,057	05-17-99	1:35p w00h20.O
W00H30 O	218,196	05-17-99	1:35p w00h30.O
W10H00 O	216,156	05-17-99	1:35p w10h00.O
W10H10 O	218,291	05-17-99	1:35p w10h10.O
W10H20 O	217,152	05-17-99	1:35p w10h20.O
W10H30 O	217,152	05-17-99	1:35p w10h30.O
W20H00 O	217,799	05-17-99	1:35p w20h00.O
W20H10 O	218,829	05-17-99	1:35p w20h10.O
W20H20 O	218,388	05-17-99	1:35p w20h20.O
W20H30 O	217,358	05-17-99	1:35p w20h30.O
W30H00 O	216,392	05-17-99	1:35p w30h00.O
W30H10 O	218,391	05-17-99	1:35p w30h10.O
W30H20 O	218,461	05-17-99	1:35p w30h20.O
W30H30 O	217,638	05-17-99	1:35p w30h30.O
W40H00 O	217,677	05-17-99	1:35p w40h00.O
W40H10 O	218,510	05-17-99	1:35p w40h10.O
W40H20 O	218,510	05-17-99	1:35p w40h20.O
W40H30 O	217,493	05-17-99	1:35p w40h30.O
W50H00 O	216,484	05-17-99	1:35p w50h00.O
W50H10 O	217,622	05-17-99	1:35p w50h10.O
W50H20 O	217,622	05-17-99	1:35p w50h20.O
W50H30 O	217,084	05-17-99	1:35p w50h30.O

Volume in drive C has no label

Volume Serial Number is 07CE-031A

Directory of C:\fftf\rev01\outputs\outputrev01

	<DIR>	05-17-99	1:46p .
	<DIR>	05-17-99	1:46p ..
69NG5~1 O	216,938	05-17-99	1:30p 69ng.5.O
69NG7~1 O	216,305	05-17-99	1:30p 69ng.7.O
69NGAL O	215,690	05-17-99	1:30p 69ngal.O
69NOS~1 O	216,338	05-17-99	1:30p 69no.5.O
69NO7~1 O	215,826	05-17-99	1:30p 69no.7.O
69NOAL O	215,781	05-17-99	1:30p 69noal.O
69NOGD O	215,367	05-17-99	1:30p 69nogd.O
69NOGF O	215,573	05-17-99	1:30p 69nogf.O
75495~1 O	216,004	05-17-99	1:30p 7549.5.O
75497~1 O	216,645	05-17-99	1:30p 7549.7.O

**Waste Package Operations****Calculation**

**Title: Fast Flux Test Facility (FFTF) Reactor Fuel Degraded Criticality Calculation:  
Degraded SNF Canister**

**Document Identifier: BBA000000-01717-0210-00033 REV 01**

**Attachment II, Page 5 of 5**

754905 O	214,868	05-17-99	1:30p	754905.O
7549AL O	216,159	05-17-99	1:30p	7549al.O
89455~1 O	217,257	05-17-99	1:30p	8945.5.O
89457~1 O	216,771	05-17-99	1:30p	8945.7.O
894508 O	216,214	05-17-99	1:30p	894508.O
8945AL O	216,285	05-17-99	1:30p	8945al.O
M06F5~1 O	234,672	05-17-99	1:30p	m06f.5.O
M06F7~1 O	234,333	05-17-99	1:30p	m06f.7.O
M06F0C O	233,548	05-17-99	1:30p	m06f0c.O
M06FAL O	232,365	05-17-99	1:30p	m06fal.O
M565~1 O	234,564	05-17-99	1:30p	m56.5.O
M567~1 O	234,078	05-17-99	1:30p	m56.7.O
M56AL O	232,428	05-17-99	1:30p	m56al.O
M56F0C O	233,537	05-17-99	1:30p	m56f0c.O
MX695~1 O	223,388	05-17-99	1:30p	mx69.5.O
MX697~1 O	224,088	05-17-99	1:30p	mx69.7.O
MX6925 O	221,863	05-17-99	1:30p	mx6925.O
MX69AL O	224,152	05-17-99	1:30p	mx69al.O
NOFE5~1 O	306,666	05-17-99	1:30p	nofe.5.O
NOFE7~1 O	307,013	05-17-99	1:30p	nofe.7.O
NOFE56 O	306,252	05-17-99	1:30p	nofe56.O
NOFEAL O	306,478	05-17-99	1:30p	nofeal.O
NOGD5~1 O	307,915	05-17-99	1:30p	nogd.5.O
NOGD7~1 O	307,062	05-17-99	1:30p	nogd.7.O
NOGD56 O	306,301	05-17-99	1:30p	nogd56.O
NOGDAL O	307,015	05-17-99	1:30p	nogdal.O
NOGF5~1 O	217,374	05-17-99	1:30p	nogf.5.O
NOGF7~1 O	216,965	05-17-99	1:30p	nogf.7.O
NOGF50 O	216,003	05-17-99	1:30p	nogf50.O
NOGFAL O	216,327	05-17-99	1:30p	nogfal.O
T00F5~1 O	233,588	05-17-99	1:30p	t00f.5.O
T00F7~1 O	232,035	05-17-99	1:30p	t00f.7.O
T00F20 O	233,161	05-17-99	1:30p	t00f20.O
T00FAL O	233,556	05-17-99	1:30p	t00fal.O
W50H5~1 O	215,619	05-17-99	1:30p	w50h.5.O
W50H7~1 O	216,166	05-17-99	1:30p	w50h.7.O
W50H00 O	216,484	05-17-99	1:30p	w50h00.O
W50HAL O	216,906	05-17-99	1:30p	w50hal.O
OUTPUT~1		05-17-99	1:51p	outputscl

49 file(s) 11,339,923 bytes  
2 dir(s) 636,354,560 bytes free

	A	B	C	D	E	F	G
1	Appendix	Specifications for DOE FFTF Casker Components					
2							
3	FFTF SNF Assembly	Outer diameter:	8				
4		Components	Fuel per:	parts/assembly:	217		
5				material:	MOX	O.D.:	10.4940cm
6						length:	91.44cm
7						material:	UO <sub>2</sub> 96+PuO <sub>2</sub> 4%
8						density:	10.02g/cm <sup>3</sup>
9				insulator	parts/assembly:	2	
10						material:	natural UO <sub>2</sub>
11						density:	9.92g/cm <sup>3</sup>
12						length:	10.429cm
13						height:	2.032
14		reflector	parts/assembly:	2			
15						material:	inner 600
16						density:	8.47g/cm <sup>3</sup>
17						length:	14.478cm
18				spring	material:	S3302	
19						volume:	2.7284cm <sup>3</sup>
20						density:	8g/cm <sup>3</sup>
21				platinum	material:	S3318	
22						length:	40.21cm
23						O.D.:	0.49022cm
24						wall thickness:	0.01367cm
25		top cap	material:	S3318			
26						length:	10.45cm
27						O.D.:	0.5843cm
28		bottom cap	material:	S3318			
29						length:	4.08cm
30						O.D.:	0.5842cm
31		cladding	material:	S3318			
32						ID.:	0.508 cm
33						O.D.:	0.5942 cm
34						length:	273.224cm
35		Components other than fuel pins	material:	S3318			
36						total mass:	172.819-2170.463kg 74.3678 kg
37	Ident No.	components	Fuel per:	parts	217		
38			centerline:	mass	59.08kg		
39				material:	S3304L		
40	Bottom Assembly	material:	S3318L				
41		Components	center line:	O.D.:	17.3cm		
42				ID.:	15.3cm		
43				length:	412.8cm		
44		divider plates	parts/centerline:	5			
45				length:	14.6448cm		
46				height:	412.8cm		

A	B	C	D	E	F	G
47			Thickness:	1cm		
48		Outer Shell	O.R.:	22.8cm		
49			I.R.:	21.8075cm		
50			Length:	488.0cm		
51			Material:	m-316		
52			Density:	7.932g/cm <sup>3</sup>		
53	Volume for homogenizing tankspout:	$\pi * 22.8075^2 * 488.0m$	780407.469m <sup>3</sup>			
54	Total fuel price per tonne:	217/m <sup>3</sup>	1302			

	A	B	C	D	E	F	G
1	Cladding:	material:	SS316				
2		I.D.:	0.508 cm				
3		O.D.:	0.6842 cm				
4		length:	(237.744-10.46-4.06)cm=	223.224cm			
5		vol:	$\pi^*(0.5842^*2-0.508^*2)*223.224/4cc=$	14.5911cc			
6		total vol:	1302*14.5911cc=	18997.6122cc			
7		vol fraction:	18997.6122/103905.6147=	0.18283528			
8		density:	7.98g/cc				
9							
10	Element	Identifier	Al Mass	WL%	Al Density	Al Density	
11					(at/cm <sup>3</sup> b)	(st./cm <sup>3</sup> b)	
12						(homogenized)	
13	C	6000.50c	12.01115	0.06	3.2007E-04	5.8521E-05	
14	Mn	25055.50c	54.9380503	2	1.7494E-03	3.1986E-04	
15	P	15031.50c	30.9737647	0.045	6.9817E-05	1.2765E-05	
16	S	16032.50c	31.9720737	0.03	4.5091E-05	8.2443E-06	
17	Si	14000.50c	28.086	0.75	1.2833E-03	2.3463E-04	
18	Cr	24000.50c	51.996	17	1.5712E-02	2.8728E-03	
19	Ni	28000.50c	58.71	12	9.8223E-03	1.7959E-03	
20	Mo	42000.50c	95.94	2.5	1.2522E-03	2.2895E-04	
21	N	7014.50c	14.00307439	0.1	3.4318E-04	6.2745E-05	
22	Fe	26000.50c	55.847	65.495	5.6358E-02	1.0304E-02	
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							

	A	B	C	D	E	F
1	MOX:	material:	UO1.96+PuO1.96			
2		density:	10.02g/cc			
3		length:	91.44cm			
4		O.D.:	0.49403cm			
5		vol:	$\pi \cdot 0.49403^2 \cdot 91.44\text{cm}^3 =$	17.5280cc		
6		total vol:	130217.5280cc	22821.456cc		
7		vol fraction:	22821.456/103905.8147=	0.21963841		
8						
9	Pu(moles):	38.4/239.1891=	0.16054			
10	U(moles):	114.3/238.04478=	0.48016			
11	O(moles):	$1.96 \cdot (0.16054 + 0.48016) =$	1.25577			
12	O(mass):	15.998985*1.25577=	20.091g			
13	Total mass:	38.4+114.3+20.091=	172.791g			
14						
15	Pu:	mass:	38.4g			
16		weight fraction:	0.22223			
17						
18	Isotope	Isotopic Mass	Weight Fraction	At. Mass		
19	Pu239	239.052148	0.8735	239.189095		
20	Pu240	240.053882	0.1163			
21	Pu241	241.056737	0.0102			
22						
23	U:	mass:	114.3g			
24		weight fraction:	0.66149			
25						
26	Isotope	Isotopic Mass	Weight Fraction	At. Mass		
27	U235	235.043915	0.002	238.044756		
28	U238	238.05077	0.998			
29						
30						
31	O:	mass:	20.091g			
32		weight fraction:	0.11627			
33						
34	MOX					
35	Isotope	Identifier	Isotopic Mass	Wt. Fraction	At. Density	At. Density
36					(at/cm <sup>3</sup> b)	(at/cm <sup>3</sup> b)
37						(homogenized)
38	O16	8016.50c	15.998985	0.11627	4.3851E-02	9.6314E-03
39	U235	92235.50c	235.043915	0.00132	3.3887E-05	7.4428E-06
40	U238	92238.50c	238.05077	0.88017	1.6734E-02	3.6754E-03

	A	B	C	D	E	F
41	Pu239	94239.50c	239.052146	0.19412	4.8999E-03	1.0762E-03
42	Pu240	94240.50c	240.053882	0.02385	6.4977E-04	1.4271E-04
43	Pu241	94241.50c	241.056737	0.00227	5.6822E-05	1.2480E-05

A	B	C	D	E	F
1					
2					
3	Endcap material:	SS316			
4	length:	10.45+4.06=	14.52cm		
5	diameter:	0.5842cm			
6	vol:	$\pi * 0.5842^2 * 14.52 / 4 =$	3.89206cc		
7	total vol:	1302*3.89206cc	5067.46212cc		
8	vol. fraction:	5067.46212/103905.6147=	0.0487699		
9	density:	7.98g/cc			
10					
11	Element Identifier	At. Mass	Wt. %	At. Density	At. Density (at/cm <sup>3</sup> b) (homogenized)
12					
13					
14	C	6000.50c	12.01115	0.08	3.2007E-04 1.5610E-05
15	Mn	25055.50c	54.9380503	2	1.7494E-03 8.5320E-05
16	P	15031.50c	30.9737647	0.045	6.9817E-05 3.4050E-06
17	S	16032.50c	31.9720737	0.03	4.5091E-05 2.1991E-06
18	Si	14000.50c	28.086	0.75	1.2833E-03 6.2584E-05
19	Cr	24000.50c	51.996	17	1.5712E-02 7.6626E-04
20	Ni	28000.50c	58.71	12	9.8223E-03 4.7903E-04
21	Mo	42000.50c	95.94	2.5	1.2522E-03 6.1071E-05
22	N	7014.50c	14.00307439	0.1	3.4318E-04 1.6737E-05
23	Fe	26000.50c	55.847	65.495	5.6358E-02 2.7485E-03

A	B	C	D	E	F	G
1 Insulator	material:	natural UO2				
2	parts per rod:	2				
3	length:	2.032cm				
4	diameter:	0.508cm				
5	vol:	$\pi * 0.508^2 * 2.032 * 2/4 =$	0.8237cc			
6	total vol:	1302*0.8237=	1072.4574cc			
7	vol. fraction:	1072.4574/103905.6147=	0.010321458			
8	density:	10.42g/cc				
9	U mass/assembly:	1500g				
10						
11	U(moles):	1500/238.0289=	6.3018			
12	O(moles):	2*6.3018=	12.6035			
13	O(mass):	16*12.6035=	201.656			
14	total mass:	1701.656				
15	U(Wt. Fraction):	1500/1701.656=	0.8815			
16	O(Wt. Fraction):	201.656/1701.656=	0.1185			
17						
18	Isotope	Identifier	At. Mass	Wt. Fraction	At. Density	At. Density
19					(st/cm^3b)	(st/cm^3b)
20						(homogenized)
21	U235	92235.50c	235.043915	0.00626	1.6712E-04	1.7249E-06
22	U238	92238.50c	238.05077	0.87524	2.3071E-02	2.3813E-04
23	O16	8016.50c	15.998985	0.1185	4.6477E-02	4.7971E-04
24						

	A	B	C	D	E	F
1	Ident 69	material:	SS304L			
2		density:	7.89g/cc			
3		mass:	68.09kg			
4		vol:	580807.9e-	7479.75		
5		vol. fraction:	7479.75/103805.6147e-	0.071988		
6						
7	Element	Identifier	Al_Mass	Wt %	Al_Density	Al_Density (homogenized)
8					(g/cm <sup>3</sup> )	
9						
10	C	6000.50c	12.01118	0.03	1.1842E-04	8.6637E-08
11	Mn	25068.50c	64.9380503	2	1.7319E-03	1.2467E-04
12	P	15031.50c	30.8737847	0.048	8.9117E-06	4.8755E-08
13	S	16032.50c	31.9720737	0.03	4.4639E-06	3.2134E-08
14	Si	14000.50c	28.088	0.76	1.2704E-03	9.1481E-05
15	Cr	24000.50c	51.996	19	1.7384E-02	1.2514E-03
16	Ni	28000.50c	58.89	10	8.1059E-03	8.8381E-04
17	N	7014.50c	14.00307438	0.1	3.3974E-04	2.4456E-05
18	Fe	26000.50c	55.847	68.045	8.7965E-02	4.1727E-03

	A	B	C	D	E	F	G
1	Basket	material:	SS316L				
2		density:	7.86g/cc				
3		components:	center tube:	O.D.:	17.3cm		
4				I.D.:	15.3cm		
5				length:	412.5cm		
6				vol:	$\pi(17.3^{\prime\prime}2-15.3^{\prime\prime}2)^{412.54\prime\prime}$	21123.2636cc	
7			divider plates:	parts/canister:	5		
8				thickness:	1cm		
9				length:	(43.815-17.3)/2=	13.2575cm	
10				height:	412.5cm		
11				vol:	$5^{\prime\prime}1^{\prime\prime}13.2575^{\prime\prime}412.5\prime\prime$	27343.5938cc	
12							
13		total vol:	48466.8774	cc			
14		vol fraction:	48466.877/103905.6147=	0.466450992			
15							
16	Element	Identifier	At. Mass	Wt. %	Al. Density ( $\text{g/cm}^3$ )	Al. Density ( $\text{g/cm}^3$ )	
17							(homogenized)
18							
19	C	6000.50c	12.01115	0.03	1.2003E-04	5.5987E-05	
20	Mn	25055.50c	54.9380503	2	1.7494E-03	8.1603E-04	
21	P	15031.50c	30.9737647	0.045	6.9817E-05	3.2568E-05	
22	S	16032.50c	31.9720737	0.03	4.5091E-05	2.1033E-05	
23	Si	14000.50c	28.086	0.75	1.2833E-03	5.9858E-04	
24	Cr	24000.50c	51.996	17	1.5712E-02	7.3287E-03	
25	Ni	28000.50c	58.71	12	9.8223E-03	4.5818E-03	
26	Mo	42000.50c	95.94	2.5	1.2322E-03	5.8410E-04	
27	H	7014.50c	14.00307439	0.1	3.4318E-04	1.6008E-04	
28	Fe	26000.50c	55.847	65.545	5.6401E-02	2.6306E-02	
29							

	A	B	C	D	E
1	Gd				
2	Volume of basket (cc)	48466.8774			
3	density of SS316 (g/cc)	7.98			
4	Mass Basket (g)	386765.6817			
5	2% of the mass is Gd	0.02			
6	Mass Gd (g)	7735.313633	464.118818		
7	Mole of Gd (M=157.25 g/mol)	49.19118368			
8	Atoms of Gd	2.96229E+25			
9	Volume of the SNF DOE Canister	103905.6147			
10	Homogenized Density at/b.cm	0.000285095			
11					
12					
13	atom/density	volume	mole	mass	
14	6.93356E-05	0.000104	1.16E-08	1.82E-08	
15	0.000672942	0.00100941	1.09E-08	0.000172	
16	2.68559E-05	4.0284E-05	1.74E-09	2.74E-07	
17	1.73449E-05	2.6017E-05	7.26E-10	1.14E-07	
18		1.43E-04	207811.229	47.62519	7469.061

A	B	C	D	E
1	Volume cc	Volume Fraction		
2 Clad	18997.6122	0.030398		
3 Mox	22821.456	0.036516		
4 End Cap	5057.46212	0.008108		
5 Insulator	1072.4574	0.001718		
6 Indent	7479.75	0.011968		
7 basket	48466.877	0.077551		
8 Dry Volume	103905.6147	0.166257		
9 Volume Canister	624971.2629			
10 Volume of Water to add to flood the canister	521065.6482	0.833743		
11 Mass(g) of Water to add	521065.6482			
12 Mole of Water to add	26931.11			
13 Atomes of O to add	1.74223E+28			
14 Atomes of H to add	3.48446E+28			
15 density of H homogenized to add (st/cm.b)	0.06687186			
16 density of O homogenized to add (st/cm.b)	0.03343593			

A	B	C	D	E	F	G	H	I	J	K	L	M	N
1													
2	hematite forms at 10.26 1000s of years +			0 *100 % of water	total volume	6145900	cc	tot mass	23921.4	tot density	0.0039		
3													
4	p= 3.892 kg/l			Na= 6.02E-01 atm/bcm		Volume=	6145900	cc	mass	23921.4	kg		
5	isotopes	Atomic Mass	INCHP ID	Mole%	mass (g)	number densities (atm/bar.cm)				1 mol is	24.700146	g	
6	H	1.0078252	1001.50c	6.4551	6.30E+04	6.13E-03		6.1256E-03			968471.992	moles	
7	C	12.01115	6000.50c	0.0002	2.33E+01	1.90E-07		1.8979E-07					
8	O	15.994915	8016.50c	59.7993	9.26E+06	5.67E-02		5.6746E-02					
9	Na	22.989771	11023.50c	0.0761	1.69E+04	7.22E-05		7.2215E-05					
10	Al	26.981539	13027.50c	1.1394	2.98E+05	1.08E-03		1.0812E-03					
11	Si	28.086	14000.50c	11.693	3.23E+06	1.13E-02		1.1286E-02					
12	Ca	40.08	20000.50c	0.2762	1.07E+05	2.62E-04		2.6210E-04					
13	K	39.102	19000.50c	0.3872	1.47E+05	3.67E-04		3.6743E-04					
14	Tl	47.9	22000.50c	0.1819	8.44E+04	1.73E-04		1.7261E-04					
15	Mn	54.93805	25055.50c	0.7144	3.80E+05	6.78E-04		6.7793E-04					
16	Fe	55.847	26000.55c	18.8429	1.02E+07	1.79E-02		1.7881E-02					
17	Ni	58.71	28000.50c	0.22	1.25E+05	2.09E-04		2.0877E-04					
18	Cu	63.54	29000.50c	0.0123	7.57E+03	1.17E-05		1.1672E-05					
19	Gd	157.25	64000.35c	0.002	3.05E+03	1.90E-06		1.6979E-06					
20				100	23921400	0.0948948		9.4895E-02		tot moles	968471.99		
21													
22	water			mass (g)	number densities (atm/bar.cm)								
23	P= 1 kg/l			Na= 6.02E-01 atm/bcm		Volume=	0	cc	mass=	0	g		
24	H	1.0078252	1001.50c	200	0.00E+00	0.00E+00				1 mol is	1.80E+01		
25	O	15.994915	8016.50c	100	0.00E+00	0.00E+00				0.00E+00	mole of h2o		
26					0.00E+00	0.00E+00							
27													
28													
29													
30													
31													
32													
33													
34													
35													
36													
37													
38	hematite forms at 10.26 1000s of years +		0.2 *100 % of water	total volume	7682375	cc	tot mass	1560396.4	tot density	0.2031			
39													
40	p= 3.892 kg/l			Na= 6.02E-01 atm/bcm		Volume=	6145900	cc	mass	23921.4	kg		

A	B	C	D	E	F	G	H	I	J	K	L	M	N
				Mole%	mass (g)	number densities (at/bar.cm)							
41	Isotopes		Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm					
42	H	1.0078252	1001.50c	6.4551	6.30E+04	4.90E-03		1.8276E-02					
43	C	12.01115	6000.50c	0.0002	2.33E+01	1.52E-07		1.5183E-07					
44	O	15.994915	8016.50c	59.7993	9.26E+06	4.54E-02		5.2084E-02					
45	Na	22.989771	11023.50c	0.0761	1.69E+04	5.78E-05		5.7772E-05					
46	Al	26.981539	13027.50c	1.1394	2.98E+05	8.65E-04		8.6498E-04					
47	Si	28.086	14000.50c	11.893	3.23E+06	9.03E-03		9.0287E-03					
48	Ca	40.08	20000.50c	0.2762	1.07E+05	2.10E-04		2.0968E-04					
49	K	39.102	19000.50c	0.3872	1.47E+05	2.94E-04		2.9395E-04					
50	Ti	47.9	22000.50c	0.1819	8.44E+04	1.38E-04		1.3809E-04					
51	Mn	54.93805	25055.50c	0.7144	3.80E+05	5.42E-04		5.4234E-04					
52	Fe	55.847	26000.55c	18.8429	1.02E+07	1.43E-02		1.4305E-02					
53	NI	58.71	28000.50c	0.22	1.25E+05	1.87E-04		1.8701E-04					
54	Cu	63.54	29000.50c	0.0123	7.57E+03	9.34E-06		9.3376E-06					
55	Gd	157.25	64000.35c	0.002	3.05E+03	1.52E-06		1.5183E-06					
56				100	23821400	0.0759158		9.5977E-02			tot moles	1053781.6	
57													
58	water				mass (g)	number densities (at/bar.cm)							
59	p=	1	kg/l		Na=	6.02E-01	at/b.cm	Volume=	1536475	cc	mass=	1536475	g
60	H	1.0078252	1001.50c	200	1.72E+05	1.34E-02					1 mol is	1.80E+01	
61	O	15.994915	8016.50c	100	1.36E+06	6.89E-03					8.53E+04	mole of h2o	
62					1.54E+06	2.01E-02							
63													
64													
65													
66													
67	hematite forms at 10.26 1000s of years +			0.4906547	*100 % of water	total volume	12066275	cc	tot mass	5944296.27	tot density	0.4926	
68						Max Volume	12066275						
69	p=	3.892	kg/l		Na=	6.02E-01	at/bcm	Volume=	8145900	cc	mass	23921.4	kg
70	Isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm				1 mol is	24.700146	g
71	H	1.0078252	1001.50c	6.4551	6.30E+04	3.12E-03		3.5931E-02					
72	C	12.01115	6000.50c	0.0002	2.33E+01	9.67E-08		9.6664E-08					
73	O	15.994915	8016.50c	59.7993	9.26E+06	2.89E-02		4.5309E-02					
74	Na	22.989771	11023.50c	0.0761	1.69E+04	3.68E-05		3.6782E-05					
75	Al	26.981539	13027.50c	1.1394	2.98E+05	5.51E-04		5.5072E-04					
76	Si	28.086	14000.50c	11.893	3.23E+06	5.75E-03		5.7484E-03					
77	Ca	40.08	20000.50c	0.2762	1.07E+05	1.33E-04		1.3350E-04					
78	K	39.102	19000.50c	0.3872	1.47E+05	1.87E-04		1.8715E-04					
79	Ti	47.9	22000.50c	0.1819	8.44E+04	8.79E-05		8.7920E-05					
80	Mn	54.93805	25055.50c	0.7144	3.80E+05	3.45E-04		3.4530E-04					



O	P	Q	R	S	T	U	V	W	X	Y
1										
2	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value			
3	hematite forms 3.765 1000s y	1.3E+07	461.7	94	95.71047131	6556631.196	1.7104713			
4		750107	456.9	22.86	24.57047131	410751.1957	1.7104713			
5										
6				final		6145900				
7										
8										
9				Volume of clay needed		6145900				
10										
11										
12	SNF in the Bottom									
13										
14		1.3E+07	461.7	94	99.62337999	6896007				
15					5.623379986					
16	clay needed	6145900			final	6896007.457				
17										
18										
19										
20										
21										
22										
23										
24										
25										
26										
27										
28										
29										
30										
31										
32										
33										
34										
35										
36										
37										
38	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value			
39	hematite forms 3.765 1000s y	1.3E+07	461.7	94	117.5706312	8432482.457	23.570631			
40		750107	456.9	22.86	45.72	750107.4569	22.86			

















A	B	C	D	E	F	G	H	I
1 Atomic Densities (at/cm^3b)				Assembly hardware, Reflector, Plenum, Spring neglected				
2								
3 Canister Component:	Ident 89	Basket	Cladding	Endcap	MOX	Insulator		Total
4								
5 MCNP Isotope ID								
6 64000.35c								
7 1001.80c (H)								
8 8000.50c (C)	8.8537E-08	8.8867E-08	8.8521E-08	1.8610E-08	0.0000E+00	0.0000E+00		1.3847E-04
9 25055.50c (Mn)	1.2448E-04	8.1603E-04	3.1986E-04	8.8320E-06	0.0000E+00	0.0000E+00		1.3459E-03
10 15031.50c (P)	4.8755E-08	3.2508E-05	1.2785E-06	3.4050E-08	0.0000E+00	0.0000E+00		5.3712E-06
11 18032.50c (S)	3.2134E-08	2.1033E-05	8.2443E-08	2.1991E-08	0.0000E+00	0.0000E+00		3.4880E-05
12 14000.50c (Si)	8.1451E-08	8.8858E-04	2.3483E-04	8.2584E-05	0.0000E+00	0.0000E+00		8.8724E-04
13 24000.50c (Cr)	1.2314E-03	7.3287E-03	2.8726E-03	7.8426E-04	0.0000E+00	0.0000E+00		1.2219E-02
14 28000.50c (Ni)	8.8351E-04	4.8818E-03	1.7959E-03	4.7903E-04	0.0000E+00	0.0000E+00		7.4410E-03
15 42000.50c (Mo)	0.0000E+00	8.8410E-04	2.2895E-04	6.1071E-05	0.0000E+00	0.0000E+00		8.7413E-04
16 7014.50c (N)	2.4456E-05	1.8008E-04	8.2745E-05	1.8737E-05	0.0000E+00	0.0000E+00		2.8401E-04
17 26000.85c (Fe)	4.1727E-03	2.8308E-02	1.0304E-02	2.7485E-03	0.0000E+00	0.0000E+00		4.3533E-02
18 29000.80c (Cu)	0.0000E+00	8.0000E+00	8.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00		0.0000E+00
19 8018.50c (O)	0.0000E+00	8.0000E+00	8.0000E+00	0.0000E+00	8.6314E-03	4.7871E-04		1.0111E-02
20 92235.50c (U235)	0.0000E+00	8.0000E+00	8.0000E+00	0.0000E+00	7.4429E-08	1.7249E-06		9.1878E-08
21 92238.50c (U238)	0.0000E+00	8.0000E+00	8.0000E+00	0.0000E+00	3.8754E-03	2.3813E-04		3.9135E-03
22 94238.85c (Pu239)	0.0000E+00	8.0000E+00	8.0000E+00	0.0000E+00	1.0762E-03	0.0000E+00		1.0782E-03
23 94240.50c (Pu240)	0.0000E+00	8.0000E+00	8.0000E+00	0.0000E+00	1.4271E-04	0.0000E+00		1.4271E-04
24 94241.80c (Pu241)	0.0000E+00	8.0000E+00	8.0000E+00	0.0000E+00	1.2490E-05	0.0000E+00		1.2490E-05
25								8.2156E-02
26								
27								
28 0 % of water in the Hemette				% of water in fuel	0.00%	25.00%	50.00%	65.00%
29				MCNP Isotope ID	density (at/b cm)	density (at/b cm)	density (at/b cm)	density (at/b cm)
30 Density of Hemette (g/cc)	8.2749E+00			64000.35c	2.8508E-04	2.1382E-04	1.4255E-04	8.8783E-05
31 Volume of the fuel Homogenized	1.0381E+05			1001.80c (H)	0.0000E+00	1.87180E-02	3.34359E-02	4.34667E-02
32 Mole:at. b. of Hemette	3.0145E-20			6000.80c (C)	1.34867E-04	1.0400E-04	8.8335E-05	4.8335E-05
33 Mole of hemette in the fuel	3.7557E+03			25065.50c (Mn)	1.3459E-03	1.0094E-03	6.7294E-04	4.7106E-04
34 Mass of Hemette(g)	8.9871E+05			15031.80c (P)	8.3712E-08	4.0294E-06	2.6854E-06	1.3799E-06
35 Volume of Hemette (cc)	1.1369E+05			18032.50c (S)	3.4890E-06	2.8017E-06	1.7345E-06	1.2141E-05
36 Volume of Hemette (l)	1.1348E+02			14000.50c (Si)	8.8724E-04	7.4043E-04	4.8362E-04	3.4533E-04
37 0 % of this volume is water	0.0000E+00			24000.50c (Cr)	1.2219E-02	9.1643E-03	6.1094E-03	4.2787E-03
38 volume of water (cc)	0.0000E+00			28000.50c (Ni)	7.4400E-03	8.5800E-03	5.7200E-03	2.8040E-03
39				42000.50c (Mo)	8.7413E-04	8.8539E-04	4.3700E-04	3.0504E-04
40 Mass(g) of Water to add	0			7014.50c (N)	2.8401E-04	1.9801E-04	1.3201E-04	8.2405E-05

	A	B	C	D	E	F	G	H	I
41	Mole of Water to add		8		28000.85c (Fe)	4.3633E-02	3.2840E-02	2.1787E-02	1.8237E-02
42	Atoms of O to add		8		28000.80C (Cu)	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
43	Atoms of H to add		8		8016.80C (O)	7.5411E-02	6.4817E-02	5.4434E-02	4.8127E-02
44	density of H homogenized to add (at/cm.b.)	0.0000E+00			122238.80C (U235)	9.1678E-06	8.8784E-06	8.4839E-06	8.2047E-06
45	density of C homogenized to add (at/cm.b.)	0.0000E+00			122234.80C (U238)	3.9134E-03	2.8351E-03	1.9447E-03	1.3697E-03
46					64238.80C (Pu239)	1.0762E-03	8.0718E-04	5.3610E-04	3.7887E-04
47	Max Volume of the canister	824871.2629			642440.80C (Pu240)	1.4271E-04	1.6704E-04	7.1387E-06	4.9945E-06
48					642441.80C (Pu241)	1.3480E-05	9.3601E-06	8.3401E-06	4.3680E-06
49					total volume	1.0381E+06	1.38341E+06	2.07811E+06	2.96673E+06
50					total # density	1.4774E-01	1.3588E-01	1.3402E-01	1.1691E-01
51					water in the snf	6.2107E+06	4.8643E+05	4.1718E+06	3.2910E+06
52					H/X in the snf	0.0	20.6	61.8	114.4
53									
54	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value		
55									
56		824871.2629	414.5	21.9075	9.78985275	103910	-12.13791472		
57		824871.2629	414.5	21.9075	11.9784322	138540	-8.829087804		
58		824871.2629	414.5	21.9075	18.07415808	207810	-6.83334192		
59		824871.2629	414.5	21.9075	21.04744981	294870	-0.860060191		
60		824871.2629	414.5	21.9075	43.815	6.25E+05	21.9075		
61									
62									
63									
64	38 % of water in the hematite				% of water in fuel	0.00%	25.00%	50.00%	68.00%
65					MCHP Isotope ID	density (at/b.cm)	density (at/b.cm)	density (at/b.cm)	density (at/b.cm)
66	Density of Hematite (g/cc)	5.2749E+00			64000.35c	2.8509E-04	2.1582E-04	1.4251E-04	9.9713E-06
67	Volume of the fuel Homogenized	1.0391E+06			1001.80c (M)	2.18608E-02	3.88448E-02	8.53964E-02	8.54175E-02
68	Mole/cc. b. of Hematite	3.8145E-26			6000.80c (C)	1.3848E-04	1.0400E-04	8.8330E-06	4.8535E-05
69	Mass of hematite in the fuel	3.7559E+03			25055.80c (Mn)	1.3489E-03	1.0084E-03	6.7294E-04	4.7108E-04
70	Mass of Hematite(g)	8.9973E+06			18031.80c (P)	8.3712E-05	4.0284E-06	2.8858E-06	1.8799E-06
71	Volume of Hematite (cc)	1.1370E+06			18032.80c (S)	3.4810E-06	2.8017E-06	1.7345E-06	1.2141E-06
72	Volume of Hematite (l)	1.1370E+02			14000.50c (Si)	8.8724E-04	7.4043E-04	4.8363E-04	3.4553E-04
73	0 % of this volume is water	3.0000E-01			24000.80c (Cr)	1.2219E-02	8.1643E-03	6.1093E-03	4.2767E-03
74	volume of water (cc)	3.4109E+04			28000.80c (Nb)	7.4400E-03	6.8400E-03	3.7200E-03	2.8040E-03
75					42000.80c (Mo)	8.7413E-04	8.5559E-04	4.3708E-04	3.0594E-04
76	Mass(g) of Water to add	34108.84621			7014.80c (N)	2.8401E-04	1.9801E-04	1.3201E-04	0.2406E-05
77	Mole of Water to add	1893.815407			28000.85c (Fe)	4.3533E-02	3.2650E-02	2.1787E-02	1.8237E-02
78	Atoms of C to add	1.14048E+27			28000.80C (Cu)	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
79	Atoms of H to add	2.29081E+27			8016.80C (O)	8.8387E-02	7.8992E-02	6.83890E-02	6.81027E-02

A	B	C	D	E	F	G	H	I
80 density of H homogenized to add (at/cm.b.)	2.1951E-02			92235.80C (U235)	9.1679E-06	6.8735E-06	4.5539E-06	3.2057E-06
81 density of O homogenized to add (at/cm.b.)	1.0975E-02			92236.80C (U238)	3.9135E-03	2.9341E-03	1.9547E-03	1.3647E-03
82				94239.85C (Pu239)	1.0782E-03	8.0715E-04	5.3810E-04	3.7967E-04
83 Max Volume of the canister	824971.2829			94240.80C (Pu240)	1.4271E-04	1.0704E-04	7.1357E-05	4.9950E-06
84				94241.80C (Pu241)	1.2480E-06	8.3601E-06	6.2401E-06	4.3640E-06
85				total volume	1.0381E+06	1.38547E+05	2.07820E+06	2.96884E+06
86				total # density	1.8086746E-01	1.8881E-01	1.8883E-01	1.9884E-01
87				water in the snf	8.2108E+06	4.8642E+05	4.1715E+05	3.2808E+06
88				H/X in the snf	20.2	47.6	102.1	172.2
89								
90								
91								
92								
93 44 % of water in the hematite				% of water in fuel	0.00%	25.00%	50.00%	65.00%
94				MCNP Isotope ID	density (at/b.cm)	density (at/b.cm)	density (at/b.cm)	density (at/b.cm)
95 Density of Hematite (g/cc)	5.2749E+00			64000.35c	2.1550E-04	2.1382E-04	1.4235E-04	9.9733E-05
96 Volume of the fuel Homogenized	1.0381E+05			1001.80c (M)	4.3602E-02	8.0819E-02	7.73378E-02	8.73884E-02
97 Mole/c.b. of Hematite	3.6145E-28			6000.80c (C)	1.3467E-04	1.0400E-04	6.9336E-06	4.8335E-05
98 Mole of Hematite In the fuel	3.7588E+03			25058.80c (Mn)	1.3458E-03	1.0084E-03	6.7294E-04	4.7108E-04
99 Mass of Hematite(g)	8.9973E+06			15031.80c (P)	6.3712E-06	4.0284E-06	2.6834E-06	1.8799E-05
100 Volume of Hematite (cc)	1.1370E+05			18032.80c (S)	3.4490E-05	2.8017E-05	1.7345E-05	1.2141E-05
101 Volume of Hematite (l)	1.1370E+02			14000.80c (Si)	8.8724E-04	7.4043E-04	4.8342E-04	3.4533E-04
102 0 % of this volume is water	8.0000E-01			24000.80c (Cr)	1.2219E-02	9.1843E-03	6.1098E-03	4.2787E-03
103 volume of water (cc)	8.8217E+04			28000.80c (Ni)	7.4400E-03	5.5800E-03	3.7200E-03	2.8040E-03
104				42000.80c (Mo)	8.7413E-04	6.5358E-04	4.3708E-04	3.0684E-04
105 Mass(g) of Water to add	88217.37242			7014.80c (N)	2.8401E-04	1.9601E-04	1.3201E-04	9.2405E-05
106 Mole of Water to add	3787.830814			28000.88c (Fe)	4.3433E-02	3.3680E-02	2.1787E-02	1.6237E-02
107 Atomes of O to add	2.28081E+27			29000.80C (Cu)	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
108 Atomes of H to add	4.58182E+27			8018.80C (O)	9.7342E-02	8.88682E-02	7.83744E-02	7.00781E-02
109 density of H homogenized to add (at/cm.b.)	4.3902E-02			92235.80C (U235)	9.1679E-06	6.8768E-06	4.5539E-06	3.2057E-06
110 density of O homogenized to add (at/cm.b.)	2.1951E-02			92236.80C (U238)	3.9135E-03	2.9341E-03	1.9547E-03	1.3647E-03
111				94239.85C (Pu239)	1.0782E-03	8.0715E-04	5.3810E-04	3.7967E-04
112 Max Volume of the canister	824971.2829			94240.80C (Pu240)	1.4271E-04	1.0704E-04	7.1357E-05	4.9950E-06
113				94241.80C (Pu241)	1.2480E-06	8.3601E-06	6.2401E-06	4.3640E-06
114				total volume	1.0381E+06	1.38547E+05	2.07820E+06	2.96884E+06
115				total # density	2.1559E-01	2.0174E-01	1.8988E-01	1.8279E-01
116				water in the snf	8.2108E+06	4.8642E+05	4.1715E+05	3.2808E+06
117				H/X in the snf	60.4	74.8	142.8	230.0

	J	K	L	M	N	O
1						
2						
3	Total degraded fuel	Total degraded fuel				
4	In SNF Canister	In SNF Canister				
5	(Fe becomes Fe2O3)	Saturation of the hematite				
6	2.8509E-04	64000.35c (Gd)				
7	0.0000E+00	1001.80c (H)				
8	1.3867E-04	6000.80c (C)				
9	1.3458E-03	25056.80c (Mn)				
10	8.3712E-05	18031.80c (P)				
11	3.4810E-05	18032.80c (S)				
12	8.8724E-04	14000.80c (Si)				
13	1.2219E-02	24000.80c (Cr)				
14	7.4400E-03	28000.80c (Ni)				
15	8.7413E-04	42000.80c (Mo)				
16	2.8401E-04	7014.80c (N)				
17	4.3533E-02	28000.85c (Fe)				
18	0.0000E+00	29000.80C (Cu)				
19	7.5411E-02	8016.80C (O)				
20	9.1678E-06	92235.80C (U235)				
21	3.8125E-03	92234.80C (U234)				
22	1.0762E-03	94238.85C (Pu238)				
23	1.4271E-04	94240.80C (Pu240)				
24	1.2440E-06	94241.80C (Pu241)				
25	1.4744E-01	1.4744E-01				
26						
27						
28	83.37%					
29	density (g/b cm)					
30	4.7399E-05					
31	8.87540E-02					
32	2.3085E-05					
33	2.2378E-04					
34	8.8299E-06					
35	8.7874E-06					
36	1.8414E-04					
37	2.0315E-03					
38	1.2370E-03					
39	1.4533E-04					
40	4.3884E-05					

	J	K	L	M	N	O
41	7.2377E-03					
42	0.0000E+00					
43	4.0415E-02					
44	1.8242E-06					
45	8.5084E-04					
46	1.7892E-04					
47	2.3727E-05					
48	2.0749E-06					
49	0.24871E+05					
50	1.0819E-01					
51	0.0000E+00					
52	308.0					
53						
54						
55						
56						
57						
58						
59						
60						
61						
62						
63						
64	83.37%					
65	density (at/b.cm)					
66	4.7399E-05					
67	7.77046E-02					
68	2.3055E-05					
69	2.2370E-04					
70	8.9299E-06					
71	8.7874E-06					
72	1.8414E-04					
73	2.0316E-03					
74	1.2370E-03					
75	1.4633E-04					
76	4.3864E-05					
77	7.2377E-03					
78	0.0000E+00					
79	8.13900E-02					

J	K	L	M	N	O
80	1.8242E-08				
81	6.8084E-04				
82	1.7892E-04				
83	2.3727E-06				
84	2.6749E-08				
85	6.24998E-08				
86	1.4112E-01				
87	0.0000E+00				
88	430.6				
89					
90					
91					
92					
93	83.37%	50.00%	50.00%	50.00%	50.00%
94	density (ml/b.cm)	nogd	0gd	Dgd	10gd
95	4.7399E-05	0	7.1274E-08	8.8528E-08	1.4255E-05
96	9.86558E-02	7.73378E-02	7.73378E-02	7.73378E-02	7.73378E-02
97	2.3055E-05	8.93358E-08	8.93358E-08	8.93358E-08	8.93358E-08
98	2.2378E-04	6.72942E-04	6.72942E-04	6.72942E-04	6.72942E-04
99	8.9299E-06	2.88559E-05	2.88559E-05	2.88559E-05	2.88559E-05
100	8.7874E-06	1.73449E-05	1.73449E-05	1.73449E-05	1.73449E-05
101	1.8414E-04	4.83619E-04	4.83619E-04	4.83619E-04	4.83619E-04
102	2.0315E-03	6.10952E-03	6.10952E-03	6.10952E-03	6.10952E-03
103	1.2370E-03	3.72001E-03	3.72001E-03	3.72001E-03	3.72001E-03
104	1.4533E-04	4.37063E-04	4.37063E-04	4.37063E-04	4.37063E-04
105	4.3884E-06	1.32007E-04	1.32007E-04	1.32007E-04	1.32007E-04
106	7.2377E-03	2.17867E-02	2.17867E-02	2.17867E-02	2.17867E-02
107	0.0000E+00	0.00000E+00	0.00000E+00	0.00000E+00	0.00000E+00
108	6.23854E-02	7.83744E-02	7.83744E-02	7.83744E-02	4.37243E-02
109	1.8242E-08	4.58388E-08	4.58388E-08	4.58388E-08	4.58388E-08
110	6.5084E-04	1.85674E-03	1.85674E-03	1.85674E-03	1.85674E-03
111	1.7892E-04	5.38097E-04	5.38097E-04	5.38097E-04	5.38097E-04
112	2.3727E-05	7.13567E-06	7.13567E-06	7.13567E-06	7.13567E-06
113	2.0749E-08	6.24007E-08	6.24007E-08	6.24007E-08	6.24007E-08
114	6.24998E-08	2.07820E+05	2.07820E+05	2.07820E+05	2.07820E+05
115	1.7406E-01	1.8873E-01	1.8873E-01	1.8873E-01	1.3548E-01
116	0.0000E+00	4.17151E+05	4.17151E+05	4.17151E+05	4.17151E+05
117	952.3	142.8	142.8	142.8	142.8

A	B	C	D	E	F	G	H
1	Appendix	Specifications for DOE FFTF Coolant Components					
2							
3	FFTF SHF Assembly	part/parameter	5				
4		components:	fuel pin	diameter/mm:	217		
5			*	component:	Al2O3	O.D.:	0.69403cm
6						length:	91.44cm
7						material:	UO2.98+PuO1.98
8						density:	16.62g/cm3
9						moderator:	graphite:
10						component:	2
11						material:	natural UO2
12						density:	10.42g/cm3
13						length:	2.032
14						reflectors:	graphite:
15						material:	graphite:
16						density:	6.47g/cm3
17						length:	14.478cm
18						spring:	material:
19							SS302
20						volume:	2.7284cc
21						density:	8g/cc
22						plenum:	material:
23							SS316
24						length:	98.21cm
25						O.D.:	0.48022cm
26						wall thickness:	0.01387cm
27						top cap:	material:
28							SS316
29						bottom cap:	material:
30							SS316
31						cladding:	material:
32							SS316
33						ID:	0.508 cm
34						O.D.:	0.5842 cm
35						length:	223.224cm
36						density:	7.9497g/cc
37	Ident 98	components	Components other than fuel pins	material:	SS316		
38				Total mass:	172.819-217*0.4538=	74.3878 kg	
39							
40	Basket Assembly	material:	SS316L	parts:	217		
41		components:	center tube:	mass:	56.08kg		
42				material:	SS304L		
43				O.D.:	17.3cm		
44				ID.:	16.3cm		
45				length:	412.8cm		
46				height:	14.6448cm		
					412.8cm		

	A	B	C	D	E	F	G	H
47				Thickness:	1cm			
48			Cylinder Shell	O.R.:	22.88cm			
49				L.R.:	21.807cm			
50				length:	400.8cm			
51				outerdia:	30-316			
52				density:	7.852g/cm <sup>3</sup>			
53	Volume for homogeneous isotropic:			$\pi * 22.88^2 * 400.8 =$	790107.4398cm <sup>3</sup>			
54	Total fuel pins per cylinder:			2176	1302			

A	B	C	D	E	F	G
1 Cladding:	material:	SS316				
2	I.D.:	0.508 cm				
3	O.D.:	0.5842 cm				
4	length:	(237.744-10.46-4.06)cm=	223.224cm			
5	vol:	$\pi(0.5842^2-0.508^2)*223.224/4cc=$	14.5911cc			
6	total vol:	1302*14.5911cc=	18997.6122	cc		
7	vol fraction:	18997.6122/167963.6=	0.113092065			
8	density:	7.98g/cc				
9						
10 Element	Identifier	At. Mass	Wt.%	At. Density (at/cm <sup>3</sup> b)	At. Density (at/cm <sup>3</sup> b) (homogenized)	
11						
12						
13 C	6000.50c	12.01115	0.08	3.2007E-04	3.6198E-05	
14 Mn	25055.50c	54.9380503	2	1.7494E-03	1.9785E-04	
15 P	15031.50c	30.9737647	0.045	6.9817E-05	7.8958E-06	
16 S	16032.50c	31.9720737	0.03	4.5091E-05	5.0995E-08	
17 Si	14000.50c	28.086	0.75	1.2833E-03	1.4513E-04	
18 Cr	24000.50c	51.996	17	1.5712E-02	1.7769E-03	
19 Ni	28000.50c	58.71	12	9.8223E-03	1.1108E-03	
20 Mo	42000.50c	95.94	2.5	1.2522E-03	1.4162E-04	
21 N	7014.50c	14.00307439	0.1	3.4318E-04	3.8811E-05	
22 Fe	26000.50c	55.847	65.495	5.6356E-02	6.3736E-03	

A	B	C	D	E	F
1 MOX:	material:	UO1.96+PuO1.96			
2	density:	10.02g/cc			
3	length:	91.44cm			
4	O.D.:	0.49403cm			
5	vol:	p=0.49403*2*91.44/4cc=	17.8280cc		
6	total vol:	1302*17.8280cc=	22621.456cc		
7	vol fraction:	22821.456/103905.8147=	0.21963641		
8					
9 Pu(moles):	38.4/239.1891=	0.16054			
10 U(moles):	114.3/238.04476=	0.48016			
11 O(moles):	1.06*(0.16054+0.48016)=	1.25577			
12 O(mass):	15.998965*1.25577=	20.091g			
13 Total mass:	38.4+114.3+20.091=	172.791g			
14					
15 Pu:	mass:	38.4g			
16	weight fraction:	0.22223			
17					
18 Isotope	Isotopic Mass	Weight Fraction	Al. Mass		
19 Pu239	239.052146	0.8735	239.189095		
20 Pu240	240.053842	0.1163			
21 Pu241	241.056737	0.0102			
22					
23 U:	mass:	114.3g			
24	weight fraction:	0.66149			
25					
26 Isotope	Isotopic Mass	Weight Fraction	Al. Mass		
27 U235	235.043915	0.002	238.044756		
28 U238	238.05077	0.998			
29					
30					
31 O:	mass:	20.091g			
32	weight fraction:	0.11627			
33					
34 MOX					
35 Isotope	Identifier	Isotopic Mass	Wt. Fraction	AL Density	AL Density
36				(eV/cm^3b)	(eV/cm^3b)
37					(homogenized)
38 O16	8016.50c	15.998965	0.11627	4.3851E-02	9.8314E-03
39 U235	92235.50c	235.043915	0.00132	3.3887E-05	7.4428E-06
40 U238	92238.50c	238.05077	0.66017	1.6734E-02	3.6754E-03

	A	B	C	D	E	F	G
41	Pu239	94239.50c	239.052148	0.19412	4.8999E-03	6.8588E-04	
42	Pu240	94240.50c	240.053682	0.02585	6.4977E-04	8.8275E-05	
43	Pu241	94241.50c	241.056737	0.00227	5.6822E-05	7.7195E-06	

	A	B	C	D	E	F
1						
2						
3	Endcap	material: ..	SS316			
4		length:	10.46+4.06=	14.52cm		
5		diameter:	0.5842cm			
6		vol:	$\pi(0.5842^2 * 2 * 14.52 / 4) =$	3.89205cc		
7		total vol:	1302*3.89206=	5067.46212cc		
8		vol. fraction:	5067.46212/103905.6147=	0.0487699		
9		density:	7.98g/cc			
10						
11	Element	Identifier	Al Mass	Wt %	Al. Density	Al. Density
12					(g/cm^3b)	(g/cm^3b)
13						(homogenized)
14	C	6000.50c	12.01115	0.08	3.2007E-04	1.5610E-05
15	Mn	25055.50c	54.9380503	2	1.7494E-03	8.5320E-05
16	P	15031.50c	30.9737647	0.045	8.9817E-05	3.4050E-05
17	S	16032.50c	31.9720737	0.03	4.5001E-05	2.1991E-08
18	Si	14000.50c	28.066	0.75	1.2833E-03	6.2584E-05
19	Cr	24000.50c	51.996	17	1.5712E-02	7.6826E-04
20	Ni	28000.50c	58.71	12	9.8223E-03	4.7903E-04
21	Mo	42000.50c	95.94	2.5	1.2522E-03	6.1071E-05
22	N	7014.50c	14.00307439	0.1	3.4318E-04	1.6737E-05
23	Fe	26000.50c	55.847	65.495	5.6358E-02	2.7485E-03

	A	B	C	D	E	F	G
1	insulator	material:	natural UO2				
2		parts per rod:	2				
3		length:	2.032cm				
4		diameter:	0.508cm				
5		vol:	$\pi(0.508/2)^2 * 2.032 * 2/4 =$	0.8237cc			
6		total vol:	1302*0.8237=	1072.4574cc			
7		vol. fraction:	1072.4574/103905.8147=	0.010321458			
8		density:	10.42g/cc				
9		U mass/assembly:	1500g				
10							
11	U(moles):	1500/238.0289=	6.3018				
12	O(moles):	$2^*6.3018=$	12.6035				
13	O(mass):	$16^*12.6035=$	201.656				
14	total mass:	1701.656					
15	U(Wt. Fraction):	1500/1701.656=	0.8815				
16	O(Wt. Fraction):	201.656/1701.656=	0.1185				
17							
18	Isotope	Identifier	At. Mass	Wt. Fraction	At. Density (at/cm^3b)	At. Density (at/cm^3b) (homogenized)	
19							
20							
21	U235	92235.50c	235.043915	0.00826	1.6712E-04	1.7249E-06	
22	U238	92238.50c	238.05077	0.87524	2.3071E-02	2.3813E-04	
23	O16	8016.50c	15.998985	0.1185	4.6477E-02	4.7971E-04	
24							

A	B	C	D	E	F
1	Ident 69	material:	83304L		
2		density:	7.890cc		
3		mass:	53.69kg		
4		vol.	6.60907.9e-	7478.76	
5		vol. fraction:	7478.76/103905.8147e	0.671930	
6					
7	Element	Identifier	Al_Mass	Al_Vol	Al_Density
8				(atom%)	(at/cm <sup>3</sup> )
9					(homogenized)
10	C	6000.80c	12.01115	0.03	1.1082E-04
11	Mn	25055.80c	64.9380503	2	1.7310E-03
12	P	18031.80c	30.9737647	0.045	5.9117E-05
13	S	16032.80c	31.0730737	0.03	4.4639E-05
14	Si	14000.80c	23.984	0.75	1.9704E-03
15	Cr	24000.80c	51.984	10	1.7384E-02
16	Ni	28000.80c	58.89	10	8.9059E-03
17	N	7014.80c	14.80307438	0.1	3.3874E-04
18	Fe	26000.80c	65.847	61.845	6.7985E-02

	A	B	C	D	E	F	G
1	Basket	material:	SS316L				
2		density:	7.86g/cc				
3		components:	center tube:	O.D.:	17.3cm		
4				I.D.:	15.3cm		
5				length:	412.6cm		
6				vol:	$\pi^*(17.3^*2-15.3^*2)*412.64=$	21123.2636cc	
7			divider plates:	parts/canister:	5		
8				thickness:	1cm		
9				length:	$(43.815-17.3)/2=$	13.2575cm	
10				height:	412.6cm		
11				vol:	$5^*13.2575^*412.6=$	27343.9338cc	
12							
13		total vol:	48466.8774	cc			
14		vol fraction:	48466.877/103905.6147=	0.466450992			
15							
16	Element	Identifier	At. Mass	Wt. %	At. Density	At. Density	
17					(at/cm <sup>3</sup> b)	(at/cm <sup>3</sup> b)	
18						(homogenized)	
19	C	6000.50c	12.01115	0.03	1.2003E-04	5.5987E-05	
20	Mn	25055.50c	54.0360503	2	1.7494E-03	8.1603E-04	
21	P	15031.50c	30.8737647	0.045	6.9817E-05	3.2566E-05	
22	S	16032.50c	31.8720737	0.03	4.8091E-05	2.1033E-05	
23	Si	14000.50c	28.086	0.75	1.2833E-03	5.9658E-04	
24	Cr	24000.50c	51.896	17	1.8712E-02	7.3287E-03	
25	Ni	26000.50c	58.71	12	9.8223E-03	4.5616E-03	
26	Mo	42000.50c	95.84	2.5	1.8522E-03	6.8410E-04	
27	H	7014.50c	14.00307439	0.1	3.4318E-04	1.6008E-04	
28	Fe	26000.50c	55.847	85.845	8.8401E-02	2.8308E-02	
29							

	A	B	C	D	E
1	Gd				
2	Volume of basket (cc)	48466.8774			
3	density of 85316 (g/cc)	7.98			
4	Mass Basket (g)	386765.8817			
5	2% of the mass is Gd	0.02			
6	Mass Gd (g)	7735.313833	484.118818		
7	Mole of Gd (M=157.25 g/mol)	49.19118368			
8	Atoms of Gd	2.98229E+25			
9	Volume of the SNF DOE Canister	103905.6147			
10	Homogenized Density at/b.cm	0.000285095			
11					
12					
13		atom/density	volume	mole	mass
14		6.93356E-05	0.000104	1.16E-08	1.82E-08
15		0.000672942	0.00100941	1.09E-08	0.000172
16		2.68559E-05	4.0264E-05	1.74E-09	2.74E-07
17		1.73449E-05	2.6017E-05	7.28E-10	1.14E-07
18		1.43E-04	207811.229	47.62519	7489.061

	A	B
1	Gd	
2	Volume of basket (cc)	48466.8774
3	density of ss316 (g/cc)	7.98
4	Mass Basket (g)	386765.6817
5	2% of the mass is Gd	0.02
6	Mass Gd (g)	7735.313633
7	Mole of Gd (M=157.25 g/mol)	49.19118368
8	Atoms of Gd	2.98229E+25
9	Volume of the SNF DOE Canister	167984.6048
10	Homogenized Density at/b.cc	0.000176343

A	B	C	D	E
	Volume cc	Density	Mass (g)	Volume fraction
1				
2	Clad	16997.612	7.98	151600.9454
3	Mox	22821.456	10.02	228670.9891
4	End Cap	5067.4621	7.98	40438.34772
5	Insulator	1072.4574	10.42	11175.00611
6	Indent	7479.75	7.9	59090.025
7	basket	48466.877	7.98	386765.6817
8	canister	64078.9895	7.98	511350.3358
9	Dry Volume	167984.6		1389091.331
10				
11				
12				
13				
14				total Mass should not exceed 3400kg

	A	B	C	D	E	F	G	H	I	J	K	L	M
1	75% water in the fuel												
2	% of clay and fuel mix together			10%			25%			50%			100%
3	at density in	fuel	75% water	dry clay	mix	fuel	clay	Mix	fuel	clay	Mix	fuel	clay
4	at/cm												Mix
5	64000.35c	4.41E-06	1.90E-08	6.08E-08	4.41E-06	1.90E-08	6.08E-08	4.41E-06	1.90E-08	6.08E-08	4.41E-06	1.90E-08	6.08E-08
6	1001.50c (F)	6.02E-02	6.13E-03	1.06E-02	6.02E-02	6.13E-03	1.06E-02	6.02E-02	6.13E-03	1.06E-02	6.02E-02	6.13E-03	1.06E-02
7	9000.50c (C)	8.20E-06	1.90E-07	8.29E-08	8.20E-06	1.90E-07	8.29E-08	8.20E-06	1.90E-07	8.29E-08	8.20E-06	1.90E-07	5.29E-06
8	25055.50c (Mn)	3.75E-04	6.78E-04	6.48E-04	3.75E-04	6.78E-04	6.48E-04	3.75E-04	6.78E-04	6.48E-04	3.75E-04	6.78E-04	6.48E-04
9	15031.50c (P)	1.50E-05	6.00E+00	1.47E-06	1.50E-05	6.00E+00	1.47E-06	1.50E-05	6.00E+00	1.47E-06	1.50E-05	6.00E+00	1.47E-06
10	18032.50c (S)	9.84E-06	6.00E+00	8.82E-07	9.84E-06	6.00E+00	8.82E-07	9.84E-06	6.00E+00	9.82E-07	9.84E-06	6.00E+00	9.82E-07
11	14000.50c (Si)	2.73E-04	1.13E-02	1.02E-02	2.73E-04	1.13E-02	1.02E-02	2.73E-04	1.13E-02	1.02E-02	2.73E-04	1.13E-02	1.02E-02
12	24000.50c (Cr)	3.39E-03	6.00E+00	3.34E-04	3.39E-03	6.00E+00	3.34E-04	3.39E-03	6.00E+00	3.34E-04	3.39E-03	6.00E+00	3.34E-04
13	28000.50c (Ni)	2.04E-03	2.09E-04	3.34E-04	2.09E-03	2.09E-04	3.34E-04	2.09E-03	2.09E-04	3.34E-04	2.09E-03	2.09E-04	3.94E-04
14	42000.50c (Mo)	2.85E-04	6.00E+00	2.81E-05	2.85E-04	6.00E+00	2.81E-05	2.85E-04	6.00E+00	2.81E-05	2.85E-04	6.00E+00	2.51E-05
15	7014.50c (N)	7.34E-05	6.00E+00	7.23E-06	7.34E-05	6.00E+00	7.23E-06	7.34E-05	6.00E+00	7.23E-06	7.34E-05	6.00E+00	7.25E-06
16	26000.55c (Fe)	1.21E-02	1.73E-02	1.21E-02	1.73E-02	1.79E-02	1.73E-02	1.79E-02	1.73E-02	1.73E-02	1.79E-02	1.73E-02	1.73E-02
17	29000.50c (Cu)	0.00E+00	1.17E-05	1.05E-05	0.00E+00	1.17E-05	1.05E-05	0.00E+00	1.17E-05	1.05E-05	0.00E+00	1.17E-05	1.05E-05
18	6018.50c (O)	4.48E-02	6.87E-02	8.84E-02	4.48E-02	6.87E-02	8.84E-02	4.48E-02	6.87E-02	8.84E-02	4.48E-02	6.87E-02	5.56E-02
19	92235.50c (U235)	1.42E-06		1.40E-07	1.42E-06	0.00E+00	1.40E-07	1.42E-06	0.00E+00	1.40E-07	1.42E-06	0.00E+00	1.40E-07
20	92238.50c (U238)	6.05E-04		6.96E-05	6.05E-04	0.00E+00	6.96E-05	6.05E-04	0.00E+00	6.96E-05	6.05E-04	0.00E+00	5.96E-05
21	94239.55c (Pu239)	1.84E-04		1.84E-05	1.84E-04	0.00E+00	1.84E-05	1.84E-04	0.00E+00	1.84E-05	1.84E-04	0.00E+00	1.64E-05
22	94240.50c (Pu240)	2.21E-05		2.18E-06	2.21E-05	0.00E+00	2.18E-06	2.21E-05	0.00E+00	2.18E-06	2.21E-05	0.00E+00	2.18E-06
23	94241.50c (Pu241)	1.93E-04		1.90E-07	1.93E-06	0.00E+00	1.90E-07	1.93E-06	0.00E+00	1.90E-07	1.93E-06	0.00E+00	1.90E-07
24	11023.50c (Na)		7.22E-05	8.51E-05	0.00E+00	7.22E-05	8.51E-05	0.00E+00	7.22E-05	8.51E-05	0.00E+00	7.22E-05	6.51E-05
25	13027.50c (Al)		1.04E-03	9.78E-04	0.00E+00	1.04E-03	9.78E-04	0.00E+00	1.04E-03	9.78E-04	0.00E+00	1.04E-03	9.75E-04
26	20000.50c (Ca)		2.62E-04	2.36E-04	0.00E+00	2.62E-04	2.36E-04	0.00E+00	2.62E-04	2.36E-04	0.00E+00	2.62E-04	2.36E-04
27	19000.50c (K)		3.67E-04	2.31E-04	0.00E+00	3.67E-04	2.31E-04	0.00E+00	3.67E-04	2.31E-04	0.00E+00	3.67E-04	3.31E-04
28	22000.50c (Ti)		1.73E-04	1.84E-04	0.00E+00	1.73E-04	1.84E-04	0.00E+00	1.73E-04	1.84E-04	0.00E+00	1.73E-04	1.58E-04
29	total	1.14E-01	9.49E-02	9.64E-02	1.14E-01	9.49E-02	9.64E-02	1.14E-01	9.49E-02	9.64E-02	1.14E-01	9.49E-02	9.68E-02
30	volume		8.72E+05	8.15E+06	8.82E+06	8.65E+06	8.53E+06	1.70E+06	5.04E+06	4.61E+06	4.09E+06	2.68E+06	6.82E+06
31	TOTAL		8.82E+06		8.82E+06			8.82E+06			8.82E+06		6.82E+06
32	VOLD		8.00E+06			8.00E+06			8.00E+06		8.00E+06		6.00E+06
33	HX Ratio				632.6			632.6			632.6		632.6
34													
35	BNF in the middle	Volume	Length	Radius	Height of the	Cylinder Seg	x value						
36	hemispherical forms 3.765.10	8.53E+06	4.82E+02	9.40E+01	8.39E+01	8.53E+06	-1.01E+01						
37		8.21E+06	4.82E+02	9.40E+01	9.18E+01	8.21E+06	-2.25E+00						
38		8.82E+06	4.82E+02	9.40E+01	8.97E+01	8.82E+06	4.72E+00						
39		4.61E+06	4.62E+02	9.40E+01	7.31E+01	4.61E+06	-2.09E+01						
40		6.31E+06	4.62E+02	9.40E+01	9.29E+01	6.31E+06	-1.09E+00						

	A	B	C	D	E	F	G	H	I	J	K	L	M	
41		6.82E+06	4.62E+02	9.40E+01	9.87E+01	6.82E+06	4.72E+00							
42		2.46E+06	4.62E+02	9.40E+01	4.64E+01	2.46E+06	4.76E+01							
43		6.55E+06	4.62E+02	9.40E+01	9.56E+01	6.55E+06	1.62E+00							
44		6.82E+06	4.62E+02	9.40E+01	9.87E+01	6.82E+06	4.72E+00							
45		0.00E+00	4.62E+02	9.40E+01	0.00E+00	0.00E+00	-9.40E+01							
46		6.82E+06	4.62E+02	9.40E+01	9.87E+01	6.82E+06	4.72E+00							
47														
48														
49														
50		no water in hematite				no water in hematite				no water in hematite				
51		water to fill the void space of density	dry fuel	dry clay	total	water to fill the void space of density	dry fuel	dry clay	total	water to fill the void space of density	dry fuel	dry clay	total	
52	Horn over the entire volume			0.1					0.5				0.8	
53	64000.35c	1.76E-04	1.90E-06		3.22E-06	1.76E-04	1.90E-06		3.22E-06	1.76E-04	1.90E-06		3.22E-06	
54	1001.50c (H)		6.13E-03	6.69E-03	6.33E-03		6.13E-03	3.34E-02	1.99E-02		6.13E-03	5.35E-02		3.01E-02
55	6000.50c (C)	2.08E-04	1.90E-07		2.82E-06	2.08E-04	1.90E-07		2.82E-06	2.08E-04	1.90E-07		2.82E-06	
56	25055.50c (Mn)	1.50E-03	6.78E-04		3.45E-04	1.50E-03	6.78E-04		3.45E-04	1.50E-03	6.78E-04		3.45E-04	
57	15031.50c (P)	5.99E-05	0.00E+00		7.85E-07	5.99E-05	0.00E+00		7.85E-07	5.99E-05	0.00E+00		7.85E-07	
58	16032.50c (S)	3.87E-05	0.00E+00		5.07E-07	3.87E-05	0.00E+00		5.07E-07	3.87E-05	0.00E+00		5.07E-07	
59	14000.50c (Si)	1.10E-03	1.13E-02		5.43E-03	1.10E-03	1.13E-02		5.43E-03	1.10E-03	1.13E-02		5.43E-03	
60	24000.50c (Cr)	1.36E-02	0.00E+00		1.78E-04	1.36E-02	0.00E+00		1.78E-04	1.36E-02	0.00E+00		1.78E-04	
61	28000.50c (Ni)	8.35E-03	2.09E-04		2.10E-04	8.35E-03	2.09E-04		2.10E-04	8.35E-03	2.09E-04		2.10E-04	
62	42000.50c (Mo)	1.02E-03	0.00E+00		1.33E-05	1.02E-03	0.00E+00		1.33E-05	1.02E-03	0.00E+00		1.33E-05	
63	7014.50c (N)	2.94E-04	0.00E+00		3.86E-06	2.94E-04	0.00E+00		3.86E-06	2.94E-04	0.00E+00		3.86E-06	
64	26000.55c (Fe)	4.84E-02	1.79E-02		9.21E-03	4.84E-02	1.79E-02		9.21E-03	4.84E-02	1.79E-02		9.21E-03	
65	29000.50C (Cu)	0.00E+00	1.17E-05		5.60E-06	0.00E+00	1.17E-05		5.60E-06	0.00E+00	1.17E-05		5.60E-06	
66	8016.50C (O)	7.89E-02	5.67E-02	3.34E-03	2.99E-02	7.89E-02	5.67E-02	1.67E-02	3.67E-02	7.89E-02	5.67E-02	2.67E-02	4.18E-02	
67	92235.50C (U235)	5.67E-06			7.43E-08	5.67E-06			7.43E-08	5.67E-06			7.43E-08	
68	92238.50C (U238)	2.42E-03			3.17E-05	2.42E-03			3.17E-05	2.42E-03			3.17E-05	
69	94239.55C (Pu239)	6.66E-04			8.73E-06	6.66E-04			8.73E-06	6.66E-04			8.73E-06	
70	94240.50C (Pu240)	8.83E-05			1.16E-06	8.83E-05			1.16E-06	8.83E-05			1.16E-06	
71	94241.50C (Pu241)	7.72E-08			1.01E-07	7.72E-08			1.01E-07	7.72E-08			1.01E-07	
72	11023.50c (Na)		7.22E-05		3.46E-05		7.22E-05		3.46E-05		7.22E-05		3.46E-05	
73	13027.50c (Al)		1.06E-03		5.16E-04		1.06E-03		5.16E-04		1.06E-03		5.16E-04	

	A	B	C	D	E	F	G	H	I	J	K	L	M
74	20000.50c (Ca)		2.62E-04		1.26E-04		2.62E-04		1.26E-04		2.62E-04		1.26E-04
75	19000.50c (K)		3.67E-04		1.76E-04		3.67E-04		1.76E-04		3.67E-04		1.76E-04
76	22000.50c (Tl)		1.73E-04		8.28E-05		1.73E-04		8.28E-05		1.73E-04		8.28E-05
77	total	1.57E-01	9.49E-02	1.00E-02	8.26E-02	1.57E-01	9.49E-02	5.02E-02	7.30E-02	1.57E-01	9.49E-02	8.02E-02	8.83E-02
78	volume	1.68E+05	8.15E+06	6.50E+06	1.28E+07	1.68E+05	8.15E+06	6.50E+06	1.28E+07	1.68E+05	8.15E+06	6.50E+06	1.28E+07
79	TOTAL				719.4				2261.7				3418.4
80	VOID												
81													
82													
83	60% of water in the hematite												
84	78% water in the fuel												
85	% of clay and fuel mix together			10%			25%			60%			100%
86	at density in	fuel 75% wat	dry clay	mix	fuel	clay	Mix	fuel	clay	Mix	fuel	clay	Mix
87	g/bcm												
88	64000.35c	4.41E-05	1.90E-06	8.06E-06	4.41E-05	1.90E-06	8.06E-06	4.41E-05	1.90E-06	8.06E-06	4.41E-05	1.90E-06	8.06E-06
89	1001.50c (H)	6.24E-02	6.13E-03	1.17E-02	6.24E-02	6.13E-03	1.17E-02	6.24E-02	6.13E-03	1.17E-02	6.24E-02	6.13E-03	1.17E-02
90	6000.50c (C)	5.20E-05	1.90E-07	5.29E-06	5.20E-05	1.90E-07	5.29E-06	5.20E-05	1.90E-07	5.29E-06	5.20E-05	1.90E-07	5.29E-06
91	25055.50c (Mn)	3.75E-04	6.78E-04	8.48E-04	3.75E-04	6.78E-04	8.48E-04	3.75E-04	6.78E-04	8.48E-04	3.75E-04	6.78E-04	8.48E-04
92	15031.50c (P)	1.50E-05	0.00E+00	1.47E-06	1.50E-05	0.00E+00	1.47E-06	1.50E-05	0.00E+00	1.47E-06	1.50E-05	0.00E+00	1.47E-06
93	16032.50c (S)	9.66E-06	0.00E+00	9.52E-07	9.66E-06	0.00E+00	9.52E-07	9.66E-06	0.00E+00	9.52E-07	9.66E-06	0.00E+00	9.52E-07
94	14000.50c (Si)	2.75E-04	1.13E-02	1.02E-02	2.75E-04	1.13E-02	1.02E-02	2.75E-04	1.13E-02	1.02E-02	2.75E-04	1.13E-02	1.02E-02
95	24000.50c (Cr)	3.39E-03	0.00E+00	3.34E-04	3.39E-03	0.00E+00	3.34E-04	3.39E-03	0.00E+00	3.34E-04	3.39E-03	0.00E+00	3.34E-04
96	28000.50c (Ni)	2.09E-03	2.09E-04	3.94E-04	2.09E-03	2.09E-04	3.94E-04	2.09E-03	2.09E-04	3.94E-04	2.09E-03	2.09E-04	3.94E-04
97	42000.50c (Mo)	2.55E-04	0.00E+00	2.51E-05	2.55E-04	0.00E+00	2.51E-05	2.55E-04	0.00E+00	2.51E-05	2.55E-04	0.00E+00	2.51E-05
98	7014.50c (N)	7.36E-05	0.00E+00	7.25E-06	7.36E-05	0.00E+00	7.25E-06	7.36E-05	0.00E+00	7.25E-06	7.36E-05	0.00E+00	7.25E-06
99	26000.55c (Fe)	1.21E-02	1.79E-02	1.73E-02	1.21E-02	1.79E-02	1.73E-02	1.21E-02	1.79E-02	1.73E-02	1.21E-02	1.79E-02	1.73E-02
100	29000.50C (Cu)	0.00E+00	1.17E-05	1.05E-05	0.00E+00	1.17E-05	1.05E-05	0.00E+00	1.17E-05	1.05E-05	0.00E+00	1.17E-05	1.05E-05
101	6016.50C (O)	5.09E-02	5.67E-02	5.62E-02	5.09E-02	5.67E-02	5.62E-02	5.09E-02	5.67E-02	5.62E-02	5.09E-02	5.67E-02	5.62E-02
102	92235.50C (U235)	1.42E-06	0.00E+00	1.40E-07	1.42E-06	0.00E+00	1.40E-07	1.42E-06	0.00E+00	1.40E-07	1.42E-06	0.00E+00	1.40E-07
103	92238.50C (U238)	6.05E-04	0.00E+00	5.96E-05	6.05E-04	0.00E+00	5.96E-05	6.05E-04	0.00E+00	5.96E-05	6.05E-04	0.00E+00	5.96E-05
104	94239.55C (Pu239)	1.66E-04	0.00E+00	1.64E-05	1.66E-04	0.00E+00	1.64E-05	1.66E-04	0.00E+00	1.64E-05	1.66E-04	0.00E+00	1.64E-05
105	94240.50C (Pu240)	2.21E-05	0.00E+00	2.18E-06	2.21E-05	0.00E+00	2.18E-06	2.21E-05	0.00E+00	2.18E-06	2.21E-05	0.00E+00	2.18E-06
106	94241.50C (Pu241)	1.93E-06	0.00E+00	1.90E-07	1.93E-06	0.00E+00	1.90E-07	1.93E-06	0.00E+00	1.90E-07	1.93E-06	0.00E+00	1.90E-07
107	11023.50c (Na)		7.22E-05	6.51E-05	0.00E+00	7.22E-05	6.51E-05	0.00E+00	7.22E-05	6.51E-05	0.00E+00	7.22E-05	6.51E-05
108	13027.50c (Al)		1.08E-03	9.75E-04	0.00E+00	1.08E-03	9.75E-04	0.00E+00	1.08E-03	9.75E-04	0.00E+00	1.08E-03	9.75E-04
109	20000.50c (Ca)		2.62E-04	2.36E-04	0.00E+00	2.62E-04	2.36E-04	0.00E+00	2.62E-04	2.36E-04	0.00E+00	2.62E-04	2.36E-04
110	19000.50c (K)		3.87E-04	3.31E-04	0.00E+00	3.67E-04	3.31E-04	0.00E+00	3.67E-04	3.31E-04	0.00E+00	3.67E-04	3.31E-04
111	22000.50c (Tl)		1.73E-04	1.56E-04	0.00E+00	1.73E-04	1.56E-04	0.00E+00	1.73E-04	1.56E-04	0.00E+00	1.73E-04	1.56E-04
112	total	1.33E-01	9.49E-02	9.86E-02	1.33E-01	9.49E-02	9.86E-02	1.33E-01	9.49E-02	9.86E-02	1.33E-01	9.49E-02	9.86E-02
113	volume	6.72E+05	6.15E+06	6.82E+05	6.05E+05	5.53E+06	1.70E+06	5.04E+05	4.61E+06	4.09E+06	2.69E+05	2.46E+06	6.82E+06





	N	O	P	Q	R	S	T	U
41								
42								
43	***							
44								
45								
46								
47								
48								
49								
50	no water in hematite				50% of water in hematite			
51	dry fuel	dry clay	water to fill the void space of density	total	dry fuel	dry clay	water to fill the void space	total
52			1					
53	1.76E-04	1.90E-06		3.22E-06	1.76E-04	1.90E-06		9.22E-07
54		6.13E-03	6.69E-02	3.69E-02	4.88E-02	6.13E-03	6.69E-02	3.74E-02
55	2.08E-04	1.90E-07		2.82E-06	2.08E-04	1.90E-07		9.22E-08
56	1.50E-03	6.78E-04		3.45E-04	1.50E-03	6.78E-04		3.29E-04
57	5.99E-05	0.00E+00		7.85E-07	5.99E-05	0.00E+00		0.00E+00
58	3.87E-05	0.00E+00		5.07E-07	3.87E-05	0.00E+00		0.00E+00
59	1.10E-03	1.13E-02		5.43E-03	1.10E-03	1.13E-02		5.48E-03
60	1.36E-02	0.00E+00		1.78E-04	1.36E-02	0.00E+00		0.00E+00
61	8.35E-03	2.09E-04		2.10E-04	8.35E-03	2.09E-04		1.01E-04
62	1.02E-03	0.00E+00		1.33E-05	1.02E-03	0.00E+00		0.00E+00
63	2.94E-04	0.00E+00		3.88E-06	2.94E-04	0.00E+00		0.00E+00
64	4.84E-02	1.79E-02		6.21E-03	4.84E-02	1.79E-02		8.69E-03
65	0.00E+00	1.17E-05		5.60E-06	0.00E+00	1.17E-05		5.87E-06
66	7.89E-02	5.67E-02	3.34E-02	4.52E-02	1.03E-01	5.67E-02	3.34E-02	4.48E-02
67	5.67E-08				7.43E-08	5.67E-08		0.00E+00
68	2.42E-03				3.17E-05	2.42E-03		0.00E+00
69	6.66E-04				8.73E-06	6.66E-04		0.00E+00
70	8.83E-05				1.16E-06	8.83E-05		0.00E+00
71	7.72E-06				1.01E-07	7.72E-06		0.00E+00
72		7.22E-05		3.46E-05		7.22E-05		3.51E-05
73		1.06E-03		5.18E-04		1.06E-03		5.25E-04

	N	O	P	Q	R	S	T	U
74		2.62E-04		1.26E-04		2.62E-04		1.27E-04
75		3.67E-04		1.76E-04		3.67E-04		1.79E-04
76		1.73E-04		8.28E-05		1.73E-04		8.39E-05
77	1.57E-01	9.49E-02	1.00E-01	9.85E-02	2.30E-01	9.49E-02	1.00E-01	9.77E-02
78	1.68E+05	6.15E+06	6.50E+06	1.28E+07	0.00E+00	6.15E+06	6.50E+06	1.26E+07
79					4189.6			
80								
81								
82								
83								
84								
85								
86	fuel	clay						
87								
88	4.41E-05	1.90E-06						
89	6.24E-02	6.13E-03						
90	5.20E-05	1.90E-07						
91	3.75E-04	6.78E-04						
92	1.50E-05	0.00E+00						
93	9.66E-06	0.00E+00						
94	2.75E-04	1.13E-02						
95	3.39E-03	0.00E+00						
96	2.09E-03	2.09E-04						
97	2.55E-04	0.00E+00						
98	7.36E-05	0.00E+00						
99	1.21E-02	1.79E-02						
100	0.00E+00	1.17E-05						
101	5.09E-02	5.67E-02						
102	1.42E-06	0.00E+00						
103	6.05E-04	0.00E+00						
104	1.66E-04	0.00E+00						
105	2.21E-05	0.00E+00						
106	1.93E-06	0.00E+00						
107	0.00E+00	7.22E-05						
108	0.00E+00	1.08E-03						
109	0.00E+00	2.62E-04						
110	0.00E+00	3.67E-04						
111	0.00E+00	1.73E-04						
112	1.33E-01	9.49E-02						
113	0.00E+00	0.00E+00						



	A	B	C	D	E	F	G	H	I	J	K	L	M	N
1														
2	hematite forms at 10.26 1000s of years +				0	-100 % of water		total volume	6145900	cc	tot mass	23921.4	tot density	0.003892
3														
4	p=	3.892	kg/l					Na=	6.02E-01	at/b.cm			mass	23921.4 kg
5	isotopes	Atomic Mass	MCNP ID	Major%	mass (g)		number densities (at/bar.cm)				at/bar.cm		1 mol is	24.7001464 g
6	H	1.00782519	1001.50c	6.4551	6.30E+04		6.13E-03				6.1258E-03			
7	C	12.01115	8000.50c	0.0002	2.33E+01		1.80E-07				1.8979E-07			
8	O	15.994915	8016.50c	59.7993	9.26E+06		5.67E-02				5.6744E-02			
9	Na	22.9897707	11023.50c	0.0781	1.68E+04		7.22E-05				7.2215E-05			
10	Al	26.9815389	13027.50c	1.1394	2.98E+05		1.06E-03				1.0612E-03			
11	Si	28.086	14000.50c	11.893	3.23E+06		1.13E-02				1.1266E-02			
12	Ca	40.08	20000.50c	0.2782	1.07E+05		2.62E-04				2.6210E-04			
13	K	39.102	19000.50c	0.3872	1.47E+05		3.67E-04				3.6743E-04			
14	Ti	47.9	22000.50c	0.1819	8.44E+04		1.73E-04				1.7261E-04			
15	Mn	54.9380503	25055.50c	0.7144	3.80E+05		6.76E-04				6.7793E-04			
16	Fe	55.847	26000.55c	18.6429	1.02E+07		1.79E-02				1.7881E-02			
17	Ni	58.71	28000.50c	0.22	1.25E+05		2.09E-04				2.0877E-04			
18	Cu	63.54	29000.50c	0.0123	7.57E+03		1.17E-05				1.1672E-05			
19	Gd	157.25	64000.35c	0.002	3.05E+03		1.90E-06				1.8979E-06			
20				100	23921400		0.0948948				9.4895E-02		tot moles	968471.992
21														
22	water				mass (g)	number densities (at/bar.cm)								
23	p=	1	kg/l		Na=	6.02E-01	at/b.cm	Volume=	0	cc	mass=	0	g	
24	H	1.00782519	1001.50c	200	0.00E+00	0.00E+00					1 mol is	1.80E+01		
25	O	15.994915	8016.50c	100	0.00E+00	0.00E+00					0.00E+00	mole of h2o		
26					0.00E+00	0.00E+00								
27														
28														
29														
30														
31														
32														
33														
34														
35														
36														
37														
38	hematite forms at 10.26 1000s of years +			0.25	-100 % of water		total volume	8194533.3	cc	tot mass	2072555	tot density	0.252919	
39														
40	p=	3.892	kg/l		Na=	6.02E-01	at/b.cm	Volume=	6E+06	cc	mass	23921.4	kg	

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
41	isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm					1 mol ls	24.7001464	g
42	H	1.00782519	1001.50c	6.4551	6.30E+04	4.59E-03			2.1312E-02			968472	moles	
43	C	12.01115	6000.50c	0.0002	2.33E+01	1.42E-07			1.4234E-07					
44	O	15.994915	8016.50c	59.7993	9.26E+06	4.26E-02			5.0919E-02					
45	Na	22.9897707	11023.50c	0.0761	1.69E+04	5.42E-05			5.4161E-05					
46	Al	26.9815389	13027.50c	1.1394	2.98E+05	8.11E-04			8.1092E-04					
47	Si	28.066	14000.50c	11.893	3.23E+06	8.46E-03			8.4644E-03					
48	Ca	40.08	20000.50c	0.2762	1.07E+05	1.97E-04			1.9657E-04					
49	K	39.102	19000.50c	0.3872	1.47E+05	2.76E-04			2.7557E-04					
50	Ti	47.9	22000.50c	0.1819	8.44E+04	1.29E-04			1.2946E-04					
51	Mn	54.9380503	25055.50c	0.7144	3.80E+05	5.08E-04			5.0845E-04					
52	Fe	55.847	26000.55c	18.8429	1.02E+07	1.34E-02			1.3411E-02					
53	Ni	58.71	28000.50c	0.22	1.25E+05	1.57E-04			1.5658E-04					
54	Cu	63.54	29000.50c	0.0123	7.57E+03	8.75E-06			8.7540E-06					
55	Gd	157.25	64000.35c	0.002	3045.84	1.42E-06			1.4234E-06					
56				100	23921400	0.0711711			9.6248E-02			tot moles	1082218.19	
57														
58	water				mass (g)	number densities (at/bar.cm)								
59	P=	1 kg/l			Na=	6.02E-01 at/b.cm			Volume=	2E+06 cc		mass=	2048633.33	g
60	H	1.00782519	1001.50c	200	2.29E+05	1.67E-02						1 mol ls	1.80E+01	
61	O	15.994915	8016.50c	100	1.82E+06	8.36E-03						1.14E+05	moles of H2o	
62					2.05E+06	2.51E-02								
63														
64														
65														
66														
67	hematite forms at 10.26 1000s of years +			0.51409656	*100 % of water		total volume	12648398	cc	tot mass	6526419	tot density	0.515988	
68						12144444	Max Volume							
69	P=	3.892 kg/l			Na=	6.02E-01 at/b.cm			Volume=	6E+06 cc		mass	23921.4	kg
70	isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm					1 mol ls	24.7001464	g
71	H	1.00782519	1001.50c	6.4551	6.30E+04	2.98E-03			3.7355E-02			968472	moles	
72	C	12.01115	6000.50c	0.0002	2.33E+01	9.22E-06			9.2219E-08					
73	O	15.994915	8016.50c	59.7993	9.26E+06	4.26E-02			4.4763E-02					
74	Na	22.9897707	11023.50c	0.0761	1.69E+04	5.42E-05			3.5089E-05					
75	Al	26.9815389	13027.50c	1.1394	2.98E+05	5.25E-04			5.2537E-04					
76	Si	28.066	14000.50c	11.893	3.23E+06	8.46E-03			5.4838E-03					
77	Ca	40.08	20000.50c	0.2762	1.07E+05	1.27E-04			1.2735E-04					
78	K	39.102	19000.50c	0.3872	1.47E+05	1.79E-04			1.7854E-04					
79	Ti	47.9	22000.50c	0.1819	8.44E+04	8.39E-05			8.3874E-05					
80	Mn	54.9380503	25055.50c	0.7144	3.80E+05	3.29E-04			3.2941E-04					



O	P	Q	R	S	T	U	V
1							
2	<b>SNF in the middle</b>	Volume	Length	Radius	Height of the segment	Cylinder Segment Volu	x value
3	hematite forms 3.765 1000s y	1E+07	461.7	94	90.97767766	6145900	-3.022322
4	FFTF SNF	167985	461.7	94	92.91348971	6313884.605	-1.06651
5	total	6E+06					
6	FFTF SNF 25% water	223979	461.7	94	93.55851742	6369879.473	-0.441363
7		6E+06					
8	FFTF SNF 50% water	335969	461.7	94	94.84884085	6481869.209	0.848841
9		6E+06					
10	FFTF SNF 75% water	671938	461.7	94	98.72144618	6817838.418	4.721446
11		7E+06					
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38	<b>SNF in the middle</b>	Volume	Length	Radius	Height of the segment	Cylinder Segment Volu	x value
39	hematite forms 3.765 1000s y	1E+07	461.7	94	114.749842	8194533.333	20.74984
40	FFTF SNF	167985	461.7	94	118.7391545	8362517.94	22.73915





A	B	C	D	E	F	G	H	I
1 Atomic Densities (aU/cm^3b)								
2								
3 Canister Component:	Ident 89	Basket	Cladding	Endcap	MOX	Insulator	Canister shell	Total
4								
5 MCNP Isotope Identifier								
6 640000 35c								
7 1001.50c (H)								
8 80000 50c (C)	8.2904E-08	3.463E-06	3.61977E-06	9.65545E-06			0.000122093	8.000207889
9 25055 50c (Mn)	7.71161E-06	0.0006048	0.000197848	5.27745E-05			0.000667343	0.00149835
10 15031.50c (P)	3.07756E-08	2.014E-06	7.89577E-06	2.10813E-06			2.84324E-05	8.94554E-05
11 16032.50c (S)	1.98764E-08	1.301E-06	8.06544E-08	1.36025E-06			1.72005E-05	3.84578E-05
12 14000 50c (Si)	8.65645E-08	0.0003702	0.000148127	3.87114E-05			0.000488512	0.001100183
13 24000 50c (Cr)	0.000774053	0.0046332	0.001778866	0.000473945			0.006993374	0.013551418
14 28000 50c (Ni)	0.000360931	0.0026339	0.001110823	0.000296303			0.003744808	0.008348808
15 42000 50c (Mo)	0	0.0003613	0.000141617	3.77753E-05			0.000477875	0.001018363
16 7014 50c (N)	1.51274E-05	8.801E-05	3.88106E-05	1.03425E-05			0.000130909	0.000294214
17 26000 55c (Fe)	0.002540979	0.0162728	0.006373588	0.001700104			0.021488131	0.048425575
18 28000 50c (Cu)	0							0
19 8018 50c (O)	0				0.005937447	0.000296721		0.004254167
20 92235.50c (U235)	0				4.80373E-06	1.06695E-06		5.87049E-06
21 92234 50c (U238)	0				0.002273375	0.000147292		0.002420667
22 94239 55c (Pu239)	0				0.000645878	0		0.000645875
23 94240 50c (Pu240)	0				8.82748E-05	0		8.82748E-05
24 94241 50c (Pu241)	0				7.71954E-06			7.71954E-06
25 total	0.00387513	0.025043	0.009833875	0.002623108	0.008987096	0.000445078	0.033189682	0.083986936
26 volume	167964.8048							
27								
28 % hematite occupied by water					See table 6.2.2			
29								
30 Density of Hematite (g/cc)	5.2749E+00	MCNP Isotope Identifier		8.90%	28.80%	80.80%	76.80%	
31 Volume of the fuel Homogenized	1.8798E+05	64000.35c	1.7834E-04	1.7634E-04	1.3226E-04	8.8172E-05	4.4088E-05	
32 Mole/cc of Hematite	4.0207E-25	1801.80c (H)	0.0000E+00	0.0000E+00	1.8718E-02	3.3438E-02	5.0154E-02	
33 Mole of hematite in the fuel	8.7542E+03	6000.80c (C)	2.0747E-04	2.0787E-04	1.8810E-04	1.0383E-04	5.1967E-04	
34 Mass of Hematite(g)	1.0785E+06	28064.80c (Mn)	1.4998E-03	1.4998E-03	1.1242E-03	7.4992E-04	3.7498E-04	
35 Volume of Hematite (cc)	2.0444E+05	16031.50c (P)	8.9434E-06	8.9434E-06	4.4892E-06	2.9928E-05	1.4964E-04	
36 Volume of Hematite (l)	2.0448E+02	18032.80c (S)	3.8458E-05	3.8458E-05	2.8993E-05	1.9129E-05	9.8644E-06	
37 % of this volume is water	8.0000E+00	14000.80c (Si)	1.1002E-03	1.1002E-03	8.2612E-04	5.8008E-04	2.7504E-04	
38 volume of water (cc)	0.0000E+00	34060.80c (Cr)	1.3531E-02	1.3531E-02	1.0164E-02	0.7757E-03	3.3879E-03	
39								
40 Mass(g) of Water to add	0	28000.80c (Ni)	8.3488E-03	1 8.3488E-03	6.2616E-03	4.1744E-03	2.0472E-03	

A	B	C	D	E	F	G	H	I
41 Mole of Water to add		0	7014.88e (H)	2.8421E-04	2.8421E-04	2.2098E-04	1.4711E-04	7.3383E-05
42 Atomes of O to add		0	26804.55e (Fe)	4.8426E-02	4.8426E-02	3.8319E-02	2.4213E-02	1.2106E-02
43 Atomes of H to add		0	29804.88C (Cu)	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
44 density of H homogenized to add (g/cm.b)	0.0000E+00	8016.88C (O)	7.8893E-02	7.8893E-02	6.7529E-02	5.8184E-02	4.4800E-02	
45 density of O homogenized to add (atom.b)	0.0000E+00	82234.88C (U234)	8.6707E-06	8.6707E-06	4.2530E-06	2.8353E-06	1.4177E-06	
46		82238.88C (U238)	2.4207E-03	2.4207E-03	1.8155E-03	1.2103E-03	8.0517E-04	
47 Max Volume of the canister	824971.2629	84228.88C (Pu238)	8.8568E-04	8.8568E-04	4.9926E-04	3.3284E-04	1.8642E-04	
48		84240.88C (Pu240)	8.8275E-05	8.8275E-05	4.8208E-06	4.4137E-06	2.2089E-05	
49		84341.88C (Pu241)	7.7195E-06	7.7195E-06	3.7897E-06	3.8564E-06	1.8299E-06	
50		Total	1.5680E-01	1.5680E-01	1.4288E-01	1.2655E-01	1.1443E-01	
51		Volume	1.8798E+05	1.8798E+05	2.2394E+05	3.3347E+05	8.7194E+03	
52							2.5000E-01	
53		N/A	0.0	0.0	33.2	99.0	298.0	
54					See table 6.2-2			
55 30% hematite occupied by water					PFTF BNf Diluted at	PFTF BNf Diluted at	PFTF BNf Diluted at	
56 Density of Hematite (g/cc)	8.2749E+00	MCNP Isotope Identifier		0.00%	22.80%	60.80%	78.80%	
57 Volume of the fuel Homogenized	1.8794E+05	64000.38c	1.7834E-04	1.7834E-04	1.3228E-04	8.8172E-06	4.4064E-05	
58 Mole/atom of Hematite	4.0207E-26	1801.88c (H)	0.0000E+00	2.4418E-02	3.5031E-02	4.8645E-02	8.6258E-02	
59 Mole of hematite in the fuel	6.7542E+03	6800.88c (C)	2.0787E-04	2.0787E-04	1.8580E-04	1.0393E-04	5.1967E-05	
60 Mass of Hematite(g)	1.0785E+06	28058.88c (Mo)	1.4998E-03	1.4998E-03	1.1249E-03	7.4992E-04	3.7498E-04	
61 Volume of Hematite(cc)	2.0448E+05	16031.88c (P)	5.8858E-05	5.8858E-05	4.4882E-05	2.9928E-05	1.4944E-05	
62 Volume of Hematite (l)	2.0448E+02	18432.88c (S)	3.8658E-05	3.8658E-05	2.8993E-05	1.9329E-05	8.8444E-06	
63 0 % of this volume is water	3.8000E-01	14999.88c (Si)	1.1002E-03	1.1002E-03	8.2812E-04	8.3004E-04	2.7504E-04	
64 Volume of water (cc)	6.1338E+04	14999.88c (Cr)	1.3551E-02	1.3551E-02	1.0184E-02	6.7737E-03	3.3879E-03	
65		28000.88c (Ni)	8.3448E-03	8.3448E-03	6.2816E-03	4.1744E-03	2.6872E-03	
66 Mass(g) of Water to add	81337.80271	42008.88c (Mo)	1.0184E-03	1.0184E-03	7.4377E-04	6.0918E-04	2.8458E-04	
67 Mole of Water to add	3405.842255	7014.88c (H)	2.8421E-04	2.8421E-04	2.2046E-04	1.4711E-04	7.3553E-04	
68 Atomes of O to add	2.05048E+27	26008.88c (Fe)	4.8426E-02	4.8426E-02	3.8318E-02	2.4213E-02	1.2106E-02	
69 Atomes of H to add	4.10178E+27	29000.88C (Cu)	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	
70 density of H homogenized to add (g/cm.b)	2.4418E-02	8016.88C (O)	7.8893E-02	7.8893E-02	7.6485E-02	8.2261E-02	4.7852E-02	
71 density of O homogenized to add (atom.b)	1.2209E-02	82234.88C (U234)	8.6707E-06	8.6707E-06	4.2530E-06	2.8353E-06	1.4177E-06	
72		82238.88C (U238)	2.4207E-03	2.4207E-03	1.8155E-03	1.2103E-03	8.0517E-04	
73 Max Volume of the canister	824971.2629	84229.88C (Pu239)	8.8568E-04	8.8568E-04	4.9926E-04	3.3284E-04	1.8642E-04	
74		84240.88C (Pu240)	8.8275E-05	8.8275E-05	4.8208E-06	4.4137E-06	2.2089E-05	
75		84341.88C (Pu241)	7.7195E-06	7.7195E-06	3.7897E-06	3.8564E-06	1.8299E-06	
76		Volume	1.8798E+05	1.8798E+05	2.2394E+05	3.3347E+05	8.7194E+03	
77		Total	1.5680E-01	1.5680E-01	1.7016E-01	1.4887E-01	1.2359E-01	
78							2.5000E-01	
79		N/A	0.0	1	38.4	88.6	134.0	335.2
80					See table 6.2-2			

A	B	C	D	E	F	G	H	I
81 46% hematite occupied by water					PFTF BMF Diluted at			
82 Density of Hematite (g/cc)	6.2748E+00		MCNP Isotope Identifier	8.0000E+00	2.0000E-01	8.0000E-01	7.8000E-01	
83 Volume of the fuel Homogenized	1.8780E+05	64000.354	1.7634E-04	1.7634E-04	1.3226E-04	8.8172E-06	4.4088E-06	
84 Mole/loc_b of Hematite	4.0207E-28	1001.1894 (M)	0.0000E+00	4.8835E-02	8.3344E-02	6.7654E-02	8.2363E-02	
85 Mole of hematite in the fuel	8.7342E+03	6000.000 (C)	2.0787E-04	2.0787E-04	1.8580E-04	1.0393E-04	8.1907E-06	
86 Mass of Hematite(g)	1.9768E+04	12000.500 (Mm)	1.4994E-03	1.4994E-03	1.1249E-03	7.4962E-04	3.7400E-04	
87 Volume of Hematite (cc)	2.0444E+05	10031.500 (P)	8.8458E-06	8.8458E-06	4.4882E-05	2.8026E-06	1.4884E-06	
88 Volume of Hematite (l)	2.0444E+02	10031.500 (S)	3.8448E-06	3.8448E-06	2.8993E-05	1.8329E-05	8.8444E-06	
89 0 % of this volume is water	8.3000E-01	14000.000 (B)	1.1002E-03	1.1002E-03	8.2512E-04	8.3000E-04	2.7804E-04	
90 volume of water (cc)	1.2264E+05	24000.500 (C)	1.3551E-02	1.3551E-02	1.9164E-02	8.7757E-03	3.3479E-03	
91		23000.500 (M)	8.3448E-03	8.3448E-03	8.2618E-03	4.1744E-03	2.0872E-03	
92 Mass(g) of Water to add	122675.8064	42000.500 (Mo)	1.0184E-03	1.0184E-03	7.8377E-04	8.0018E-04	2.8489E-04	
93 Mole of Water to add	6011.32481	7014.800 (P)	2.9421E-04	2.9421E-04	2.2088E-04	1.4711E-04	7.3553E-05	
94 Atomes of O to add	4.10178E+27	29000.500 (Fe)	4.8426E-02	4.8426E-02	3.8319E-02	2.4213E-02	1.2108E-02	
95 Atomes of H to add	8.20358E+27	29000.500 (Cu)	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	
96 density of H homogenized to add (g/cm b)	4.6835E-02	8815.80C (O)	7.8893E-02	1.0331E-01	8.5842E-02	8.8373E-02	8.0004E-02	
97 density of O homogenized to add (g/cm.b)	2.4418E-02	92238.50C (U238)	8.6707E-06	8.6707E-06	4.2530E-06	2.8333E-06	1.4117E-06	
98		92238.50C (U238)	2.4207E-03	2.4207E-03	1.8155E-03	1.2103E-03	8.0517E-04	
99 Max Volume of the canister	824971.2629	94229.54C (Pu239)	8.8568E-04	8.8568E-04	4.9926E-04	3.3294E-04	1.6442E-04	
100		94248.50C (Pu240)	8.8275E-05	8.8275E-05	6.6208E-06	4.4137E-06	2.2068E-05	
101		94241.50C (Pu241)	7.7195E-06	7.7195E-06	5.7887E-06	3.8598E-06	1.9290E-06	
102		volume	1.8798E+05	1.8798E+06	2.2398E+05	3.3597E+05	8.7194E+05	
103		total	1.5830E-01	2.3005E-01	1.9762E-01	1.8518E-01	1.3274E-01	
104								
105		Mt	0.0	72.7	105.9	172.4	371.6	

	J	K	L	M
1				
2				
3	Total degraded dry . . .			
4	(Fe becomes Fe2O3)			
5				
6	0.000176343			
7				
8	0.000207888			
9	0.001499835			
10	8.94556E-06			
11	3.84578E-05			
12	0.001100165			
13	0.013551418			
14	0.008348808			
15	0.001018383			
16	0.000294214			
17	0.048425373			
18	0			
19	0.078892529			
20	8.67069E-06			
21	0.002420667			
22	0.000645675			
23	8.82748E-05			
24	7.71954E-06			
25	0.15480184	H/X		0
26				
27				
28				
29	PFTF SNF Diluted at			
30	97.48%			
31	4.4409E-06			
32	8.5188E-02			
33	6.2348E-06			
34	3.7771E-05			
35	1.8074E-06			
36	8.7353E-07			
37	2.7708E-05			
38	3.4127E-04			
39	2.1025E-04			
40	2.5644E-05			

	J	K	L	M
41	7.4093E-06			
42	1.2195E-03			
43	0.0000E+00			
44	3.4581E-02			
45	1.4281E-07			
46	6.0960E-06			
47	1.8794E-06			
48	2.2230E-06			
49	1.9440E-07			
50	1.0173E-01			
51	6.6705E+06			
52	2.5183E-02			
53	3835.7			
54				
55				
56	97.48%			
57	4.4409E-08			
58	6.8803E-02			
59	5.2348E-06			
60	3.7771E-05			
61	1.5074E-06			
62	9.7353E-07			
63	2.7704E-05			
64	3.4127E-04			
65	2.1025E-04			
66	2.8844E-05			
67	7.4093E-06			
68	1.2195E-03			
69	0.0000E+00			
70	3.4884E-02			
71	1.4281E-07			
72	6.0960E-06			
73	1.8794E-06			
74	2.2230E-06			
75	1.9440E-07			
76	6.6705E+06			
77	1.0295E-01			
78	2.5183E-02			
79	3892.1			
80				

J	K	L	M
81	no gd	no gd	
82	9.7482E-01	0.75	0.75
83	4.4409E-06	0	0.0000E+00
84	6.6419E-02	6.24E-02	6.24E-02
85	8.2348E-06	8.20E-05	8.20E-05
86	3.7771E-05	3.75E-04	3.75E-04
87	1.5074E-06	1.50E-06	1.50E-06
88	9.7353E-07	9.66E-06	9.66E-06
89	2.7708E-05	2.75E-04	2.75E-04
90	3.4127E-04	3.38E-03	3.38E-03
91	2.1025E-04	2.09E-03	2.08E-03
92	2.9644E-05	2.93E-04	2.93E-04
93	7.4093E-06	7.38E-05	7.38E-05
94	1.2195E-03	1.21E-02	0.00E+00
95	0.0000E+00	0.00E+00	0.00E+00
96	3.8194E-02	8.09E-02	3.27E-02
97	1.4281E-07	1.42E-06	1.42E-06
98	8.0900E-05	8.05E-04	8.05E-04
99	1.8794E-06	1.86E-04	1.86E-04
100	2.2230E-06	2.21E-06	2.21E-06
101	1.9440E-07	1.93E-06	1.93E-06
102	6.8705E+06	1.33E-01	1.02E-01
103	1.0358E-01	1.3270E-01	1.33E-01
104			
105	3928.0	371.0	371.0

A	B	C	D	E	F	G
1	Appendix	Specifications for DOE FFTF Canister Components				
2						
3	FFTF BMF Assembly	part/canister	5			
4		component: fuel pin:	part/canister:	217		
5		component:	AMOX		O.D.:	0.49403cm
6					length:	91.44cm
7					material:	UO1 98+PuO1 98
8					density:	10.02g/cc
9				insulator:	part/canister:	2
10					material:	natural UO2
11					density:	10.2g/cc
12					length:	2.032
13				reflector:	part/canister:	2
14					material:	Inconel 600
15					density:	8.47g/cc
16					length:	14.476cm
17				spring:	material:	SS302
18					volume:	2.7264cc
19					density:	8g/cc
20				plenum:	material:	SS316
21					length:	68.21cm
22					O.D.:	0.49022cm
23					wall thickness:	0.01367cm
24				top cap:	material:	SS316
25					length:	10.46cm
26					O.D.:	0.3442cm
27				bottom cap:	material:	SS316
28					length:	4.08cm
29					O.D.:	0.5842cm
30				cladding:	material:	SS316
31					I.D.:	0.508 cm
32					O.D.:	0.5842 cm
33					length:	223.224cm
34					density:	7.9497g/cc
35		Components other than fuel pins:		material:	SS316	
36				total mass:	172 619-2170 4536	74.3678 kg
37	Ident 00	component: fuel pin:	parts:	217		
38		component: canister:	mass:	88.08kg		
39			material:	SS304L		
40	Basket Assembly	material:	SS316L			
41		component: center tube:	O.D.:	17.3cm		
42			I.D.:	15.3cm		
43			length:	412.5cm		
44		diverter plates:	part/canister:	5		
45			length:	14.848cm		
46			height:	412.5cm		

	A	B	C	D	E	F	G
47				Thickness:	1mm		
48			canister Shell	OD R.:	22.85cm		
49				I.D.:	21.927cm		
50				Length:	458.9cm		
51				Material:	ba-316		
52				Density:	7.862g/cm3		
53	Volume for homogenizing isotopes:	pi*(22.85cm)^2*458.9cm			750107.456ccm3		
54	Total fuel pins per canister:	2179		1302			

	A	B	C	D	E	F	G
1	Cladding:	material:	SS316				
2		I.D.:	0.508 cm				
3		O.D.:	0.5842 cm				
4		length:	(237.744-10.46-4.06)cm=	223.224cm			
5		vol:	$\pi*(0.5842^2*2-0.508^2)*223.224/4cc$	14.5911cc			
6		total vol:	1302*14.5911cc=	18997.6122	cc		
7		vol fraction:	18997.6122/167983.6=	0.113002065			
8		density:	7.98g/cc				
9							
10	Element	Identifier	At. Mass	Wt %	At. Density (at/cm <sup>3</sup> b)	At. Density (at/cm <sup>3</sup> b) (homogenized)	
11							
12							
13	C	6000.50c	12.01115	0.06	3.2007E-04	3.6198E-05	
14	Mn	25055.50c	54.9380503	2	1.7494E-03	1.9785E-04	
15	P	15031.50c	30.9737647	0.045	6.9817E-05	7.8958E-06	
16	S	16032.50c	31.9720737	0.03	4.5091E-05	5.0995E-06	
17	Si	14000.50c	28.068	0.75	1.2833E-03	1.4513E-04	
18	Cr	24000.50c	51.996	17	1.5712E-02	1.7769E-03	
19	Ni	28000.50c	58.71	12	9.8223E-03	1.1108E-03	
20	Mo	42000.50c	95.94	2.5	1.2522E-03	1.4162E-04	
21	N	7014.50c	14.00307439	0.1	3.4318E-04	3.8811E-05	
22	Fe	26000.50c	55.847	65.495	5.6358E-02	6.3738E-03	
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							

A	B	C	D	E	F
1 MOX:	material:	UO <sub>1.96</sub> PuO <sub>1.96</sub>			
2	density:	10.02 g/cc			
3	length:	91.44 cm			
4	O.D.:	0.49403 cm			
5	vol:	$\pi \times 0.49403^2 \times 91.44 / 4 =$	17.5260 cc		
6	total vol:	1302*17.5260cc=	22821.456	cc	
7	vol fraction:	22821.456/167963.6=	0.135855262		
8					
9 Pu(moles):	38.4/239.1891=	0.16054			
10 U(moles):	114.3/238.04476=	0.48018			
11 O(moles):	1.96*(0.16054+0.48018)=	1.25577			
12 O(mass):	15.998985*1.25577=	20.091g			
13 Total mass:	38.4+114.3+20.091=	172.791g			
14					
15 Pu:	mass:	38.4g			
16	weight fraction:	0.22223			
17					
18 Isotope	Isotopic Mass	Weight Fraction	At. Mass		
19 U239	239.052148	0.8735	239.1890947		
20 Pu240	240.053882	0.1163			
21 Pu241	241.056737	0.0102			
22					
23 U:	mass:	114.3g			
24	weight fraction:	0.66149			
25					
26 Isotope	Isotopic Mass	Weight Fraction	At. Mass		
27 U235	235.043915	0.002	238.0447543		
28 U238	238.05077	0.998			
29					
30					
31 O:	mass:	20.091g			
32	weight fraction:	0.11627			
33					
34 MOX					
35 Isotope	Identifier	Isotopic Mass	Wt. Fraction	At. Density	At. Density
36				(at/cm <sup>3</sup> b)	(at/cm <sup>3</sup> b)
37					(homogenized)
38 O16	8016.50c	15.998985	0.11627	4.3451E-02	5.9574E-03
39 U235	92235.50c	235.043915	0.00132	3.3887E-05	4.6037E-06
40 U238	92238.50c	238.05077	0.66017	1.6734E-02	2.2734E-03

	A	B	C	D	E	F
41	Pu239	94239.50c	239.052148	0.19412	4.8999E-03	6.6568E-04
42	Pu240	94240.50c	240.053882	0.02585	6.4977E-04	8.8275E-05
43	Pu241	94241.50c	241.056737	0.00227	5.6822E-05	7.7195E-06

A	B	C	D	E	F
1					
2					
3 Endcaps	material:	SS316			
4 length:	10.4644.06=	14.52cm			
5 diameter:	0.5842cm				
6 vol:	$\pi(0.5842^2 * 14.52)/4 =$	3.69206cc			
7 total vol:	$1302^3 * 3.69206 =$	5067.46212 cc			
8 vol. fraction:	5067.46212/167983.6=	0.03016641			
9 density:	7.98g/cc				
10					
11 Element	Identifier	At. Mass	Wt %	At. Density (at/cm <sup>3</sup> b)	At. Density (at/cm <sup>3</sup> b) (homogenized)
12					
13					
14 C	6000.50c	12.01115	0.06	3.2007E-04	9.6555E-06
15 Mn	25055.50c	54.9380503	2	1.7494E-03	5.2774E-05
16 P	15031.50c	30.9737647	0.045	6.9817E-05	2.1061E-06
17 S	16032.50c	31.9720737	0.03	4.5091E-05	1.3602E-06
18 Si	14000.50c	28.086	0.75	1.2833E-03	3.8711E-05
19 Cr	24000.50c	51.996	17	1.5712E-02	4.7396E-04
20 Ni	28000.50c	58.71	12	9.8223E-03	2.9630E-04
21 Mo	42000.50c	95.94	2.5	1.2522E-03	3.7775E-05
22 N	7014.50c	14.00307439	0.1	3.4318E-04	1.0352E-05
23 Fe	26000.50c	55.847	65.495	5.6358E-02	1.7001E-03

A	B	C	D	E	F
1	insulator	material:	natural UO2		
2		parts per rod:	2		
3		length:	2.032cm		
4		diameter:	0.508cm		
5		vol:	$\pi * 0.508^2 * 2.032 / 4 =$	0.8237cc	
6		total vol:	1302 * 0.8237 =	1072.4574	cc
7		vol. fraction:	1072.4574 / 167983.6 =	0.006364298	
8		density:	10.42g/cc		
9		U mass/assembly:	1500g		
10					
11	U(moles):	1500/238.0269 =	6.3018		
12	O(moles):	2 * 6.3018 =	12.6035		
13	O(mass):	16 * 12.6035 =	201.658		
14	total mass:	1701.658			
15	U(Wt. Fraction):	1500/1701.658 =	0.8815		
16	O(Wt. Fraction):	201.658/1701.658 =	0.1185		
17					
18	Isotope	Identifier	At. Mass	Wt. Fraction	At. Density (at/cm <sup>3</sup> b)
19					(at/cm <sup>3</sup> b)
20					(homogenized)
21	U235	92235.50c	235.043915	0.00626	1.6712E-04
22	U238	92238.50c	238.05077	0.87524	2.3071E-02
23	O16	8016.50c	15.998985	0.1185	4.6477E-02
24					2.9672E-04

A	B	C	D	E	F
1	Ident 89	material: S3304L			
2	density:	7.9g/cc			
3	mass:	59.09kg			
4	vol:	59090/7.9=	7479.75		
5	vol. fraction:	7479.75/167983.6=	0.0445269668		
6					
7	Element	Identifier	Al. Mass	Wt.%	Al. Density
8					(atom%)
9					(homogenized)
10	C	6000.50c	12.01115	0.03	1.1882E-04
11	Mn	25035.50c	54.8380503	2	1.7319E-03
12	P	15031.50c	30.8737847	0.045	4.9117E-05
13	S	18032.50c	31.9720737	0.03	4.4639E-05
14	Si	14000.50c	28.086	0.75	1.2704E-03
15	Cr	24000.50c	51.096	18	1.7384E-02
16	Ni	28000.50c	58.09	10	8.1058E-03
17	N	7014.80c	14.00307438	0.1	3.3974E-04
18	Fe	26000.50c	55.847	68.045	8.7985E-02

	A	B	C	D	E	F	G
1	Basket	material:	SS316L				
2		density:	7.86g/cc				
3		components:	center tube:	O.D.:	17.3cm		
4				I.D.:	15.3cm		
5				length:	412.5cm		
6				vol:	$\pi*(17.3^2-15.3^2)*412.5/4 = 21123.2836$	cc	
7		divider plates:	parts/canister:	5			
8			thickness:	1cm			
9			length:	(43.815-17.3)/2=	13.2575cm		
10			height:	412.5cm			
11			vol:	$5*1*13.2575*412.5=$	27343.5938	cc	
12							
13		total vol:	48466.8774	cc			
14		vol fraction:	48466.877/167983.6=	0.288521481			
15							
16	Element	Identifier	At. Mass	Wt.%	Al Density	Al Density	
17					(at/cm <sup>3</sup> b)	(at/cm <sup>3</sup> b)	
18					(homogenized)		
19	C	6000.50c	12.01115	0.03	1.2003E-04	3.4830E-05	
20	Mn	25055.50c	54.9380503	2	1.7494E-03	5.0475E-04	
21	P	15031.50c	30.9737647	0.045	6.8817E-05	2.0144E-05	
22	S	16032.50c	31.9720737	0.03	4.5091E-05	1.3010E-05	
23	Si	14000.50c	28.068	0.75	1.2833E-03	3.7025E-04	
24	Cr	24000.50c	51.896	17	1.5712E-02	4.5332E-03	
25	Ni	28000.50c	58.71	12	9.8223E-03	2.8339E-03	
26	Mo	42000.50c	95.94	2.5	1.2522E-03	3.8130E-04	
27	In	7014.50c	14.00307439	0.1	3.4318E-04	9.9014E-05	
28	Fe	26000.50c	55.847	65.545	5.8401E-02	1.6273E-02	
29							

A	B	C	D	E	F
1	DOE SNF Canister shell		material:	SS316L	
2			mass:	511350.3358	509.556kg
3			vol:	64078.98945	64078.98945cc
4			total vol.:		
5			vol. fraction:	64078.98945/167983.6=	0.381459794
6					
7	Element	Identifier	At. Mass	Wt. %	At. Density (st/cm^3b) (homogenized)
8					
9					
10	C	6000.50c	12.01115	0.06	3.2007E-04
11	Mn	25055.50c	54.93805	2	1.7494E-03
12	P	15031.50c	30.973785	0.045	6.9817E-05
13	S	16032.50c	31.972074	0.03	4.5091E-05
14	Si	14000.50c	28.066	0.75	1.2833E-03
15	Cr	24000.50c	51.996	17	1.5712E-02
16	Ni	28000.50c	58.71	12	9.8223E-03
17	Mo	42000.50c	95.94	2.5	1.2522E-03
18	N	7014.50c	14.003074	0.1	3.4318E-04
19	Fe	26000.50c	55.847	65.495	5.6358E-02
					2.1498E-02

	A	B
1	Gd	
2	Volume of basket (cc)	48486.8774
3	density of ss316 (g/cc)	7.98
4	Mass Basket (g)	386785.6817
5	2% of the mass is Gd	0.02
6	Mass Gd (g)	7735.313633
7	Mole of Gd (M=157.25 g/mol)	49.19118368
8	Atoms of Gd	2.96229E+25
9	Volume of the SNF DOE Canister	167884.6046
10	Homogenized Density at/b.cc	0.000178343

	A	B	C	D	E
		Volume cc	Density	Mass (g)	Volume fraction
1					
2	Clad	18997.61	7.98	151600.9454	0.113091389
3	Mox	22821.48	10.02	228670.9891	0.13585445
4	End Cap	5067.462	7.98	40438.34772	0.030166229
5	Insulator	1072.457	10.42	11175.00611	0.00638426
6	Indent	7479.75	7.9	59090.025	0.044526402
7	basket	48466.88	7.98	386765.6817	0.288519758
8	canister	64078.989	7.98	511350.3358	0.381457513
9	Dry Volume	187984.8		1369091.331	
10					
11					
12					
13					
14				total Mass should not exceed 3400kg	

	A	B	C	D	E	F	G	H	I
1	67.98% water in the fuel	69% water in clay							
2	% of clay and fuel mix together			1.0000E+01					
3		Fuel 67.98% water	50% water in clay mix		Fuel 67.98% water	50% water in clay mix		0.25	
4	µl/cm								
5	64000.35c	8.8470E-06	9.4995E-07	3.2214E-08	8.8470E-08	8.4898E-07	3.2214E-08	8.6470E-06	9.4895E-07
6	1001.50c (M)	4.8458E-03	6.4064E-03	8.0048E-03	4.8458E-02	6.4064E-03	8.0048E-03	4.8458E-02	6.4064E-03
7	6000.80c (C)	8.8545E-06	9.4895E-08	2.8158E-08	8.8545E-05	9.4895E-08	2.8158E-08	8.8545E-05	9.4895E-08
8	25055.80c (Mn)	4.8029E-04	3.3894E-04	3.4475E-04	4.8029E-04	3.3894E-04	3.4475E-04	4.8029E-04	3.3894E-04
9	15031.80c (P)	1.9167E-06	6.0000E+00	7.8485E-07	1.9167E-05	0.0000E+00	7.8485E-07	1.9167E-05	0.0000E+00
10	18032.80c (S)	1.2379E-05	0.0000E+00	5.0649E-07	1.2379E-05	0.0000E+00	5.0649E-07	1.2379E-05	0.0000E+00
11	14000.80c (Si)	3.8230E-04	8.8429E-03	8.4264E-03	3.8230E-04	8.8429E-03	8.4264E-03	3.8230E-04	8.8429E-03
12	24000.80c (Cr)	4.3395E-03	0.0000E+00	1.7762E-04	4.3395E-03	0.0000E+00	1.7762E-04	4.3395E-03	0.0000E+00
13	28000.80c (Ni)	2.6735E-03	1.0438E-04	2.0954E-04	2.6735E-03	1.0438E-04	2.0954E-04	2.6735E-03	1.0438E-04
14	42000.80c (Mo)	3.2611E-04	0.0000E+00	1.3348E-05	3.2611E-04	0.0000E+00	1.3348E-05	3.2611E-04	0.0000E+00
15	7014.80c (N)	8.4215E-05	0.0000E+00	3.8563E-06	8.4215E-05	0.0000E+00	3.8563E-06	8.4215E-05	0.0000E+00
16	26000.85c (Fe)	1.8507E-02	8.8406E-03	8.2028E-03	1.8507E-02	8.8406E-03	8.2028E-03	1.8507E-02	8.9405E-03
17	29000.80C (Cu)	0.0000E+00	8.8346E-08	8.8972E-08	0.0000E+00	8.8346E-08	8.8972E-08	0.0000E+00	8.8346E-08
18	4016.80C (O)	4.7982E-02	3.0045E-02	3.0790E-02	4.7982E-02	3.0045E-02	3.0790E-02	4.7982E-02	3.0045E-02
19	92235.80C (U235)	1.8159E-04		7.4326E-06	1.8159E-06	0.0000E+00	7.4326E-06	1.8159E-06	0.0000E+00
20	92238.80C (U238)	7.7518E-04		3.1728E-05	7.7518E-04	0.0000E+00	3.1728E-05	7.7518E-04	0.0000E+00
21	94239.85C (Pu239)	2.1317E-04		8.7250E-04	2.1317E-04	0.0000E+00	8.7250E-04	2.1317E-04	0.0000E+00
22	94240.80C (Pu240)	2.8268E-05		1.1570E-06	2.8268E-05	0.0000E+00	1.1570E-06	2.8268E-05	0.0000E+00
23	94241.80C (Pu241)	2.4720E-04		1.0118E-07	2.4720E-04	0.0000E+00	1.0118E-07	2.4720E-04	0.0000E+00
24	11023.80C (Na)		3.6107E-05	2.4630E-05	0.0000E+00	3.6107E-05	2.4630E-05	0.0000E+00	3.6107E-05
25	13027.80C (Al)		5.4082E-04	8.1849E-04	0.0000E+00	8.4042E-04	8.1849E-04	0.0000E+00	8.4082E-04
26	20000.80C (Ca)		1.3103E-04	1.2581E-04	0.0000E+00	1.3103E-04	1.2581E-04	0.0000E+00	1.3103E-04
27	18000.80C (K)		1.8372E-04	1.7820E-04	0.0000E+00	1.8372E-04	1.7820E-04	0.0000E+00	1.8372E-04
28	22000.80C (Tl)		8.8307E-05	8.2774E-05	0.0000E+00	8.8307E-05	8.2774E-05	0.0000E+00	8.8307E-05
29	total	1.1840E-01	8.2443E-02	8.5142E-02	1.1840E-01	8.2443E-02	8.5142E-02	1.1840E-01	8.2443E-02
30	volume	8.2458E+05	1.2292E+07	1.2818E+06	4.7212E+05	1.1063E+07	3.2041E+06	3.8344E+05	9.2188E+06
31	HxL			909.7			909.7		
32	% of fuel mixt		Length	Radius	Segment height	Segment Volume	X value		
33	0.1	Clay	1.1063E+07	4.8170E+02	9.4000E+01	151.4335342	1.1063E+07	57.43353418	
34		Clay + mix	1.2344E+07	4.8170E+02	9.4000E+01	173.1292323	1.2344E+07	79.12923298	
35		Clay+mix+fuel	1.2616E+07	4.8170E+02	9.4000E+01	184	1.2616E+07	94	
36	0.25	Clay	9.2189E+06	4.8170E+02	9.4000E+01	127.0775029	9.2189E+06	33.07780285	
37		Clay + mix	1.2423E+07	4.8170E+02	9.4000E+01	174.9627268	1.2423E+07	80.96272855	
38		Clay+mix+fuel	1.2816E+07	4.8170E+02	9.4000E+01	188	1.2816E+07	94	
39	0.6	Clay	4.9167E+06	4.8170E+02	9.4000E+01	28.71900131	4.9167E+06	-17.28099649	
40		Clay + mix	1.2607E+07	4.8170E+02	9.4000E+01	179.415085	1.2607E+07	85.41509501	

	A	B	C	D	E	F	G	H	I
41		Clay+min+fuel	1.2816E+07	4.8170E+02	8.4000E+01	155	1.2816E+07	94	

	J	K	L	M	N	O
1						
2	0.0				1	
3	mix	Aust 67.88% water	50% water in clay	mix	Aust 67.88% water	50% water in clay
4						
5	3.2214E-06	8.8470E-05	8.4895E-07	3.2214E-06	8.8470E-05	8.4895E-07
6	8.0048E-03	4.8488E-02	8.4084E-03	8.0048E-03	4.8488E-02	8.4084E-03
7	2.8158E-06	8.8585E-06	8.4895E-08	2.8158E-06	8.8585E-06	8.4895E-08
8	3.4473E-04	4.8029E-04	3.3898E-04	3.4473E-04	4.8029E-04	3.3898E-04
9	7.8453E-07	1.9167E-06	0.0000E+00	7.8453E-07	1.9167E-06	0.0000E+00
10	8.0849E-07	1.2379E-05	0.0000E+00	8.0849E-07	1.2379E-05	0.0000E+00
11	8.4264E-03	3.8230E-04	8.8429E-03	8.4264E-03	3.8230E-04	8.8429E-03
12	1.7762E-04	4.3395E-03	0.0000E+00	1.7762E-04	4.3395E-03	0.0000E+00
13	2.0934E-04	2.8735E-03	1.0438E-04	2.0934E-04	2.8735E-03	1.0438E-04
14	1.3348E-05	3.2611E-04	0.0000E+00	1.3348E-05	3.2611E-04	0.0000E+00
15	3.8543E-06	9.4215E-05	0.0000E+00	3.8543E-06	9.4215E-05	0.0000E+00
16	8.2092E-03	1.5507E-02	8.8405E-03	8.2092E-03	1.5507E-02	8.8405E-03
17	5.5972E-06	0.0000E+00	8.8380E-06	5.5972E-06	0.0000E+00	8.8380E-06
18	3.0780E-02	4.7992E-02	3.0045E-02	3.0780E-02	4.7992E-02	3.0045E-02
19	7.4326E-06	1.8159E-06	0.0000E+00	7.4326E-06	1.8159E-06	0.0000E+00
20	3.1728E-05	7.7316E-04	0.0000E+00	3.1728E-05	7.7316E-04	0.0000E+00
21	8.7250E-06	2.1317E-04	0.0000E+00	8.7250E-06	2.1317E-04	0.0000E+00
22	1.1570E-06	2.8268E-05	0.0000E+00	1.1570E-06	2.8268E-05	0.0000E+00
23	1.0118E-07	2.4720E-06	0.0000E+00	1.0118E-07	2.4720E-06	0.0000E+00
24	3.4630E-05	0.0000E+00	3.8107E-05	3.4630E-05	0.0000E+00	3.8107E-05
25	5.1849E-04	0.0000E+00	8.4062E-04	5.1849E-04	0.0000E+00	8.4062E-04
26	1.2560E-04	0.0000E+00	1.3105E-04	1.2560E-04	0.0000E+00	1.3105E-04
27	1.7620E-04	0.0000E+00	1.8372E-04	1.7620E-04	0.0000E+00	1.8372E-04
28	8.2774E-05	0.0000E+00	8.6307E-06	8.2774E-05	0.0000E+00	8.6307E-05
29	8.5162E-02	1.1840E-01	8.2443E-02	8.5162E-02	1.1840E-01	8.2443E-02
30	7.6898E+06	2.0883E+05	4.9167E+06	1.2814E+07	8.0000E+00	0.0000E+00
31	809.7		809.7			
32						
33						
34						
35						
36						
37						
38						
39						
40						

	J	K	L	M	N	O
41						

A	B	C	D	E	F	G	H	I	J	K	L
1											
2	hematite forms at 10.35 1000s of years +				0 *100 % of water	total volume	6145900 cc	tot mass	23621.4		
3											
4	pH	3.892	kg/l		N= 6.02E-01 sub cm		Volumen	6145900 cc	mass		
5	isotopes	Atomic Mass	MCMF ID	Molar%	mass (g)	number densities (at/bar.cm)	at/bar.cm		1 mol ls		
6	H	1.00782519	1001.50c		8.4551	6.30E+04 6.12E-03			8.1256E-03		968471.962
7	C	12.01118	6000.50c		0.0002	2.33E+01 1.90E-07			1.8979E-07		
8	O	15.994915	8016.50c		89.7993	9.38E+08 8.87E-02			8.6744E-02		
9	Na	22.9897707	11023.50c		0.0761	1.09E+04 7.22E-03			7.2218E-03		
10	Al	26.9815369	13027.50c		1.1394	2.98E+05 1.08E-03			1.0612E-03		
11	Si	28.086	14000.50c		11.893	3.23E+08 1.13E-02			1.1284E-02		
12	Ca	40.08	20000.50c		0.2762	1.07E+05 2.62E-04			2.6210E-04		
13	K	39.102	19000.50c		0.3472	1.47E+05 3.67E-04			3.6743E-04		
14	Ti	47.8	22000.50c		0.1819	8.44E+04 1.73E-04			1.7241E-04		
15	Mn	64.93480503	25053.50c		0.7144	3.80E+05 8.78E-04			8.7793E-04		
16	Fe	55.847	26000.50c		18.8428	1.02E+07 1.79E-02			1.7881E-02		
17	Ni	58.71	28000.50c		0.22	1.25E+06 2.09E-04			2.0677E-04		
18	Cu	63.54	29000.50c		0.0123	7.37E+03 1.17E-05			1.1672E-05		
19	Cr	187.25	64000.35c		0.002	3.05E+03 1.90E-04			1.8979E-04		
20					100	23821400 0.9948949			9.4895E-02		tot molar
21											
22	water			mass (g)		number densities (at/bar.cm)					
23	pH	3.892	kg/l			N= 6.02E-01 sub cm		Volumen	0 cc	mass	
24	H	1.00782519	1001.50c		200	0.00E+00 0.00E+00				1 mol ls	
25	O	15.994915	8016.50c		100	0.00E+00 0.00E+00				0.00E+00	
26						0.00E+00 0.00E+00					
27											
28											
29											
30											
31											
32											
33											
34											
35											
36											
37											
38	hematite forms at 10.35 1000s of years +				0.25	*100 % of water	total volume	6194533.333 cc	tot mass	228784.733	
39									4621848.994		
40	pH	3.892	kg/l			N= 6.02E-01 sub cm		Volumen	6145900 cc	mass	

A	B	C	D	E	F	G	H	I	J	K	L
Isotopes	Atomic Mass	MCMF ID	Mole%	mass (g)	number densities (atm/bar.cm)			atm/bar.cm		1 mol is	
41 H	1.00782518	1001.50c		0.4551	0.30E+04	4.99E-03			0.2980E-03		944471.992
42 C	12.01115	8000.50c		0.0002	2.33E+01	1.42E-07			1.4234E-07		
44 O	15.994816	8018.50c		58.7993	9.26E+06	4.26E-02			4.3386E-02		
45 Na	22.9897707	11023.50c		0.0761	1.88E+04	8.46E-08			8.4161E-05		
46 Al	26.9815389	13027.50c		1.1394	2.98E+05	8.11E-04			8.1082E-04		
47 Si	28.086	14000.50c		11.893	3.23E+08	8.48E-03			8.4844E-03		
48 Ca	--	--	40.06	20000.50c	0.2762	1.07E+08	1.97E-04		1.9647E-04		
49 K	--	--	39.102	18000.50c	0.3872	1.47E+03	2.76E-04		2.7557E-04		
50 Ti	--	--	47.9	22000.50c	0.1610	8.44E+04	1.29E-04		1.2944E-04		
51 Mn	--	--	54.9380503	25055.50c	0.7144	3.80E+05	8.00E-04		8.0045E-04		
52 Fe	--	--	55.847	28000.50c	18.8429	1.02E+07	1.34E-02		1.3411E-02		
53 Ni	--	--	58.71	28000.50c	0.22	1.28E+08	1.87E-04		1.9658E-04		
54 Cu	--	--	63.54	28000.50c	0.0123	7.87E+03	8.75E-06		8.7540E-06		
55 Cd	--	--	157.25	84000.35c	0.002	3.05E+03	1.42E-06		1.4234E-06		
56				100	23821400	0.8711711			7.3679E-02	tot moles	
57											
58 water				mass (g)	number densities (atm/bar.cm)			density	0.1		
59 p=			1 kgf		Na=	8.02E-01	atm/cm	Volume=	204863.333 cc	mass=	
60 H	--	--	1.00782518	1001.50c	200	2.29E+04	1.87E-03			1 mol is	
61 O	--	--	15.994815	8018.50c	100	1.82E+05	8.34E-04				1.14E+04
62						2.05E+08	2.51E-03				
63											
64											
65											
66											
67	Humidity form at 18.28 1000s of years =				0.814086338	100 % of water	total volume	12648397.7 cc	tot mass	874171.17	
68						12144444	Max Volume				
69	p=		3.882 kgf		Na=	8.02E-01	atm/cm	Volume=	8145900 cc	mass	
70 Isotopes	Atomic Mass	MCMF ID	Mole%	mass (g)	number densities (atm/bar.cm)			atm/bar.cm			
71 H	--	--	1.00782518	1001.50c	0.4551	0.30E+04	2.94E-05		6.4143E-03		
72 C	--	--	12.01115	8000.50c	0.0002	2.33E+01	8.22E-08		8.2219E-08		
73 O	--	--	15.994815	8018.50c	58.7993	9.26E+06	4.26E-02		4.3386E-02		
74 Na	--	--	22.9897707	11023.50c	0.0761	1.88E+04	8.46E-08		8.4098E-08		
75 Al	--	--	26.9815389	13027.50c	1.1394	2.98E+05	8.11E-04		8.2537E-04		
76 Si	--	--	28.086	14000.50c	11.893	3.23E+08	8.48E-03		8.4438E-03		
77 Ca	--	--	40.06	20000.50c	0.2762	1.07E+05	1.27E-04		1.2736E-04		
78 K	--	--	39.102	18000.50c	0.3872	1.47E+03	1.79E-04		1.7854E-04		
79 Ti	--	--	47.9	22000.50c	0.1610	8.44E+04	8.39E-05		8.3874E-06		
80 Mn	--	--	54.9380503	25055.50c	0.7144	3.80E+05	8.00E-04		8.0041E-04		

	A	B	C	D	E	F	G	H	I	J	K	L	
81	Fe	55.847	26000.55c	18.8429	1.02E+07	8.69E-03			8.6884E-03				
82	Mg	58.71	26000.50c	0.22	1.25E+08	1.01E-04			1.0144E-04				
83	Cu	63.54	26000.50c	0.0123	7.57E+03	8.67E-04			8.6715E-05				
84	Gd	157.25	64000.35c	0.002	3.06E+03	8.22E-07			8.2219E-07				
85				100	23821400	0.0461067			8.1298E-02				
86													
87	water				mass (g)		number densities (atbar.cm)				density	0.1	
88	Po	1	kg/l			Nm=	8.02E-01	a/b cm					
89	H	1.00782519	1001.50c	200	7.28E+04	3.44E-03			8502487.7	cc	mass		
90	O	15.994915	8016.50c	100	8.77E+05	1.72E-03					1 mol ls		
91					6.50E+05	8.18E-03					3.81E+04		
92													
93													
94													
95													
96													
97	hematite forms at 10.26 10000 of years +				0.493933188	100 % of water	total volume		12144443.91	cc	tot mass	623775.791	
98													
99	Po	3.892	kg/l			Nm=	8.02E-01	a/b cm					
100	Isotopes	Atomic Mass	MCHNP ID	Mole%	mass (g)		number densities (atbar.cm)			8148800	cc	mass	
101	H	1.00782519	1001.50c		8.4551	6.30E+04	3.10E-03		8.4030E-03			966471.992	
102	C	12.0115	6000.50c	0.0002		2.33E+01	8.60E-06			8.6044E-06			
103	O	15.994915	8016.50c		89.7953	9.26E+06	2.07E-02		9.0369E-02				
104	Na	22.9887707	11023.50c		0.0761	1.89E+04	3.85E-05		3.8546E-05				
105	Al	26.9815389	13027.50c		1.1394	2.90E+06	8.47E-04		8.4718E-04				
106	Si	28.046	14000.50c		11.993	3.23E+06	8.71E-03		8.7114E-03				
107	Ca	40.08	20000.50c		0.2762	1.07E+06	1.33E-04		1.3284E-04				
108	K	39.102	18000.50c		0.3472	1.47E+06	1.86E-04		1.8685E-04				
109	Ti	47.8	22000.50c		0.1818	8.44E+04	8.74E-05		8.7354E-05				
110	Mn	64.9380503	25055.50c		0.7144	3.80E+05	3.43E-04		3.4308E-04				
111	Fe	55.847	26000.55c	18.8429	1.02E+07	8.06E-03			8.0488E-03				
112	Mg	58.71	26000.50c	0.22	1.25E+08	1.06E-04			1.0648E-04				
113	Cu	63.54	26000.50c	0.0123	7.57E+03	8.91E-06			8.9048E-06				
114	Gd	157.25	64000.35c	0.002	3.05E+03	8.60E-07			8.6046E-07				
115				100	23821400	0.0460231			8.2978E-02		tot moles		
116													
117	water				mass (g)		number densities (atbar.cm)				density	0.1	
118	Po	1	kg/l			Nm=	8.02E-01	a/b cm					
119	H	1.00782519	1001.50c	200	8.71E+04	3.30E-03			8998543.91	cc	mass		
120	O	15.994915	8016.50c	100	8.33E+05	1.65E-03					1 mol ls		
											3.33E+04		

A	B	C	D	E	F	G	H	I	J	K	L
121				6.00E+01	4.95E-03						
122											
123											
124											
125											
126											
127	homotite forms at 10.26 1000s of years +			0.5	*100 % of water	total volume	12291800	cc	tot mass	636311.4	
128											
129	p <sup>a</sup>	3.892 kg/l			No=	6.02E-01 atm/cm	Volumes	6145900	cc	mass	
130	isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (atm/bar.cm)	at/bar.cm			1 mol ls	
131	H	1.00782519	1001.50c		8.4551	6.30E+04	3.08E-03		8.4084E-03		968471.992
132	C	12.01115	6000.50c		0.0002	2.33E+01	9.49E-06		8.4895E-08		
133	O	15.994915	8016.50c		59.7993	9.36E+04	2.84E-02		3.0045E-02		
134	Na	22.9897707	11023.50c		0.0781	1.89E+04	3.61E-05		3.6107E-05		
135	Al	26.9815348	13027.50c		1.1384	2.98E+05	8.41E-04		8.4082E-04		
136	Si	28.096	14000.50c		11.893	3.23E+06	8.64E-03		8.6429E-03		
137	Ca	40.08	20000.50c		0.2762	1.07E+05	1.31E-04		1.3105E-04		
138	K	39.102	18000.50c		0.3872	1.47E+06	1.84E-04		1.8372E-04		
139	Tl	47.9	22000.50c		0.1818	8.44E+04	8.63E-05		8.6307E-05		
140	Mn	54.9380503	25055.50c		0.7144	3.80E+05	3.39E-04		3.3895E-04		
141	Fe	55.847	28000.55c		18.8429	1.02E+07	8.94E-03		8.9405E-03		
142	Ni	58.71	28000.50c		0.22	1.25E+05	1.04E-04		1.0438E-04		
143	Cu	63.54	28000.50c		0.0123	7.87E+03	5.84E-06		5.8360E-06		
144	Gd	157.25	64000.35c		0.002	3.05E+03	8.40E-07		8.4885E-07		
145				100		23821400	0.0474474		8.2483E-02		tot mass
146											
147	water			mass (g)		number densities (atm/bar.cm)			density	0.1	
148	p <sup>a</sup>	1 kg/l			No=	6.02E-01 atm/cm	Volumes	6145900	cc	mass	
149	H	1.00782519	1001.50c		200	6.30E+04	3.34E-03			1 mol ls	
150	O	15.994915	8016.50c		100	8.44E+05	1.97E-03				3.41E+04
151						8.16E+05	6.02E-03				
152											
153											
154											
155											
156	homotite forms at 10.26 1000s of years +			0.46	*100 % of water	total volume	11174363.84	cc	tot mass	520787.764	
157											
158	p <sup>a</sup>	3.892 kg/l			No=	6.02E-01 atm/cm	Volumes	6145900	cc	mass	
159	isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (atm/bar.cm)	at/bar.cm			1 mol ls	
160	H	1.00782519	1001.50c		8.4551	6.30E+04	3.37E-03		6.3783E-03		968471.992



M	N	O	P	Q	R	S	T	U	V	W	X
1											
2	tot density	0.0038923	BNF In the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment	X value		
3			hematite forms 3.785 1000s y	12816382.33	481.7	94	90.97767796	81459000	-3.022322		
4	23821.4 kg		FFTF BNF	167984.9046	481.7	94	92.91548871	8313884.806	-1.09851		
5	24.70014442 g		total	8313884.806							
6	molee		- FFTF BNF 25% water	223978.4726	481.7	94	93.55861742	8369879.473	-0.441383		
7				8369879.473							
8			FFTF BNF 50% water	335983.2091	481.7	94	94.94884065	8481669.206	0.8488406		
9				8481669.206							
10			FFTF BNF 75% water		481.7	94	95.72144618	8617838.416	4.7214462		
11											
12											
13											
14											
15											
16											
17											
18											
19											
20	969471.9018										
21											
22											
23	0 g										
24	1.80E+01										
25	mole of h2o										
26											
27											
28											
29											
30											
31											
32											
33											
34											
35											
36											
37											
38	tot density	0.0278182	BNF In the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment	X value	hematite forms at 10.26 1000s	
39			hematite forms 3.785 1000s y	12816382.33	481.7	94	114.749842	8194533.333	20.749842		
40	23821.4 kg		FFTF BNF	167984.9067	481.7	94	116.7391545	8362517.94	22.739155	g	3.892



	M	N	O	P	Q	R	S	T	U	V	W	X
81												
82												
83												
84												
85		tot mole		1004578.787								
86												
87	g/cc											
88	850249.77	g										
89	1.80E+01											
90	mole of h2o											
91												
92												
93												
94												
95												
96												
97	tot density	0.0513631	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment	x value	hematite forms at 10.36 1000s		
98			hematite forms 3.785 1000s y	12816382.33	481.7	94	188.1053693	12144443.81	78.106549			
99	23821.4	kg	FFTF BNF	-11876459.31	481.7	94	7.4027525	167934.8048	-98.887725	p+	3.892	
100	24.70014842	g	total	24792641.83			178.5083418			Isotopes	Atomic Mass	
101	moles							12144443.81		H	1.00782519	
102										C	12.01118	
103										O	15.994915	
104							0			Na	22.9897707	
105										Al	26.9815340	
106										Si	28.086	
107										Ca	40.08	
108										K	39.102	
109										Ti	47.9	
110										Mn	54.9380603	
111										Fe	55.847	
112										Ni	58.71	
113										Cu	63.54	
114										Od	157.25	
115	1001777.886											
116												
117										water		
118	599854.391	g								p+	1	
119	1.80E+01						1			H	1.00782519	
120	mole of h2o									O	15.994915	

M	N	O	P	Q	R	S	T	U	V	W	X
121											
122											
123											
124											
125											
126											
127	tot density	0.0519461	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment	x value		
128			Hematite forms 3.785 1000e y	12816382.33	481.7	94	172.033294	12291800.02	78.033294		
129	23921.4	kg	FFTF BNF	-12123815.42	481.7	94	7.4027525	167984.8049	-86.89725	3.892	kgd
130	24.70014642	g	Total	24940167.74			179.4360465			Atomic Mass	MCNP ID
131	moles							12291800		1.00782519	1001.50c
132										12.011118	6000.50c
133										13.984915	8018.50c
134										22.8897707	11023.50c
135										26.9818389	13027.50c
136										29.086	14000.50c
137										40.06	20000.50c
138										51.102	18000.50c
139										47.8	22000.50c
140										64.9340503	25064.50c
141										65.847	28000.50c
142										68.71	28000.50c
143										83.84	29000.50c
144										157.25	64000.35c
145	1002395.831										
146											
147											
148	814590	g									3 kgd
149	1.80E+01									1.00782519	1001.50c
150	mole of H2O									15.994915	8018.50c
151											
152											
153											
154											
155											
156	tot density	0.0471407	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment	x value	hematite forms at 18.26 1000e	
157			Hematite forms 3.785 1000e y	12816382.33	481.7	94	153.0483054	11174364	58.048306		
158	23921.4	kg	FFTF BNF	-11008378.4	481.7	94	7.4027525	167984.8049	-86.89725	pa	3.892
159	24.70014642	g	Total	23822761.72			180.4710579			Isotope	Atomic Mass
160	moles									H	1.00782519



	Y	Z	AA	AB	AC	AD	AE	AF	AG	AH	AI	AJ
1												
2												
3												
4												
5												
6												
7												
8												
9												
10												
11												
12												
13												
14												
15												
16												
17												
18												
19												
20												
21												
22												
23												
24												
25												
26												
27												
28												
29												
30												
31												
32												
33												
34												
35												
36												
37												
38	1 years +		0.25 *100 % of water		total volume	8194533.333 cc	tot mass	1048238.067	tot density	0.1279192		
39						-8194533.333						
40	kg/l		N=	8.02E-01 a/b cm		Volume=	8145900 cc	mass		23921.4 kg		

Y	Z	AA	AB	AC	AD	AE	AF	AG	AH	AI	AJ	
41	MCMC ID	Mole%	mass (g)	number densities (at/bar.cm)		at/bar.cm			1 mol is	24.70014842	g	
42	1001.80c	0.4581	6.30E+04	4.58E-03			1.2963E-02		963471.9618	moles		
43	6000.80c	0.0002	2.33E+01	1.42E-07			1.4224E-07					
44	8018.80c	69.7993	9.28E+08	4.29E-02			4.8739E-02					
45	11023.80c	0.0781	1.08E+04	8.42E-05			8.4161E-05					
46	13027.80c	1.1384	2.94E+05	8.11E-04			8.1082E-04					
47	14000.80c	11.893	3.23E+06	8.44E-03			8.4441E-03					
48	20000.80c	0.2782	1.07E+06	1.87E-04			1.9467E-04					
49	18000.80c	0.3872	1.47E+08	2.76E-04			2.7837E-04					
50	22000.80c	0.1819	8.44E+04	1.29E-04			1.2944E-04					
51	25055.80c	0.7144	3.80E+05	8.08E-04			8.0848E-04					
52	26000.80c	18.8429	1.02E+07	1.34E-02			1.3411E-02					
53	28000.80c	0.22	1.25E+05	1.87E-04			1.8658E-04					
54	29000.80c	0.0123	7.87E+03	8.75E-06			8.7540E-06					
55	64000.35c	8.007	3.05E+03	1.42E-06			1.4234E-06					
56		100	23921400	0.071171086			8.3710E-02		tot mass	1025345.091		
57												
58		mass (g)	number densities (at/bar.cm)				density		0.8	g/cc		
59	kpl		No=	8.02E-01	a/b.cm				mass=	1024316.967	g	
60	1001.80c	200	1.15E+05	8.34E-03		Volume=	204833.3	cc	1 mol is	1.80E+01		
61	8018.80c	100	9.10E+05	4.18E-03					8.89E+04	mole of h2o		
62			8.02E+06	1.25E-02								
63												
64												
65												
66												
67	years +	0.514006544	"100 % of water		total volume	12848387.7	cc	tot mass	3275170.25	tot density	0.2568395	
68			12144443.81		Max Volume							
69	kpl		No=	8.02E-01	a/b.cm		Volume=	8145800	cc	mass	23921.4	kg
70	Isotopes	Atomic Mass	MCMC ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm					
71	H	1.00782519	1001.80c	6.4581	8.30E+04	2.98E-03			2.0164E-02			
72	C	12.01115	8000.80c	0.0002	2.33E+01	8.22E-06			8.2218E-06			
73	O	15.994615	8018.80c	69.7993	9.28E+08	2.78E-02			3.6168E-02			
74	Na	22.9887707	11023.80c	0.0781	1.08E+04	3.81E-05			3.8089E-05			
75	Al	26.9815369	13027.80c	1.1384	2.94E+05	8.25E-04			8.2537E-04			
76	Si	28.084	14000.80c	11.893	3.23E+06	8.48E-03			8.4835E-03			
77	Ca	40.08	20000.80c	0.2782	1.07E+05	1.27E-04			1.2735E-04			
78	K	39.102	18000.80c	0.3872	1.47E+05	1.79E-04			1.7854E-04			
79	Li	47.9	22000.80c	0.1819	8.44E+04	8.39E-05			8.3874E-05			
80	Mn	54.9380503	25055.80c	0.7144	3.80E+05	3.29E-04			3.2841E-04			

	Y	Z	AA	AB	AC	AD	AE	AF	AG	AH	AI	AJ
81		Fe	88.847	28000.50c	18.8429	1.02E+07	8.88E-03			8.8884E-03		
82		Ni	58.71	28000.50c	0.22	1.23E+06	1.81E-04			1.0144E-04		
83		Cu ***	63.84	28000.50c	0.0123	7.57E+03	8.67E-06			8.6715E-06		
84		Gd	187.28	84000.35c	0.002	3.68E+03	8.22E-07			8.2219E-07		
85					100	23821400	0.044109701			7.1094E-02		
86												
87			mass (g)	number densities (at/bor.cm)					density	0.5		
88	kgf		Na=	8.02E-01	a/b.cm				mass=	3251248.85 g		
89	1001.50c		200	3.84E+05	1.72E-02				1 mol ls	1.80E+01		
90	8018.50c		100	2.89E+06	8.89E-03					1.81E+05	mole of H2O	
91				3.25E+06	2.58E-02							
92												
93												
94												
95												
96												
97	years *		0.493833188	*100 % of water		total volume	12144443.91 cc	tot mass	3023193.355	tot density	0.2489343	
98												
99	kgf		Na=	8.02E-01	a/b.cm	Volume=	8145900 cc	mass	23821.4 kg			
100	MCP ID	Mole%	mass (g)	number densities (at/bor.cm)	a/bor.cm	a/bor.cm		1 mol ls	24.70014642 g			
101	1001.50c	8.4551	6.30E+04	3.10E-03		1.9615E-02			864471.9918 moles			
102	6000.50c	0.0002	2.33E+01	8.80E-08		8.8048E-08						
103	8018.50c	59.7983	9.26E+06	2.87E-02		3.8975E-02						
104	11023.50c	0.0761	1.89E+04	3.85E-05		3.8546E-05						
105	13027.50c	1.1394	2.94E+05	8.47E-04		8.4718E-04						
106	14000.50c	11.893	3.23E+06	8.71E-03		8.7114E-03						
107	20000.50c	0.2762	1.07E+05	1.33E-04		1.3264E-04						
108	18000.50c	0.3872	1.47E+05	1.88E-04		1.8585E-04						
109	22000.50c	0.1819	8.44E+04	8.74E-05		8.7354E-05						
110	25055.50c	0.7144	3.80E+05	3.43E-04		3.4306E-04						
111	26000.55c	18.8429	1.02E+07	8.00E-03		9.0499E-03						
112	28000.50c	0.22	1.25E+05	1.06E-04		1.0545E-04						
113	29000.50c	0.0123	7.57E+03	8.91E-08		8.8068E-08						
114	44000.35c	0.002	3.05E+03	8.80E-07		8.8048E-07						
115		100	23821400	0.048023099		7.2798E-02		tot moles	1135000.465			
116								density	0.5			
117			mass (g)	number densities (a/bor.cm)								
118	kgf		Na=	8.02E-01	a/b.cm	Volume=	8998543.9 cc	mass=	2999271.945 g			
119	1001.50c	200	3.36E+05	1.85E-02		1		1 mol ls	1.80E+01			
120	8018.50c	100	2.88E+06	8.26E-03					1.87E+05	mole of H2O		

	Y	Z	AA	AB	AC	AD	AE	AF	AG	AH	AI	AJ
121			3.00E+06	2.48E-02	.							
122												
123												
124												
125												
126												
127		0.5	*100 % of water		total volume	12291800 cc		tot mass	3099871.4	tot density	0.251946127	
128												
129		Na=	6.02E-01	at/b cm	Volume=	6145900 cc		mass	23921.4	kg	3.892	
130	Mole%	mass (g)	number densities (at/bar.cm)		at/bar.cm			1 mol is	24.70014642	g	Atomic Ma	
131	6.4551	6.30E+04	3.06E-03		1.9781E-02			968471.9918	moles		1.0078252	
132	0.0002	2.33E+01	9.48E-08		8.4895E-08						12.01115	
133	89.7993	8.26E+06	2.84E-02		3.6732E-02						15.994915	
134	0.0761	1.08E+04	3.81E-05		3.6107E-08						22.989771	
135	1.1384	2.98E+05	8.41E-04		8.4082E-04						26.981538	
136	11.893	3.22E+06	8.84E-03		8.8429E-03						28.006	
137	0.2762	1.07E+05	1.31E-04		1.3105E-04						40.06	
138	0.3872	1.47E+05	1.84E-04		1.8472E-04						38.102	
139	0.1818	8.44E+04	8.63E-08		8.6307E-08						47.9	
140	0.7144	3.80E+06	3.39E-04		3.3896E-04						54.93805	
141	18.8428	1.02E+07	8.94E-03		8.9405E-03						55.847	
142	0.22	1.25E+05	1.04E-04		1.0438E-04						58.71	
143	0.0123	7.57E+03	8.94E-08		8.9360E-08						63.94	
144	0.002	3.05E+03	8.49E-07		8.4895E-07						167.25	
145	100	23821400	0.04744738		7.2524E-02			tot moles	1138081.288			
146												
147	mass (g)	number densities (at/bar.cm)					density	0.8				
148	Na=	6.02E-01	at/b cm	Volume=	6145900 cc		mass=	3072950	g		1	
149	200	3.44E+05	1.87E-02				1 mol is	1.80E+01			1.0078252	
150	100	2.73E+06	8.36E-03					1.71E+05	mole of H2O		15.994915	
151	3.07E+06	2.51E-02										
152												
153												
154												
155												
156	years+	0.45	*100 % of water		total volume	11174383.84 cc		tot mass	2538153.218	tot density	0.2271407	
157												
158	at/b	Na=	6.02E-01	at/b cm	Volume=	6145900 cc		mass	23921.4	kg		
159	MCNP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm			1 mol is	24.70014642	g		
160	1001.80c	6.4551	8.30E+04	3.37E-03		1.8415E-02			968471.9918	moles		



	AK	AL	AM	AN	AO	AP	AQ	AR	AS	AT	AU	AV	AW
1													
2													
3													
4													
5													
6													
7													
8													
9													
10													
11													
12													
13													
14													
15													
16													
17													
18													
19													
20													
21													
22													
23													
24													
25													
26													
27													
28													
29													
30													
31													
32													
33													
34													
35													
36													
37													
38		Homogenization at 10.26 1000s of years +				0.25 *100 % of water		Total volume	8194533.333 cc		tot mass		
39							1			-8194533.333			
40		P=	3.002 kpl			N=	6.02E-01 atm cm	Volume=	8145900 cc				

AK	AL	AM	AN	AO	AP	AQ	AR	AS	AT	AU	AV	AW
41	.....	isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (at/bar.cm)					
42	.....	H	1.00782519	1001.50c	0.4581	0.30E+04	4.58E-03			1.7905E-02		
43	.....	C	12.01115	6000.50c	0.0002	2.33E+01	1.42E-07			1.4234E-07		
44	.....	O	15.994915	8018.50c	00.7983	0.38E+06	4.28E-02			4.8247E-02		
45	.....	Ne	22.9877707	11023.50c	0.0761	1.89E+04	8.42E-06			8.4161E-06		
46	.....	Al	26.9815389	13027.50c	1.1384	2.85E+06	8.11E-04			8.1062E-04		
47	.....	Si	28.048	14000.50c	11.8803	3.23E+06	8.48E-03			8.4844E-03		
48	.....	Ca	40.08	20000.50c	0.2782	1.57E+05	1.87E-04			1.8657E-04		
49	.....	K	39.102	18000.50c	0.3872	1.47E+05	2.76E-04			2.7557E-04		
50	.....	Ti	47.9	22000.50c	0.1819	0.44E+04	1.29E-04			1.2944E-04		
51	.....	Mn	\$4.9380503	25055.50c	0.7144	3.80E+05	5.08E-04			5.0645E-04		
52	.....	Fe	55.847	26000.50c	18.8429	1.62E+07	1.34E-02			1.3411E-02		
53	.....	Ni	58.71	28000.50c	0.22	1.25E+05	1.87E-04			1.8658E-04		
54	.....	Cu	63.64	29000.50c	0.0123	7.87E+03	8.75E-06			8.7640E-06		
55	.....	Od	187.25	64000.35c	0.002	3.05E+03	1.42E-06			1.4234E-06		
56	.....				100	23821400	0.0711711			9.1233E-02		
57	.....											
58	.....	water				mass (g)	number densities (at/bar.cm)					
59	.....	pH	1 kg/l			No=	8.02E-01	a/b cm				
60	.....	H	1.00782519	1001.50c	200	1.83E+06	1.34E-02					
61	.....	O	15.994915	8018.50c	100	1.44E+06	6.88E-03					
62	.....					1.84E+06	2.01E-02					
63	.....											
64	.....											
65	.....											
66	.....											
67	.....	hematite formed at 18.26 1000s of years +				0.514096356	*100 % of water			12648387.7	cc	tot mass
68	.....						121444444					
69	.....	pH	3.882 kg/l			No=	8.02E-01	a/b cm				
70	1 mol is	24.700148	#VALUE!			isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	Number densities (at/bar.cm)	
71	964471.99	moles		0		H	1.00782519	1001.50c	0.4581	0.30E+04	2.98E-03	
72						C	12.01115	6000.50c	0.0002	2.33E+01	9.22E-06	
73						O	15.994915	8018.50c	00.7983	0.38E+06	2.74E-02	
74						Ne	22.9877707	11023.50c	0.0761	1.89E+04	3.81E-06	
75						Al	26.9815389	13027.50c	1.1384	2.96E+05	6.23E-04	
76						Si	28.048	14000.50c	11.8803	3.23E+06	8.48E-03	
77						Ca	40.08	20000.50c	0.2782	1.57E+05	1.27E-04	
78						K	39.102	18000.50c	0.3872	1.47E+05	1.79E-04	
79						Ti	47.9	22000.50c	0.1819	0.44E+04	0.30E+06	
80						Mn	\$4.9380503	25055.50c	0.7144	3.80E+05	3.29E-04	

AK	AL	AM	AN	AO	AP	AQ	AR	AS	AT	AU	AV	AW
81					Fe	88.847	28000.55c	18.8429	1.02E+07	8.88E-03		
82					Ni	88.71	28000.55c	0.22	1.25E+06	1.81E-04		
83					Cu	83.54	28000.55c	0.0123	7.57E+03	8.87E-06		
84					Gd	157.25	64000.35c	0.002	3.04E+03	8.22E-07		
85	tot moles	1148991						100	23821400	0.046109701		
86												
87	water					mass (g)	number densities (atm/bar.cm)					density
88	p=	1 kgf				Nat	6.02E-01 atm/cm					
89	H	1.00782519	1001.50c			200	8.82E+06	2.75E-02				
90	O	15.994915	8016.50c			100	4.62E+06	1.38E-02				
91							8.20E+06	4.13E-02				
92												
93												
94												
95												
96												
97	hematite forms at 10.26 1800s of years +	6.483833189	*100 % of water				total volume	12144443.81	cc	tot mass	4822756.5	tot density
98												
99	p=	3 892 kgf				Nat	6.02E-01 atm/cm					
100	isotopes	Atomic No	MCHP ID	Mole%	mass (g)	number densities (atm/bar.cm)						
101	H	1.0078252	1001.50c	0.4651	0.30E+04	3.10E-03						
102	C	12.01115	8000.50c	0.0002	2.33E+01	8.80E-08						
103	O	15.994915	8016.50c	59.7993	9.28E+06	2.97E-02						
104	Na	22.989771	11023.50c	0.0761	1.69E+04	3.65E-06						
105	Al	26.981539	13027.50c	1.1394	2.98E+05	8.47E-04						
106	Si	28.006	14000.50c	11.893	3.23E+06	8.71E-03						
107	Ca	40.08	20000.50c	0.2762	1.97E+05	1.33E-04						
108	K	38.102	19000.50c	0.3872	1.47E+05	1.86E-04						
109	Ti	47.9	22000.50c	0.1810	0.44E+04	8.74E-06						
110	Mn	54.93805	25055.50c	0.7144	3.80E+06	3.43E-04						
111	Fe	55.847	28000.50c	18.8429	1.02E+07	8.04E-03						
112	Ni	58.71	28000.50c	0.22	1.25E+06	1.06E-04						
113	Cu	63.54	28000.50c	0.0123	7.87E+03	8.91E-06						
114	Gd	157.25	64000.35c	0.002	3.04E+03	8.80E-07						
115				100	23821400	0.046023099						tot moles
116												
117	water				mass (g)	number densities (atm/bar.cm)				density	0.8	
118	p=	1 kgf			Nat	6.02E-01 atm/cm						
119	H	1.0078252	1001.50c	200	8.37E+06	2.84E-02						
120	O	15.994915	8016.50c	100	4.26E+06	1.32E-02						

	AK	AL	AM	AN	AO	AP	AQ	AR	AS	AT	AU	AV	AW
121					4.80E+00	3.98E-02							
122													
123													
124													
125													
126													
127			0.5 **100 % of water				total volume	12291800 cc	tot mass	4940641.4	tot density	0.4019461	
128													
129	kg/l		No=	8.02E-01	atm/cm		Volume=	8145900 cc	mass	23821.4	kg	3.882	
130	MCMNP ID	Mole%	mass (g)	number densities (at/bar.cm)			at/bar.cm		1 mol is	24.70014642	g	Atomic Mass	
131	1001.50c	0.4551	6.30E+04	3.08E-03					868471.9916	moles		1.00782519	
132	6000.50c	0.0002	2.33E+01	8.49E-08								12.01116	
133	8018.50c	88.7993	8.26E+06	2.84E-02					4.1744E-02			18.994916	
134	11023.50c	0.0761	1.89E+04	3.81E-05					3.8107E-05			22.9997707	
135	13027.50c	1.1394	2.98E+05	6.41E-04					5.4082E-04			26.9918389	
136	14000.50c	11.893	3.23E+06	8.84E-03					8.8429E-03			28.006	
137	20000.50c	0.2762	1.07E+05	1.31E-04					1.3103E-04			40.08	
138	19000.50c	0.3872	1.47E+05	1.84E-04					1.8372E-04			39.102	
139	22000.50c	0.1819	8.44E+04	8.63E-05					8.6307E-05			47.9	
140	25085.50c	0.7144	3.80E+05	3.39E-04					3.3896E-04			84.9382603	
141	26000.50c	18.8429	1.02E+07	8.84E-03					8.8405E-03			65.947	
142	28000.50c	0.22	1.25E+05	1.04E-04					1.0438E-04			58.71	
143	29000.50c	6.0123	7.87E+03	8.84E-06					8.8380E-06			63.54	
144	64000.35c	0.002	3.05E+03	8.49E-07					8.4895E-07			157.25	
145		100	23921400	0 04744739					8.7571E-02	tot moles	1241442.987		
146													
147		mass (g)	number densities (at/bar.cm)						density	0.5			
148	kg/l	No=	8.02E-01	atm/cm			Volume=	8145900 cc	mass	4916720	g	1	
149	1001.50c	200	8.80E+05	2.97E-02					1 mol is	1.80E+01		1.00782519	
150	8018.50c	100	4.37E+06	1.34E-02					2.73E+06	moles of h2o		18.994916	
151			4.92E+06	4.01E-02									
152													
153													
154													
155													
156	Permitite forms at 18.26 1000s of years +		0.46 **100 % of water				total volum	11174383.84 cc	tot mass	4048882.3	tot density		
157													
158	Pt	3.882 kg/l		No=	8.02E-01	atm/cm	Volume=	8145900 cc	mass	23821.4			
159	Isoptopes	Atomic Mass	MCMNP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm		1 mol is	24.7001464			
160	H	1.0078252	1001.50c	8.4551	6.30E+04	3.37E-03			2.7443E-02		988471.99	moles	



	AX	AY	AZ	BA	BB	BC	BD	BE	BF	BG	BH	BI	BJ
1													
2													
3			...										
4													
5													
6													
7													
8													
9													
10													
11													
12													
13													
14													
15													
16													
17													
18													
19													
20													
21													
22													
23													
24													
25													
26													
27													
28													
29													
30													
31													
32													
33													
34													
35													
36													
37													
38	1642828.057	tot density	0.20291919				hemitite forms at 10.25 1000s of years +				0.25 "100 % of water		total value
39													
40	mass	23921.4	kg				ps	3.852	kg/l			Name	0.02E-01 m3/b cm

	AX	AY	AZ	BA	BB	BC	BD	BE	BF	BG	BH	BI	BJ	
41	1 mol ls	24.70014642	g			Isotopes	Atomic Mass	MCMC ID	Mole%	mass (g)	number densities [st/bar.cm]			
42	964471.9918	moles				H	1.00782519	1001.50c	0.4551	0.30E+04	4.59E-03			
43						C	12.011115	8000.50c	0.0002	2.33E+01	1.42E-07			
44						O	15.994915	8016.50c	0.7993	0.28E+08	4.29E-02			
45						Na	22.98977707	11023.50c	0.0761	1.89E+04	8.42E-05			
46						Al	26.96153489	13027.50c	1.1394	2.98E+06	8.11E-04			
47						Si	28.066	14000.50c	11.893	3.23E+06	8.44E-03			
48						Ca	40.08	20000.50c	0.2782	1.07E+05	1.97E-04			
49						K	39.102	19000.50c	0.3872	1.47E+06	2.76E-04			
50						Ti	47.8	22000.50c	0.1819	8.44E+04	1.29E-04			
51						Mn	54.9380503	25065.50c	0.7144	3.80E+05	6.08E-04			
52						Fe	55.847	26000.50c	18.8429	1.02E+07	1.34E-02			
53						Ni	58.71	28000.50c	0.22	1.25E+05	1.87E-04			
54						Cu	63.94	29000.50c	0.0123	7.57E+03	8.75E-06			
55						Gd	157.35	84000.35c	0.002	3.06E+03	1.42E-04			
56	tot moles	1058468.85								100	23921400	0.07117108		
57														
58	0.8 g/cc					water				mass (g)	number densities [st/bar.cm]			
59	mass=	1638908.847	g			po	1 kg/l			Ne-	6.02E-01	st/b.cm		
60	1 mol ls	1.80E+01				H	1.00782519	1001.50c	200	2.29E+05	1.87E-02			
61	8.10E+04	mole of h2o				O	15.994915	8016.50c	100	1.82E+06	8.34E-03			
62										2.05E+06	2.81E-02			
63														
64														
65														
66														
67	52259158	tot density	0.413188504			nominal terms at 10.35 1000s of years +				0.8140985356	*100 % of water	total volu		
68											12144443.9			
69	mass	23921.4	kg			po	3.892	kg/l		Ne-	6.02E-01	st/b.cm	Max Volum	
70	st/bar.cm			1 mol ls	24.700146	EVALUED				Isotopes	Atomic Mass	MCMC ID	Mole%	mass (g)
71	-3.0478E-02			964471.99	moles		0			H	1.00782519	1001.50c	0.4551	0.30E+04
72	8.2219E-08									C	12.011115	8000.50c	0.0002	2.33E+01
73	4.1325E-02									O	15.994915	8016.50c	0.7993	0.28E+08
74	3.5089E-03									Na	22.98977707	11023.50c	0.0761	1.89E+04
75	8.2537E-04									Al	26.96153489	13027.50c	1.1394	2.98E+06
76	5.4838E-03									Si	28.066	14000.50c	11.893	3.23E+06
77	1.2736E-04									Ca	40.08	20000.50c	0.2782	1.07E+05
78	1.7854E-04									K	39.102	19000.50c	0.3872	1.47E+06
79	8.3874E-05									Ti	47.8	22000.50c	0.1819	8.44E+04
80	3.2941E-04									Mn	54.9380503	25065.50c	0.7144	3.80E+05

	AX	AY	AZ	BA	BB	BC	BD	BE	BF	BG	BH	BI	BJ	
81	8.6884E-03								Fe	68.847	28000.58e	18.8429	1.02E+07	
82	-1.0144E-04								Ni	88.71	28000.58e	0.22	1.25E+08	
83	5.6715E-04								Cu	63.64	28000.58e	0.8123	7.57E+03	
84	9.2219E-07								Gd	187.25	64000.35e	0.002	3.64E+03	
85	-8.7364E-02											100	23821400	
86														
87	0.8								water			mass (g)	number densities (at/bars/cm)	
88	mass=	8201898.16	g						p <sup>a</sup>	1 kgf		No=	6.02E-01 at/b cm	
89	1 mol is	1.80E+01							H	1.00782519	1001.50e	200	7.21E+06	
90	2.89E+05	mole of h2o							O	18.994915	8018.50e	100	8.77E+06	
91												8.80E+06	8.18E-02	
92														
93														
94														
95														
96														
97	0.397118292	hematite forms at 10.24 1000e of years +			0.48393319	*100 % of water			total volume	12144443.91	cc	tot mass	8022485	
98														
99	kg				p <sup>a</sup>	3.892 kgf			No=	6.02E-01 at/b cm		Volume=	6148900 cc	
100	g				isotopes	Atomic Mass	MCKP ID	Mole%	mass (g)	number densities (at/bars/cm)		mass		
101					H	1.00782519	1001.50e	0.4551	6.30E+04	3.1DE-03		1 mol is		
102					C	12.01118	8000.50e	0.0002	2.33E+01	9.60E-08			8.64472	
103					O	15.994915	8018.50e	0.7993	9.24E+00	2.87E-02			4.8233E-02	
104					Na	22.8887707	11023.50e	0.0761	1.89E+04	3.85E-05			3.6546E-06	
105					Al	26.9816389	13027.50e	1.1304	2.94E+05	8.47E-04			8.4718E-04	
106					Si	28.08	14000.50e	11.893	3.23E+08	8.71E-03			8.7114E-03	
107					Ca	40.08	20000.50e	0.2762	1.07E+05	1.33E-04			1.3284E-04	
108					K	39.102	18000.50e	0.3872	1.47E+06	1.86E-04			1.8595E-04	
109					Ti	47.8	22000.50e	0.1819	8.44E+04	8.74E-05			8.7354E-06	
110					Mn	64.9380503	25065.50e	0.7144	3.80E+06	3.43E-04			3.4306E-04	
111					Fe	68.847	28000.58e	18.8429	1.02E+07	8.05E-03			9.0489E-03	
112					Ni	88.71	28000.50e	0.22	1.25E+06	1.08E-04			1.0585E-04	
113					Cu	63.54	28000.50e	0.0123	7.57E+03	8.81E-06			8.9088E-06	
114					Gd	187.25	64000.35e	0.002	3.05E+03	9.80E-07			9.8046E-07	
115								100	23821400	0.048023099			0.7488E-02	
116												tot moles		
117					water				mass (g)	number densities (at/bars/cm)			density	1
118	g					p <sup>a</sup>		1 kgf	No=	6.02E-01 at/b cm		Volume=	5994543.91 cc	
119					H	1.00782519	1001.50e	200	6.71E+05	3.30E-02			1 mol is	
120					O	18.994915	8018.50e	100	8.33E+06	1.63E-02			3.33E+06	

	AX	AY	AZ	BA	BB	BC	BD	BE	BF	BG	BH	BI	BJ
121						6.00E+06	4.95E-02						
122													
123													
124													
125													
126													
127			0.5	*100 % of water		total volume	12291800 cc		tot mass	6189421.4	tot density	0.501946127	
128													
129	kg/l		Name	6.02E-01	a/v.cm	Volume=	6145800 cc		mass=	23921.4	kg		
130	MCNP ID	Mole%	mass (g)			number densities (a/v.cm)	a/v.cm		1 mol is	24.7001464	g		
131	1001.50c	0.4531	0.30E+03	3.08E-03			3.6499E-02			648471.9918	moles		
132	6000.50c	0.0002	2.33E+01	9.49E-04			9.4895E-06						
133	6018.50c	89.7993	9.25E+08	2.84E-02			4.8061E-02						
134	11023.50c	0.0761	1.80E+04	3.61E-06			3.8107E-06						
135	13027.50c	1.1394	2.84E+05	8.41E-04			8.4082E-04						
136	14000.50c	11.893	3.23E+06	8.84E-03			8.8429E-03						
137	20000.50c	0.2762	1.07E+05	1.31E-04			1.3103E-04						
138	19000.50c	0.3872	1.47E+05	1.84E-04			1.8372E-04						
139	22000.50c	0.1818	8.44E+04	8.83E-05			8.8307E-05						
140	25065.50c	0.7144	3.80E+05	3.38E-04			3.3898E-04						
141	26000.50c	18.8428	1.02E+07	8.84E-03			8.8405E-03						
142	28000.50c	0.22	1.25E+05	1.04E-04			1.0438E-04						
143	29000.50c	0.0123	7.87E+03	5.84E-06			5.8360E-06						
144	44000.35c	0.002	3.05E+03	8.48E-07			8.4895E-07						
145		100	23921400	0.0474474			8.7801E-02		tot mass	1308710.50			
146													
147		mass (g)	number densities (a/v.cm)					density		1			
148	kg/l		Name	6.02E-01	a/v.cm	Volume=	6145800 cc		mass=	6145800	g		
149	1001.50c	200	6.88E+05	3.34E-02					1 mol is	1.80E+01			
150	6018.50c	100	5.48E+06	1.67E-02						3.41E+05	moles of H2O		
151			6.15E+06	8.02E-02									
152													
153													
154													
155													
156	0.382140739	Isomeric forms at 10.25 1000s of years +		0.45	*100 % of water			total volume	11174343.64	cc	tot mass	8052385	
157													
158	kg	p=	3.882	kg/l		Name	6.02E-01	a/v.cm	Volume=	6145800	cc	mass	
159	g	Isotopes	Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (a/v.cm)					1 mol is	
160	H		1.00782519	1001.50c.	0.4531	6.30E+04	3.37E-03					988472	



	BK	BL	BM	BN	BO	BP	BQ	BR
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
21								
22								
23								
24								
25								
26								
27								
28								
29								
30								
31								
32								
33								
34								
35								
36								
37								
38	8194533.333	cc	tot mass	2072554.733	tot density	0.2529182		
39	-8194533.333							
40	Volume=	8145900	cc	mass	23821.4	kg		

	BK	BL	BM	BN	BO	BP	BQ	BR
41	atbar.cm			1 mol ls	24.700146	g		
42	2.1312E-02			868471.9918	moles			
43	1.4234E-07							
44	8.0019E-02							
45	8.4161E-05							
46	8.1082E-04							
47	8.4644E-03							
48	1.9637E-04							
49	2.7857E-04							
50	1.2944E-04							
51	8.0845E-04							
52	1.3411E-02							
53	1.5668E-04							
54	8.7540E-06							
55	1.4234E-06							
56	8.6248E-02		sol moles	1062218.2				
57								
58			density	1	g/cc			
59	Volume=	2048633.333	cc	mass=	2048633.3	g		
60				1 mol ls	1.80E+01			
61				1.14E+06	mole of H2O			
62								
63								
64								
65								
66								
67	12648387.7	cc	sol mass	6326419.1	sol density	0.5159678		
68								
69	Volume=	6145900	cc	mass	23621.4	kg		
70	number densities (atbar.cm)		atbar.cm		1 mol ls	24.700146		
71	2.98E-03			3.7355E-02		868471.99	moles	
72	8.22E-06			9.2219E-08				
73	2.76E-02			4.4763E-02				
74	3.81E-05			3.8049E-05				
75	6.29E-04			8.2937E-04				
76	8.48E-03			8.4838E-03				
77	1.27E-04			1.2735E-04				
78	1.79E-04			1.7854E-04				
79	8.39E-05			8.3874E-05				
80	3.29E-04			3.2941E-04				

BK	BL	BM	BN	BO	BP	BQ	BR
81	8.89E-03		8.884E-03				
82	1.01E-04		1.0144E-04				
83	8.67E-06		8.6716E-06				
84	9.22E-07		9.2219E-07				
85	0.048106701		0.7178E-02			tot moles	1329509.9
86							
87		density	1				
88	Volume	6502487.7 cc	mass	6802487.7 g			
89			1 mol is	1.80E+01			
90			3.81E+05 mole of h2o				
91							
92							
93							
94							
95							
96							
97	tot density	0.495802929					
98							
99	23821.4 kg						
100	24.70014642 g						
101	moles						
102							
103							
104							
105							
106							
107							
108							
109							
110							
111							
112							
113							
114							
115	1301528.838						
116							
117							
118	5996543.81 g						
119	1.80E+01						
120	mole of h2o						

	BK	BL	BM	BN	BO	BP	BQ	BR
121								
122								
123								
124								
125								
126								
127								
128								
129								
130								
131								
132								
133								
134								
135								
136								
137								
138								
139								
140								
141								
142								
143								
144								
145								
146								
147								
148								
149								
150								
151								
152								
153								
154								
155								
156	tot density	0.452140739						
157								
158	23821.4	kg						
159	24.70014442	g						
160	moles							



A	B	C	D	E	F	G	H	I
1 Atomic Densities (sV/cm <sup>3</sup> )								
2								
3 Canister Component: ..	Ident 89	Becket	Cladding	Endcap	MOX	Insulator	Canister shell	Total
4								
5 MCNP Isotope ID								
6 64000.35c								
7 1001.80c (H)								
8 6000.80c (C)	8.29004E-08	3.48E-06	3.61877E-06	8.85545E-06			0.000122095	0.000207886
9 25063.80c (Mn)	7.71161E-08	0.000505	0.00179848	8.27745E-05			0.000667343	0.00149838
10 15031.80c (P)	3.07754E-08	2.01E-06	7.89577E-06	2.10613E-06			2.84324E-05	8.98558E-05
11 18032.80c (S)	1.94764E-08	1.3E-08	8.09948E-08	1.36023E-06			1.72006E-05	3.85578E-05
12 14000.80c (Si)	8.85685E-05	0.00037	0.000145127	3.87114E-05			0.000419512	0.001100165
13 24000.80c (Cr)	0.000774055	0.004633	0.001778846	0.000473943			0.003893374	0.013551418
14 28000.80c (Ni)	0.000380631	0.002834	0.001110423	0.000298303			0.003746804	0.008344806
15 42000.80c (Mo)	0	0.000361	0.000141817	3.77753E-05			0.000477875	0.001018343
16 7014.80c (N)	1.81274E-05	9.8E-05	3.88108E-06	1.03523E-05			0.000130800	0.000294214
17 28000.55c (Fe)	0.002580979	0.016273	0.008373548	0.001700104			0.021466131	0.044251575
18 28000.80C (Cu)	0							
19 8016.80C (O)	0						0.00585745	0.00023672
20 92235.80C (U235)	0						4.6037E-06	1.087E-06
21 92238.80C (U238)	0						0.002277338	0.000147729
22 94238.80C (Pu238)	0						0.000645644	0
23 94240.80C (Pu240)	0						8.8275E-06	0
24 94241.80C (Pu241)	0						7.7193E-06	7.7194E-06
25 total	0.00347513	0.025043	0.000833875	0.002623108	0.00089971	0.00044508	0.033189682	0.063684933
26 volume	167884.8046							
27								
28								97.5% of water in the
29					Density of water (g/cc)	1.0	1.0	1.0
30 Density of Hematite (g/cc)	5.2749E+00	MCNP Isotope ID	% of water in the RfU SNF	0.00%	20.00%	50.00%	97.48%	
31 Volume of the fuel Homogenized	1.6788E+03	64000.35c		1.7834E-04	1.7834E-04	1.5278E-04	8.8172E-05	4.4408E-05
32 Molaric % of Hematite	4.8207E-26	1001.80c (H)		0.0000E+00	0.0000E+00	1.8718E-02	3.3436E-02	0.5184E-02
33 Mole of hematite in the fuel	6.7542E+03	6000.80c (C)		2.0787E-04	2.0787E-04	1.5590E-04	1.0393E-04	0.2348E-04
34 Mass of Hematite(g)	1.0783E+06	28063.80c (Mn)		1.4998E-03	1.4998E-03	1.1249E-03	7.4992E-04	3.7771E-04
35 Volume of Hematite (cc)	2.0448E+06	15031.80c (P)		5.9854E-05	5.9854E-05	4.4892E-06	2.9892E-06	1.5074E-06
36 Volume of Hematite (l)	2.0448E+02	18032.80c (S)		3.8658E-05	3.8658E-05	2.9995E-06	1.8329E-06	0.7333E-01
37 % of this volume is water	0.8000E+00	14000.80c (Cr)		1.1002E-03	1.1002E-03	8.2312E-04	5.9008E-04	2.7708E-05
38 volume of water (cc)	0.0000E+00	24000.80c (Mn)		1.3551E-02	1.3551E-02	1.0184E-02	6.7787E-03	3.4127E-04
39		28000.80c (Ni)		1	8.3484E-02	8.3484E-03	6.2618E-03	4.1744E-03
40 Mass(g) of Water to add	0	42000.80c (Mo)		1.0184E-03	1.0184E-03	7.85377E-04	5.0918E-04	2.1023E-04

A	B	C	D	E	F	G	H	I
41 Mole of Water to add	0	7014.88e (M)		2.9421E-04	2.9421E-04	2.2048E-04	1.4711E-04	7.4093E-06
42 Atomes of O to add	0	26800.84e (Fe)		4.8426E-02	4.8426E-02	3.6319E-02	2.4213E-02	1.2194E-03
43 Atomes of H to add	0	29000.80C (Cn)		0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
44 density of H homogenized to add (a1/cm.b)	0.0000E+00	8816.80C (O)		7.8880E-02	7.8893E-02	6.7828E-02	6.6164E-02	3.4581E-02
45 density of O homogenized to add (a1/cm.b)	0.0000E+00	92238.80C (U238)		5.8707E-06	5.8707E-06	4.2830E-06	2.8335E-06	1.4281E-07
46		92238.80C (U238)		2.4207E-03	2.4207E-03	1.8168E-03	1.2103E-03	6.0960E-06
47 Max Volume of the canister	824971.2629	94239.88C (Pu239)		0.8544E-04	0.8544E-04	4.9928E-04	3.3264E-04	1.0761E-06
48		94240.80C (Pu240)		0.8275E-05	0.8275E-05	0.8208E-05	4.4137E-05	2.2230E-06
49		94241.80C (Pu241)		7.7193E-06	7.7193E-06	6.7897E-06	3.8508E-06	1.9440E-07
50		total		1.5680E-01	1.5680E-01	1.4284E-01	1.2855E-01	1.0173E-01
51		volume		1.6798E+05	1.6798E+05	2.2398E+05	3.3597E+05	6.8705E+06
52								
53		H/x		0.0000E+00	0.0000E+00	3.3203E+01	9.9608E+01	3455.7
54								
55						94.37% of water in the fuel		
56								
57 Density of Hematite (g/cc)	5.2749E+00	MC1NP Isotope ID	Density of water (g/cc)	1.0		1.0	0.8	
58 Volume of the fuel Homogenized	1.0790E+05	164000.85c	% of water in the ftd SNF	9.80%	94.37%	94.37%	94.37%	
59 Mole/c.b of Hematite	4.0207E-26	1601.80e (H)		1.7834E-04	1.7834E-04	6.4093E-06	6.4093E-06	
60 Mole of hematite in the fuel	0.7542E+03	5000.88e (C)		0.0000E+00	0.0000E+00	6.4441E-02	6.4441E-02	5.1553E-02
61 Mass of Hematite(g)	1.0785E+06	25000.80e (Mn)		2.0787E-04	2.0787E-04	7.8552E-06	7.8552E-06	
62 Volume of Hematite (cc)	2.0446E+05	16031.85e (P)		1.4998E-03	1.4998E-03	6.4513E-06	6.4513E-06	
63 Volume of Hematite (l)	2.0446E+02	16032.80e (S)		5.9858E-05	5.9858E-05	2.1785E-08	2.1785E-08	2.1785E-06
64 % of this volume is water	8.8000E+00	14000.80e (Si)		3.0658E-05	3.0658E-05	1.4050E-06	1.4050E-06	1.4060E-06
65 volume of water (cc)	0.0000E+00	24000.80e (Cr)		1.1002E-03	1.1002E-03	3.9906E-05	3.9906E-05	3.9906E-05
66		23000.80e (M)		1.3551E-02	1.3551E-02	4.9254E-04	4.9254E-04	4.9254E-04
67 Mass(g) of Water to add	0	47000.80e (Mo)		8.3488E-03	8.3488E-03	3.0344E-04	3.0344E-04	3.0344E-04
68 Mole of Water to add	0	7014.88e (M)		1.0184E-03	1.0184E-03	3.7013E-05	3.7013E-05	3.7013E-05
69 Atomes of O to add	0	26800.84e (Fe)		2.9421E-04	2.9421E-04	1.0693E-05	1.0693E-05	1.0693E-05
70 Atomes of H to add	0	29000.80C (Cn)		4.8426E-02	4.8426E-02	1.7601E-03	1.7601E-03	1.7601E-03
71 density of H homogenized to add (a1/cm.b)	0.0000E+00	8816.80C (O)		0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
72 density of O homogenized to add (a1/cm.b)	0.0000E+00	92238.80C (U238)		5.8707E-06	5.8707E-06	2.0811E-07	2.0811E-07	2.0811E-07
73		92238.80C (U238)		2.4207E-03	2.4207E-03	8.7981E-05	8.7981E-05	8.7981E-05
74 Max Volume of the canister	824971.2629	94239.88C (Pu239)		0.8544E-04	0.8544E-04	2.4194E-05	2.4194E-05	2.4194E-05
75		94240.80C (Pu240)		0.8275E-05	0.8275E-05	3.2084E-06	3.2084E-06	3.2084E-06
76		94241.80C (Pu241)		7.7193E-06	7.7193E-06	2.8057E-07	2.8057E-07	2.8057E-07
77		volume		1.6798E+05	1.6798E+05	4.8218E-06	4.8218E-06	4.8218E-06
78		total		1.5680E-01	1.5680E-01	1.0234E-01	1.0234E-01	8.3029E-02
79		H/x		0.0	0.0	3.0344E-02	3.0344E-02	3.0344E-02
80						2641.0	2641.0	2112.8





J	K	L	M	N	O	P
1						
2						
3 Total degraded dry -		dry no Cd	dry no Fe2O3	dry no gd Fe2O3		
4 (Fe becomes Fe2O3)						
5						
6 0.000176343		0.0000E+00	0.000176343	0		
7			0	0		
8 0.000207989		2.0797E-04	0.000207989	0.000207989		
9 0.001498435		1.4984E-03	0.001498435	0.001498435		
10 8.94554E-05		8.94554E-05	0.000894554	0.000894554		
11 3.86578E-05		3.86578E-05	0.000386578	0.000386578		
12 0.001100185		1.1002E-03	0.001100185	0.001100185		
13 0.013351418		1.3351E-02	0.013351418	0.013351418		
14 0.008348808		8.3488E-03	0.008348808	0.008348808		
15 0.001018363		1.0184E-03	0.001018363	0.001018363		
16 0.000294214		2.9421E-04	0.000294214	0.000294214		
17 0.048425573		4.8426E-02	0	0		
18 0		0.0000E+00	0	0		
19 0.078492828		7.8493E-02	0.2542E-03	0.006254167		
20 5.87065E-06		5.8707E-06	5.87069E-06	5.87069E-06		
21 0.002420667		2.4207E-03	0.002420667	0.002420667		
22 0.000685878		8.8588E-04	0.000685878	0.000685878		
23 8.82748E-05		8.8275E-05	8.82748E-05	8.82748E-05		
24 7.71954E-06		7.7195E-06	7.71954E-06	7.71954E-06		
25 0.15440164		0	1.5440E-01	3.8738E-02	3.8561E-02	
26						
27						
28 vol		78% of water in the fuel				
29	0.0	0.5	0.1	1.0	0.3	0.8
30	97.48%	97.48%	97.48%	78.80%	78.80%	78.80%
31	4.4409E-06	4.4409E-06	4.4409E-06	4.4096E-05	4.4096E-06	4.4096E-06
32	8.2150E-02	2.2594E-02	0.8154E-03	8.0154E-02	4.0123E-02	8.0154E-03
33	8.2348E-06	8.2348E-06	8.2348E-06	8.1947E-06	8.1947E-06	8.1947E-05
34	3.7771E-06	3.7771E-06	3.7771E-06	3.7498E-04	3.7498E-04	3.7498E-04
35	1.5074E-06	1.5074E-06	1.5074E-06	1.4964E-05	1.4964E-06	1.4964E-06
36	9.7335E-07	9.7335E-07	9.7335E-07	9.6644E-08	9.6644E-08	9.6644E-08
37	2.7706E-05	2.7706E-05	2.7706E-05	2.7504E-04	2.7504E-04	2.7504E-04
38	3.4127E-04	3.4127E-04	3.4127E-04	3.3879E-03	3.3879E-03	3.3879E-03
39	2.1023E-04	2.1023E-04	2.1023E-04	2.0672E-03	2.0672E-03	2.0672E-03
40	2.5648E-05	2.5648E-05	2.5648E-05	2.5459E-04	2.5459E-04	2.5459E-04

J	K	L	M	N	O	P
41	7.4092E-08	7.4092E-08	7.4092E-08	7.3653E-05	7.3653E-05	7.3653E-05
42	1.2195E-03	1.2195E-03	1.2195E-03	1.2104E-02	1.2104E-02	1.2104E-02
43	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
44	2.8062E-02	1.8284E-02	8.2442E-03	4.4800E-02	3.9793E-02	3.2962E-02
45	1.4281E-07	1.4281E-07	1.4281E-07	1.4177E-05	1.4177E-05	1.4177E-05
46	8.9980E-05	6.0980E-06	8.0980E-05	8.0817E-04	8.0317E-04	8.0817E-04
47	1.8784E-05	1.8784E-05	1.8784E-05	1.8642E-04	1.8642E-04	1.8642E-04
48	2.2230E-08	2.2230E-08	2.2230E-08	2.2089E-05	2.2089E-05	2.2089E-05
49	1.8440E-07	1.8440E-07	1.8440E-07	1.8299E-05	1.8299E-05	1.8299E-05
50	8.2174E-02	8.2840E-02	1.3727E-02	1.1443E-01	9.9385E-02	7.6916E-02
51	8.6705E-08	8.6705E-08	8.6705E-08	8.7194E+05	8.7194E+05	8.7194E+05
52						
53	3084.8	1927.9	385.6	298.8	238.1	149.4
54						
55						
56	8.8	8.1				
57	98.37%	98.37%				
58	8.4093E-08	8.4093E-08				
59	3.2221E-02	8.4441E-03				
60	7.6552E-06	7.6552E-06				
61	5.4513E-06	5.4513E-05		*		
62	2.1755E-06	2.1755E-06				
63	1.4050E-06	1.4050E-06				
64	3.9986E-05	3.9986E-05				
65	4.9254E-04	4.9254E-04				
66	3.0344E-04	3.0344E-04				
67	3.7013E-05	3.7013E-05				
68	1.0683E-06	1.0683E-06				
69	1.7801E-03	1.7801E-03				
70	0.0000E+00	0.0000E+00				
71	1.8878E-02	6.0695E-03	*			
72	2.0811E-07	2.0811E-07				
73	8.7981E-05	8.7981E-05				
74	2.4194E-06	2.4194E-05				
75	3.2084E-06	3.2084E-06				
76	2.8057E-07	2.8067E-07				
77	4.8218E+06	4.8218E+06				
78	8.4030E-02	1.5389E-02				
79	3.8348E-02	3.8348E-02				1
80	1320.5	264.1				

	J	K	L	M	N	O	P
81							
82	89.77%	of water in the fuel					
83	1.0	0.0	0.0	0.1			
84	89.77%	89.77%	89.77%	89.77%			
85	1.8041E-05	1.8041E-05	1.8041E-05	1.8041E-05			
86	0.0031E-02	4.8024E-02	3.0018E-02	0.0031E-03			
87	2.1208E-05	2.1208E-05	2.1208E-05	2.1208E-05			
88	1.8344E-04	1.8344E-04	1.8344E-04	1.8344E-04			
89	8.1235E-08	8.1235E-08	8.1235E-08	8.1235E-08			
90	3.8548E-04	3.8548E-04	3.8548E-04	3.8548E-04			
91	1.1235E-04	1.1235E-04	1.1235E-04	1.1235E-04			
92	1.3864E-03	1.3864E-03	1.3864E-03	1.3864E-03			
93	8.8411E-04	8.8411E-04	8.8411E-04	8.8411E-04			
94	1.0418E-04	1.0418E-04	1.0418E-04	1.0418E-04			
95	3.0098E-06	3.0098E-05	3.0098E-05	3.0098E-05			
96	4.8541E-03	4.8541E-03	4.8541E-03	4.8541E-03			
97	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00			
98	3.8088E-02	3.2083E-02	2.3079E-02	1.1073E-02			
99	8.8013E-07	8.8013E-07	8.8013E-07	8.8013E-07			
100	2.4784E-04	2.4784E-04	2.4784E-04	2.4784E-04			
101	8.8101E-05	8.8101E-05	8.8101E-05	8.8101E-05			
102	9.0308E-04	9.0308E-04	9.0308E-04	9.0308E-04			
103	7.8974E-07	7.8974E-07	7.8974E-07	7.8974E-07			
104	1.8420E+08	1.8420E+08	1.8420E+08	1.8420E+08			
105	1.0808E-01	8.8078E-02	8.1084E-02	2.5048E-02			
106							
107	874.0	699.2	437.0	87.4			
108							
109	negd	no fo2a3	negdnofa2a3				
110	1	1	1	1			
111	87.9775%	87.9775%	87.9775%	87.9775%			
112	8.8470E-05	0	8.8470E-05	0.0000E+00			
113	4.8458E-02	4.8458E-02	4.8458E-02	4.8458E-02			
114	8.8588E-08	8.8588E-08	8.8588E-08	8.8588E-08			
115	4.8029E-04	4.8029E-04	4.8029E-04	4.8029E-04			
116	1.8167E-05	1.8167E-05	1.8167E-05	1.8167E-05			
117	1.2379E-05	1.2379E-05	1.2379E-05	1.2379E-05			
118	3.8230E-04	3.8230E-04	3.8230E-04	3.8230E-04			
119	4.3388E-03	4.3388E-03	4.3388E-03	4.3388E-03			
120	2.8735E-03	2.8735E-03	2.8735E-03	2.8735E-03			

	J	K	L	M	N	O	P
121	3.2611E-04	3.2611E-04	3.2611E-04	3.2611E-04			
122	8.4216E-05	8.4216E-05	8.4216E-05	8.4216E-05			
123	1.6507E-02	4.5507E-02	0.0000E+00	0.0000E+00			
124	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00			
125	4.7992E-02	4.7992E-02	2.4732E-02	2.4732E-02			
126	1.8189E-06	1.8189E-06	1.8189E-06	1.8189E-06			
127	7.7516E-04	7.7516E-04	7.7516E-04	7.7516E-04			
128	2.1317E-04	2.1317E-04	2.1317E-04	2.1317E-04			
129	2.8264E-05	2.8264E-05	2.8264E-05	2.8264E-05			
130	2.4720E-06	2.4720E-06	2.4720E-06	2.4720E-06			
131	8.2458E+05	8.2458E+05	8.2458E+05	8.2458E+05			
132	1.1840E-01	1.1834E-01	7.9831E-02	7.9574E-02			
133	211.4	211.4	211.4	211.4			

	A	B	C	D	E	F	G
1	Appendix	Specifications for DOE FFTF Canister Components					
2							
3	FFTF SHF Assembly	part/partno:	5				
4	components:	fuel pin:	parts:	217			
5		component:	MOCU:	O.D.:	0.4940cm		
6				length:	91.44cm		
7				material:	UO <sub>2</sub> 98%Pu <sub>2</sub> 1.9%		
8				density:	10.02g/cm <sup>3</sup>		
9				fuel tube:	parts/no.:	2	
10				material:	natural UO <sub>2</sub>		
11				density:	10.42g/cm <sup>3</sup>		
12				length:	2.032		
13				reflector:	parts/no.:	2	
14				material:	Inoxed 800		
15				density:	8.47g/cm <sup>3</sup>		
16				length:	14.478cm		
17				spring:	material:	SS302	
18					volume:	2.7284cc	
19					density:	8g/cm <sup>3</sup>	
20				platinum:	material:	SS316	
21					length:	98.21cm	
22					O.D.:	0.49023cm	
23					wall thickness:	0.01387cm	
24				top cap:	material:	SS316	
25					length:	10.46cm	
26					O.D.:	0.5843cm	
27				bottom cap:	material:	SS316	
28					length:	4.08cm	
29					O.D.:	0.5842cm	
30				cladding:	material:	SS316	
31					I.D.:	0.508 cm	
32					O.D.:	0.5842 cm	
33					length:	223.224cm	
34					density:	7.8487g/cm <sup>3</sup>	
35		Components other than fuel pins:		material:	SS316		
36				total mass:	172.818-217.04638=	74.3978 kg	
37	Item 59	components:	fuel pin:	parts:	217		
38			center tube:	mass:	58.08kg		
39				material:	SS304L		
40	Basket Assembly	material:	SS316L				
41		components:	center tube:	O.D.:	17.3cm		
42				I.D.:	15.3cm		
43				length:	412.5cm		
44			diverter plates:	parts/center:	5		
45				length:	14.8448cm		
46				height:	412.5cm		

	A	B	C	D	E	F	G
47				Pediment:	1cm		
48			center shell	O.R.:	22.86cm		
49				L.R.:	21.8075cm		
50				length:	448.8cm		
51				material:	as-316		
52				density:	7.962/cm <sup>3</sup>		
53	Volume for homogenizing bioplastic:	pi*22.88^2*145	780407.4896cm <sup>3</sup>				
54	Total heat pins per center:	2178*	1302				

	A	B	C	D	E	F	G
1	Cladding:	material:	SS316				
2		I.D.:	0.508 cm				
3		O.D.:	0.5842 cm				
4		length:	(237.744-10.48-4.06)cm=	223.224cm			
5		vol:	$\pi(0.5842^2/4-0.508^2/4)*223.224/4cc=$	14.5911cc			
6		total vol:	1302*14.5911cc=	18997.6122 cc			
7		vol fraction:	18997.6122/167983.6=	0.113092065			
8		density:	7.98g/cc				
9							
10	Element	Identifier	At. Mass	Wt. %	At. Density (at/cm <sup>3</sup> b)	At. Density (at/cm <sup>3</sup> b) (homogenized)	
11							
12							
13	C	6000.50c	12.01115	0.06	3.2007E-04	3.8198E-03	
14	Mn	25055.50c	54.9380503	2	1.7494E-03	1.9785E-04	
15	P	15031.50c	30.9737647	0.045	6.9817E-05	7.8958E-06	
16	S	16032.50c	31.9720737	0.03	4.5091E-05	5.0995E-06	
17	Si	14000.50c	28.086	0.75	1.2833E-03	1.4513E-04	
18	Cr	24000.50c	51.996	17	1.5712E-02	1.7769E-03	
19	Ni	28000.50c	58.71	12	9.8223E-03	1.1108E-03	
20	Mo	42000.50c	95.94	2.5	1.2522E-03	1.4182E-04	
21	N	7014.50c	14.00307439	0.1	3.4318E-04	3.8811E-05	
22	Fe	26000.50c	55.847	65.495	5.6358E-02	6.3738E-03	
23							
24							

	A	B	C	D	E	F	G
1	MOX:	material:	UO1.96+PuO1.96				
2		density:	10.02/g/cc				
3		length:	91.44cm				
4		O.D.:	0.49403cm				
5		vol:	$\pi * 0.49403^2 * 91.444\text{cc} =$	17.5380cc			
6		total vol:	1302*17.5280cc=	22821.456	cc		
7		vol fraction:	22821.456/167983.8=	0.135855262			
8							
9	Pu(moles):	38.4/239.1891=	0.16054				
10	U(moles):	114.3/238.04476=	0.48016				
11	O(moles):	1.96*(0.16054+0.4)	1.25577				
12	O(mass):	15.998985*1.2557	20.091g				
13	Total mass:	38.4+114.3+20.09	172.791g				
14							
15	Pu%	mass:	38.4g				
16		weight fraction:	0.22223				
17							
18	Isotope	Isotopic Mass	Weight Fraction	At. Mass			
19	U239	239.052148	0.8735	239.1890947			
20	Pu240	240.053882	0.1163				
21	Pu241	241.056737	0.0102				
22							
23	U:	mass:	114.3g				
24		weight fraction:	0.66149				
25							
26	Isotope	Isotopic Mass	Weight Fraction	At. Mass			
27	U235	235.043915	0.002	238.0447563			
28	U238	238.05077	0.998				
29							
30							
31	O:	mass:	20.091g				
32		weight fraction:	0.11627				
33							
34	MOX						
35	Isotope	Identifier	Isotopic Mass	Wt. Fraction	At. Density	At. Density	
36					(eV/cm <sup>-3</sup> )	(eV/cm <sup>-3</sup> )	
37						(homogenized)	
38	O16	8016.50c	15.998985	0.11627	4.3851E-02	5.9574E-03	
39	U235	92235.50c	235.043915	0.00132	3.3887E-05	4.6037E-06	
40	U238	92238.50c	238.05077	0.66017	1.6734E-02	2.2734E-03	

	A	B	C	D	E	F	G
41	Pu239	94239.50c	239.052148	0.19412	4.8999E-03	6.6568E-04	
42	Pu240	94240.50c	240.053882	0.02585	6.4977E-04	8.8278E-05	
43	Pu241	94241.50c	241.056737	0.00227	3.6822E-05	7.7195E-06	

	A	B	C	D	E	F
1						
2						
3	Endcaps	material:	SS316			
4		length:	10.46+4.06=	14.52cm		
5		diameter:	0.5842cm			
6		vol:	$\pi * 0.5842^2 * 14.52 / 4 =$	3.89206cc		
7		total vol:	1302*3.89206=	5067.46212 cc		
8		vol. fraction:	5067.46212 / 167983.6=	0.03016641		
9		density:	7.98g/cc			
10						
11	Element	Identifier	At. Mass	Wt %	At. Density (st/cm <sup>3</sup> b)	At. Density (st/cm <sup>3</sup> b) (homogenized)
12						
13						
14	C	6000.50c	12.01115	0.08	3.2007E-04	9.6555E-06
15	Mn	25055.50c	54.9380503	2	1.7494E-03	5.2774E-05
16	P	15031.50c	30.9737647	0.045	6.9817E-05	2.1061E-06
17	S	16032.50c	31.9720737	0.03	4.5091E-05	1.3602E-06
18	Si	14000.50c	28.086	0.75	1.2833E-03	3.8711E-05
19	Cr	24000.50c	51.996	17	1.5712E-02	4.7396E-04
20	Ni	28000.50c	58.71	12	9.8223E-03	2.9630E-04
21	Mo	42000.50c	95.94	2.5	1.2522E-03	3.7775E-05
22	N	7014.50c	14.00307439	0.1	3.4318E-04	1.0352E-05
23	Fe	26000.50c	55.847	65.495	5.6358E-02	1.7001E-03

A	B	C	D	E	F
1 Insulator	material:	natural UO2			
2	parts per rod:	2			
3	length:	2.032cm			
4	diameter:	0.506cm			
5	vol:	$\pi * 0.508^2 * 2.032 / 4 =$ 0.8237cc			
6	total vol:	1302*0.8237=	1072.4574	cc	
7	vol. fraction:	1072.4574/167983.6=	0.006384298		
8	density:	10.42g/cc			
9	U mass/assembly	1500g			
10					
11 U(moles):	1500/238.0289=	6.3018			
12 O(moles):	2*6.3018=	12.6035			
13 O(mass):	16*12.6035=	201.656			
14 total mass:	1701.656				
15 U(Wt. Fraction):	1500/1701.656=	0.8815			
16 O(Wt. Fraction):	201.656/1701.65	0.1185			
17					
18 Isotope	Identifier	At. Mass	Wt. Fraction	At. Density (at/cm <sup>3</sup> b)	At. Density (at/cm <sup>3</sup> b) (homogenized)
19					
20					
21 U235	92235.50c	235.043915	0.00628	1.6712E-04	1.0670E-06
22 U238	92238.50c	238.05077	0.87524	2.3071E-02	1.4729E-04
23 O16	8016.50c	15.99895	0.1185	4.6477E-02	2.9672E-04
24					

	A	B	C	D	E	F
1	Ident 69	material:	SS304L			
2		density:	7.8960			
3		mass:	59.06kg			
4		vol:	690607.9e-00	7479.75		
5		vol. fraction:	7479.75/167843.6e-00	0.04493867		
6						
7	Element	Identifier	Al_Mass	44.1%	Al_Density	Al_Density
8					(atom%)	(atom%)
9						(homogenized)
10	C	6000.80c	12.01115	0.03	1.1842E-04	6.2906E-06
11	Mn	25055.80c	54.8380603	2	1.7319E-03	7.7116E-05
12	P	15031.80c	30.9737647	0.045	6.9117E-05	3.0778E-08
13	S	16032.80c	31.9720737	0.03	4.4639E-05	1.9876E-08
14	Si	14000.80c	28.086	0.76	1.2704E-03	6.6567E-05
15	Cr	24000.80c	51.996	19	1.7344E-02	7.7405E-04
16	Ni	28000.80c	58.69	10	8.1058E-03	3.8093E-04
17	N	7014.80c	14.00307438	0.1	3.3974E-04	1.5127E-05
18	Fe	26000.80c	65.847	68.045	5.7948E-02	2.8410E-03

	A	B	C	D	E	F	G
1	Basket	material:	SS316L				
2		density:	7.98g/cc				
3	+++	components:	center tube:	O.D.: 17.3cm			
4				I.D.: 15.3cm			
5				length: 412.5cm			
6				vol: $\pi * (17.3^2 - 15.3^2) * 412.5 / 4 = 21123.2836 \text{ cc}$			
7		divider plates:	parts/canister:	5			
8				thickness: 1cm			
9				length: $(43.815 - 17.3) / 2 = 13.2575\text{cm}$			
10				height: 412.5cm			
11				vol: $5 * 13.2575 * 412.5 = 27343.5938 \text{ cc}$			
12							
13		total vol:	48466.8774 cc				
14		vol fraction:	48466.877 / 16798	0.288521481			
15							
16	Element	Identifier	Al. Mass	Wt.%	Al. Density	Al. Density	
17					(g/cm <sup>3</sup> b)	(g/cm <sup>3</sup> b)	
18							(homogenized)
19	C	6000.50c	12.01115	0.03	1.2003E-04	3.4830E-05	
20	Mn	25055.50c	54.9380503	2	1.7494E-03	5.0475E-04	
21	P	15031.50c	30.9737647	0.045	6.9817E-05	2.0144E-05	
22	S	16032.50c	31.9720737	0.03	4.5091E-05	1.3010E-05	
23	Si	14000.50c	28.086	0.75	1.2833E-03	3.7025E-04	
24	Cr	24000.50c	51.996	17	1.5712E-02	4.5332E-03	
25	Ni	28000.50c	58.71	12	9.8223E-03	2.8339E-03	
26	Mo	42000.50c	95.94	2.5	1.2522E-03	3.6130E-04	
27	N	7014.50c	14.00307439	0.1	3.4318E-04	9.8014E-05	
28	Fe	26000.50c	55.847	65.545	5.6401E-02	1.6273E-02	
29							

	A	B	C	D	E	F	G
1	DOE SNF Canister shell			material:	SS316L		
2				mass:	511350.3358	509.556kg	
3	***			vol:	64078.98945	64078.98945cc	
4				total vol.:			
5				vol. fraction	64078.98945/167983	0.38145979	
6							
7	Element	Identifier	Al. Mass	Wt.%	Al. Density	Al. Density	
8					(g/cm <sup>3</sup> b)	(g/cm <sup>3</sup> b)	
9						(homogenized)	
10	C	6000.50c	12.01115	0.06	3.2007E-04	1.2209E-04	
11	Mn	25055.50c	54.93805	2	1.7494E-03	6.6734E-04	
12	P	15031.50c	30.973765	0.045	6.9817E-05	2.6632E-05	
13	S	16032.50c	31.972074	0.03	4.5091E-05	1.7201E-05	
14	Si	14000.50c	28.086	0.75	1.2833E-03	4.8951E-04	
15	Cr	24000.50c	51.896	17	1.5712E-02	5.9934E-03	
16	Ni	28000.50c	58.71	12	9.8223E-03	3.7468E-03	
17	Mo	42000.50c	95.94	2.5	1.2522E-03	4.7768E-04	
18	N	7014.50c	14.003074	0.1	3.4318E-04	1.3091E-04	
19	Fe	26000.50c	55.847	65.495	5.6358E-02	2.1498E-02	

	A	B
1	Gd	
2	Volume of basket (cc)	48466.8774
3	density of ss316 (g/cc)	7.98
4	Mass Basket (g)	386765.6817
5	2% of the mass is Gd	0.02
6	Mass Gd (g)	7735.313633
7	Mole of Gd (M=157.25 g/mol)	49.19118368
8	Atoms of Gd	2.96229E+25
9	Volume of the SNF DOE Canister	167984.8046
10	Homogenized Density at/b.cc	0.000176343

A	B	C	D	E	F	G
1		Volume	Denali	Mass (g)	Volume fraction	
2	Clad	18997.6	7.98	151600.95	0.113091	
3	Mox	22821.5	10.02	228870.99	0.135854	
4	End Cap	5067.46	7.98	40438.348	0.030166	
5	Insulator	1072.46	10.42	11175.006	0.008384	
6	Indent	7479.75	7.9	69090.025	0.044526	
7	basket	48486.9	7.98	386785.68	0.28852	
8	canister	64079	7.98	511350.34	0.381458	
9	Dry Volume	187985		1389091.3		
10						
11						
12						
13						
14				total Mass should not exceed 3400kg		

A	B	C	D	E	F	G	H
1	0%	of the HLW mixt with DOE BMF		water fraction	0%		
2	Footage	Fuel	Clay	Mixed	Water		
3	MCNP ID	attenuity	attenuity	attenuity	1 g/sec		
4	64000.36c	1.7634E-04	1.8979E-06	1.7634E-04			
5	1001.80c (H)	0.0000E+00	6.1254E-03	0.0000E+00	6.064871642		
6	8000.80c (C)	2.0787E-04	1.8979E-07	2.0787E-04			
7	25048.80c (Min)	1.4998E-03	6.7730E-04	1.4998E-03			
8	18031.80c (P)	6.9656E-06		6.9656E-06			
9	18032.80c (S)	3.9638E-05		3.9638E-06			
10	14000.80c (Si)	1.1002E-03	1.1294E-02	1.1002E-03			
11	24000.80c (Cr)	1.3531E-02	0.0000E+00	1.3531E-02			
12	28000.80c (Ni)	8.3488E-03	2.0777E-04	8.3488E-03			
13	42000.80c (Mo)	1.0184E-03		1.0184E-03			
14	7014.80c (N)	2.8421E-04		2.8421E-04			
15	26000.85c (Fe)	4.8426E-02	1.7841E-02	4.8426E-02			
16	28000.90C (Cu)	0.0000E+00	1.1672E-06	0.0000E+00			
17	9018.80C (O)	7.8893E-02	8.8748E-02	7.8893E-02	0.033435821		
18	92235.80C (U235)		8.8707E-08	8.8707E-08			
19	92234.80C (U238)		2.4207E-03	2.4207E-03			
20	04239.85C (Pu239)		6.8548E-04	6.8548E-04			
21	04240.80C (Pu240)		8.8275E-05	8.8275E-06			
22	04241.80C (Pu241)		7.7195E-08	7.7195E-08			
23	11023.80c (Ne)		7.2218E-06	0.0000E+00			
24	13027.80c (Ar)		1.0612E-03	0.0000E+00			
25	20000.80c (Ca)		2.6210E-04	0.0000E+00			
26	19000.80c (K)		3.8743E-04	0.0000E+00			
27	22000.80c (Tl)		1.7291E-04	0.0000E+00			
28	total	1.8480E-01	9.4895E-02	1.8480E-01	1.0031E-01		
29	volume	187984.8046	6145900	1.87984E+05	8502487.723		
30	TOTAL Mixt+ clay	6313484.808			H/X Fuel	H/X mixt	
31	TOTAL Mixt+ clay+water	12816382.33				0	0.0000E+00
32							
33	BMF In the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	z value
34	Fuel layer	12816382.33	481.7	94	7.40278349	187984.8046	-88.58724761
35	Clay layer		481.7	94	92.91348971	6313484.808	-1.066510293
36	water layer		481.7	94	188	12816382.33	94
37							
38							
39							
40							

A	B	C	D	E	F	G	H
41							
42	10% of the HLW mixt with DOE SNF		water fraction	0%			
43	440000	Fuel	Clay	Mixt	Water		
44		density	density	density	1 g/cc		
45	44000.35c	1.7834E-04	1.8979E-04	2.8344E-04			
46	1001.80c (H)	0.0000E+00	6.1248E-03	4.8107E-03	0.088571842		
47	6000.80c (C)	2.0787E-04	1.8979E-07	4.4770E-08			
48	28055.80c (Mn)	1.4998E-03	6.7703E-04	8.5434E-04			
49	15031.80c (P)	8.8858E-05		1.2648E-06			
50	16032.80c (S)	3.8454E-04		8.2941E-04			
51	14000.80c (Si)	1.1002E-03	1.1288E-02	8.0994E-03			
52	24000.80c (Cr)	1.3551E-02	8.0000E+00	2.8000E-03			
53	28000.80c (Ni)	8.5448E-03	2.0677E-04	1.9561E-03			
54	42000.80c (Mo)	1.0184E-03		2.1860E-04			
55	7614.80c (N)	2.9421E-04		8.3183E-06			
56	26000.80c (Fe)	4.8429E-02	1.7881E-02	2.4438E-02			
57	29000.80c (Cu)		1.1072E-06	9.1044E-06			
58	8018.80C (O)	7.8893E-02	8.8744E-02	8.1500E-02	0.033435921		
59	92235.80C (U235)	8.6707E-06		1.2172E-06			
60	92238.80C (U238)	2.4207E-03		8.1961E-04			
61	94239.80C (Pu238)	8.6544E-04		1.4239E-04			
62	94240.80C (Pu240)	8.8278E-05		1.8949E-05			
63	94241.80C (Pu241)	7.7195E-06		1.8870E-06			
64	11023.80c (Na)		7.2215E-05	8.8714E-05			
65	13027.80c (Al)		1.0812E-03	8.4814E-04			
66	20000.80c (Ca)		2.8210E-04	2.0684E-04			
67	19000.80c (K)		3.6743E-04	2.0494E-04			
68	22000.80c (Ti)		1.7291E-04	1.3554E-04			
69	total	1.5680E-01	8.4895E-02	1.0818E-01	1.0031E-01		
70	volume	187984.8040	8331310	7.8257E+06	8502487.723		
71	TOTAL Mart+ clay	6313884.805			H/X Fuel	H/X mid	
72	TOTAL Mart+ clay+water	12816382.33		8.1458E+06	8.3433E+06	0	0.6
73							
74	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value
75	Fuel layer	12816382.33	461.7	84	20.96481596	782570	-73.03618416
76	Clay layer		461.7	84	82.91346971	8313884.806	-1.086510293
77	water layer		461.7	84	186	12816382.33	84
78							
79							
80							

A	B	C	D	E	F	G	H
81							
82							
83	20% of the HLW mixt with DOE SNF		water fraction		0%		
84	Fuel	Clay	Mixt	Water			
85	MCNP ID	efficiency	efficiency	efficiency	1 g/sec		
86	64000.50c	1.7834E-04	1.9879E-08	2.2872E-05			
87	100.50c (H)	0.0000E+00	6.1234E-03	5.3691E-03	0.066871842		
88	9000.50c (C)	2.0787E-04	1.9779E-07	2.5180E-06			
89	25035.50c (Mn)	1.4996E-03	6.7793E-04	7.7871E-04			
90	15031.50c (P)	5.9856E-04		7.1966E-06			
91	16032.50c (S)	3.8858E-03		4.8479E-06			
92	14000.50c (Si)	1.1002E-03	1.1286E-02	1.0061E-02			
93	24000.50c (Cr)	1.3551E-02	0.0000E+00	1.8283E-03			
94	28000.50c (Ni)	8.3488E-03	2.0677E-04	1.1874E-03			
95	42000.50c (Mo)	1.0184E-03		1.2244E-04			
96	7014.50c (N)	2.9421E-04		3.5374E-06			
97	28000.55c (Fe)	4.8426E-02	1.7881E-02	2.1833E-02			
98	28000.50c (Cu)			1.1672E-05	1.0219E-05		
99	4016.50C (O)	7.8893E-02	8.8744E-02	8.9409E-02	0.033435821		
100	92235.50C (U235)	8.8707E-08		6.8180E-07			
101	92238.50C (U238)	2.4207E-03		2.9104E-04			
102	94239.55C (Pu239)	8.8564E-04		8.0024E-05			
103	94240.50C (Pu240)	8.8275E-05		1.0614E-05			
104	94241.50C (Pu241)	7.7195E-08		8.2814E-07			
105	110223.50c (Ne)		7.2215E-05	8.3532E-05			
106	13027.50c (Al)		1.0812E-03	8.8123E-04			
107	200000.50c (Ca)		2.8210E-04	2.3038E-04			
108	18000.50c (K)		3.8743E-04	3.2326E-04			
109	22000.50c (Tl)		1.7261E-04	1.8104E-04			
110	total	1.8680E-01	9.4195E-02	1.0234E-01	1.0031E-01		
111	volume	187984.8046	4616720	1.3972E+08	8502497.723		
112	TOTAL Mixt+clay	8313884.805			H/X Fuel	H/X mixt	
113	TOTAL Mixt+clay+water	12816382.33		6.1458E+06		0	8.3262E-01
114							
115	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	# value
116	Fuel layer	12816382.33	461.7	94	31.22741776	1387200	-42.77235224
117	Clay layer			461.7	94	92.91344871	8313884.806
118	water layer			461.7	94	168	12816382.33
119					1		94
120							

A	B	C	D	E	F	G	H
121							
122							
123							
124	30% of the HLW mixt with DOE SNF		water fraction	0%		mixt vol. gd	
125	Mixt ID	Fuel	Clay	Mixt	Water		
126		density	density	density		1 g/cc	
127	64000.Sfc	1.7834E-04	1.8979E-08	1.8484E-08			
128	1601.Soc (H)	0 0000E+00	8.1236E-03	8.8141E-03	0.000071842		0.00001408
129	4000.Soc (C)	2.0787E-04	1.8979E-07	1.7631E-06			1.76314E-06
130	25055.Soc (Mn)	1.4996E-03	8.7783E-04	7.4454E-04			0.000746580
131	15031.Soc (P)	8.9856E-05		4.9980E-08			4.99804E-08
132	16032.Soc (S)	3.9658E-08		3.2290E-08			3.22798E-08
133	14000.Soc (S)	1.1002E-03	1.1298E-02	1.0435E-02			0.010435317
134	24000.Soc (Cr)	1.3481E-02	0 0000E+00	1.1316E-03			0.001131584
135	28000.Soc (Ni)	8.3488E-03	2.0877E-04	8.8447E-04			0.000884874
136	42000.Soc (Mo)	1.0184E-03		8.5035E-06			8.50349E-06
137	7014.Soc (H)	2.9421E-04		2.4587E-05			2.45873E-05
138	26000.Sfc (Fe)	4.8426E-02	1.7848E-02	2.0431E-02			0.020431454
139	29000.SOC (Cu)			1.1672E-05	1.0687E-05		1.06874E-08
140	8016.90C (O)	7.8893E-02	8.6744E-02	8.8586E-02	0.033435821		0.058595649
141	82235.BOC (U235)	8.6070E-08		4.7351E-07			4.73511E-07
142	82238.BOC (U238)	2.4207E-03		2.0213E-04			0.000202129
143	84238.SSC (Pu239)	8.6564E-04		8.5545E-05			8.55849E-06
144	84240.SOC (Pu240)	8.8276E-05		7.3711E-06			7.37108E-06
145	84241.SOC (Pu241)	7.7195E-08		6.4459E-07			6.44584E-07
146	11023.Soc (Na)		7.2215E-06	6.6185E-06			6.61849E-06
147	13027.Soc (Al)		1.0012E-03	8.9095E-04			0.000900647
148	20000.Soc (Ca)		2.8210E-04	2.4021E-04			0.000240214
149	19000.Soc (K)		3.6743E-04	3.3875E-04			0.000336781
150	22000.Soc (Ti)		1.7281E-04	1.5820E-04			0.0001582
151	total	1.8680E-01	9.4895E-02	1.0000E-01	1.0031E-01		1.0005E-01
152	volume	167964.8046	4202130	2.0118E+06	6502487.723		
153	TOTAL Mixt+ clay	8313884.805			H/X Fuel	H/X mixt	
154	TOTAL Mixt+ clay+water	12816382.33		8.1459E+06		0	8.5903E-01
155							
156	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value
157	Fuel layer	12816382.33	461.7	94	40.25890774	2011800	-83.74108226
158	Clay layer		461.7	94	82.81348971	8313884.805	-1.086510293
159	water layer		461.7	94	1	188	12816382.33
160							94

A	B	C	D	E	F	G	H
161							
162							
163							
164							
165							
166							
167							
168							
169							
170	1.9000E-01	of the HLW mixt with DOE SNF					
171	Volume	Fuel	Fuel	Fuel	Clay	Mixt	Water
172	MCNP ID	at/density	w/o gd	w/o gd or fo	at/density	at/density	1.0000E+00
173	64000.50c	1.2344E-04	0.0000E+00	0.0000E+00	1.3285E-08	2.7541E-05	
174	1001.50c (H)	2.0082E-02	2.0082E-02	2.0082E-02	2.4349E-02	2.3429E-02	8.8472E-02
175	8000.50c (C)	1.4581E-04	1.4581E-04	1.4581E-04	1.3285E-07	3.1339E-05	
176	28055.50c (Mn)	1.0499E-03	1.0499E-03	1.0499E-03	4.7455E-04	5.9805E-04	
177	18031.50c (P)	4.1899E-05	4.1899E-05	4.1899E-05	0.0000E+00	8.9939E-06	
178	18032.50c (S)	2.7080E-05	2.7080E-05	2.7080E-05	0.0000E+00	5.8067E-06	
179	14000.50c (Si)	7.7012E-04	7.7012E-04	7.7012E-04	7.8001E-03	6.3694E-03	
180	24000.50c (Cr)	8.4860E-03	8.4860E-03	8.4860E-03	0.0000E+00	2.0342E-03	
181	28000.50c (Ni)	8.8442E-03	8.8442E-03	8.8442E-03	1.4816E-04	1.3883E-03	
182	42000.50c (Mo)	7.1263E-04	7.1263E-04	7.1263E-04	0.0000E+00	1.8302E-04	
183	7014.50c (N)	2.0505E-04	2.0505E-04	2.0505E-04	0.0000E+00	4.4206E-05	
184	26000.50c (Fe)	3.3898E-02	3.3898E-02	0.0000E+00	1.2517E-02	1.7108E-02	
185	29000.50c (Cu)	0.0000E+00	0.0000E+00	0.0000E+00	8.1704E-06	8.4166E-06	
186	80116.50c (O)	8.3254E-02	8.3254E-02	1.4409E-02	4.9753E-02	8.3061E-02	3.3436E-02
187	82235.50c (U235)	3.9885E-06	3.9885E-06	3.9885E-06		8.3207E-07	
188	82238.50c (U238)	1.8945E-03	1.8945E-03	1.8945E-03		3.8373E-04	
189	84239.55C (Pu239)	4.6587E-04	4.6587E-04	4.6587E-04		1.0002E-04	
190	84240.50c (Pu240)	8.1782E-05	8.1782E-05	8.1782E-05		1.3264E-05	
191	84241.50C (Pu241)	8.4037E-06	8.4037E-06	8.4037E-06		1.1599E-06	
192	11023.50c (Na)				8.0850E-06	3.9699E-05	
193	13027.50c (Al)				7.5886E-04	8.9440E-04	
194	20000.50c (C4)				1.8347E-04	1.4409E-04	
195	19000.50c (K)				2.8720E-04	2.8189E-04	
196	22000.50c (Tl)				1.2043E-04	9.4893E-06	
197	total	1.3985E-01	1.3073E-01	8.4935E-02	9.6519E-02	1.0582E-01	1.0031E-01
198	volume	2.3898E+06	2.3004E+06	2.3004E+06	7.9019E+06	1.1190E+06	3.7945E+06
199	TOTAL Mixt+clay	9.0194E+00					
200	TOTAL Mixt+clay+water	1.2816E+07					

A	B	C	D	E	F	G	H
201							
202 SNF in the middle	Volume				Length	Radius	Height of the segment
203 Fuel layer	1.2818E+07				4.8170E+02	8.4000E+01	2.6773E+01
204 Clay layer					4.8170E+02	8.4000E+01	1.3444E+02
205 water layer					4.8170E+02	8.4000E+01	1.8800E+02
206							
207							
208							
209	0.0000% of the HLW mixt with DOE SNF	water fraction		88.7368%	mixt w/o Gd Fe	mixt w/o Gd	
210 isotopes	Fuel				Clay	Mixed	Water
211 MCNP ID	atmosphere				atmosphere	atmosphere	1.8000E+00
212 64000.85c	8.8474E-06	0.0000E+00	0.0000E+00		9.3496E-07	8.8474E-06	
213 1001.80c (M)	3.3928E-02	3.3928E-02	3.3928E-02		3.6946E-02	3.3928E-02	6.8472E-02
214 6000.80c (C)	1.0241E-04	1.0241E-04	1.0241E-04		9.3498E-08	1.0241E-04	
215 23053.80c (Mn)	7.3888E-04	7.3888E-04	7.3888E-04		3.3398E-04	7.3888E-04	
216 15031.80c (P)	2.9487E-06	2.9487E-05	2.9487E-05		0.0000E+00	2.9487E-05	
217 16032.80c (S)	1.9044E-05	1.9044E-05	1.9044E-05		0.0000E+00	1.9044E-05	
218 14000.80c (S)	6.4199E-04	6.4199E-04	6.4199E-04		6.8169E-03	6.4199E-04	
219 24000.80c (Cr)	6.6780E-03	6.6780E-03	6.6780E-03		0.0000E+00	6.6780E-03	
220 28000.80c (Ni)	4.1130E-03	4.1130E-03	4.1130E-03		1.0265E-04	4.1130E-03	
221 42000.80c (Mo)	6.0169E-04	6.0169E-04	6.0169E-04		0.0000E+00	6.0169E-04	
222 7014.80c (N)	1.4494E-04	1.4494E-04	1.4494E-04		0.0000E+00	1.4494E-04	
223 26000.85c (Fe)	2.3854E-02	2.3854E-02	2.3854E-02		8.8099E-03	2.3854E-02	
224 29000.80C (Cu)	0.0000E+00	0.0000E+00	0.0000E+00		6.7801E-06	0.0000E+00	
225 8016.80C (O)	5.8430E-02	5.8430E-02	5.8430E-02		4.4820E-02	5.8430E-02	3.3438E-02
226 #2238.80C (U235)	2.7934E-08	2.7934E-08	2.7934E-08			2.7934E-08	
227 #2234.80C (U238)	1.1923E-03	1.1923E-03	1.1923E-03			1.1923E-03	
228 #4239.85C (Pu239)	3.2794E-04	3.2794E-04	3.2794E-04			3.2794E-04	
229 #4240.80C (Pu240)	4.3488E-05	4.3488E-05	4.3488E-05			4.3488E-05	
230 #4241.80C (Pu241)	3.8030E-06	3.8030E-06	3.8030E-06			3.8030E-06	
231 11023.80c (Na)					3.8578E-06	0.0000E+00	
232 13027.80c (A)					6.3266E-04	0.0000E+00	
233 20000.80c (Ca)					1.2912E-04	0.0000E+00	
234 19000.80c (K)					1.8101E-04	0.0000E+00	
235 22000.80c (Tl)					8.5037E-06	0.0000E+00	
236 total	1.2814E-01	1.2806E-01	8.8411E-02		9.7641E-02	1.2814E-01	1.0031E-01
237 volume	3.4099E+06	3.4099E+05	3.4099E+05		1.2478E+07	3.4099E+08	-3.5577E-07
238 TOTAL Mixt+clay	1.2816E+07			1			
239 TOTAL Mixt+clay+water	1.2816E+07						
240							

I	J	K	L	M	N	O	P
1	6.8000%	of the HLW mix with DCE SNF	water fraction	16.8000%			
2	heatupe	Fuel	Clay	Mix	Water		
3	MCNP ID	atdensity	atdensity	atdensity	1.8000E+00	g/cm3	
4	64000.50c	1.8871E-04	1.7081E-06	1.8871E-04			
5	1801.50c (M)	6.8472E-03	1.2200E-02	6.8472E-03	6.8472E-02		
6	6000.50c (C)	1.8708E-04	1.7081E-07	1.8708E-04			
7	25055.50c (Mn)	1.3499E-03	8.1014E-04	1.3499E-03			
8	1801.50c (P)	6.3478E-06	8.0000E+00	6.3478E-06			
9	18032.50c (S)	3.4782E-05	0.0000E+00	3.4782E-05			
10	14000.50c (Si)	9.8015E-04	1.9157E-02	9.8015E-04			
11	24000.50c (Cr)	1.2198E-02	0.0000E+00	1.2198E-02			
12	28000.50c (Ni)	7.8139E-03	1.8789E-04	7.8139E-03			
13	42000.50c (Mo)	9.1653E-04	0.0000E+00	9.1653E-04			
14	7014.50c (N)	2.6479E-04	8.0000E+00	2.6479E-04			
15	26000.50c (Fe)	4.3583E-02	1.8093E-02	4.3583E-02			
16	29000.50C (Cu)	0.0000E+00	1.0508E-05	0.0000E+00			
17	8016.50C (O)	7.4347E-02	5.4415E-02	7.4347E-02	3.3438E-02		
18	82233.50C (U235)	5.1038E-06		5.1038E-06			
19	82238.50C (U238)	2.1784E-03		2.1784E-03			
20	84239.85C (Pu239)	8.9911E-04		8.9911E-04			
21	84240.80C (Pu240)	7.9447E-05		7.9447E-05			
22	84241.80C (Pu241)	8.9478E-06		8.9478E-06			
23	11023.50c (Na)		8.4993E-06	0.0000E+00			
24	13027.50c (Al)		8.7311E-04	0.0000E+00			
25	20000.50c (Ca)		2.3588E-04	0.0000E+00			
26	19000.50c (Ti)		3.3069E-04	0.0000E+00			
27	22000.50c (Tl)		1.5533E-04	0.0000E+00			
28	total	1.8116E-01	9.8430E-02	1.8116E-01	1.0031E-01		
29	volume	1.8445E+05	6.8288E+06	1.8445E+06	8.8010E+06		
30	TOTAL Mix> clay	7.0154E+06			H/X Fuel	H/X mbd	
31	TOTAL Mix> clay+water	1.2618E+07				11.06782038	7.8500E-01
32							
33	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	s value
34	Fuel layer	1.2818E+07	4.8170E+02	8.4000E+01	7.9442E+00	1.9465E+05	-44.05384749
35	Clay layer				1.8100E+02	7.9154E+06	7.002008452
36	water layer				1.8400E+02	1.2618E+07	94
37							
38							
39							
40							





I	J	K	L	M	N	O	P
121							
122							
123							
124	30.0000% of the HLW mixt with DOE SNF		water fraction	18.8000%			
125	isotope	Fuel	Clay	Mixed	Water		
126	MCMC ID	at/density	at/density	at/density	1.8000E+00 g/cc		
127	84.000 .36c	1.5471E-04	1.7081E-04	1.4818E-04			
128	1001.50c (H)	8.8872E-03	1.2280E-02	1.1740E-02	8.8872E-02		
129	8000.50c (C)	1.8708E-04	1.7081E-07	1.5778E-06			
130	25003.50c (Mn)	1.3498E-03	6.1014E-04	6.7190E-04			
131	19031.50c (P)	8.3470E-05		4.4882E-06			
132	16032.50c (S)	3.4782E-05		2.8042E-06			
133	14000.50c (Si)	9.9018E-04	1.6187E-02	9.3618E-03			
134	24000.50c (Cr)	1.2196E-02		1.0184E-03			
135	26000.50c (Ni)	7.8198E-03	1.8789E-04	7.9943E-04			
136	42000.50c (Mo)	9.1833E-04		7.8531E-05			
137	7014.50c (N)	2.6479E-04		2.2111E-05			
138	26000.50c (Fe)	4.3883E-02	1.8093E-02	1.8348E-02			
139	26000.50c (Cu)	0.0000E+00	1.0605E-04	9.6277E-06			
140	8018.50c (O)	7.4347E-02	8.4415E-02	8.8080E-02	3.3436E-02		
141	92235.50C (U235)	8.1034E-06		4.2616E-07			
142	92238.50C (U238)	2.1788E-03		1.8182E-04			
143	94238.50C (Pu239)	8.9911E-04		5.0020E-05			
144	94240.50C (Pu240)	7.9447E-05		6.8340E-06			
145	94241.50C (Pu241)	8.8478E-06		8.8013E-07			
146	11023.50c (Na)	6.4893E-08		6.9544E-09			
147	13027.50c (Al)	8.7311E-04		8.8185E-04			
148	20000.50c (Ca)	2.3549E-04		2.1819E-04			
149	19000.50c (K)		3.3069E-04	3.0306E-04			
150	22000.50c (Tl)		1.8833E-04	1.4234E-04			
151	total	1.8118E-01	9.8436E-02	1.8009E-01	1.0031E-01		
152	volume	1.8645E+06	4780144.444	2.2353E+06	8.8010E+06		
153	TOTAL Milt+ clay	7.0154E+06			H/X Fuel	H/X mixt	
154	TOTAL Milt+ clay+water	1.2818E+07				11.06782035	1.3781E+00
155							
156	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	z value
157	Fuel layer	1.2818E+07	4.8170E+02	9.4000E+01	4.3358E+01	2.2353E+06	50.8448087
158	Clay layer		4.8170E+02	9.4000E+01	1.8100E+02	7.0154E+06	7.002008452
159	water layer		4.8170E+02	9.4000E+01	11.8800E+02	1.2818E+07	94
160							











Q	R	S	T	U	V	W
121						
122						
123						
124	20.0000%	of the HLW mixt with DOE SNF	water fractions	20.0000%		
125	stage	Fuel	Clay	Mixt	Water	
126	SNCF ID	density	density	density	1.0000E+00	g/cs
127	44000 Soc	1.4107E-04	1.5183E-08	1.3171E-05		
128	1001.80c (H)	1.3374E-02	1.8278E-02	1.7986E-02	6.6872E-02	
129	40000 Soc (C)	1.6830E-04	1.5183E-07	1.4025E-06		
130	25068 Soc (Mn)	1.1995E-03	8.4234E-04	8.9725E-04		
131	15031.80c (P)	4.7885E-05		3.9984E-06		
132	16032.80c (S)	3.0626E-05		2.8424E-06		
133	14000 Soc (Si)	8.8013E-04	9.0297E-03	8.3463E-03		
134	24000 Soc (Cr)	1.0641E-02		9.8525E-04		
135	28000 Soc (Ni)	6.6780E-03	1.8701E-04	7.1078E-04		
136	42000 Soc (Mo)	8.1469E-04		8.8028E-05		
137	7014.80c (N)	2.3537E-04		1.9854E-05		
138	26000 Soc (Fe)	3.8740E-02	1.4305E-02	1.8345E-02		
139	28000 Soc (Cu)	0.0000E+00	9.3370E-06	8.8579E-06		
140	8018.80C (O)	8.9001E-02	8.2084E-02	8.3564E-02	3.3438E-02	
141	82235.80C (U235)	4.5363E-06		3.7841E-07		
142	82238.80C (U238)	1.8343E-03		1.8170E-04		
143	94238.85C (Pu238)	8.3254E-04		4.4468E-05		
144	94240.80C (Pu240)	7.0620E-05		5.8959E-06		
145	94241.80C (Pu241)	8.1754E-06		8.1567E-07		
146	11023.80c (Na)		6.7772E-06	8.2944E-06		
147	13027.80c (Al)		8.8498E-04	7.8278E-04		
148	20000.80c (Ca)		2.0648E-04	1.8217E-04		
149	18000.80c (K)		2.9385E-04	2.6940E-04		
150	22000.80c (Tl)		1.3608E-04	1.2634E-04		
151	total	1.4580E-01	8.5877E-02	8.0011E-01	1.0031E-01	
152	volume	2.0994E+05	8.3777E+06	2.5147E+06	4.8240E+06	
153	TOTAL Mixt+ clay	7.8924E+06			H/X Fuel	H/X mixt
154	TOTAL Mixt+ clay+water	1.2818E+07				24.90214578 2.0672E+00
155						
156	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume x value
157	Fuel layer	1.2818E+07	4.6170E+02	8.4000E+01	4.7121E+01	2.5147E+06 -46.87821944
158	Clay layer				1.1120E+02	7.8824E+06 17.19565293
159	water layer				1.8800E+02	1.2816E+07 94
160						



O	R	S	T	U	V	W	X
201							
202							
203							
204							
205							
206							
207							
208							
209							
210							
211							
212							
213							
214							
215							
216							
217							
218							
219							
220							
221							
222							
223							
224							
225							
226							
227							
228							
229							
230							
231							
232							
233							
234							
235							
236							
237							
238							
239							
240							

Y	Z	AA	AB	AC	AD	AE	AF
1	0.0000% of the HLW mixt with DOE 840 <sup>r</sup>		water fraction	30.000%			
2	isotope	Fuel	Clay	Mild	Water		
3	MCNP ID	attnosity	attnosity	attnosity	1.000E+00	g/sec	
4	64000.35c	1.2344E-04	1.3285E-08	1.2344E-04			
5	1001.50c (H)	2.0042E-02	2.4349E-02	2.0032E-02	6.6472E-02		
6	0000.50c (C)	1.4551E-04	1.3285E-07	1.4551E-04			
7	23055.50c (Mn)	1.0496E-03	4.7453E-04	1.0496E-03			
8	15031.50c (P)	4.1899E-05	0.0000E+00	4.1899E-05			
9	16032.50c (S)	2.7080E-06	0.0000E+00	2.7080E-06			
10	14000.50c (Si)	7.7012E-04	7.1801E-03	7.7012E-04			
11	24000.50c (Cr)	8.4880E-03	0.0000E+00	8.4880E-03			
12	26000.50c (Ni)	8.8442E-03	1.4614E-04	8.8442E-03			
13	42000.50c (Mo)	7.1268E-04	0.0000E+00	7.1268E-04			
14	7014.50c (N)	2.0595E-04	0.0000E+00	2.0595E-04			
15	26000.55c (Fe)	3.3898E-02	1.2517E-02	3.3898E-02			
16	29000.50c (Cu)	0.0000E+00	8.1704E-08	0.0000E+00			
17	9018.50c (O)	6.8254E-02	4.9753E-02	6.8254E-02	3.3434E-02		
18	U2235.50C (U235)	3.8691E-08		3.8691E-08			
19	U2234.50C (U234)	1.8945E-03		1.8945E-03			
20	84238.55C (Pu239)	4.8597E-04		4.8597E-04			
21	84240.50C (Pu240)	6.1792E-06		6.1792E-06			
22	84241.50C (Pu241)	8.4037E-08					
23	11023.50c (Na)	6.0560E-05	0.0000E+00				
24	13027.50c (Al)	2.9888E-04	0.0000E+00				
25	20000.50c (Ca)	1.8347E-04	0.0000E+00				
26	18000.50c (K)	2.8720E-04	0.0000E+00				
27	22000.50c (Tl)	1.2083E-04	0.0000E+00				
28	total	1.3003E-01	8.6519E-02	1.3003E-01	1.0031E-01		
29	volume	2.3988E+05	8.7799E+05	2.3988E+05	3.7948E+05		
30	TOTAL_Mild+clay	8.0198E+06			H/X Fuel	H/X Mild	
31	TOTAL_Mild+clay+water	1.2816E+07			42.69936278	2.3480E+00	
32							
33	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value
34	Fuel layer	1.2816E+07	4.6170E+02	9.4000E+01	8.4108E+00	2.3998E+05	-84.58935418
35	Clay layer		4.6170E+02	9.4000E+01	1.2484E+02	9.0198E+05	30.83932917
36	water layer		4.6170E+02	9.4000E+01	1.8800E+02	1.2816E+07	94
37					1		
38							
39							
40							











AG	AH	AI	AJ	AK	AL	AM	AN
1	9.9999%	of the HLW mixt with DOE BMF	water fraction	40.0000%			
2	Neutrons	Fuel	Clay	Mixed	Water		
3	MCMNP ID	at/density	at/density	at/density	1.0000E+00	g/cc	
4	64000.30c	1.0581E-04	1.1387E-04	1.0681E-04			
5	1001.50c (H)	2.6749E-02	3.0424E-02	2.6749E-02	6.6872E-02		
6	4000.50c (C)	1.2472E-04	1.1387E-07	1.2472E-04			
7	21055.50c (Mn)	8.9990E-04	4.0675E-04	8.9990E-04			
8	15031.50c (P)	3.5813E-05	6.0000E+00	3.5813E-05			
9	16032.50c (S)	2.3105E-05	6.0000E+00	2.3105E-05			
10	14000.50c (Si)	6.6010E-04	6.7718E-03	6.6010E-04			
11	24000.50c (Cr)	8.1309E-03	6.0000E+00	8.1309E-03			
12	28000.50c (M)	8.0091E-03	1.2538E-04	8.0091E-03			
13	42000.50c (Mo)	8.1102E-04	6.0000E+00	8.1102E-04			
14	7014.50c (M)	1.7833E-04	6.0000E+00	1.7833E-04			
15	26000.50c (Fe)	2.8055E-02	1.8729E-02	2.8055E-02			
16	29000.50C (Cu)	6.0000E+00	7.0032E-06	6.0000E+00			
17	6016.50C (O)	6.0710E-02	4.7422E-02	6.0710E-02	3.3438E-02		
18	92233.50C (U235)	3.4024E-06		3.4024E-06			
19	92234.50C (U234)	1.4524E-03		1.4524E-03			
20	94238.55C (Pu239)	3.9941E-04		3.9941E-04			
21	94240.50C (Pu240)	8.2985E-06		8.2985E-05			
22	94241.50C (Pu241)	4.6317E-08		4.6317E-08			
23	11023.50c (Na)		4.3329E-05	8.0000E+00			
24	13027.50c (Al)		6.4874E-04	8.0000E+00			
25	20000.50c (Ca)		1.8726E-04	8.0000E+00			
26	19000.50c (K)		2.2044E-04	8.0000E+00			
27	22000.50c (Tl)		1.0387E-04	8.0000E+00			
28	total	1.3420E-01	9.7060E-02	1.3420E-01	1.0031E-01		
29	volume	2.7987E+05	1.0243E+07	2.7987E+06	2.2932E+06		
30	TOTAL Mat+ clay	1.0623E+07			H/X Fuel	H/X mat	
31	TOTAL Mat+ clay+water	1.2818E+07			88.40572207	3.1400E+00	
32							
33	BMF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	R value
34	Fuel layer	1.2818E+07	4.6170E+02	8.4000E+01	1.0441E+01	2.7987E+05	-83.6891
35	Clay layer			4.6170E+02	8.4000E+01	1.4385E+02	1.6823E+07
36	water layer			4.6170E+02	8.4000E+01	1.8800E+02	1.2616E+07
37							94.0000
38							
39							
40							



AG	AH	AI	AJ	AK	AL	AM	AN
81							
82							
83	20.000%	of the HLW mixt with DOE BNf		water fraction	40.000%		
84	Feat	Clay	Mixt	Water			
85	MCNP ID	at/density	at/density	at/density	1.0000E+00	Bdcs	
86	44000.35c	1.0681E-04	1.1387E-08	1.3723E-08			
87	1001.80c (H)	2.8749E-02	3.9424E-02	2.9882E-02	6.8872E-02		
88	0000.80c (C)	1.2472E-04	1.1387E-07	1.5094E-04			
89	25035.80c (Mn)	8.9990E-04	4.0876E-04	4.9805E-04			
90	15031.80c (P)	3.9913E-05	0.0000E+00	4.3180E-04			
91	18032.80c (S)	2.3195E-05	0.0000E+00	2.7888E-08			
92	14000.80c (Si)	6.8010E-04	6.7716E-03	6.9367E-03			
93	24000.80c (Cr)	8.1300E-03	0.0000E+00	9.7798E-04			
94	28000.80c (M)	8.0083E-03	1.2426E-04	7.1244E-04			
95	42000.80c (Mo)	8.1102E-04	0.0000E+00	7.3444E-06			
96	7014.80c (N)	1.7853E-04	0.0000E+00	2.1224E-05			
97	28000.85c (Fe)	2.9054E-02	1.0729E-02	1.2932E-02			
98	28000.80C (Cu)	0.0000E+00	7.0032E-08	6.1612E-08			
99	8018.80C (O)	8.0710E-02	4.7422E-02	4.9020E-02	3.3438E-02		
100	92238.80C (U235)	3.4024E-08		4.9608E-07			
101	92238.80C (U238)	1.4824E-03		1.7463E-04			
102	94238.85C (Pu239)	3.9941E-04		4.8022E-05			
103	94240.80C (Pu240)	8.2965E-05		8.3661E-06			
104	94241.80C (Pu241)	4.8317E-06		8.5848E-07			
105	11023.80c (Na)		4.3329E-05	3.9119E-05			
106	13027.80c (Al)		8.4874E-04	8.7074E-04			
107	20000.80c (Ca)		1.5728E-04	1.3833E-04			
108	19000.80c (K)		2.2046E-04	1.9385E-04			
109	22000.80c (Tl)		1.0357E-04	8.1116E-05			
110	total	1.3420E-01	8.7060E-02	1.8153E-01	1.0031E-01		
111	volume	2.7997E+05	8.1945E+06	2.3294E+06	2.2932E+06		
112	TOTAL Mixt+ clay	1.0523E+07			H/X Fuel	H/X mixt	
113	TOTAL Mixt+ clay+water	1.2816E+07				66.40572207	3.8198E+00
114							
115	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	Z value
116	Fuel layer	1.2816E+07	4.8170E+02	9.4000E+01	4.4625E+01	2.3298E+08	-49.37533068
117	Clay layer			4.8170E+02	9.4000E+01	1.4385E+02	1.0623E+07
118	water layer			4.8170E+02	9.4000E+01	1.8800E+02	1.2816E+07
119						1	
120							



AG	AH	AI	AJ	AK	AL	AM	AN
161							
162							
163							
164							
165							
166							
167							
168							
169							
170							
171							
172							
173							
174							
175							
176							
177							
178							
179							
180							
181							
182							
183							
184							
185							
186							
187							
188							
189							
190							
191							
192							
193							
194							
195							
196							
197							
198							
199							
200							



AO	AP	AO	AR	AS	AT	AU
1	9.5000% of the HLW melt with DOE SNF		water fraction	88.7348%	mixt w/o Cd Fe	mixt w/o Cd
2	halope	Fuel	Clay	Mixt	Water	
3	MCMF ID	at/density	at/density	1.0000E+00		
4	64000.50c (H)	8.8874E-05	8.3498E-07	8.8874E-05		0.0000E+00
5	1001.50c (H)	3.3628E-02	3.8848E-02	3.3628E-02	6.8872E-02	3.3628E-02
6	6000.50c (C)	1.0241E-04	9.3498E-08	1.0241E-04		1.0241E-04
7	23058.50c (Mn)	7.3888E-04	5.3308E-04	7.3888E-04		7.3888E-04
8	18031.50c (P)	2.9487E-05	0.0000E+00	2.9487E-05		2.9487E-05
9	18032.50c (S)	1.9044E-05	0.0000E+00	1.9044E-05		1.9044E-05
10	14000.50c (Si)	5.4199E-04	5.5599E-03	5.4199E-04		5.4199E-04
11	24000.50c (Cr)	8.6780E-03	0.0000E+00	8.6780E-03		8.6780E-03
12	28000.50c (Nb)	4.1130E-03	1.0285E-04	4.1130E-03		4.1130E-03
13	42000.50c (Mo)	8.0168E-04	0.0000E+00	8.0168E-04		8.0168E-04
14	7014.50c (N)	1.4494E-04	0.0000E+00	1.4494E-04		1.4494E-04
15	28000.55c (Fe)	2.3856E-02	8.8088E-03	2.3856E-02		2.3856E-02
16	28000.50c (Cu)	0.0000E+00	5.7801E-08	0.0000E+00		0.0000E+00
17	6018.50C (O)	8.5830E-02	4.4920E-02	8.5830E-02	3.3436E-02	2.0045E-02
18	92235.50C (U235)	2.7938E-06		2.7938E-06		2.7938E-06
19	92234.50C (U238)	1.1825E-03		1.1825E-03		1.1825E-03
20	64239.55C (Pu238)	3.2794E-04		3.2794E-04		3.2794E-04
21	64240.50C (Pu240)	4.3488E-05		4.3488E-05		4.3488E-05
22	64241.50C (Pu241)	3.8030E-08		3.8030E-08		3.8030E-08
23	11023.50c (Na)		5.5578E-05	0.0000E+00		0.0000E+00
24	13027.50c (Al)		5.3298E-04	0.0000E+00		0.0000E+00
25	20000.50c (Ca)		1.2912E-04	0.0000E+00		0.0000E+00
26	18000.50c (K)		1.8101E-04	0.0000E+00		0.0000E+00
27	22000.50c (Tl)		8.8037E-06	0.0000E+00		0.0000E+00
28	total	1.2814E-01	9.7641E-02	1.2814E-01	1.0031E-01	8.8411E-02
29	volume	3.4099E+05	1.3478E+07	3.4099E+05	-3.5577E-07	
30	TOTAL Mixt+ clay	1.2816E+07			H/X Fuel	H/X mixt
31	TOTAL Mixt+ clay+water	1.2816E+07				102.5841668
32						3.9428E+00
33	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume
34	Fuel layer	1.2818E+07	4.6170E+02	9.4000E+01	1.1827E+01	3.4099E+05
35	Clay layer		4.6170E+02	9.4000E+01	1.8800E+02	1.2816E+07
36	water layer		4.6170E+02	9.4000E+01	1.8800E+02	1.2816E+07
37						
38						
39						
40						

AO	AP	AQ	AR	AS	AT	AU
41						
42	10.0000%	of the HLW mixd with DOE BNF		water fraction	00.7358%	
43	topsope	Fuel	Clay	MLst	Water	
44	MICNP ID	atmosphy	atmosphy	atmosphy	1.0000E+00	g/sec
45	64000.50c	8.8874E-05	9.3498E-07	1.9342E-06		
46	1001.50c (H)	3.3824E-02	3.8844E-02	3.6234E-02	6.8872E-02	
47	8000.50c (C)	1.0241E-04	9.3498E-08	2.2058E-08		
48	26066.50c (Mn)	7.3884E-04	3.3398E-04	4.2049E-04		
49	15031.50c (P)	2.8487E-05	0.0000E+00	8.3397E-08		
50	16032.50c (S)	1.9044E-05	0.0000E+00	4.0480E-08		
51	14000.50c (Si)	8.4199E-04	8.5599E-03	4.4828E-03		
52	24000.50c (Cr)	8.8760E-03	0.0000E+00	1.4330E-03		
53	28000.50c (Mg)	4.1130E-03	1.0285E-04	9.6345E-04		
54	42000.50c (Mo)	8.0168E-04	0.0000E+00	1.5769E-04		
55	7014.50c (N)	1.4484E-04	0.0000E+00	3.1113E-04		
56	26000.50c (Fe)	2.3856E-02	8.8098E-03	1.2039E-02		
57	28000.50c (Cu)	0.0000E+00	9.7301E-08	4.5154E-08		
58	6018.50c (O)	6.8430E-02	4.4920E-02	4.7262E-02	3.3436E-02	
59	92235.50c (U235)	2.7936E-06		8.9967E-07		
60	92238.50c (U238)	1.1925E-03		2.8594E-04		
61	94239.50c (Pu239)	3.2784E-04		7.0384E-06		
62	94240.50c (Pu240)	4.3488E-05		9.3349E-06		
63	94241.50c (Pu241)	3.8030E-06		8.1633E-07		
64	11023.50c (Na)	3.5578E-05		2.7939E-05		
65	13027.50c (Al)	9.3266E-04		4.1832E-04		
66	20000.50c (Ca)	1.2912E-04		1.0140E-04		
67	18000.50c (K)	1.8101E-04		1.4219E-04		
68	22000.50c (Tl)	8.6037E-06		8.6783E-06		
69	total	1.2814E-01	8.7841E-02	1.0419E-01	1.0031E-01	
70	volume	3.4099E+06	1.1229E+07	1.5883E+08	7.3442E+00	
71	TOTAL Mat+ clay	1.2816E+07			HX Fuel	HX mixt
72	TOTAL Mat+ clay+water	1.2818E+07				102.5840499 4.2610E+00
73						
74	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume
75	Fuel layer	1.2816E+07	4.6170E+02	9.4000E+01	3.4136E+01	1.5883E+08 -50 86444375
76	Clay layer				1.8800E+02	1.2816E+07 84
77	water layer				1.8800E+02	1.2816E+07 84
78						
79						
80						

AO	AP	AQ	AR	AS	AT	AU
81						
82						
83	20.0000% of the HLW mixt with DOE BMF		water fraction	88.7368%		
84	Neutropo	Fuel	Clay	Mixt	Water	
85	MCNP ID	efficiency	efficiency	efficiency	1.0000E+00	g/ds
86	44000.50c	8.6874E-06	8.3498E-07	1.1264E-04		
87	1001.50c (M)	3.3829E-02	3.8946E-02	2.8883E-02	8.6872E-02	
88	6000.50c (C)	1.0241E-04	9.3498E-04	1.2395E-04		
89	28055.50c (Mn)	7.3888E-04	3.3398E-04	3.8294E-04		
90	15031.50c (Fe)	2.9487E-05	0.0000E+00	3.5413E-04		
91	18032.50c (S)	1.9044E-03	0.0000E+00	2.2394E-04		
92	14000.50c (Si)	8.4199E-04	8.5899E-03	4.9564E-03		
93	24000.50c (Cr)	6.6780E-03	0.0000E+00	8.0267E-04		
94	28000.50c (Ni)	4.1130E-03	1.0215E-04	8.8500E-04		
95	42000.50c (Mo)	8.0189E-04	0.0000E+00	6.0319E-04		
96	7014.50c (N)	1.4494E-04	0.0000E+00	1.7427E-04		
97	26000.85c (Fe)	2.3654E-02	8.8089E-03	1.0619E-02		
98	28000.50c (Cu)	0.0000E+00	8.7301E-06	8.0648E-06		
99	8016.80c (O)	8.8830E-02	4.4920E-02	4.8231E-02	3.3436E-02	
100	92235.50C (U235)	2.7834E-06		3.3568E-07		
101	92238.50C (U238)	1.1823E-03		1.4338E-04		
102	94238.50C (Pu238)	3.2784E-04		3.9429E-06		
103	94240.50C (Pu240)	4.3488E-05		6.2287E-06		
104	94241.50C (Pu241)	3.8030E-05		4.8724E-07		
105	11023.50c (Na)		3.8876E-06	3.1299E-05		
106	13027.50c (Al)		8.3266E-04	4.8862E-04		
107	20000.50c (Ca)		1.2912E-04	1.1380E-04		
108	18000.50c (K)		1.8101E-04	1.9825E-04		
109	22000.50c (Ti)		8.6037E-05	7.4612E-05		
110	total	1.2814E-01	8.7041E-02	1.0131E-01	1.0031E-01	
111	volume	3.4099E+05	9.9403E+06	2.8361E+06	7.3442E+00	
112	TOTAL Mat+ clay	1.2816E+07			H/X Fuel	H/X mixt
113	TOTAL Mat+ clay+water	1.2816E+07			102.5840496	4.2944E+00
114						
115	BMF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume
116	Fuel layer	1.2816E+07	4.8170E+02	8.4000E+01	8.1333E+01	2.8361E+06
117	Clay layer		4.8170E+02	8.4000E+01	1.8800E+02	1.2816E+07
118	water layer		4.8170E+02	8.4000E+01	1.8800E+02	1.2816E+07
119					1	
120						

AO	AP	AQ	AR	AS	AT	AU
121						
122						
123						
124	38.8000%	of the HLW mixt with DOE BMF	water fraction	69.7358%		
125	Isootope	Fuel	Mist	Water		
126	MCMNP ID	st/density	st/density	st/density	1.0000E+00	g/cc
127	64000.80c	8.84874E-05	9.3498E-07	8.1110E-08		
128	1601.80c (H)	3.3628E-02	3.8948E-02	2.0034E-02	8.6872E-02	
129	4000.80c (C)	1.0241E-04	9.3498E-06	8.6367E-08		
130	25065.80c (Mn)	7.3688E-04	3.3398E-04	3.8779E-04		
131	15031.80c (P)	2.9487E-05	0.0000E+00	2.4822E-04		
132	16032.80c (S)	1.9044E-05	0.0000E+00	1.8902E-06		
133	14000.80c (Si)	8.4199E-04	8.8549E-03	8.1409E-03		
134	24000.80c (Cr)	8.8790E-03	0.0000E+00	8.8744E-04		
135	29000.80c (Ni)	4.1130E-03	1.0285E-04	4.3770E-04		
136	42000.80c (Mo)	8.0109E-04	0.0000E+00	4.1992E-03		
137	7014.80c (N)	1.4494E-04	0.0000E+00	1.2103E-06		
138	26000.80c (Fe)	2.3856E-02	8.8081E-03	1.0064E-02		
139	29000.80c (Cu)	0.0000E+00	8.7601E-06	8.2700E-06		
140	6018.80c (O)	8.5830E-02	4.4920E-02	4.5831E-02	3.9438E-02	
141	92238.80c (U238)	2.7834E-06		2.3327E-07		
142	92238.85C (Pu239)	1.1923E-03		8.8577E-05		
143	94239.85C (Pu239)	3.2794E-04		2.7349E-06		
144	94240.80C (Pu240)	4.3488E-05		3.6313E-06		
145	94241.80C (Pu241)	3.8030E-06		3.1755E-07		
146	11023.80c (Me)		3.8576E-05	3.2605E-06		
147	13027.80c (Al)		6.3296E-04	4.8418E-04		
148	20000.80c (Ca)		1.2912E-04	1.1834E-04		
149	18000.80c (Ti)		1.8101E-04	1.8590E-04		
150	22000.80c (Tl)		8.5037E-05	7.7934E-05		
151	total	1.2814E-01	9.7641E-02	1.0018E-01	1.0031E-01	
152	volume	3.4099E+05	8.7328E+06	4.0436E+06	7.3442E+00	
153	TOTAL Mist+ clay	1.2816E+07			H/X Fuel	H/X mist
154	TOTAL Mist+ clay+water	1.2816E+07				102.5840499
155						4.3074E+00
156	BMF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume
157	Fuel layer	1.2816E+07	4.8170E+02	9.4000E+01	6.6836E+01	4.0636E+06
158	Clay layer		4.8170E+02	8.4000E+01	1.8800E+02	1.2816E+07
159	water layer		4.8170E+02	9.4000E+01	1.8800E+02	1.2816E+07
160						94

	AO	AP	AQ	AR	AS	AT	AU
161							
162							
163	***						
164							
165							
166							
167							
168							
169							
170							
171							
172							
173							
174							
175							
176							
177							
178							
179							
180							
181							
182							
183							
184							
185							
186							
187							
188							
189							
190							
191							
192							
193							
194							
195							
196							
197							
198							
199						1	
200							

	AO	AP	AO	AR	AS	AT	AU
201							
202							
203							
204							
205							
206							
207							
208							
209							
210							
211							
212							
213							
214							
215							
216							
217							
218							
219							
220							
221							
222							
223							
224							
225							
226							
227							
228							
229							
230							
231							
232							
233							
234							
235							
236							
237							
238							
239							
240							

	A	B	C	D	E	F	G	H	I	J	K	L
1												
2	hematite forms at 10.35 1000s of years +					0 *100 % of water		total volume	6145800	cc	tot mass	23621.4
3												
4	p=	3.892	kg/l			No=	6.02E-01	aVb/cm				
5	isotopes	Atomic Mass	MCP ID	Molar%	mass (g)	number densities (atmbar/cm)		Volume=	8E+06	cc	mass	
6	H	1.00782518	1001.50c	0.4551	0.30E+04	6.13E-03			6.1254E-03			968471.99
7	C	12.01115	4000.50c	0.0002	2.33E+01	1.90E-07			1.8879E-07			
8	O	15.994915	8016.50c	88.7903	9.29E+00	8.87E-02			8.8744E-02			
9	Na	22.9897707	11023.50c	0.0761	1.88E+04	7.22E-05			7.2215E-05			
10	Al	26.9815368	13027.50c	1.1394	2.98E+00	1.08E-03			1.0812E-03			
11	Si	28.084	14000.50c	11.933	2.23E+08	1.13E-02			1.1244E-02			
12	Ca	40.08	20000.50c	0.2762	1.07E+05	2.62E-04			2.6210E-04			
13	K	39.102	18000.50c	0.3672	1.47E+05	3.07E-04			3.0743E-04			
14	Ti	47.9	22000.50c	0.1819	8.44E+04	1.73E-04			1.7281E-04			
15	Mn	54.9380503	25055.50c	0.7144	3.80E+05	6.78E-04			6.7793E-04			
16	Fe	55.847	26000.50c	18.8429	1.02E+07	1.79E-02			1.7881E-02			
17	Ni	58.71	28000.50c	0.22	1.25E+05	2.09E-04			2.0877E-04			
18	Cu	63.54	28000.50c	0.0123	7.87E+03	1.17E-05			1.1672E-05			
19	Gd	157.25	84000.35c	0.002	3.04E+03	1.80E-06			1.8979E-06			
20				100	23921400	0.09448478			9.4895E-02		tot moles	
21												
22	water				mass (g)	number densities (atmbar/cm)						
23	p=	1 kg/l			No=	6.02E-01	aVb/cm	Volume=	0 cc	mass		
24	H	1.00782518	1001.50c	200	0.00E+00	0.00E+00						1 mol is
25	O	15.994915	8016.50c	100	0.00E+00	0.00E+00						0.00E+00
26					0.00E+00	0.00E+00						
27												
28												
29												
30												
31												
32												
33												
34												
35												
36												
37												
38	hematite forms at 10.35 1000s of years +				0.25 *100 % of water		total volume	6194533.333	cc	tot mass		104833.1
39						1			4421848.994			
40	p=	3.892	kg/l		No=	6.02E-01	aVb/cm	Volume=	6E+06	cc	mass	

A	B	C	D	E	F	G	H	I	J	K	L
41 Isotopes		Atomic Mass	MCHP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm			1 mol ls	
42 H	1.00782518	1001.50c		6.4551	6.30E+04	4.80E-03		1.2953E-02			948471.00
43 C	12.01115	8000.50c		0.0002	2.33E+01	1.42E-07			1.4234E-07		
44 O	15.994915	8016.50c		59.7993	9.20E+08	4.28E-02			4.8730E-02		
45 Na	22.9897707	11023.50c		0.0761	1.89E+04	5.42E-06			8.4161E-05		
46 Al	26.9815348	13027.50c		1.1304	2.94E+05	8.11E-04			8.1062E-04		
47 Si	28.088	14000.50c		11.883	3.23E+08	8.44E-03			8.4444E-03		
48 Ca	40.08	20000.50c		0.2762	1.07E+06	1.97E-04			1.9657E-04		
49 K	39.102	19000.50c		0.3872	1.47E+06	2.70E-04			2.7857E-04		
50 Ti	47.8	22000.50c		0.1819	8.44E+04	1.29E-04			1.2944E-04		
51 Mn	54.9380503	25055.50c		0.7144	3.80E+06	8.08E-04			8.0843E-04		
52 Fe	55.847	26000.50c		18.8429	1.02E+07	1.34E-02			1.3411E-02		
53 Ni	58.71	28000.50c		0.22	1.24E+06	1.57E-04			1.3858E-04		
54 Cu	63.54	29000.50c		0.0123	7.87E+03	8.78E-06			8.7540E-06		
55 Gd	157.28	64000.50c		0.002	3.04E+03	1.42E-06			1.4234E-06		
56				100	23921400	0.07117109			8.3710E-02		tot moles
57											
58 water					mass (g)	number densities (at/bar.cm)			density	0.0	
59	p=	1 kgf			Ne=	6.02E-01	a/b cm	Volumen	2E+06	cc	mass
60 H		1.00782518	1001.50c	200	1.15E+05	8.36E-03					1 mol ls
61 O		15.994915	8016.50c	100	9.10E+06	4.18E-03					5.68E+04
62					1.02E+06	1.25E-02					
63											
64											
65											
66											
67	Nonradioactive atoms at 10.26 1000s of years				0.514009558	100 % of water	total volume	12648387.7	cc	tot mass	674171.17
68						12144443.8	Max Volume				
69	p=	3.892 kgf			Ne=	6.02E-01	a/b cm	Volumen	8E+06	cc	mass
70	Isotopes	Atomic Mass	MCHP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm			1 mol ls	
71 H	1.00782518	1001.50c		6.4551	6.30E+04	2.94E-03			6.4143E-03		
72 C	12.01115	8000.50c		0.0002	2.33E+01	8.22E-09			8.2219E-09		
73 O	15.994915	8016.50c		59.7993	9.20E+08	2.70E-02			2.8292E-02		
74 Na	22.9897707	11023.50c		0.0761	1.89E+04	3.81E-05			3.5069E-05		
75 Al	26.9815348	13027.50c		1.1304	2.94E+05	6.25E-04			6.2537E-04		
76 Si	28.088	14000.50c		11.883	3.23E+08	8.44E-03			8.4834E-03		
77 Ca	40.08	20000.50c		0.2762	1.07E+06	1.27E-04			1.2735E-04		
78 K	39.102	19000.50c		0.3872	1.47E+06	1.78E-04			1.7854E-04		
79 Ti	47.8	22000.50c		0.1819	8.44E+04	8.39E-05			8.3874E-05		
80 Mn	54.9380503	25055.50c		0.7144	3.80E+06	3.29E-04			3.2941E-04		

	A	B	C	D	E	F	G	H	I	J	K	L
81 Fe		65.847	26000.55c	10.8429	1.02E+07	8.89E-03			8.6884E-03			
82 Ni		58.71	28000.50c	0.22	1.25E+05	1.81E-04			1.0144E-04			
83 Cu		63.54	29000.50c	0.0123	7.87E+03	8.87E-06			8.715E-06			
84 Gd		157.25	64000.35c	0.002	3.04E+03	8.22E-07			9.2219E-07			
85				100	23821400	8.0481087			8.1294E-02			tot moles
86												
87 water					mass (g)	number densities (at/bar.cm)				density		0.1
88	p=		1 kg/l		N=	8.02E-01	at/b cm					
89 H		1.00782519	1001.50c	200	7.28E+04	3.44E-03			7E+06	cc		
90 O		15.994815	8016.50c	100	8.77E+06	1.72E-03						1 mol is
91					8.80E+05	8.18E-03						3.81E+04
92												
93												
94												
95												
96												
97												
98 hematite forms at 10.25 1000s of years +				0.49383319	"100 % of water "		total volume	12144443.91	cc	tot mass		3023193.4
99							Max Volume	12816382.33				
100	p=	3.882	kg/l		N=	8.02E-01	at/b cm		Volumen	8E+06	cc	mass
101 isotopes		Atomic Mass	MCNP ID	Mole%	mass (g)	number densities (at/bar.cm)	at/bar.cm					
102 H		1.00782519	1001.50c	0.4551	6.30E+04	3.10E-03			1.9618E-02			868471.99
103 C		12.01115	8000.50c	0.0002	2.33E+01	9.80E-06			8.8044E-06			
104 O		15.994815	8016.50c	58.7983	9.26E+06	2.87E-02			3.8974E-02			
105 Na		22.9877707	11023.50c	0.0781	1.69E+04	3.65E-05			3.6544E-05			
106 Al		26.9818389	13027.50c	1.1384	2.98E+05	8.47E-04			8.4718E-04			
107 Si		28.089	14000.50c	11.883	3.23E+08	5.71E-03			5.7114E-03			
108 Ca		40.04	20000.50c	0.2782	1.07E+05	1.33E-04			1.3264E-04			
109 K		39.102	18000.50c	0.3872	1.47E+05	1.84E-04			1.8485E-04			
110 Ti		47.8	22000.50c	0.1819	8.44E+04	8.74E-05			8.7354E-05			
111 Mn		64.9380503	25055.50c	0.7144	3.80E+05	3.43E-04			3.4304E-04			
112 Fe		65.847	26000.55c	10.8429	1.02E+07	8.05E-03			8.0498E-03			
113 Ni		58.71	28000.50c	0.22	1.25E+06	1.04E-04			1.0345E-04			
114 Cu		63.54	29000.50c	0.0123	7.87E+03	8.81E-06			8.7088E-06			
115 Gd		157.25	64000.35c	0.002	3.04E+03	8.80E-07			8.8044E-07			
116				100	23821400	8.0480231			7.2798E-02			tot moles
117												
118 water					mass (g)	number densities (at/bar.cm)				density		0.1
119	p=		1 kg/l		N=	8.02E-01	at/b cm		Volumen	8E+06	cc	mass
120 H		1.00782519	1001.50c	200	3.38E+05	1.65E-02						1 mol is



A	B	C	D	E	F	G	H	I	J	K	L
161											
162	isomeric forms at 10.28 1000s of years +				0.45	*100 % of water	total volume	11174363.64	cc	tot mass	5052343
163	...										
164	p+	3.882 kg/l			Ne=	8.02E-01	a/l/cm		Volume=	8E+08	cc
165	isotopes	Atomic Mass	MCNP ID	Molar%	mass (g)	number densities (a/lbar.cm)	a/lbar.cm			1 mol ls	
166	H	1.00782510	1001.80c	0.4551	6.30E+04	3.37E-03			3.1048E-02		964471.00
167	C	12.01115	6000.80c	0.0002	2.33E+01	1.94E-07			1.9438E-07		
168	O	15.994915	8018.80c	89.7983	9.28E+06	3.12E-02			4.5045E-02		
169	Na	22.9897707	11623.80c	0.0761	1.99E+04	3.87E-06			3.9718E-06		
170	Al	26.9815369	13027.80c	1.1304	2.98E+05	8.95E-04			8.9448E-04		
171	Si	28.086	14000.80c	11.883	3.23E+03	8.21E-03			8.2072E-03		
172	Ca	40.08	20000.80c	0.2782	1.07E+05	1.44E-04			1.4415E-04		
173	K	39.102	19000.80c	0.3872	1.47E+05	2.02E-04			2.0208E-04		
174	Ti	47.9	22000.80c	0.1019	6.44E+04	8.49E-05			8.4937E-06		
175	Mn	54.9340603	23068.80c	0.7144	3.90E+05	3.73E-04			3.7286E-04		
176	Fe	55.847	26000.85c	18.8429	1.02E+07	8.83E-03			8.8345E-03		
177	Ni	58.71	28000.80c	0.22	1.25E+05	1.15E-04			1.1482E-04		
178	Cu	63.54	29000.80c	0.0123	7.87E+03	8.42E-06			8.4196E-06		
179	Od	137.25	84000.35c	0.002	3.06E+03	1.04E-06			1.0434E-06		
180				100	23821400	0.04219213			0.3725E-02		tot moles
181											
182	water				mass (g)	number densities (a/lbar.cm)				density	1
183					Ne=	8.02E-01	a/l/cm				
184	H	1.00782510	1001.80c	200	8.63E+06	2.77E-02				1 mol ls	
185	O	15.994915	8018.80c	100	4.47E+08	1.38E-02				2.79E+03	
186					8.03E+08	4.15E-02					

M	N	O	P	Q	R	S	T	U	V
1									
2	tot density	0.0034823	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value
3			hematite forms 3.785 1000s y	12816382	461.7	94	90.97767766	8145808	-3.022322341
4	23921.4	kg	FFTF SNF	0	461.7	94	92.91348871	8313844.804	-1.046510293
5	24.70014442	g	total	8145900					
6	moles		FFTF SNF 25% water	198649.8	461.7	94	93.55861742	8349678.473	-8.441362542
7				8332556					
8			FFTF SNF 50% water	200880.8	461.7	94	94.84884085	8481989.209	8.948840854
9				8333881					
10			FFTF SNF 75% water	239978	461.7	94	94.72144618	8417838.418	4.721446178
11				8385678					
12									
13									
14									
15									
16									
17									
18									
19									
20	964471.9918								
21									
22									
23	0.9								
24	1.80E+01								
25	mole of H2O								
26									
27									
28									
29									
30									
31									
32									
33									
34									
35									
36									
37									
38	tot density	0.1279192	BNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value
39			hematite forms 3.785 1000s y	12916382	461.7	94	114.749842	8194533.333	20.74984196
40	23921.4	kg	FFTF SNF	187984.8	461.7	94	118.7391545	8382517.84	22.73915452



M	N	O	P	Q	R	S	T	U	V
81									
82									
83	***								
84									
85	1004875.787								
86									
87									
88	850249.77 g								
89	1.80E+01								
90	moles of Na2O								
91									
92									
93									
94									
95									
96	*								
97	**								
98	tot density	0.2489383	SNF in the middle	Volume	Length	Radius	Height of the segment	Cylinder Segment Volume	x value
99			hemispherical form 3.765 1000e-09	12816382	661.7	84	188.1055893	12144443.81	75.10554829
100	23921.4 kg		FFTF SNF	-1.2E+07	661.7	84	7.4027825	167884.8046	-86.5972475
101	24.70014642 g		total	24792842			178.5063418		
102	moles							12144443.81	
103									
104									
105						0			
106									
107									
108									
109									
110									
111	**								
112									
113									
114									
115									
116	1135000.485								
117									
118									
119	2999271.955 g								
120	1.80E+01						1		





	A	B	C	D	E	F	G	H	I	J
1	Atomic Densities (at/cm^3)									
2										
3	Canister Component:	Ident #9	Basket	Cladding	Endcap	MOX	Insulator	Canister shell	Total	Total degraded dry (Fe becomes Fe2O3)
4										
5	MCNP Isotope ID									
6	64000.35c									8.000176343
7	1001.50c (H)									
8	8000.50c (C)	6.29084E-06	3.443E-05	3.61977E-06	8.65545E-06			6.000122095	8.000207068	8.000207068
9	2505.50c (Mn)	7.71181E-05	0.0005048	8.000197849	8.27748E-05			6.000087343	6.001499835	6.001499835
10	15031.50c (P)	3.07736E-06	2.014E-05	7.88577E-06	2.10613E-06			2.64324E-05	5.84554E-05	5.84554E-05
11	18032.50c (S)	1.90764E-06	1.301E-05	5.08948E-06	1.38025E-06			1.72008E-05	3.84578E-05	3.84578E-05
12	14000.50c (Si)	8.65645E-05	0.0003702	8.000145127	3.87114E-05			6.000489512	0.001100165	0.001100165
13	24000.50c (Cr)	0.000774055	0.0045332	0.001778844	0.000473965			6.005983374	0.013551418	0.013551418
14	28000.50c (Ni)	0.000360931	0.0028339	8.001110823	0.000296303			6.003746808	0.006348808	0.006348808
15	42000.50c (Mo)	0	0.0003613	0.000141617	3.77753E-05			0.000477873	0.001018363	0.001018363
16	7014.50c (In)	1.81274E-05	9.891E-05	3.88106E-05	1.03525E-05			6.000130909	0.000294214	0.000294214
17	26000.55c (Fe)	0.002580979	0.0162728	0.006373388	0.001700104			6.021486131	0.048428575	0.048425373
18	29000.50c (Cu)	0						0	0	0
19	5018.50c (O)	0						6.005957447	0.000296721	0.008254167
20	82235.50C (U235)	0						4.80373E-06	1.06886E-06	8.87089E-06
21	82238.50C (U238)	0						6.002273378	0.000147292	0.002420647
22	84238.55C (Pu238)	0						6.000685873	0	0.000685873
23	94240.50C (Pu240)	0						6.82748E-05	0	8.82748E-05
24	94241.50C (Pu241)	0						7.71954E-08	0	7.71954E-08
25	total	0 00387513	0 025043	0 009833875	0 002623104	0 004997094	6.000445079	0 033169682	0 0839848935	0 15480164
26	volume	187984.6048								
27										
28										
29										
30	Density of Hematite (g/cc)	5.2749E+00	MCNP Isotope ID		8.00%	18.80%	28.80%	38.80%		48.80%
31	Volume of the fuel Homogenized	1.6794E+05	64000.35c	1.7634E-04	1.7634E-04	1.5871E-04	1.4107E-04	1.2344E-04	1.0581E-04	
32	Mole/cb of Hematite	4.0207E-26	1001.50c (H)	0.0000E+00	0.0000E+00	8.6872E-03	1.3374E-02	2.0062E-02	2.8749E-02	
33	Mole of hematite in the fuel	8.7542E-03	8000.50c (C)	2.0787E-04	2.0787E-04	1.8708E-04	1.6430E-04	1.4551E-04	1.2472E-04	
34	Mass of Hematite(g)	1.0785E+06	2505.50c (Mn)	1.4998E-03	1.4998E-03	1.3499E-03	1.1899E-03	1.0499E-03	8.9990E-04	
35	Volume of Hematite (cc)	2.0446E+06	15031.50c (P)	8.9456E-05	8.9456E-05	8.3870E-05	4.7848E-06	4.1899E-05	3.8913E-05	
36	Volume of Hematite (l)	2.0446E+02	16832.50c (S)	3.9458E-05	3.9458E-05	3.4792E-05	3.0626E-06	2.7060E-06	2.3193E-05	
37	0 % of this volume is water	0.0000E+00	14000.50c (Si)	1.1002E-03	1.1002E-03	8.9015E-04	8.8013E-04	7.7012E-04	6.6010E-04	
38	volume of water (cc)	0.0000E+00	24000.50c (Cr)	1.3551E-02	1.3551E-02	1.2190E-02	1.0841E-02	9.4860E-03	8.1309E-03	
39			28000.50c (Ni)	8.3488E-03	8.3488E-03	7.6139E-03	6.8790E-03	5.8442E-03	5.0093E-03	
40	Mass(g) of Water to add	0	42000.50c (Mo)	1.0184E-03	1.0184E-03	9.1653E-04	8.1469E-04	7.1265E-04	6.1102E-04	

	A	B	C	D	E	F	G	H	I	J
41	Mole of Water to add		0	7014.80e (H)	2.9421E-04	2.9421E-04	2.8479E-04	2.3337E-04	2.0648E-04	1.7813E-04
42	Atoms of O to add		0	28496.84e (O <sub>2</sub> )	4.8426E-02	4.8426E-02	4.3583E-02	3.8740E-02	3.3699E-02	2.9065E-02
43	Atoms of H to add .. .		0	20000.88C (Cu)	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00	0.0000E+00
44	density of H homogenized to add (g/cm.b)	0.0000E+00	8816.80C (O)	7.8893E-02	7.8893E-02	7.4347E-02	6.9801E-02	6.5234E-02	6.0710E-02	
45	density of O homogenized to add (g/cm.b)	0.0000E+00	82233.88C (U238)	8.6707E-04	8.6707E-04	8.1034E-04	4.8365E-06	3.9895E-08	3.4024E-06	
46			82233.88C (U238)	2.4207E-03	2.4207E-03	2.1788E-03	1.8043E-03	1.6848E-03	1.4524E-03	
47	Max Volume of the container	824971.2629	84233.88C (Pu238)	6.6544E-04	6.6544E-04	6.5011E-04	8.3264E-04	4.6887E-04	3.9041E-04	
48			84246.88C (Pu240)	8.8278E-05	8.8278E-05	7.9447E-05	7.0820E-05	6.1792E-06	5.2965E-06	
49			84241.88C (Pu241)	7.7195E-06	7.7195E-06	6.9478E-06	6.1784E-06	5.4037E-06	4.6317E-06	
50			Total	1.5680E-01	1.5680E-01	1.5118E-01	1.4850E-01	1.3845E-01	1.3420E-01	
51			Volume	1.8798E+06	1.8798E+05	1.8645E+06	2.0998E+06	2.3998E+06	2.7997E+06	
52								7.0000E-01		

K	L	M	N	O	P	Q	R	S
1								
2								
3	dry no Gd +	dry no Fe2O3	dry no gd Fe2O3					
4								
5								
6	0.0000E+00	0.000178343	0					
7		0	0					
8	2.0787E-04	0.000207888	0.000207889					
9	1.4914E-03	0.001499635	0.001499635					
10	5.9958E-05	3.96558E-05	3.96558E-06					
11	3.8458E-05	3.86578E-05	3.86578E-06					
12	1.1002E-03	0.001100185	0.001100185					
13	1.3551E-02	0.013551418	0.013551418					
14	8.3448E-03	0.008348808	0.008348808					
15	1.0184E-03	0.001018363	0.001018363					
16	2.9421E-04	0.000294214	0.000294214					
17	4.8426E-02	0	0					
18	0.0000E+00	0	0					
19	7.8493E-02	0.2542E-03	0.008254167					
20	8.6707E-06	8.67069E-06	8.67069E-06					
21	2.4207E-03	0.002420687	0.002420687					
22	6.6564E-04	0.000656575	0.000656575					
23	8.8278E-05	8.82748E-05	8.82748E-05					
24	7.7193E-06	7.71954E-06	7.71954E-06					
25	0	1.5643E-01	3.5738E-02	3.5561E-02				
26								
27								
28								
29	1	0.8	0.8	0.1	1	0.8	0.8	0.1
30	50.74%	87.48%	87.48%	87.48%	78.00%	78.00%	78.00%	75.00%
31	8.6874E-05	4.4409E-06	4.4409E-06	4.4409E-06	4.4086E-05	4.4086E-05	4.4086E-05	
32	3.3928E-02	8.2001E-02	3.2303E-02	4.4466E-03	8.0164E-02	4.6123E-02	2.5077E-02	8.0164E-03
33	1.0241E-04	8.2348E-06	8.2348E-06	8.2348E-06	8.1987E-06	8.1987E-06	8.1987E-06	
34	7.3888E-04	3.7771E-05	3.7771E-06	3.7771E-06	3.7496E-04	3.7496E-04	3.7496E-04	
35	2.9447E-03	1.8074E-06	1.8074E-06	1.8074E-06	1.4984E-05	1.4984E-05	1.4984E-05	
36	1.8044E-05	9.7353E-07	9.7353E-07	9.7353E-07	9.8644E-06	9.8644E-06	9.8644E-06	
37	8.4199E-04	2.7706E-05	2.7706E-05	2.7706E-05	2.7804E-04	2.7804E-04	2.7804E-04	
38	8.8760E-03	3.4127E-04	3.4127E-04	3.4127E-04	3.3879E-03	3.3879E-03	3.3879E-03	
39	4.1130E-03	2.1028E-04	2.1028E-04	2.1028E-04	2.0872E-03	2.0872E-03	2.0872E-03	2.0072E-03
40	5.0189E-04	2.5644E-05	2.5644E-05	2.5644E-05	2.5459E-04	2.5459E-04	2.5459E-04	



	A	B	C	D	E	F
1		keff	$\sigma$	keff+2 $\sigma$		AECNF
2	m00f0c.O	0.2824	0.0008	0.2840		0.5756
3	m00f20.O	0.2674	0.0009	0.2691		0.6012
4	m00f49.O	0.2590	0.0008	0.2606		0.6095
5	t00f0c.O	0.2695	0.0007	0.2709		0.6067
6	t00f20.O	0.2720	0.0008	0.2736		0.5955
7	t00f49.O	0.2692	0.0009	0.2709		0.5938
8	m03f0c.O	0.4471	0.0011	0.4494		0.3045
9	m06f0c.O	0.5383	0.0015	0.5413		0.2157
10	m50f0c.O	0.5245	0.0012	0.5270		0.1751
11	m80f0c.O	0.5307	0.0010	0.5327		0.0675
12	m53f0c.O	0.5794	0.0013	0.5820		0.1286
13	m83f0c.O	0.5042	0.0009	0.5060		0.0570
14	m56f0c.O	0.5978	0.0013	0.6004		0.1057
15	m86f0c.O	0.4767	0.0008	0.4783		0.0494
16	m60f0c.O	0.5646	0.0012	0.5669		0.1196
17	m63f0c.O	0.5837	0.0013	0.5863		0.0944
18	m66f0c.O	0.5774	0.0011	0.5796		0.0795
19	m20f0c.O	0.4211	0.0011	0.4232		0.3106
20	m23f0c.O	0.5294	0.0013	0.5320		0.2004
21	m26f0c.O	0.5843	0.0014	0.5871		0.1574
22	nogd56.O	1.0415	0.0012	1.0439		0.0604
23	05gd56.O	0.9185	0.0016	0.9217		0.0700
24	06gd56.O	0.9053	0.0016	0.9084		0.0697
25	10gd56.O	0.8518	0.0015	0.8547		0.0739
26	nofe56.O	0.6270	0.0009	0.6288		0.1211
27	m56f00.O	0.5979	0.0012	0.6002		0.1057
28	m56f01.O	0.6001	0.0013	0.6026		0.1056
29	nogd00.O	1.0414	0.0013	1.0440		0.0596
30	nogd01.O	1.0430	0.0013	1.0455		0.0601

	A	B	C	D	E	F
1		all absorber	keff	$\sigma$	keff+2 $\sigma$	AENCF
2	f100	dry clay dry fuel	0.1561	0.0006	0.1574	0.2828
3	f125	25% water in the clay dry fuel	0.1491	0.0007	0.1505	0.2941
4						
5		51%water in the clay dry fuel				
6		water density of the clay	keff	$\sigma$	keff+2 $\sigma$	AENCF
7	01f50	0.1	0.2107	0.0007	0.2121	0.4756
8	05f50	0.5	0.1977	0.0006	0.1989	0.4956
9	08f50	0.8	0.1972	0.0007	0.1986	0.4957
10	f50	1	0.1969	0.0008	0.1984	0.4870
11		0%water in the clay 97% water in the fuel				
12		water density of the fuel	keff	$\sigma$	keff+2 $\sigma$	AENCF
13	f97t01	0.1	0.3434	0.0008	0.3450	0.0580
14	f97t05	0.5	0.2840	0.0005	0.2850	0.0253
15	f97t08	0.8	0.2476	0.0004	0.2484	0.0198
16	f97t00	1	0.2310	0.0004	0.2318	0.0180
17		25% water in the clay 96% water in the fuel				
18		water density of the clay	keff	$\sigma$	keff+2 $\sigma$	AENCF
19	01ft25	0.1	0.2622	0.0005	0.2631	0.0206
20	05ft25	0.5	0.2610	0.0004	0.2618	0.0210
21	08ft25	0.8	0.2624	0.0004	0.2632	0.0199
22	10ft25	1	0.2617	0.0004	0.2625	0.0213
23						
24		water density in the fuel (r clay=1)	keff	$\sigma$	keff+2 $\sigma$	AENCF
25	960125	0.1	0.3305	0.0011	0.3327	0.0742
26	960525	0.5	0.3189	0.0006	0.3201	0.0301
27	960825	0.8	0.2806	0.0004	0.2813	0.0228
28	10ft25	1	0.2617	0.0004	0.2625	0.0213
29		49% water in the clay 75%water in fuel				
30		water density in the clay	keff	$\sigma$	keff+2 $\sigma$	AENCF
31	754901	0.1	0.4555	0.0009	0.4574	0.0570
32	754905	0.5	0.4726	0.0011	0.4748	0.0648
33	754908	0.8	0.4700	0.0009	0.4718	0.0664
34	754910	1	0.4675	0.0011	0.4696	0.0666
35						
36		water density in fuel (r clay=1)	keff	$\sigma$	keff+2 $\sigma$	AENCF
37	750149	0.1	0.4198	0.0012	0.4222	0.2243
38	750549	0.5	0.4865	0.0012	0.4890	0.0958
39	750849	0.8	0.4633	0.0010	0.4653	0.0750

	A	B	C	D	E	F
40	751049	1	0.4675	0.0011	0.4696	0.0666
41						
42		water denisty in fuel (r clay=0.5)	keff	$\sigma$	keff+2 $\sigma$	AENCF
43	750105		0.2450	0.0008	0.2466	0.2585
44	750505		0.4368	0.0011	0.4390	0.0993
45	750805		0.4676	0.0013	0.4701	0.0767
46	751005		0.4726	0.0011	0.4748	0.0476
47		40% water in the clay 93%water in fuel				
48		water density in the clay	keff	$\sigma$	keff+2 $\sigma$	AENCF
49	934001	0.1	0.3227	0.0006	0.3238	0.0286
50	934005	0.5	0.3223	0.0005	0.3234	0.0303
51	934008	0.8	0.3218	0.0006	0.3230	0.0284
52	934010	1	0.3222	0.0005	0.3232	0.0289
53		45% water in the clay 90%water in fuel				
54		water density in the clay	keff	$\sigma$	keff+2 $\sigma$	AENCF
55	894501	0.1	0.3775	0.0007	0.3788	0.0377
56	894505	0.5	0.3758	0.0007	0.3771	0.0374
57	894508	0.8	0.3739	0.0007	0.3752	0.0373
58	894510	1	0.3739	0.0007	0.3752	0.0376
59		50%water in the clay 68% water in the fuel				
60		water density in clay	keff	$\sigma$	keff+2 $\sigma$	AENCF
61	695001	0.1	0.4910	0.0011	0.4932	0.0766
62	695005	0.5	0.4788	0.0013	0.4814	0.0782
63	695008	0.8	0.4756	0.0010	0.4776	0.0822
64	695010	1	0.4754	0.0010	0.4775	0.0796
65						
66		water density in fuel (r clay=0.1)	keff	$\sigma$	keff+2 $\sigma$	AENCF
67	690101	0.1	0.2503	0.0009	0.2521	0.2866
68	690501	0.5	0.4362	0.0012	0.4385	0.1174
69	690801	0.8	0.4794	0.0012	0.4818	0.0895
70	691001	1	0.4910	0.0011	0.4932	0.0766
71			keff	$\sigma$	keff+2 $\sigma$	AENCF
72	mx6910		0.4876	0.0012	0.4899	0.0745
73	mx6925		0.4704	0.0010	0.4725	0.0691
74	mx6960		0.3997	0.0009	0.4016	0.0645
75			keff	$\sigma$	keff+2 $\sigma$	AENCF
76	homo	1	0.1654	0.0002	0.1659	0.0149
77	homo08	0.8	0.1766	0.0003	0.1772	0.0168
78	homo05	0.5	0.2029	0.0003	0.2035	0.0172

	A	B	C	D	E	F
79	homo01	0.1	0.2744	0.0006	0.2755	0.0245
80		different loading of poison	keff	$\sigma$	keff+2 $\sigma$	AENCF
81	69nogd		0.8848	0.0016	0.8881	0.0438
82	69nofe		0.4845	0.0011	0.4866	0.0927
83	69nogf		0.9213	0.0017	0.9247	0.0489
84		different loading of poison	keff	$\sigma$	keff+2 $\sigma$	AENCF
85	01gd50		0.2470	0.0009	0.2488	0.4043
86	01fe50		0.1964	0.0008	0.1979	0.7657
87	01gf50		0.2273	0.0008	0.2290	0.6551
88		mix	keff	$\sigma$	keff+2 $\sigma$	AENCF
89	mixt10.O		0.3481	0.0009	0.3498	0.0619
90	mixt25.O		0.3341	0.0009	0.3359	0.0574
91	mixt60.O		0.2913	0.0007	0.2927	0.0362
92	mixt100.O		0.2929	0.0005	0.2940	0.0234
93		different loading of poison	keff	$\sigma$	keff+2 $\sigma$	AENCF
94	nogd75.O		0.7987	0.0016	0.8018	0.0269
95	nogdfe.O		0.8500	0.0017	0.8534	0.0274
96	nogdal.O		0.8031	0.0016	0.8062	0.0264
97	nogfal.O		0.8539	0.0015	0.8569	0.0272
98			keff	$\sigma$	keff+2 $\sigma$	AENCF
99	f25t00.O		0.1930	0.0008	0.1946	0.2086
100	f50t00.O		0.2586	0.0009	0.2604	0.1309
101	f75t00.O		0.3463	0.0009	0.3481	0.0670
102	f97t00.O		0.2310	0.0004	0.2318	0.0180
103	f75l30.O		0.3516	0.0010	0.3535	0.0629
104	f75l60.O		0.3562	0.0008	0.3578	0.0596

	A	B	C	D	E
		keff	$\sigma$	keff+2 $\sigma$	AENCF
1					
2	69ng.5.O	0.89945	0.00152	0.90249	3.52E-02
3	69ng.7.O	0.86447	0.00161	0.86769	3.34E-02
4	69ngal.O	0.78719	0.00139	0.78997	3.13E-02
5	69no.5.O	0.96374	0.00163	0.967	3.69E-02
6	69no.7.O	0.94443	0.00163	0.94769	3.47E-02
7	69noal.O	0.89154	0.00157	0.89468	3.18E-02
8	7549.5.O	0.38442	0.00081	0.38604	6.87E-02
9	7549.7.O	0.30937	0.00061	0.31059	7.76E-02
10	7549al.O	0.2053	0.00028	0.20586	9.80E-02
11	8945.5.O	0.28098	0.00043	0.28184	4.42E-02
12	8945.7.O	0.2223	0.0004	0.2231	4.99E-02
13	8945al.O	0.15404	0.00023	0.1545	6.25E-02
14	m06f.5.O	0.5211	0.0011	0.5233	0.185158
15	m06f.7.O	0.48763	0.00122	0.49007	0.180793
16	m06fal.O	0.39508	0.00074	0.39656	0.192985
17	m56.5.O	0.53128	-0.00105	0.53338	9.75E-02
18	m56.7.O	0.45015	0.00075	0.45165	0.107335
19	m56al.O	0.31066	0.00049	0.31164	0.130183
20	mx69.5.O	0.402	0.00089	0.40378	6.59E-02
21	mx69.7.O	0.33519	0.0006	0.33639	7.26E-02
22	mx69al.O	0.24413	0.00043	0.24499	7.13E-02
23	nofe.5.O	0.55913	0.00073	0.56059	0.113962
24	nofe.7.O	0.4738	0.00057	0.47494	0.12335
25	nofeal.O	0.32721	0.00039	0.32799	0.150547
26	nogd.5.O	1.10976	0.00123	1.11222	4.72E-02
27	nogd.7.O	1.09981	0.00116	1.10213	4.26E-02
28	nogdal.O	1.04529	0.00118	1.04765	3.90E-02
29	nogf.5.O	0.91105	0.0017	0.91445	7.16E-02
30	nogf.7.O	0.90962	0.00173	0.91308	6.46E-02
31	nogfal.O	0.86668	0.00155	0.86978	5.77E-02
32	t00f.5.O	0.2495	0.00078	0.25106	0.525051
33	t00f.7.O	0.23992	0.00078	0.24148	0.497244
34	t00fal.O	0.22092	0.00075	0.22242	0.495299
35	w50h.5.O	0.40624	0.00086	0.40796	0.113614
36	w50h.7.O	0.35137	0.00085	0.35307	0.120787
37	w50hal.O	0.25174	0.00055	0.25284	0.141801

	A	B	C	D	E
1		keff	$\sigma$	keff+2 $\sigma$	AENF
2	w00h00.O	0.2239	0.0007	0.2253	0.4655
3	w00h10.O	0.3221	0.0010	0.3241	0.1421
4	w00h20.O	0.3598	0.0011	0.3619	0.0841
5	w00h30.O	0.3743	0.0009	0.3761	0.0591
6	w10h00.O	0.2803	0.0009	0.2822	0.3323
7	w10h10.O	0.4001	0.0010	0.4021	0.0944
8	w10h20.O	0.4117	0.0009	0.4135	0.0593
9	w10h30.O	0.4060	0.0010	0.4079	0.0452
10	w20h00.O	0.3284	0.0010	0.3304	0.2530
11	w20h10.O	0.4329	0.0011	0.4350	0.0748
12	w20h20.O	0.4227	0.0010	0.4247	0.0484
13	w20h30.O	0.3936	0.0009	0.3953	0.0392
14	w30h00.O	0.3698	0.0011	0.3720	0.1968
15	w30h10.O	0.4438	0.0012	0.4461	0.0633
16	w30h20.O	0.4084	0.0009	0.4102	0.0406
17	w30h30.O	0.3664	0.0007	0.3679	0.0336
18	w40h00.O	0.4109	0.0012	0.4134	0.1551
19	w40h10.O	0.4356	0.0008	0.4372	0.0515
20	w40h20.O	0.3791	0.0007	0.3805	0.0374
21	w40h30.O	0.3335	0.0007	0.3348	0.0309
22	w50h00.O	0.4468	0.0011	0.4490	0.1234
23	w50h10.O	0.4103	0.0008	0.4119	0.0440
24	w50h20.O	0.3418	0.0007	0.3432	0.0327
25	w50h30.O	0.2960	0.0005	0.2970	0.0255
26	nogd30	0.7072	0.0016	0.7103	0.0387
27	nogf30	0.6944	0.0014	0.6972	0.0410
28	nogd50	0.6175	0.0014	0.6202	0.0808
29	nogf50	0.8506	0.0018	0.8542	0.0921
30	ngd30b	0.7650	0.0018	0.7685	0.0351
31	ngf30b	0.7640	0.0015	0.7670	0.0377



file name 69nogd		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	2.1317E-04	1.0659E-04	5.3293E-05	0.0000E+00
Pu-240	6.5600E+03	2.8268E-05	2.2150E-06	0.0000E+00	0.0000E+00
Pu-241		2.4720E-06	0.0000E+00	0.0000E+00	0.0000E+00
U-235		1.8159E-06	1.0840E-04	1.6169E-04	2.1499E-04
U-236		0.0000E+00	2.6053E-05	2.8268E-05	2.8268E-05
Np-237		0.0000E+00	2.4720E-06	2.4720E-06	2.4720E-06
ref 13	15th edition of chart of nuclide				

file name 754905		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	1.6642E-04	8.3210E-05	4.1605E-05	0.0000E+00
Pu-240	6.5600E+03	2.2069E-05	1.7293E-06	0.0000E+00	0.0000E+00
Pu-241		1.9299E-06	0.0000E+00	0.0000E+00	0.0000E+00
U-235		1.4177E-06	8.4628E-05	1.2623E-04	1.6784E-04
U-236		0.0000E+00	2.0340E-05	2.2069E-05	2.2069E-05
Np-237		0.0000E+00	1.9299E-06	1.9299E-06	1.9299E-06
ref 13	15th edition of chart of nuclide				

file name o894508		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	6.8101E-05	3.4051E-05	1.7025E-05	0.0000E+00
Pu-240	6.5600E+03	9.0308E-06	7.0763E-07	0.0000E+00	0.0000E+00
Pu-241		7.8974E-07	0.0000E+00	0.0000E+00	0.0000E+00
U-235		5.8013E-07	3.4631E-05	5.1656E-05	6.8681E-05
U-236		0.0000E+00	8.3232E-06	9.0308E-06	9.0308E-06
Np-237		0.0000E+00	7.8974E-07	7.8974E-07	7.8974E-07
ref 13	15th edition of chart of nuclide				

file name m06f0c		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	1.0762E-03	5.3810E-04	2.6905E-04	0.0000E+00
Pu-240	6.5600E+03	1.4271E-04	1.1182E-05	0.0000E+00	0.0000E+00
Pu-241		1.2480E-05	0.0000E+00	0.0000E+00	0.0000E+00
U-235		9.1678E-06	5.4727E-04	8.1632E-04	1.0854E-03
U-236		0.0000E+00	1.3153E-04	1.4271E-04	1.4271E-04
Np-237		0.0000E+00	1.2480E-05	1.2480E-05	1.2480E-05
ref 13	15th edition of chart of nuclide				

file name m56f0c		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	5.3810E-04	2.6905E-04	1.3453E-04	0.0000E+00
Pu-240	6.5600E+03	7.1357E-05	5.5914E-06	0.0000E+00	0.0000E+00
Pu-241		6.2401E-06	0.0000E+00	0.0000E+00	0.0000E+00
U-235		4.5839E-06	2.7363E-04	4.0816E-04	5.4268E-04
U-236		0.0000E+00	6.5766E-05	7.1357E-05	7.1357E-05
Np-237		0.0000E+00	6.2401E-06	6.2401E-06	6.2401E-06

ref 13 15th edition of chart of nuclide

file name mx6925		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	2.1317E-04	1.0659E-04	5.3293E-05	0.0000E+00
Pu-240	6.5600E+03	2.8268E-05	2.2150E-06	0.0000E+00	0.0000E+00
Pu-241		2.4720E-06	0.0000E+00	0.0000E+00	0.0000E+00
U-235		1.8159E-06	1.0840E-04	1.6169E-04	2.1499E-04
U-236		0.0000E+00	2.6053E-05	2.8268E-05	2.8268E-05
Np-237		0.0000E+00	2.4720E-06	2.4720E-06	2.4720E-06

ref 13 15th edition of chart of nuclide

file name nofe56 nogd56		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	5.3810E-04	2.6905E-04	1.3453E-04	0.0000E+00
Pu-240	6.5600E+03	7.1357E-05	5.5914E-06	0.0000E+00	0.0000E+00
Pu-241		6.2401E-06	0.0000E+00	0.0000E+00	0.0000E+00
U-235		4.5839E-06	2.7363E-04	4.0816E-04	5.4268E-04
U-236		0.0000E+00	6.5766E-05	7.1357E-05	7.1357E-05
Np-237		0.0000E+00	6.2401E-06	6.2401E-06	6.2401E-06

ref 13 15th edition of chart of nuclide

file name nogf50		Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	3.2794E-04	1.6397E-04	8.1985E-05	0.0000E+00
Pu-240	6.5600E+03	4.3488E-05	3.4076E-06	0.0000E+00	0.0000E+00
Pu-241		3.8030E-06	0.0000E+00	0.0000E+00	0.0000E+00
U-235		2.7936E-06	1.6676E-04	2.4875E-04	3.3073E-04
U-236		0.0000E+00	4.0080E-05	4.3488E-05	4.3488E-05
Np-237		0.0000E+00	3.8030E-06	3.8030E-06	3.8030E-06

ref 13 15th edition of chart of nuclide

file name	t00f20	t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	1.0762E-03	5.3810E-04	2.6905E-04	0.0000E+00
Pu-240	6.5600E+03	1.4271E-04	1.1182E-05	0.0000E+00	0.0000E+00
Pu-241		1.2480E-05	0.0000E+00	0.0000E+00	0.0000E+00
U-235		9.1678E-06	5.4727E-04	8.1632E-04	1.0854E-03
U-236		0.0000E+00	1.3153E-04	1.4271E-04	1.4271E-04
Np-237		0.0000E+00	1.2480E-05	1.2480E-05	1.2480E-05
ref 13	15th edition of chart of nuclide				

file name	w50h00	Atomic Densities			
		t=0	t=T1/2	t=2*T1/2	t=final
	half life (ref 1)	0.0000E+00	2.4100E+04	4.8200E+04	
Pu-239	2.4100E+04	3.2794E-04	1.6397E-04	8.1985E-05	0.0000E+00
Pu-240	6.5600E+03	4.3488E-05	3.4076E-06	0.0000E+00	0.0000E+00
Pu-241		3.8030E-06	0.0000E+00	0.0000E+00	0.0000E+00
U-235		2.7936E-06	1.6676E-04	2.4875E-04	3.3073E-04
U-236		0.0000E+00	4.0080E-05	4.3488E-05	4.3488E-05
Np-237		0.0000E+00	3.8030E-06	3.8030E-06	3.8030E-06
ref 13	15th edition of chart of nuclide				