

Peripheral Oxide

Utility: Comanche Peak 2

Assembly: HH82


Face: 4

Date: 21-Oct-2003

Elevation	R02	R06	R08	R10	R12	R14
91.4	25.1	28.1	26.3	25.1	26.6	27.2
92.4	27.6	34.4	29.2	27.1	29.7	31.5
93.4	30.4	34.8	30.7	29.8	28.0	33.8
94.4	32.0	33.9	31.4	34.0	30.1	37.8
95.4	33.8	35.7	34.8	40.2	33.1	43.7
96.4	32.0	39.9	36.0	41.5	34.5	48.5
97.4	32.7	43.4	36.2	43.2	36.5	52.6
98.4	32.3	45.4	36.8	44.0	37.2	55.6
99.4	32.9	45.8	37.4	42.6	37.7	56.3
100.4	34.2	46.3	38.3	43.1	38.8	57.6
101.4	32.7	44.5	38.3	42.0	36.7	55.2
102.4	33.8	42.8	35.7	40.3	35.9	50.6
103.4	33.3	41.0	34.3	38.3	34.7	46.5
104.4	31.4	38.1	32.0	32.7	33.3	36.7
105.4	31.3	35.3	32.0	32.1	33.5	32.2
111.9	26.9	36.9	36.0	40.9	28.8	37.1
112.9	28.3	41.5	37.1	43.7	32.4	44.2
113.9	31.5	44.4	41.2	48.8	39.5	57.7
114.9	33.1	48.1	42.6	51.8	44.5	63.2
115.9	33.8	52.3	46.0	54.2	48.7	71.3
116.9	37.5	56.4	50.1	55.6	57.2	74.7
117.9	37.9	57.6	51.5	57.5	67.2	78.3
118.9	39.4	61.4	53.8	59.7	65.6	79.2
119.9	41.2	62.7	56.4	61.8	69.2	79.5
120.9	42.5	63.7	59.2	59.5	60.8	75.5
121.9	41.0	62.3	61.5	59.5	51.5	75.1
122.9	40.2	61.1	58.4	58.1	45.5	69.5
123.9	35.3	60.4	52.9	54.2	40.7	69.9
124.9	32.4	54.4	46.4	46.5	37.1	53.0
125.9	31.9	49.7	39.4	41.6	33.9	46.8
132.5	26.9	39.5	28.4	31.3	29.8	35.0
133.5	29.0	41.6	28.6	33.7	30.2	40.3
134.5	30.3	39.9	30.8	36.9	30.9	43.6
135.5	27.9	37.8	30.3	37.5	30.7	48.2
136.5	28.3	36.3	30.0	35.9	30.9	49.4
137.5	27.5	33.8	28.3	31.7	29.0	43.5
138.5	23.0	34.6	26.5	32.1	26.9	39.2
139.5	22.3	30.9	23.9	24.7	24.9	35.4
140.5	21.4	27.4	23.4	21.9	23.9	27.1
141.5	20.1	23.9	22.6	20.9	23.3	24.4
142.5	19.1	22.4	22.9	19.8	22.1	26.3
143.5	20.1	21.5	21.9	18.8	21.7	23.9


144.5	18.0	20.7	21.5	20.6	20.1	18.9
145.5	16.5	18.8	17.4	17.3	19.1	17.0
146.5	16.1	17.6	17.5	16.0	18.4	15.9
max	42.5	63.7	61.5	61.8	69.2	79.5

### Peripheral Rod Oxide (Comanche Peak 2, FA HH82, F

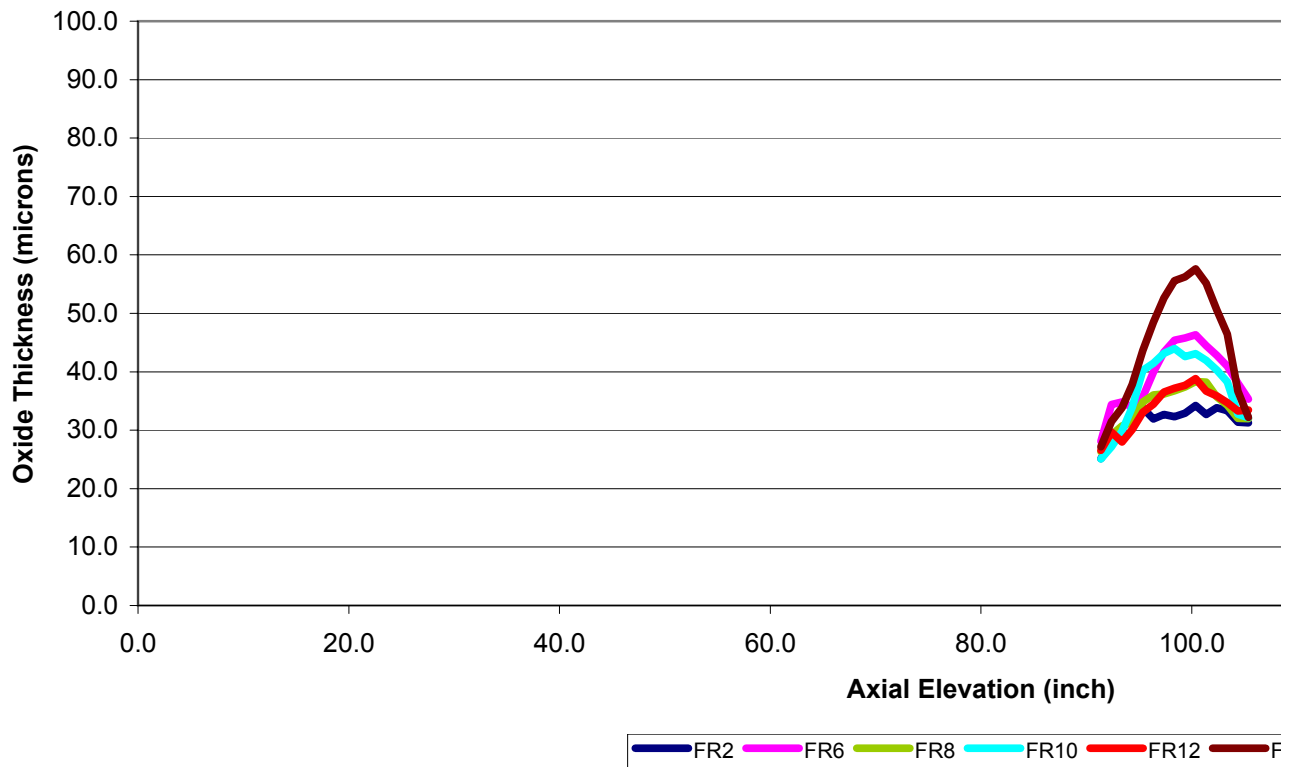



A HH82, FACE 4)

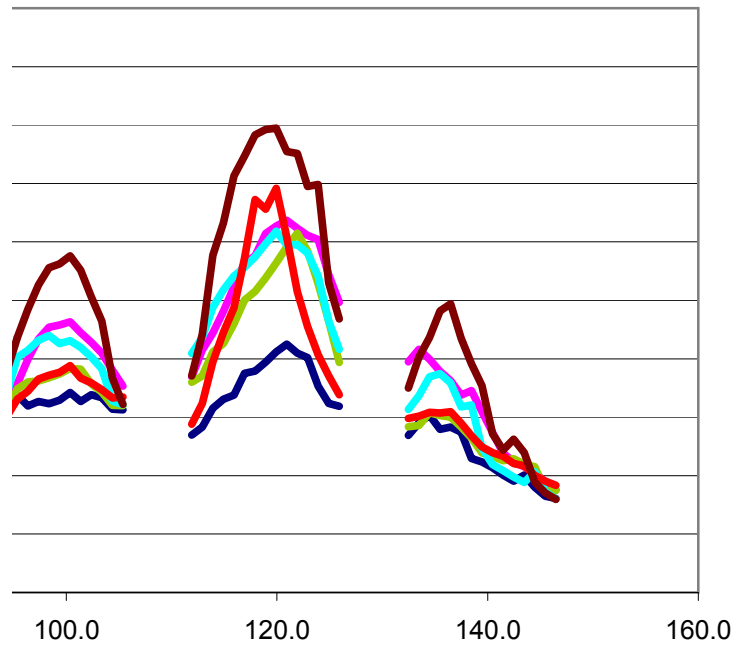

FR12 FR14

