

Peripheral Oxide

Utility: Comanche Peak 2

Assembly: HH83


Face: 4

Date: 21-Oct-2003

Elevation	R02	R03	R06	R08	R10	R12	R14
91.4	24.3	31.3	45.2	40.0	29.5	36.4	25.8
92.4	25.0	37.9	52.4	43.4	31.0	44.2	27.9
93.4	26.2	41.4	54.8	47.8	33.0	50.6	28.0
94.4	27.9	43.7	58.7	52.1	34.1	56.0	30.3
95.4	28.6	49.1	65.3	58.1	34.9	60.3	32.7
96.4	29.1	52.5	67.6	62.6	36.8	63.1	35.5
97.4	30.0	58.1	65.3	67.5	37.7	63.8	37.1
98.4	30.2	87.3	62.9	71.0	39.2	64.1	36.5
99.4	32.6	88.0	58.6	72.3	39.5	63.4	39.4
100.4	31.0	85.0	56.9	72.7	40.4	64.3	39.8
101.4	29.1	82.6	54.9	67.5	44.6	62.2	38.8
102.4	29.3	83.5	53.2	60.1	47.8	61.2	37.6
103.4	28.8	64.9	50.8	54.2	44.1	63.6	34.4
104.4	29.1	42.4	48.8	48.0	44.4	54.3	31.8
105.4	30.8	38.5	48.5	44.0	43.6	43.8	31.8
111.9	28.7	28.2	44.4	39.8	31.4	33.4	28.3
112.9	32.6	30.2	43.6	41.4	31.2	35.6	30.3
113.9	35.2	33.3	41.7	44.6	32.5	37.2	33.4
114.9	35.4	36.8	40.2	44.4	32.3	36.6	36.2
115.9	37.2	36.8	38.1	40.9	31.4	36.0	39.5
116.9	36.9	40.6	35.3	40.1	30.8	34.5	41.9
117.9	37.5	41.0	33.1	39.2	27.4	31.4	44.1
118.9	37.9	41.6	28.5	37.9	27.2	27.9	44.8
119.9	36.3	41.2	26.8	31.9	26.1	25.8	46.1
120.9	35.6	40.0	24.5	27.6	23.8	24.0	45.6
121.9	37.9	38.6	23.9	28.3	24.4	23.9	44.1
122.9	38.4	38.9	22.5	26.0	22.9	23.9	42.4
123.9	38.3	38.8	21.4	21.9	21.5	21.9	40.8
124.9	38.2	42.2	19.2	20.3	19.8	20.2	37.2
125.9	37.6	40.8	19.2	21.1	18.4	19.1	35.3
134.5	31.0	54.8	31.7	26.9	30.2	28.0	33.1
135.5	31.1	58.7	34.6	29.7	36.6	30.3	32.8
136.5	30.5	65.3	36.8	28.9	38.4	32.7	30.6
137.5	29.4	67.6	38.8	29.9	43.3	35.5	30.1
138.5	26.0	65.3	39.6	31.5	46.2	37.1	29.6
139.5	24.4	62.9	40.4	31.7	46.9	36.5	27.6
140.5	22.3	58.6	43.9	32.2	50.0	39.4	24.5
141.5	21.7	56.9	43.6	32.4	49.7	39.8	24.0
142.5	22.7	54.9	44.1	33.1	49.5	38.8	24.1

max	38.4	88.0	67.6	72.7	50.0	64.3	46.1
-----	------	------	------	------	------	------	------

Peripheral Rod Oxide (Comanche Peak 2, FA)

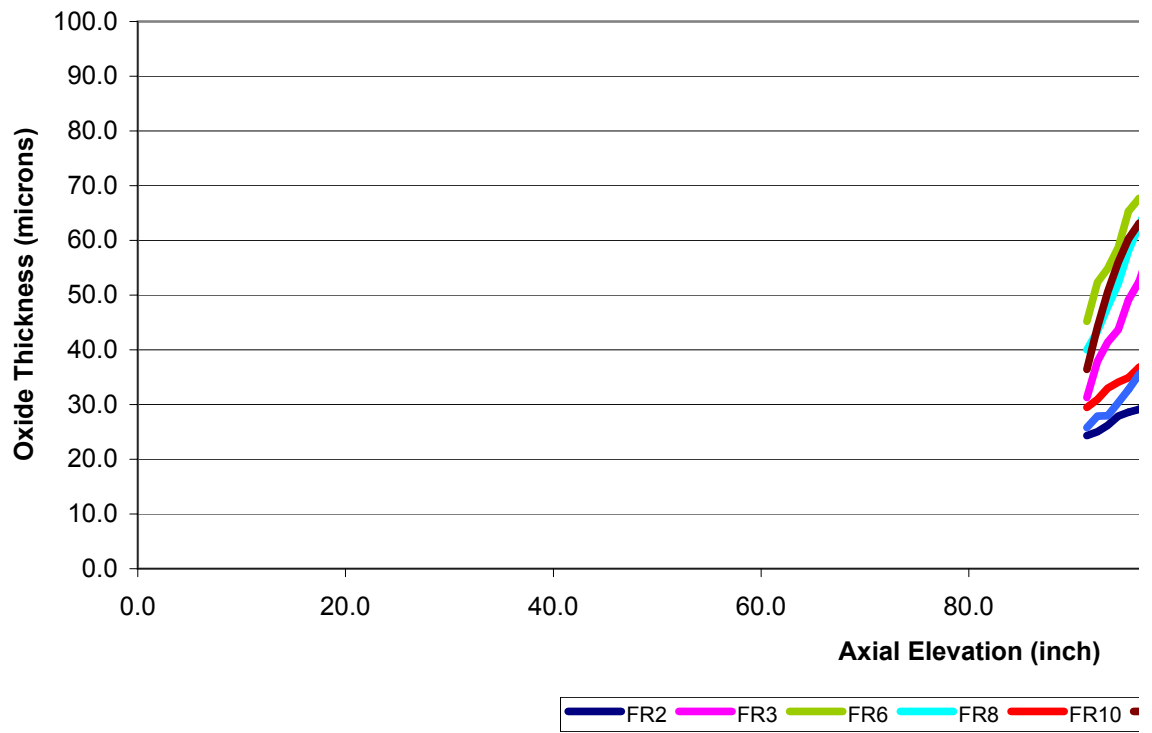

Peak 2, FA HH83, FACE 4)

