

Peripheral Oxide


Utility: Comanche Peak 2

Assembly: JW05

Face: 4

Date: 16-Oct-2003


Elevation	R02	R06	R08	R10	R12	R14
5.1	0.0	-1.4	-1.5	-3.5	-0.7	-1.5
6.1	0.2	-0.1	0.1	-2.7	-1.7	-2.2
7.1	-0.7	-1.3	-0.8	-2.6	-0.7	-1.4
8.1	-1.3	3.4	0.0	-0.7	-0.7	-0.8
9.1	-0.4	-0.1	-0.1	-0.8	0.2	-0.6
10.1	-1.2	-0.9	-0.7	-0.5	0.7	0.1
11.1	-0.7	2.9	0.2	0.0	1.0	0.1
12.1	-0.9	0.8	-0.6	1.2	1.9	1.4
13.1	0.7	0.6	0.8	1.1	1.4	1.4
14.1	0.2	0.6	-0.3	0.8	1.8	2.2
15.1	0.2	1.0	0.2	1.0	0.8	1.8
16.1	0.6	0.7	0.5	0.9	0.8	1.3
17.1	0.6	2.5	0.7	1.0	1.1	1.7
18.1	1.6	2.4	1.2	1.3	1.0	1.6
19.1	2.2	2.2	1.7	1.6	1.9	2.4
20.1	2.9	2.6	1.4	2.3	2.0	2.1
21.1	2.1	2.5	1.8	1.4	2.5	4.2
22.1	1.0	3.0	0.9	2.5	2.1	2.9
23.1	0.5	3.3	1.2	1.6	1.9	4.0
29.5	-0.3	0.7	1.8	1.1	1.4	1.5
30.5	-0.4	0.6	0.4	1.0	2.3	0.3
31.5	-0.5	0.8	0.5	0.4	0.9	1.1
32.5	1.0	2.0	0.1	-0.1	0.9	1.0
33.5	1.5	2.1	-0.4	-0.2	0.7	1.9
34.5	1.7	5.5	0.9	0.0	1.0	1.4
35.5	2.2	6.1	0.1	0.1	1.2	2.1
36.5	1.2	5.4	1.8	-0.3	1.4	1.5
37.5	3.2	6.0	1.9	1.2	2.5	1.8
38.5	3.1	3.5	2.5	0.3	2.5	2.7
39.5	4.5	3.8	2.5	1.1	3.1	3.0
40.5	3.9	3.5	2.8	0.9	4.0	3.8
41.5	3.0	2.8	4.6	1.2	3.9	3.1
42.5	4.7	2.5	4.9	2.6	5.1	5.0
43.5	2.7	2.5	4.5	0.9	3.5	3.3
50.1	-0.1	3.1	2.5	0.4	0.4	1.4
51.1	1.1	1.3	2.5	1.7	0.4	0.9
52.1	1.1	1.9	1.2	1.5	0.6	0.5
53.1	0.3	1.7	1.7	-0.2	0.1	1.0
54.1	1.4	2.6	1.4	0.8	1.1	1.3

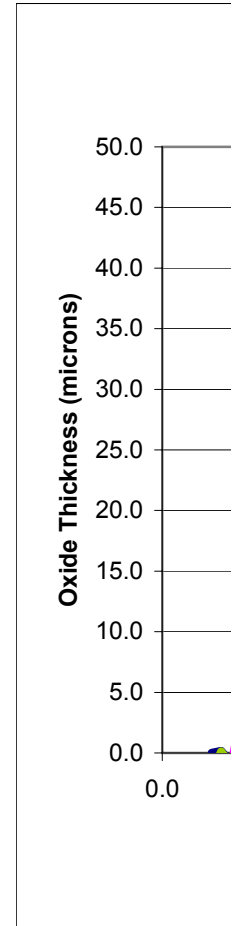

55.1	0.4	2.7	2.4	1.2	0.9	0.3
56.1	1.5	2.1	3.2	1.4	1.2	1.2
57.1	3.4	4.0	3.7	3.0	2.1	1.8
58.1	1.8	2.8	4.5	2.6	1.7	2.2
59.1	1.0	5.2	3.3	3.0	2.0	1.9
60.1	1.2	3.2	3.1	2.7	2.2	1.5
61.1	1.7	4.0	2.4	2.4	3.1	2.7
62.1	3.2	3.2	3.7	3.0	3.7	2.5
63.1	3.9	4.1	3.3	3.4	3.0	2.5
64.1	3.0	4.8	5.0	3.1	3.7	2.8
70.7	0.8	3.0	1.5	1.4	2.0	1.7
71.7	1.3	3.3	2.4	1.9	2.3	2.3
72.7	4.2	2.8	1.4	1.4	1.6	2.2
73.7	1.2	1.8	1.6	5.1	1.4	1.2
74.7	1.6	3.3	0.8	1.2	1.3	1.6
75.7	1.2	1.8	1.1	1.1	1.6	1.9
76.7	2.1	2.5	1.8	2.4	2.3	1.3
77.7	2.5	4.9	1.5	2.2	2.7	2.4
78.7	2.8	2.4	2.4	2.5	3.5	1.7
79.7	2.1	2.6	2.4	2.8	3.1	3.8
80.7	2.2	2.5	3.6	2.5	4.0	3.5
81.7	2.2	5.3	3.7	1.9	3.2	3.6
82.7	2.3	3.1	3.6	3.1	4.4	4.5
83.7	3.2	4.3	6.0	3.1	3.6	4.1
84.7	3.5	5.3	6.4	3.8	5.2	5.5
91.2	2.7	3.7	3.1	1.7	2.5	1.5
92.2	2.4	4.3	3.6	2.5	2.9	4.1
93.2	2.8	4.0	3.0	2.1	2.0	2.2
94.2	1.5	2.7	2.5	1.9	2.8	2.6
95.2	2.9	3.7	4.8	1.7	2.5	1.8
96.2	2.1	4.1	3.8	1.8	2.0	2.5
97.2	3.6	4.5	4.8	3.2	2.6	3.7
98.2	3.8	5.1	4.2	2.6	3.2	3.9
99.2	4.5	5.2	5.8	4.7	3.9	3.6
100.2	4.7	6.0	4.7	4.0	4.4	3.3
101.2	5.1	5.2	4.9	5.5	4.0	4.1
102.2	5.9	6.0	6.3	5.6	4.8	4.5
103.2	4.8	6.5	6.5	6.4	4.4	5.5
104.2	6.3	6.5	7.1	6.1	4.8	5.1
105.2	5.9	9.0	8.0	5.9	6.2	4.2
111.8	3.5	5.3	5.6	3.5	4.4	5.1
112.8	4.6	4.9	4.7	4.6	6.4	4.6
113.8	4.2	4.7	5.3	1.8	5.3	5.9
114.8	4.2	3.4	4.2	1.5	5.0	4.1
115.8	4.3	3.4	4.7	2.3	5.2	6.0
116.8	4.6	2.9	4.6	2.3	5.7	4.6
117.8	6.4	4.7	5.4	2.8	6.0	5.3
118.8	6.0	6.7	6.1	2.7	6.0	5.8
119.8	6.2	5.1	4.6	2.5	5.9	5.2

120.8	6.2	7.3	6.8	3.4	6.9	6.2
121.8	5.7	6.3	5.3	3.8	6.4	5.3
122.8	6.4	6.8	6.8	3.9	6.2	7.0
123.8	6.0	6.7	5.9	5.6	6.6	7.5
124.8	6.6	6.2	5.5	6.1	6.5	6.7
125.8	7.0	8.2	7.0	9.4	7.5	7.5
132.3	3.1	5.9	6.9	1.9	3.9	3.6
133.3	3.7	2.9	4.7	2.0	4.4	2.7
134.3	5.1	3.3	5.8	0.3	3.2	3.8
135.3	4.8	3.8	6.0	0.6	3.3	2.1
136.3	4.1	3.3	7.5	0.3	2.6	2.1
137.3	3.1	4.6	7.2	1.5	3.4	3.9
138.3	2.4	3.2	5.6	-0.1	2.7	2.5
139.3	1.6	3.5	5.8	-0.2	2.8	1.9
140.3	2.1	2.4	4.6	0.1	3.7	3.0
141.3	1.0	3.0	4.9	0.0	2.6	1.8
142.3	1.6	3.1	3.9	1.0	4.8	2.3
143.3	2.2	4.1	5.0	0.4	4.2	1.6
144.3	1.3	3.6	4.8	1.2	3.4	1.1
145.3	2.5	2.0	2.4	1.2	2.0	2.6
146.3	1.1	2.3	3.5	0.6	1.8	1.2
max	7.0	9.0	8.0	9.4	7.5	7.5

Peripheral Rod Oxide (Comanche Peak 2, FA JW05, FACE 4)

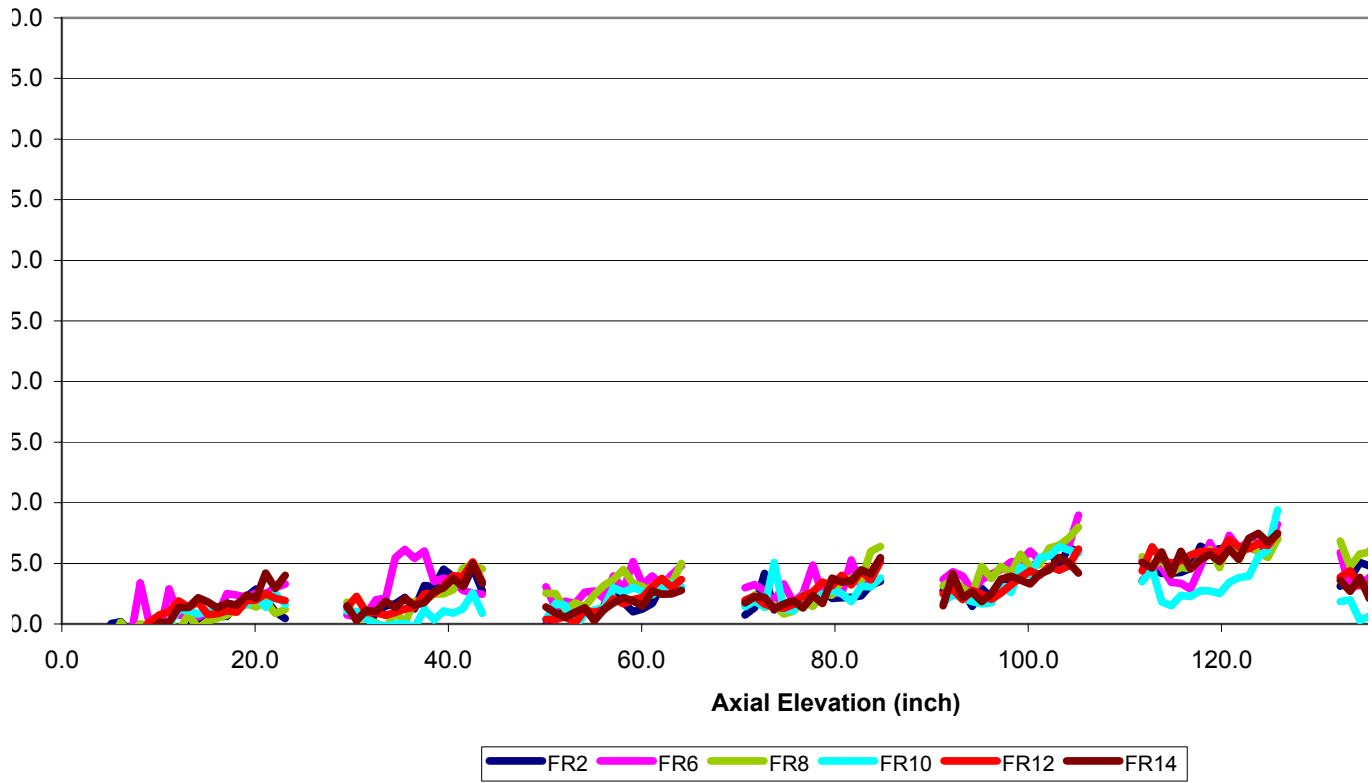

4)

