

NEI 13-02 [Rev. C1]

INDUSTRY GUIDANCE FOR COMPLIANCE WITH ORDER EA-13-109

**BWR Mark I & II Reliable Hardened
Containment Vents Capable of
Operation Under Severe Accident
Conditions**

August 2013

NEI 13-02, Rev. C1
August 2013

NEI 13-02 [Rev. C1]

Nuclear Energy Institute

**INDUSTRY GUIDANCE
FOR COMPLIANCE WITH
ORDER EA-13-109:**

**BWR Mark I & II Reliable Hardened
Containment Vents Capable of
Operation Under Severe Accident
Conditions**

August 2013

Nuclear Energy Institute, 1776 I Street N. W., Suite 400, Washington D.C. (202.739.8000)

ACKNOWLEDGEMENTS

This report was prepared by the NEI Filtering Strategies Working Group and under the oversight of the industry Fukushima Response Steering Committee. This document would not have been possible without the engagement of the BWROG and the technical bases and rationale provided by EPRI.

NOTICE

This report was prepared as an account of work sponsored by the Nuclear Energy Institute (NEI). Neither NEI nor any of its employees, members, or consultants make any warranty, expressed or implied, or assume any legal liability or responsibility for the accuracy, completeness or usefulness of any information, apparatus, product or process disclosed in this report, or represent that its use would not infringe privately-owned rights.

The opinions, conclusions, and recommendations set forth in this report are those of the authors and do not necessarily represent the views of NEI, its employees, members or consultants.

Because NEI is supported in part by Federal funds, NEI's activities are subject to Title VI of the Civil Rights Act of 1964, which prohibits discrimination based on race, color, or national origin, and other federal laws and regulations, rules, and orders issued thereunder prohibiting discrimination. Written complaints of exclusion, denial of benefits or other discrimination of those bases under this program may be filed with the United States Nuclear Regulatory Commission, Washington, DC 20555 or any other appropriate federal regulatory agency or, among others, the Tennessee Valley Authority (TVA), Office of Equal Employment Opportunity, 400 West Summit Hill Drive, Knoxville, TN 37902

TABLE OF CONTENTS

1. INTRODUCTION.....	1
1.1. Purpose	
1.2. HCVS Guiding Principles	
1.3. Procedure Interface	
1.4. Overview	
2. WETWELL VENT BOUNDARY CONDITIONS for VENT DESIGN and OPERATION	9
2.1. Wetwell HCVS Use for Design Basis	
2.2. Wetwell HCVS Use for BDBEES	
2.3. Wetwell HCVS Use during Applicable Severe Accident Conditions	
2.4. Wetwell Vent Design Boundary Conditions	
2.5. Wetwell Vent Operation Assumptions	
3. DRY WELL VENT BOUNDARY CONDITIONS for VENT DESIGN and OPERATION ...	15
3.1. Drywell HCVS Use for Design Basis	
3.2. Drywell HCVS Use for BDBEES	
3.3. Drywell HCVS Use during Applicable Severe Accident Conditions	
3.4. Drywell Vent Design Boundary Conditions	
3.5. Drywell Vent Operation Assumptions	
4. DESIGN CONSIDERATIONS	16
4.1. Vent Design Criteria (page 16)	
4.1.1. Vent Thermal Design and Capacity	
4.1.2. Multipurpose Penetration Use	
4.1.3. Routing Considerations	
4.1.4. Multiunit Interfaces	
4.1.5. Release Point	
4.1.6. Leakage Criteria	
4.1.7. Protection from Flammable Gas Ignition	
4.1.8. Combined Drywell/Wetwell Vent pipe Design considerations	
4.1.9. Fault Evaluations	
4.2. Vent Operation and Monitoring (page 24)	
4.2.1. Protection from Inadvertent Actuation	
4.2.2. Required HCVS Controls	
4.2.3. Alternate Remote Operation	
4.2.4. Vent Monitoring	
4.2.5. Operational Hazards	
4.2.6. Designed to minimize Operator Actions	
5. PROGRAMMATIC CONTROLS	35
5.1. Environmental Conditions	
5.2. Seismic and External Hazard Conditions	
5.3. Quality Requirements	
5.4. Maintenance Requirements	

6. OPERATIONAL CONSIDERATIONS	38
6.1. Operator Actions	
6.1.1. Feasibility and Accessibility	
6.1.2. Procedural Guidance	
6.1.3. Training	
6.2. Testing and Inspection of HCVS	
6.3. Allowed out of service time for HCVS	
7. REPORTING REQUIREMENTS	47
7.1. Overall Integrated Plan Template	
7.2. Six month Updates	
8. REFERENCES	50
APPENDICES	
APPENDIX A – Glossary of Terms (pg 56).....	A-1
APPENDIX B – Roadmap of Order Requirements (pg 61)	B-1
APPENDIX C – Assessment of Need for Drywell Vent (pg 66)	C-1
APPENDIX D – Interface with FLEX (pg 67)	D-1
APPENDIX E – Interface with Generic Letter 89-16 (pg 69)	E-1
APPENDIX F – Method to Estimate Operator Doses (pg 70)	F-1
APPENDIX G – Method to Estimate Source Term for Vent (pg 72)	G-1
APPENDIX H – Methods to Address Control of Flammable Gases(pg 75).....	H-1

1. INTRODUCTION

The nuclear energy industry and the NRC share a common challenge of ensuring prevention and mitigation strategies are available to maintain safety in the face of unlikely and extreme events. An approach that focuses on diverse and flexible mitigation capability will provide additional defense-in-depth safety enhancement against a range of extreme events, some of which cannot be forecasted.

The importance of reliable operation of hardened vents during conditions involving loss of active containment heat removal capability is well established and this understanding has been reinforced by the lessons learned from the accident at Fukushima Dai-ichi. Hardened vents have been in place in U.S. plants with BWR Mark I containments for many years but design variances exist across the industry with regard to the capability of the vents for a broad spectrum of events. Generally, BWR Mark II containments do not currently have hardened vent paths. The NTF 90-day report indicated hardened vent designs that were AC independent to operate with limited operator actions from the control room are necessary. Therefore, Order EA-12-050 required hardened containment venting systems in BWR facilities with Mark I and Mark II containments ~~are being required by the NRC~~ on the basis that they are needed to ensure provide reasonable assurance of adequate protection of public health and safety.

~~Prompted by Fukushima Dai-ichi accident, the NRC issued Order EA-12-050 requiring installation of a reliable hardened vents for Mark I and Mark II containments. As directed by the NRC Commissioners~~ Subsequently the original Order was rescinded and replaced with a new order to address require a severe accident capable containment vent severe accidents on the basis that it provides a cost-justified substantial safety improvement beyond what is needed to provide reasonable assurance of adequate protection of public health and safety. Order EA-13-109 was issued to maintain expand the ~~same~~ set of design and quality requirements originally imposed by EA-12-050 ~~but included additional requirements~~ to ensure that venting functions are available during postulated severe accident conditions. Because EA-12-050 has been rescinded and its requirements are now reflected in Order EA-13-109, licensees are no longer expected to comply with the requirements of Order EA-12-050, including any applicable time lines for submission of integrated plans, or for complete implementation.

The ~~new~~ severe accident Hardened Containment Venting System (HCVS) Order contains historical information and decision making insights in sections I, II and III that provide useful information, but do not contain the legally binding actions which licensees are required to comply with, which are in sections IV and Attachment 2.

1.1 Purpose

The purpose of this guidance is to assist nuclear power reactor licensees with the identification of measures needed to comply with the requirements of Order EA-13-109, "Order Modifying Licenses with Regard to Reliable Hardened Containment Vents Capable of Operation Under Severe Accidents" [Ref. 2]. This guidance provides an acceptable method for satisfying those requirements; however, licensees may propose other methods for satisfying these requirements.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Incorporation of the lessons learned from the [March 11, 2011 Fukushima Dai-ichi](#) Accident is a key element in the foundation of requirements and guidance associated with the scope of work required in response to Order EA-13-109, [which is prefaced by the following statement:](#)

“The events at the Fukushima Dai-ichi nuclear power plant following the March 2011 earthquake and tsunami highlight the possibility that events such as rare natural phenomena could challenge the traditional defense-in-depth protections related to preventing accidents, mitigating accidents to prevent the release of radioactive materials, and taking actions to protect the public should a release occur. At Fukushima Dai-ichi, limitations in time and unpredictable conditions associated with the accident significantly hindered attempts by the operators to prevent core damage and containment failure. In particular, the operators were unable to successfully operate the containment venting system. These problems, with venting the containments under the challenging conditions following the tsunami, contributed to the progression of the accident from inadequate cooling of the core leading to core damage, to compromising containment functions from overpressure and over-temperature conditions, [and to the hydrogen explosions that destroyed the reactor buildings \(secondary containments\)](#)... of three of the Fukushima Dai-ichi units. ...The events at Fukushima reinforced the importance of reliable operation of hardened containment vents during emergency conditions, [particularly for smaller containments such as the Mark I and Mark II designs](#) ...”

To address this event with the rest of the nuclear industry, there are many regulatory and industry recommendations and changes to be considered. [Among Many of](#) these [currently](#) are [documented in](#) the following:

- NRC Near Term Task Force 90 Day Report, [\[Ref. X\]](#)
- NRC SRM/SECY 11-0124 - Recommended Actions to be taken Without Delay From The Near-Term Task Force Report, [\[Ref. X\]](#)
- NRC – SRM/SECY 11-0137 - Prioritization of Recommended Actions to be Taken in Response to Fukushima Lessons Learned, [\[Ref. X\]](#)

The primary objectives of the [industry response](#) scope of work derived from these documents resulted in [NEI 12-06, revision 0, Diverse and Flexible Coping Strategies \(FLEX\) Implementation Guide, for implementation of the Industry response to NRC Order EA-12-049, Mitigation Strategies for Beyond-Design-Basis External Events \(FLEX\), \[Ref. X\]](#). Many of these cornerstones will be utilized in this guidance document for addressing NRC Order EA-13-109 [even though they did not originally extend to venting capabilities under severe accident conditions](#).

The industry is committed to continuous improvement of nuclear safety. Some applicable continuous improvement work items from lessons learned from the Fukushima Daiichi event are listed below:

- a) Confirm or establish effective coping measures to address the vulnerability of onsite and offsite AC power systems to common mode failures resulting from external and internal events, including beyond design basis events.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- b) Confirm the external events that formed the basis for plant designs exceed credible hazards based on historical data and current models (floods, high winds, seismic events, etc.) or revise the design bases and change the plants, as necessary to accomplish the revised design bases.
- c) Confirm or establish effective primary containment protective strategies that can manage post-accident conditions, including such factors as elevated pressures and hydrogen generation from fuel damage more extensive than original design bases, including use of hardened venting, etc. as appropriate.
- d) Confirm or establish effective integrated strategies to provide for system based response for events and/or severe accidents involving multiple reactors at a site (i.e., integrate Emergency Operating Procedures (EOPs), Severe Accident Management Guidelines (SAMGs), Abnormal Operating Instructions (AOIs), Extreme Damage Mitigation Guidelines (EDMGs), etc.).
- e) Provide for support during extended emergencies involving infrastructure loss, including fuel supplies, coordination of offsite resources, communications, near site living requirements and transportation, etc.
- f) Share and participate with other stakeholders to co-develop responses, improve acceptance and consensus, and minimize development costs.
- g) Establish Regional Response Centers (RRC) with multiple sets of site response equipment and long term coping equipment for mitigating fuel damage from an ELAP event.

1.2 HCVS Guiding Principles

Hardened vents have been in place in U.S. plants with BWR Mark I containments for many years but a variance exists with regard to the capability of the vents for a broad spectrum of events. BWR Mark II containments have containment venting capability but they typically are not hardened vent paths. Therefore, hardened containment venting systems in BWR facilities with Mark I and Mark II containments ~~are being~~ required by the NRC ([Order EA-12-050](#)) on the basis that they are needed to enhance protection of public health and safety.

On June 6, 2013, the US NRC rescinded Order EA-12-050 and issued a new order, EA-13-109, expanding the requirements of the original order to include requirements for the reliable hardened vent ~~for to be capable of operation during~~ severe accident conditions. The new order is applicable to all operating BWR licensees with Mark I and Mark II containments issued under Title 10 of the Code of Federal Regulations (10 CFR), Part 50, "Domestic Licensing of Production and Utilization Facilities."

The original Order EA-12-050 [Ref. 1] required that all boiling water reactor (BWR) Mark I and Mark II containments have a reliable hardened vent to remove decay heat from the containment and maintain ~~control of~~ containment pressure within acceptable limits following events that result in the loss of active containment heat removal capability or prolonged station blackout (SBO), i.e., Extended Loss of AC Power (ELAP). The original order did not include ~~explicit~~ requirements relating to severe accident service for the hardened containment venting system (HCVS); rather, the ~~focus of the~~ HCVS was only required to be able to support strategies related to the prevention of core damage under

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

a wide range of plant conditions. JLD-ISG-2012-02, [Ref. X] provided the Interim Staff Guidance (ISG) ~~to drive compliance to for implementation of~~ Order EA-12-050.

All licensees subject to Order EA-12-050 provided integrated plans for the design and implementation of reliable hardened containment vents by February 28, 2013. In SRM-SECY-12-0157 [Ref. 3], the Commissioners directed the staff to revise Order EA-12-050 to require the upgrade or replacement of the reliable hardened vents required by Order EA-12-050, with a containment venting system designed and installed to remain functional during severe accident conditions.

EA-13-109 requires that BWRs with Mark I or Mark II containments ensure that in addition to pre-core damage venting capability, the HCVS also provides a reliable hardened venting capability from the wetwell and drywell under severe accident conditions, including those involving a breach of the reactor vessel by molten core debris. A strategy for alternate containment heat removal instead of the drywell vent requirement is acceptable. The severe accident capable HCVS is intended to keep the originally required function of the HCVS, which is to help prevent severe accidents from occurring, and to add the capability of helping to mitigate the consequences of operating during a severe accident ~~should one occur~~ conditions. The wetwell and drywell vent pathways are not required to be in operation at the same time.

The development and implementation of the severe accident capable HCVS consists of two phases. The first phase consists of providing a venting system from the containment wetwell that meets the functional, quality, and programmatic requirements listed in subsequent sections of this guide. The second phase is associated with capabilities to vent from the drywell during severe accident conditions and involves either installing a venting system or developing a reliable strategy to limit the possible need to vent from the containment drywell during severe accident conditions. Thus the wetwell and drywell vent pathways will not be required to be installed concurrently.

Appendix C outlines the methodology licensees can use to evaluate the viability-need of a drywell vent path.

1.3 PROCEDURE INTERFACE

This section is intended to provide information on the accident management features of the suite of procedures needed to respond to symptoms present in a BDBE. Inclusion of this information does not intend to provide any express or implied endorsement of EPG/SAG or other details presented in this section.

Command and Control for accident response is governed by the suite of Emergency Preparedness guidelines and procedures. Containment heat removal and pressure control functions are, and have always been, manually initiated at BWR facilities. Therefore, the use of procedures to direct the use of installed systems has existed well before the development of either order. The HCVS is also initiated manually and therefore requires procedural direction to initiate venting for containment heat removal and containment pressure control.

Use of the HCVS is governed ~~Accident response is controlled~~ by the plant specific Emergency Operating Procedures (EOPs), severe accident management guidelines (SAMGs), and Emergency Preparedness procedures. The EOPs provide direction₁


Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

~~based on symptomatic containment conditions, to initiate use of installed vent paths from containment to assure to Operators for use of hardened vents (as well as other available venting) when~~ adequate core cooling has been maintained for prevention of fuel damage. -The SAMGs provide direction for use of hardened vents for the purpose of ~~containment pressure control mitigation~~ after adequate core cooling has been lost. HCVS reliability does not only depend upon the design of the HCVS, but also the procedural guidance directing use based on containment parameters. The importance of reliable operation of hardened vents during conditions involving loss of containment heat removal capability is well established and this understanding has been reinforced by the lessons learned from the accident at Fukushima Dai-ichi. Understanding the procedural interface and direction in determining HCVS design criteria is essential ~~given the influence that severe accident conditions have on the design and operational use of the vent paths.~~


Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

The plant specific procedures are based upon the BWROG generic Emergency Procedure Guidelines/Severe Accident Guidelines (EPGs/SAGs), whose organizational structure is diagrammed below:

EPG Structure

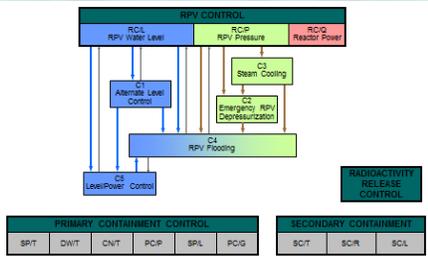

SAG Structure

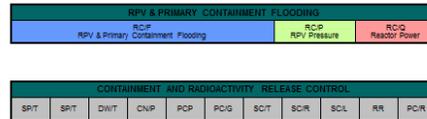


Utilities currently have implemented Revision 2 of the EPG/SAGs, but Revision 3 has been published and includes the lessons learned from Fukushima Dai-ichi.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

The BWROG standard emergency operating procedures and severe accident guides (EOP/SAG) (Revision 2 and 3) both provide direction for BWR Mark I and II plants to leave EOP/SAG flowcharts (into recovery actions) at any point where adequate containment heat removal methods are in effect as on the following illustration of containment venting characteristics (i.e., they are not predisposed to have to use drywell venting.)

Containment Venting Characteristics

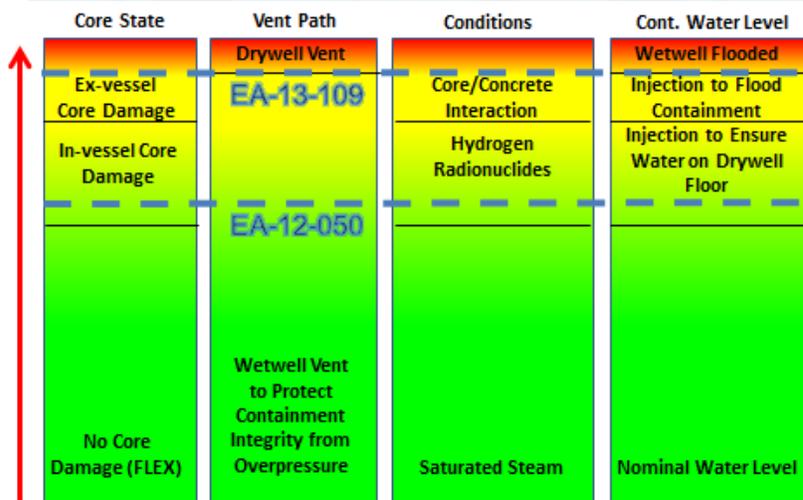

Revision 3 of the EOP/SAG enhanced the flow of information from revision 2 using lessons learned from the Fukushima event. The information presented is representative of the structure in Revision 3.

From the plant specific EOPs developed from the EPGs, use of a hardened vent is directed:

- before primary containment pressure reaches the primary containment overpressure limit defined by the Primary Containment Pressure Limit (PCPL),
- if lower containment pressure is necessary to provide RPV injection; if suppression pool approaches saturation conditions and can no longer effectively condense steam discharged from RCIC; or
- to limit total offsite dose by venting steam prior to experiencing fuel damage.

From the plant specific SAMGS developed from the SAGs, use of a hardened vent is directed:

- Before primary containment pressure reaches the primary containment overpressure condition defined by (PCPL);

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions


- To facilitate RPV injection or containment injection; or
- To remove combustible gases from primary and secondary containment.

Containment venting per the procedures and guidelines should be coordinated with evacuation procedures and timed to take advantage of favorable meteorological conditions. It should be coordinated to take advantage of suppression pool scrubbing as much as possible.

For venting using EOPs the wetwell vent is expected to be used to protect containment and will be venting mostly saturated steam, while Primary Containment Water level and pressure will be maintained to preserve the Pressure Suppression Capability of the Containment. This could include venting to protect steam driven systems being used to provide adequate core cooling or to limit the total offsite dose if it is expected that fuel damage has occurred.

Once fuel damage occurs and transfer to plant specific SAMGs is made, containment venting will depend on other plant conditions. Only two steps in plant specific SAMGs require containment flooding, steps RC/F-1 and RC/F-2. The remaining steps seek to maintain Pressure Suppression Capability (which means suppression pool water is maintained in an extended range but not flooding containment). Containment venting could be used to restore Pressure Suppression Capability by lowering containment pressure. The SAMGS do not mandate Drywell venting for all conditions.

The following graphic shows the SAMG decision block and briefly describes the conditions each step implements:

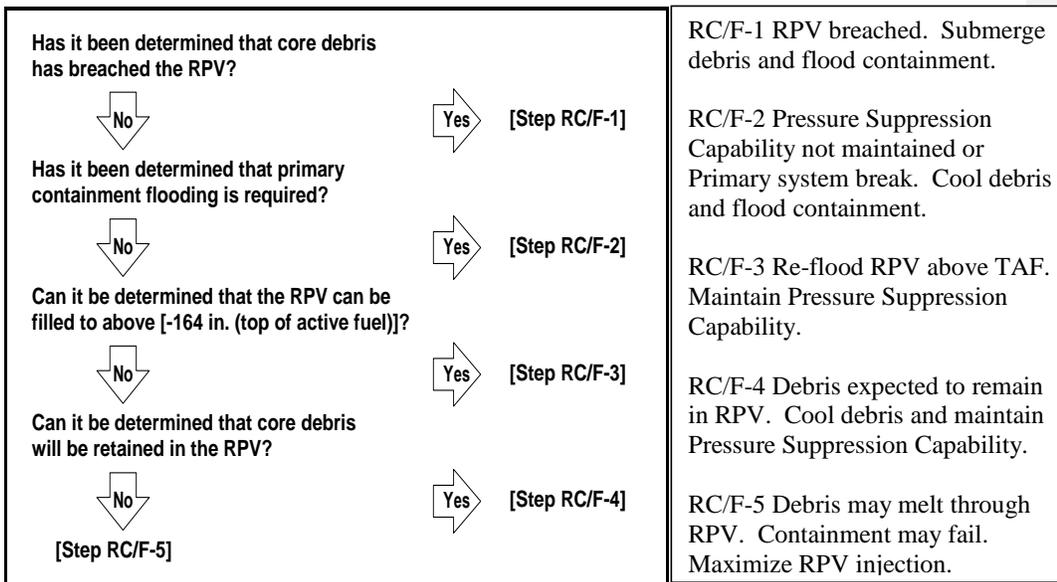

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

To summarize, containment venting is addressed in plant specific EOPs for prevention of core damage. After core damage cannot be prevented, plant specific SAMGs address mitigation of core damage. The basis for these actions is documented in the BWROG EPG/SAG Rev. 3 Appendix B, Technical Basis, and the Technical Support Guidelines, Rev. 0. Hardened containment vent designs should include a review of the EPG/SAG Revision 3 directions for use of containment vents.

1.4 OVERVIEW

This industry guidance has been developed to provide an integrated set of considerations for the design and implementation of a severe accident capable hardened containment venting system (HCVS). This guidance is organized in the following manner:

- Section 2: Description of the boundary conditions to be applied to the design of HCVS including the applicable severe accident conditions, the design boundary conditions and operational assumptions, and the role of mitigation strategy capabilities implemented under EA-12-049 [Ref. X]
- Section 3: Guidance on the design considerations for the HCVS including vent path design, vent operation and monitoring, support systems for sustained operations, protection from flammable gas ignition, other design requirements such as environmental qualification, seismic and external hazard design and quality requirements.
- Section 4: Guidance on the operational considerations for the HCVS including procedural guidance and training related to the operator actions required for use of the HCVS and the testing and inspection of the HCVS and associated components.
- Section 5: Guidance on meeting the programmatic requirements associated with the revised order.
- Section 6: Operations consideration for the HCVS including environmental considerations, procedures, allowed out of service time, and testing.
- Section 7: Template for Overall Integrated Plan Submittal and six month status updates
- Section 8: References
- Appendices: Are provided to elaborate on specific aspects of the guidance including a glossary of key terms, a cross-reference roadmap of order requirements, FLEX interfaces, generic letter 89-16 interfaces, calculation methods for defining plant-specific severe accident operator doses and source terms, and design approaches to address control of flammable gases.

~~This industry guidance provides an acceptable method for satisfying the requirements of Order EA-13-109.~~ Licensees may propose other methods for satisfying these requirements of Order EA-13-109. The NRC staff can review such methods and determine their acceptability on a case-by-case basis.

2. WET WELL VENT BOUNDARY CONDITIONS FOR VENT DESIGN AND OPERATION

Boiling-Water Reactors (BWRs) with Mark I and Mark II containments shall have a reliable, severe accident capable hardened containment venting system (HCVS). The HCVS includes a severe accident capable wetwell venting system, and may also, depending on the approach taken for Phase 2 of Order EA-13-109, include a severe accident capable drywell venting system. Because of the potential for implementation ~~it can be in~~ two phases, and the fact that the containment conditions that exist at the initiation of venting from the wetwell and drywell may be different, this document separates the boundary conditions for design and operation between wetwell and drywell into two separate sections. Boundary conditions used in design of HCVS shared components and piping is included in this Section and in Section 4.1.

Under Phase 1 of Order EA-13-109, Licensees with BWR Mark I and Mark II containments shall design and install a HCVS, using a vent path from the wetwell to remove decay heat, vent the containment atmosphere (including steam, hydrogen, carbon monoxide, non-condensable gases, aerosols, and fission products), and control containment pressure within acceptable limits. The HCVS shall be designed for those accident conditions (before and after core damage) for which containment venting is relied upon to reduce the probability of containment failure, including accident sequences that result in the loss of active containment heat removal capability during an extended loss of alternating current (AC) power (ELAP). The HCVS shall meet the requirements of Sections 4, 5, and 6 of this document.

Under Phase 2 of Order EA-13-109, Licensees with BWR Mark I and Mark II containments shall either, (1) design and install a HCVS, using a vent path from the containment drywell, that meet the requirements in Sections 3 through 6 or, (2) develop and implement a reliable containment venting strategy using the guidance provided in Appendix C of this document that demonstrates it is unlikely that a licensee would need to vent from the containment drywell before alternate reliable containment heat removal and pressure control is reestablished to meet the requirements in Section B.2 of the Order.

The requirements of Order EA-12-050 addressed the use of the HCVS for both prevention of core damage and protection of the containment from overpressure failure during a Beyond Design Basis Event (BDBE) that do not progress to core damage and severe accident conditions. Unlike conditions resulting from postulated plant events, severe accidents, by their very nature, are an effectively unbounded class of events. Although reactors licensed under 10CFR52 have certain regulatory requirements related to severe accident capabilities, the extension of regulatory requirements to design features required for severe accident conditions is unique for existing reactors licensed under Part 50. This unique aspect of Order EA-13-109 calls for very clear definition of the boundary conditions to be applied to the design and operational considerations required to implement the HCVS. The purpose of this section is to clearly outline these

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

boundary conditions and the key terms used in relation to the conditions associated with a severe accident capable vent.

Two key functional aspects of the HCVS involve the prevention of containment over-pressurization for events that do not result in core damage and for events where severe accident conditions exist.

A key guiding principle regarding the design of the HCVS is defining conditions that ~~match~~ are consistent with the capability of the containment to withstand severe accidents. The HCVS is not required to be designed or have capability beyond those containment conditions (e.g. temperature, pressure, radionuclide, combustible gases) that have potential to challenge the containment boundary function.

2.1. HCVS Use for Design Basis

Use of the HCVS during design ~~basis accident~~ or ~~other licensing basis~~ events (DBE) is not assumed nor required. ~~However, the EPGs provide directions on the use of the HCVS to support maintaining adequate core cooling and prevent core damage in response to containment conditions that progresses beyond plant design basis conditions.~~

2.2. HCVS Use for Beyond Design Basis External Events (BDBEEs)

A spectrum of Beyond Design Basis Events (BDBE) or Beyond Design Basis External Events (BDBEE) may be postulated; however, in the context of the HCVS, the design and operation in response to such events is not intended to be constrained to a specific set of scenarios or timelines. Rather, the considerations for the HCVS are defined to provide a broad functional capability for the prevention of containment over-pressurization prior to core damage and mitigation of containment over-pressure conditions that may exist after core damage.

2.2.1. BDBE are events that involve assumptions and failures that exceed those associated with DBEs but may not be considered severe accidents.

2.2.2. Certain beyond design basis events such as an extended loss of AC power (ELAP) can result in the loss of active containment heat removal capability.

2.2.2.1. Plant actions to address an ELAP are contained in the plants response to NRC Order EA-12-049, commonly referred to as FLEX. An ELAP itself is not considered a severe accident since use of FLEX mitigates core damage. However, if ELAP is not mitigated a severe accident with core damage and vessel breach may evolve.

2.2.3. The primary design objective of the HCVS is to provide sufficient venting capacity to prevent a long-term overpressure failure of the containment by keeping the containment pressure below the primary containment design pressure and the primary containment pressure limit (PCPL).

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

2.2.4. The HCVS venting pressure for a BDBE may be ~~initiated below PCPL~~ driven by ~~other~~ conditions created during BDBEs, such as to lower pressure to use a low pressure portable pump or to control containment conditions to allow continued use of installed equipment such as installed steam-driven equipment that discharges to the Suppression Pool/Torus during loss of containment cooling.

2.3. HCVS Use for Applicable Severe Accident Conditions

~~For the purpose of this order,~~ The primary severe accident use of the HCVS is to protect the containment from over-pressure failure caused by the increase in containment pressure from steam or non-condensable gases, or elevated containment temperature ~~within containment~~ following severe core damage. For the purposes of this order, the severe accident is caused by loss of active containment heat removal capability or failure to mitigate an ELAP. The conditions include both scenarios in which all core debris is cooled in-vessel (similar to the accident at TMI-2) and scenarios in which core debris breaches the reactor coolant boundary and at least some core debris relocates into containment. Increased temperature resulting from severe accidents may impact the pressure retention capability of containment, particularly the drywell head gasket. The performance of the HCVS in response to a severe accident is intended to minimize, as far as reasonably practicable, unplanned releases of radionuclides to the environment by preventing containment over-pressure.

The HCVS would also be used as an element of the SAGs-Plant procedures to maintain the Pressure Suppression Pressure function of the containment prior to RPV breach by controlling torus pressure and level. Additionally, venting of non-condensable gases from the drywell can reduce the challenge to containment integrity from stratified gas temperature effects on the drywell head.

2.3.1. The spectrum of severe accidents considered within the HCVS design are limited to those that do not compromise the containment integrity (i.e., the limitation of penetration seals, drywell head gasket, etc.) to reasonably retain radionuclides from being released to the environment given severe accident conditions.

2.3.2. Realistic assumptions (i.e. not bounding) may be used to determine the boundary conditions for design of the HCVS.

2.3.3. The integrity of the drywell head gasket should be considered to determine potential over-pressure margin to leakage from the head region.

2.4. Vent Design Boundary Conditions

The potential scope of possible severe accident conditions is essentially unbounded. In some scenarios, severe accident containment conditions can compromise containment integrity for reasons other than over-pressurization, (e.g., drywell shell melt-through in Mark Is, extremely high temperatures or other postulated containment failure modes). The unbounded nature of severe accident conditions calls for a more reasonable design philosophy; the HCVS design should not exceed meet the current capability of the limiting

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

containment components or the conditions under which it is required to operate. Four primary parameters are defined for use in defining the HCVS component capability; Pressure, Temperature, Radiation and Hydrogen/CO Concentration.

Order Reference: 1.2.10 – The HCVS shall be designed to withstand and remain functional during severe accident conditions, including containment pressure, temperature, and radiation while venting steam, hydrogen, and other non-condensable gases and aerosols. The design is not required to exceed the current capability of the limiting containment components.

2.4.1. Depending on the HCVS design, the HCVS may have three distinct portions.

- 2.4.1.1. a portion that only supports wetwell venting,
- 2.4.1.2. a portion that only supports drywell venting, and
- 2.4.1.3. a portion that is shared by both.

2.4.1.3.1. The drywell generally has the most limiting boundary conditions, so the drywell boundary condition parameters described below are recommended for the shared portions of the HCVS.

2.4.2. The use of the HCVS is ~~directed by~~provided in BWROG ~~Emergency Procedure Guidelines/Severe Accident Guidelines (EPGs/SAGs)~~Industry Guidance and adopted on a plant-specific basis through the use of flowcharts and procedures.

2.4.2.1. In the ~~SAGs~~Plant procedures, the highest pressure used for venting to control (restore and maintain) pressure is based on the plant-specific Primary Containment Pressure Limit (PCPL).

2.4.2.1.1. The most bounding PCPL for design of components is PCPL-C, which is based on the pressure capability of containment.

2.4.2.1.2. PCPL-C is selected as the boundary condition for the design pressure of the HCVS components and piping. It is expected that the capability of HCVS components and piping will be greater than the design boundary conditions.

2.4.3. During a severe accident, temperature of gases in the wetwell and drywell will differ due to ~~insufficient removal of decay heat from fission products resulting in superheat or non-saturated conditions in the drywell, the high temperatures induced by core damage.~~

2.4.3.1. The suppression pool/wetwell of a BWR Mark I/II containment can generally be considered to be in a saturated condition.

2.4.3.2. The EPG/SAG guidance on determining the plant-specific PCPL provides a temperature range for the suppression pool of 70°F to 350 °F [Ref. 6].

2.4.3.3. Therefore, the design temperature for the wetwell vent portions of the HCVS are recommended to be based on the 350 °F upper bound of the EPG/SAG bases document which is above the saturation temperature corresponding to typical PCPL values.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 2.4.4. For the drywell, the BWROG guidance on determining the plant-specific PCPL prescribes drywell temperature range for the drywell of 100°F - 545°F.
- 2.4.4.1. The maximum of this range, 545°F, is recommended as the design temperature for the drywell and shared portions of the vent unless a lower number can be analytically justified. Design temperatures have inherent margin to the components much higher plastic failure temperatures; AISC Fire Ratings for Steel is representative of this type of margin.
- 2.4.5. Hydrogen gas (and other combustible gases) is a product of the core damage process as a result of chemical reactions involving zirconium and steam (or steel and steam) and Molten Corium Concrete Interaction (MCCI).
- 2.4.5.1. Depending on the scenario and the timing of vent use, the volume fraction of hydrogen can vary widely.
- 2.4.5.2. Based on information in Appendix H, consideration of a hydrogen concentration range of 0% to 6% is recommended (see NUREG C/R-2475/NUREG C/R-6524, GE SIL 643, GE-NE-0000-003-1981-01)
- 2.4.5.2.1. Hydrogen is flammable at above 8% in many references and as low as 4% in other references.
- 2.4.5.2.1.1. The order drives two options, keep the hydrogen concentration below 8% by purging or to design for detonation.
- 2.4.5.2.1.1.1. Purging is an acceptable method for keeping the flammable concentration below 8%
- 2.4.5.2.1.1.2. Designing for detonation is addressed in Appendix H.
- 2.4.5.2.1.2. The exclusion of oxygen is an acceptable alternative to either inerting with steam or nitrogen or making the piping detonation/deflagration proof.
- 2.4.6. The recommended boundary conditions for the severe accident capable vent are summarized in Table 2-1 below.

Notes:

- JSME proposed standard related to “SA Management Design Guideline for External Events” considers 200°C as the temperature where the Primary Containment failure begins due to penetration impact resulting from thermal growth of the shell and shear fracture of penetration sleeves.
 - TEPCO proposed containment vent system design uses values of two (2) times containment design pressure and 200°C (392°F).
- The Switzerland Regulator imposed a vent design pressure of 150% of containment design pressure or 66% of failure pressure via HSK-AN-2026.
 - A European BWR uses 150°C (302°F) as the design temperature for its vent system.
- Not all BWR Containment, Drywell Sprays and Suppression Pools are sized and/or configured similarly depending on NSSS provider and construction timeline.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

**Table 2-1
Severe Accident Capable Vent Design Parameter Boundary Conditions**

Boundary Parameter	Wetwell Vent Path	Drywell Vent/ Shared Paths
Containment Design Pressure	Containment Pressure at PCPL-C	
Containment Design Temperature	350 °F	545°F

2.4.6.1. Selection of values that are more conservative than the above recommended values is acceptable (i.e., higher design pressures and temperatures).

2.4.6.2. Less restrictive bases than the above recommended values require a plant-specific technical justification.

2.4.7. The piping, valves, and the valve actuators should be designed to withstand the dynamic loading resulting from the actuation of the system, including piping reaction loads from valve opening, potential for water hammer from accumulation of steam condensation, and hydrogen detonation, if applicable, during multiple venting cycles.

2.5. Vent Operation Assumptions

The vent must be capable of operation during an extended loss of AC power (ELAP) and under conditions that may exist during a severe accident.

Order Reference: 1.2.6 The HCVS shall be capable of operating with dedicated and permanently installed equipment for at least 24 hours following the loss of normal power or loss of normal pneumatic supplies to air operated components during an extended loss of AC power.

2.5.1. Severe accident conditions within the containment require consideration of accessibility and stay time issues using the methodologies in Appendix F and G. Sections 4.2.5 and 4.2.6 provide the requirements for design.

3. DRY WELL VENT BOUNDARY CONDITIONS FOR VENT DESIGN AND OPERATION

- 3.1. Drywell HCVS Use for Design Basis
- 3.2. Drywell HCVS Use for BDBEEs
- 3.3. Drywell HCVS Use during Applicable Severe Accident Conditions
- 3.4. Drywell Vent Design Boundary Conditions
- 3.5. Drywell Vent Operation Assumptions

4. DESIGN CONSIDERATIONS

The purpose of the reliable HCVS is to enhance the capability of BWRs with Mark I and II containments to preserve containment ~~integrity capability~~ in a wide spectrum of possible beyond design basis accident conditions ~~including the presence of ex-vessel core debris~~, controlling containment pressure within acceptable limits by venting the containment atmosphere including steam, hydrogen, non-condensable gases, aerosols, and fission products. As described in Section 2, the HCVS will be designed for those accident conditions for which containment venting is relied upon to prevent containment failure; including accident sequences that result in the loss of active containment heat removal capability or extended loss of AC power (ELAP). This section describes the design considerations applicable to the design and implementation of a plant-specific HCVS.

4.1. Vent Design Criteria

4.1.1. Vent Thermal Design and Capacity

The primary design objective of the HCVS is to provide sufficient venting capacity to prevent a long-term overpressure failure of the containment by keeping the containment pressure below the PCPL and maintaining Pressure Suppression Capability such that the safety relief valves (SRVs) can be opened and closed as required by plant conditions. Operational functionality of these valves will ensure the capability to depressurize the RPV to permit injection of low head injection systems and to maintain the containment pressure boundary.

Order Reference: 1.2.10 – The HCVS shall be designed consistent with containment pressures and temperatures during severe accident conditions as well as dynamic loading resulting from system actuation. The design is not required to exceed the current capability of the limiting containment components.

Order Reference: 1.2.1 – The HCVS shall have the capacity to vent the steam/energy equivalent of 1 percent of licensed/rated thermal power (unless a lower value is justified by analyses), and be able to maintain containment pressure below the primary containment design pressure and the primary containment pressure limit (PCPL).

4.1.1.1. Key issues to be addressed in the Vent Thermal Design and Capacity requirements are:

4.1.1.1.1. Consideration of containment venting to support mitigation strategies

4.1.1.1.2. Ability of the vent system to operate under the expected pressures and temperatures of the containment.

4.1.1.1.2.1. The key consideration would be design temperature of the drywell vent components

4.1.1.1.3. Sizing considerations for the wetwell and drywell vent

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.1.1.1.3.1. A wet well vent sized under conditions of constant heat input at a rate equal to 1 percent of rated thermal power and containment pressure equal to the PCPL or containment design pressure, the exhaust-flow through the wetwell vent would be sufficient to prevent the containment pressure from increasing.

~~4.1.1.1.3.2.~~ The torus suppression capacity ~~can be assumed to be~~ typically sufficient to absorb the decay heat generated during at least the first three hours following the shutdown of the reactor with suppression pool as the source of injection. Licensees shall have an auditable engineering basis for the decay heat absorbing capacity of their suppression pools, selection of venting pressure such that the HCVS will have sufficient venting capacity under such conditions to maintain containment pressure at or below the primary containment design pressure and the PCPL

~~4.1.1.1.3.2.~~

4.1.1.1.3.3. The decay heat can be assumed to be less than 1 percent of rated thermal power three hours following shutdown of the reactor, and that decay heat continues to decrease to well under 1 percent, thereafter.

4.1.1.1.3.4. If used for justification for less than 1 percent rated thermal power decay heat generation, an auditable engineering basis will be maintained for the decay heat absorbing capacity of the licensee's suppression pools

4.1.1.1.3.5. Licensees may also use a venting capacity sized under conditions of constant heat input at a rate lower than 1 percent of thermal power if it can be justified by analysis that primary containment design pressure and the PCPL would not be exceeded. (wetwell or drywell)

4.1.1.1.3.6. In cases where plants were granted, have applied, or plan to apply for power uprates, the 1 percent thermal power should correspond to the uprated thermal power.

4.1.1.1.3.7. The basis for the venting capacity should give appropriate consideration of where venting is being performed from (i.e., wetwell or drywell) and the difference in pressure between the drywell and the suppression chamber.

4.1.1.1.3.8. Vent sizing for multi-unit sites must take into consideration simultaneous venting from all the units, and ensure that venting on one unit does not negatively impact the ability to vent on the other units.

4.1.2. Multipurpose Penetration Use

Order Reference: 1.2.3 – The HCVS shall include design features to minimize unintended cross flow of vented fluids within a unit and between units on the site.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Order Reference: 2.1 – The HCVS vent path up to and including the second containment isolation barrier shall be designed consistent with the design basis of the plant. These items include piping, piping supports, containment isolation valves, containment isolation valve actuators and containment isolation valve position indication components.

4.1.2.1. Key issues to be addressed regarding multipurpose penetration use are:

4.1.2.1.1. Exception to GDC 56, 10 CFR 50.12 submittal

4.1.2.1.1.1. Each HCVS containment penetration must have two in-series PCIVs as required by GDC 56.

4.1.2.1.1.1.1. Although GDC 56 stipulates that one valve should be inside containment and the other outside containment, both PCIVs on each HCVS containment penetration may be installed outside containment and as close as reasonably possible to the penetration.

4.1.2.1.1.1.2. Locating a power operated valve inside containment that must open and remain operable following a beyond design basis severe accident decreases the reliability of any valve and operator (including motive air and DC instrumentation and controls) located inside the containment.

4.1.2.1.2. The rationale for locating the PCIVs as close as reasonably possible to the containment penetration is to comply with the applicable GDCs.

4.1.2.1.2.1. It limits the amount of the HCVS flow path that is part of the containment penetration boundary.

4.1.2.1.2.2. Minimizing the amount of new containment penetration piping limits the risks to containment integrity. Any piping that is part of the containment penetration boundary must be designed to the appropriate criteria (typically, protected from pipe whip, jet impingement, missiles, and be designed to ASME Section III class 2 with the added requirement for low stresses during design basis operation of the plant to preclude having to postulate pipe break or pipe cracks).

4.1.2.1.2.3. Locating the PCIVs close to the containment penetration ~~restricts the possibility precludes any~~ practical local-manual operation; Section 4.2 discusses design features that will increase remote-manual operation.

4.1.2.1.3. GDC 56 stipulates that the valves must be either locked-closed or have automatic closure.

4.1.2.1.3.1. The intent of automatic isolation is to ensure that penetrations that may be open to the containment atmosphere during normal operation (e.g., nitrogen

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

inerting, nitrogen purging) are closed when containment integrity is required.

- 4.1.2.1.3.2. Automatic isolation of the HCVS valves on a containment isolation signal is possible, but it would be redundant since these valves are required to be closed during all anticipated modes of operation that could require containment isolation. (except during the period required for operation when the containment isolation signals are to be defeated to allow HCVS operation)
- 4.1.2.1.3.3. Also, automatic isolation would unnecessarily complicate valve opening if HCVS is required.
- 4.1.2.1.3.4. To support not providing locked-closed valves or automatic isolation, the new PCIVs are to be normally-closed valves that have a fail-closed mode (i.e., AOVs).
- 4.1.2.1.3.5. These valves shall have remote-manual operation, but with a key-lock on the control switch to prevent inadvertent opening.

4.1.2.1.4. As required by GDC 54, these penetrations “shall be designed with a capability to test periodically the operability of the isolation valves and associated apparatus and to determine if valve leakage is within acceptable limits.”

4.1.2.1.4.1. The periodic PCIV testing frequency is dictated by the unit’s Technical Specifications.

4.1.2.1.4.2. Periodic rupture diaphragm testing frequency shall be based on manufacturer recommendations, if the rupture diaphragm is used as a relied upon penetration barrier

~~4.1.2.1.4.2.~~ However, testing at any time may be required if a valve or rupture diaphragm reliability issue arises.

4.1.2.1.4.3.

~~4.1.2.1.4.3.~~ 4.1.2.1.4.4. Therefore, the HCVS flow path can be credited for being closed and remaining closed during all design basis transients and accidents.

4.1.3. Routing Considerations

Order Reference: 1.1.4 – The HCVS controls and indications shall be accessible and functional under a range of plant conditions, including a severe accident environment, extended loss of AC power, and inadequate containment cooling.

- 4.1.3.1. Key issues to be addressed regarding routing considerations are listed in Appendices F & G on source term and dose considerations and Section 4.2 for operator “residence time”.

4.1.4. Multi-Unit Interfaces

System cross-connections or shared Unit vent exhaust flowpaths present a potential for steam, hydrogen, and airborne radioactivity leakage to other

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

areas of the plant and to adjacent units at multi-unit sites if the units are equipped with common vent piping. At Fukushima, an explosion occurred in Unit 4, which was in a maintenance outage at the time of the event. Although the facts have not been fully established, a likely cause of the explosion in Unit 4 is that hydrogen leaked from Unit 3 to Unit 4 through a common venting system.

Order Reference: 1.2.3 – The HCVS shall include design features to minimize unintended cross flow of vented fluids within a unit and between units on the site.”

- 4.1.4.1. HCVS design should provide design features to minimize the cross flow of vented fluids and migration to other areas within the plant or to adjacent units at multi-unit sites.
 - 4.1.4.1.1. A design that is free of physical and control interfaces with other systems eliminates the potential for any cross-flow is one way to satisfy this requirement.
 - 4.1.4.1.2. Examples of acceptable means for minimizing cross flow are the use of valves, “leak-tight” dampers, and check valves.
 - 4.1.4.1.3. Pressurizing with inert gas between system boundary valves could also be used (provided sufficient gas exists to support this during the required sustained operation period).
 - 4.1.4.1.4. Other means are acceptable with a site specific justification based on the component parameters.
 - 4.1.4.1.5.** Any HCVS flowpath interface should be designed to remain closed or automatically close upon the initiation of the HCVS and remain closed for as long as the HCVS is in operation.
 - 4.1.4.1.4.1.4.1.4.1.5.1.** **If Operator actions are required for changing state of interfacing valves, then validation of the action using normal plant validation methods should be performed.**
 - 4.1.4.1.5.4.1.4.1.6.** The environmental conditions (e.g. pressure, temperature) at the flowpath interface locations during venting operations should be evaluated to ensure that the interface will remain sufficiently leak-tight.
 - 4.1.4.1.6.4.1.4.1.7.** If power is required for the interfacing valves to move to isolation position, it should be from power sources meeting the same standards and qualifications as the vent valves.
 - 4.1.4.1.7.4.1.4.1.8.** Leak tightness of any such barriers should be periodically verified by testing as described in Section 6 of this document.

4.1.5. Release Point

The HCVS release to outside atmosphere should be at an elevation higher than adjacent plant structures. (Refer to Section 5 for discussion of qualification details)

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Order Reference: 1.2.2 – The HCVS shall discharge the effluent to a release point above main plant structures.

4.1.5.1. Release through existing plant meteorological stack(s) is acceptable.

4.1.5.2. If the release from HCVS is through a stack different than the plant meteorological stack, the elevation of the stack should meet the following criteria:

4.1.5.2.1. Be higher than the nearest power block building or structure.

4.1.5.2.2. The release point should be situated away from ventilation system intake and exhaust openings or exhaust openings that may be used during a BDBEE (e.g., to prevent entrainment into natural circulation ventilation flowpaths.)

4.1.5.2.3. The release stack or structure exposed to outside should be designed or protected to withstand missiles that could be generated by the external events that screen in for the plant site using the guidance in NEI 12-06 as endorsed by JLD-ISG-12-01 (See Section 5 for details).

4.1.6. Leakage Criteria

The HCVS design should address the reduction of Hydrogen Gas flammability in the vent pipe through the use of steam suppression (Reference Appendix H and reference NUREG C/R-2475/NUREG C/R-6524, GE SIL 643, GE-NE-0000-003-1981-01) nitrogen inerting or the exclusion of oxygen.

Order Reference: 1.2.3 – The HCVS shall include design features to minimize unintended cross flow of vented fluids within a unit and between units on the site.

Order Reference: 1.2.12 – The HCVS shall be designed to minimize the potential for hydrogen gas migration and ingress into the reactor building or other buildings.

4.1.6.1. Design for Leakage during HCVS Operation:

4.1.6.1.1. HCVS line inerting

4.1.6.1.1.1. The HCVS up to the second containment isolation valve should be either nitrogen inerted or be “steam inerted” such that any hydrogen gases within the containment or vent pipe remain below the hydrogen gas flammability limit (See NUREG/CR-2475 and GE-NE-0000-003-1981-01).

4.1.6.1.1.2. The HCVS pipe beyond the isolation valves used to initiate/cease venting should be designed for deflagration/detonation due to potential for oxygen intrusion resulting from steam condensation following HCVS vent closure or have the capability of being purged prior to the vent drawing in oxygen.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.1.6.1.2. HCVS line exclusion

4.1.6.1.2.1. The exclusion of oxygen as an acceptable alternative to either inerting with steam or nitrogen or making the piping detonation/deflagration proof. An example of this approach is maintaining the line pressure above atmosphere to the last isolation valve.

4.1.6.1.2.2. The HCVS pipe beyond the isolation valves should be detonation/deflagration proof or have a purge system that would keep oxygen out of the system.

4.1.6.2. Design for Leakage in interfacing piping to HCVS:

The HCVS pipe beyond the interfacing piping isolation valve should meet the provisions of Section 4.1.4.1.

4.1.7. Protection from Flammable Gas Ignition

Protection from flammable gas ignition should utilize principles found in NUREG/CR-2475. Additional information is provided in Appendix H of this document. The evaluation of gas ignition is to document the capability of the HCVS piping to maintain integrity should deflagration or detonations occur. Deformation of the pipe is acceptable given the integrity and continued functional capability of the pipe-vent system is shown to be maintained.

Order Reference: 1.2.11 – The HCVS shall be designed and operated to ensure the flammability limits of gases passing through the system are not reached; otherwise, the system shall be designed to withstand dynamic loading resulting from hydrogen deflagration and detonation.

4.1.7.1. Design for Deflagration/Detonation

Most plants have a UFSAR evaluation of the Offgas flow path for detonation potential that evaluates piping for this issue. This method can be similarly used to evaluate the HCVS design. Methods of designing the HCVS piping/components against flammable gas detonation/deflagration are discussed in Appendix H. Susceptible portions of the piping should be determined based on where oxygen can be drawn into the piping/interfacing piping.

4.1.7.2. Purge systems to reduce gas concentrations below flammability limits.

Use of a purge system in sections of pipe susceptible to air intrusion from intermittent HCVS operation can also be used to minimize detonation/deflagration potential.

4.1.7.3. Design Systems to Prevent Detonation/Deflagration

Design of the HCVS may include features that prevent air/oxygen backflow into the discharge piping. Use of design features in sections of pipe susceptible to air intrusion from intermittent HCVS

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

operation can also be used to minimize detonation/deflagration potential.

4.1.7.4. Combination of loads

The design of the HCVS is required to withstand the dynamic loading resulting from hydrogen deflagration/detonation. For design purposes, the HCVS is not required to consider assumed simultaneous loads that would not be present or occur during the venting of hydrogen (e.g. seismic loads).

4.1.8. Combined Drywell/Wetwell Vent pipe Design considerations

4.1.8.1. Depending on the HCVS design, the HCVS may have three distinct portions or flowpaths;

- 4.1.8.1.1. A portion that only supports wetwell venting,
- 4.1.8.1.2. A portion that only supports drywell venting, and
- 4.1.8.1.3. A portion that is shared by both.

4.1.8.2. The drywell generally has the most limiting boundary conditions, so the drywell boundary condition parameters described in Sections 2 and 3 are recommended for the shared portions of the HCVS.

4.1.9. Fault/Failure Evaluations

The table below provides an example of a Failure Evaluation that will be included in the Overall Integrated Plan. The table details the HCVS system interactions with design and operation for potential failures and alternate actions. However, it should not be construed from inclusion of this table in this guide, that the HCVS should be designed as a single failure proof system due to the low probability of a Severe Accident BDBEE.

SAMPLE: Failure Evaluation Table

Functional Failure Mode	Failure Cause	Alternate Action*	Failure with Alternate Action Impact on Containment Venting?
Fail to Vent (Open) on Demand	Valves fail to open/close due to loss of normal AC power	Switch power supply to inverter backed AC power	No
	Valves fail to open/close due to loss of one train of inverter backed AC power	Align power supply to alternate inverter	No
	Valves fail to open/close due to complete loss of DC batteries (long term)	Recharge batteries with FLEX provided generators <u>considering severe accident conditions</u>	No
	Valves fail to open/close due	No action needed, valves are	No

Formatted: Not Highlight

Formatted: Not Highlight

Formatted: Font: 11 pt, Not Highlight

Formatted: Not Highlight

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

	to loss of normal pneumatic air supply	provided with accumulator tanks which are sufficient for up to 5 actuations in a 24 hour period	
	Valves fail to open/close due to loss of alternate pneumatic air supply (long term)	Recharge accumulator tanks with N ₂ bottles and/or portable air compressors. Replace bottles as needed.	No
	Valve fails to open/close due to SOV failure	No Non-Heroic Action	Yes

Note: If a low cost equipment change or redundancy can provide enhanced reliability, it should be considered.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.2 Vent Operation and Monitoring

The importance of reliable operation of hardened vents during conditions involving loss of containment heat removal capability is well established and this understanding has been reinforced by the lessons learned from the accident at Fukushima Dai-ichi. This sub-section describes the design considerations relative to the HCVS operation and monitoring.

By nature, some BDBEEs create a need to initially operate the vent manually (either locally or from remote stations) and the design concepts espoused in this document protect that operational capability. Due to the multiple functions provided by the vent path, a single set of passive features (e.g., Rupture Diaphragms) cannot achieve all of the operational functions, therefore operator actions are required. The challenges found in operating the vents at Fukushima have been addressed by this guidance as have the required actions to complete multiple functions (e.g. FLEX heat removal venting, normal plant venting, intermittent venting ~~for source term control~~ in severe accidents, post severe accident venting for combustible gas control). Based on this, the design elements proposed by this guidance (as listed below) do not require specific new requirements to minimize operator actions to address the ability to operate vents as required for ELAP and severe accident conditions.

4.2.1 Protection from Inadvertent Actuation

The design of the HCVS should incorporate features, such as control panel key-locked switches, locking systems, rupture discs, or administrative controls to prevent the inadvertent opening of use-of the vent ~~valves~~.

- a. The system should be designed to preclude inadvertent actuation of the HCVS due to any single active failure.
- b. The design should consider general guidelines such as single point vulnerability and spurious operations of any plant installed equipment associated with HCVS.
- c. Use of Administrative controls on energizing the HCVS controls can also be a part of the acceptable plan to minimize impact on Current Licensing Basis (CLB) controls.

Order Reference: 1.2.7 - The HCVS shall include means to prevent inadvertent actuation.

4.2.1.1 One or more of the following criteria are acceptable approaches for inadvertent actuation features of the HCVS.

- 4.2.1.1.1 Rupture diaphragm in the HCVS flowpath
- 4.2.1.1.2 Key lock for HCVS valve switches
- 4.2.1.1.3 Administrative Controls for energizing HCVS components/controls

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 4.2.1.1.4 Interface with Technical Specification Components (such as current primary containment isolation valve (PCIV) controls).
 - 4.2.1.2 Meeting design features and the above criteria will show compliance with separation of controls from negative impact on CLB equipment and methods to demonstrate reasonable prevention of inadvertent actuation of the system.
 - 4.2.1.3 Prevention of inadvertent actuation, while important for all plants, is essential for plants relying on containment accident pressure (CAP) to provide adequate net positive suction head to the emergency core cooling system (ECCS) pumps. Plants that rely on CAP should have an evaluation that specifically addresses the design considerations for minimizing inadvertent actuation interaction. This evaluation may include a combination of design features and administrative controls.
- 4.2.2 Required HCVS Controls {Primary Control and Monitoring Location}
- The preferred location for remote operation and control of the HCVS is from the main control room. However, alternate locations to the control room are also acceptable.
- Order Reference: 1.2.4** - The HCVS shall be designed to be manually operated during sustained operations from a control panel located in the main control room or a remote but readily accessible location.
- Order Reference: 1.2.8** - The HCVS shall include means to monitor the status of the vent system (e.g., valve position indication) from the control panel required by 1.2.4. The monitoring system shall be designed for sustained operation during an extended loss of AC power.
- 4.2.2.1 The control location should take into consideration the following:
 - 4.2.2.1.1 The ability to open/close the valves multiple times during the event, i.e., sustained operations.
 - 4.2.2.1.1.1 Licensees should determine the number of open/close cycles necessary during the first 24 hours of operation and provide supporting basis consistent with the plant-specific containment venting strategy.
 - 4.2.2.1.1.2 Sustained operational requirements may continue beyond the capacity of the installed HCVS system motive force (air/nitrogen) make-up, power supply changes or both, i.e., beyond the first 24 hours.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 4.2.2.1.1.3 Sustained operations provisions should continue until 7 days or a shorter period of time if until an alternative method of containment heat removal is put in place by using installed or portable equipment (e.g., a means of shutdown cooling aligned directly to the RPV, drywell or suppression pool.) The alternate method of containment heat removal should not rely on the HCVS (i.e., the HCVS isolation valves should be able to remain closed such that releases and cross unit or system interface leakages are no longer a concern.)-
- 4.2.2.1.1.4 During Sustained Operation, the containment barrier is initially manually controlled by the plant staff/ERO during containment heat removal operations (either by containment venting or alternative measures) to prevent further fuel damage. This manual containment heat removal allows RPV injection by use of RCIC or external water supplies (reduced containment pressure may be required.)- This does not prevent the use of automatic vent valve cycling/throttling for containment pressure control after initial vent operation.
- 4.2.2.1.1.5 Severe accident venting to remove containment heat should be stopped as soon as possible to fully restore the containment function so that the containment source term barrier is available (i.e., no substantial leakage through containment components.); Thus allowing design barriers to be maintained for potential degrading core conditions.
- 4.2.2.1.2 The temperature and radiological conditions that operating personnel may encounter both in transit and locally at the controls.
- 4.2.2.1.2.1 This should include the impacts on initial release of post severe accident source term and impacts of vent piping related heat up in areas with little or no ventilation on the controls/controlling station. Alternatives may be used, such as providing features to facilitate manual operation of valves from remote locations or relocating/reorienting containment vent valves.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 4.2.2.1.3 Availability of permanently installed HCVS equipment, including any connections required to supplement the HCVS operation during an ELAP (e.g., electric power, N₂/air) consistent with the staff's guidance in JLD-ISG-2012-01 for Order EA-12-049 with consideration of severe accident conditions.
- 4.2.2.1.4 The controls/control location design should preclude the need for operators to move temporary ladders or operate from atop scaffolding to access the HCVS valves or remote operating locations.
- 4.2.2.1.5 HCVS valve position indication should be available at the primary controlling location.
- 4.2.2.1.6 HCVS valve position indicators should be capable of operating under the temperature/radiation conditions existing at the valve locations.
- 4.2.2.1.7 HCVS valve position indicators and indications should be powered from sources that will be available during the appropriate mission time of the HCVS system. The mission time varies by component but should be no less than the first 24 hours post event for installed plant HCVS equipment.
- 4.2.2.1.8 HCVS system should include indications of effluent temperature. Permanently installed gauges that are at, or nearby, the HCVS control panel is an acceptable method to address this item.
- ~~4.2.2.1.8~~4.2.2.1.9 The HCVS system should include indications for the Containment Pressure and Wetwell level for determination of vent operation. These indications may be either at the primary controlling location (order criteria 1.2.4) for the HCVS or at another location with communication to the HCVS controlling location.
- 4.2.2.1.10 Considerations for alternative approaches for system status instrumentation must provide sufficient information and justification for alternative approaches and be submitted to the NRC for approval.
- 4.2.2.2 The following criteria are acceptable approaches for HCVS Primary Controls and Monitoring location:
 - 4.2.2.2.1 Requirement for sustained operation of the HCVS
 - 4.2.2.2.2 Requirements for assessment of temperature and radiological condition
 - 4.2.2.2.3 Reasonable protection of required equipment
 - 4.2.2.2.4 Required design criteria for indications

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.2.2.3 Meeting design features and the above criteria will show compliance with Primary Controls and Monitoring location requirements (including instrumentation).

4.2.3 Alternate Remote Operation {Alternate/Local Valve Control Location}

During an ELAP, manual operation/action from alternate control locations may become necessary to operate the HCVS. As demonstrated during the Fukushima event, the valves lost motive force including electric power and pneumatic air supply to the valve operators, and control power to solenoid valves.

a. If direct access and local operation of the valves is not feasible due to temperature or radiological hazards, licensees should include design features to facilitate remote manual operation of the HCVS valves. This could include means such as reach rods, chain links, hand wheels, alternative control locations, and portable equipment to provide motive force as needed (e.g., air/N₂ bottles, diesel powered compressors, and DC batteries).

Note, throughout this section portable equipment will not be relied upon until 24 hours after event initiation.

Order Reference: 1.2.5 - The HCVS shall, in addition to the requirements of 1.2.4, be capable of manual operation (e.g., reach-rod with hand wheel or manual operation of pneumatic supply valves from a shielded location), which is accessible to plant operators during sustained operations.

4.2.3.1 The HCVS design should consider the following elements to facilitate remote manual operation:

4.2.3.1.1 An assessment of temperature and radiological conditions that operating personnel may encounter both in transit and locally at the local or alternate control location.

4.2.3.1.1.1 Include radiological conditions associated with post severe accident source terms and impacts of vent piping related heat up in areas with little or no ventilation on the local or alternate control location.

4.2.3.1.1.2 Alternatives such as providing features to facilitate manual operation of valves from remote locations or relocating/reorienting the valves may be used.

4.2.3.1.1.3 Consider that local-manual access to PCIVs for an ELAP event may not be feasible due to high temperature or radiation levels in the

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Reactor Building since they will be located near a containment penetration.

~~4.2.3.1.1.4 Reach rods and chain-operators may not be credible except when located at a short distance from the valve and with limited turns which would not be the case for most of these valves.~~

~~4.2.3.1.1.54~~ 4.2.3.1.1.4 The connections between the valves and portable equipment should be designed for quick deployment.

~~4.2.3.1.1.64~~ 4.2.3.1.1.5 If a portable motive force (e.g., air or N₂ bottles, DC power supplies) is used in the design strategy, licensees should provide reasonable protection of that equipment consistent with the staff's guidance in JLD-ISG-2012-01 for Order EA-12-049 considering severe accident conditions.

~~4.2.3.1.1.74~~ 4.2.3.1.1.6 The Local Controls/Alternate Valve Control Location design should preclude the need for operators to move temporary ladders or operate from atop scaffolding to access the HCVS valves or remote operating locations.

~~4.2.3.1.1.84~~ 4.2.3.1.1.7 The HCVS system should include indications for the Containment Pressure and Wetwell level for determination of vent operation. These indications may be either at the local controls/alternate control location for the HCVS systems or at another location with communication to the Local Controls/Alternate Valve Control Location.

4.2.3.2 The following criteria are acceptable approaches for HCVS Local Controls/Alternate Valve Control Location:

- 4.2.3.2.1 Supply an alternate method of HCVS valve operation
- 4.2.3.2.2 Assessment of temperature and radiological conditions
- 4.2.3.2.3 Reasonable protection of required equipment
- 4.2.3.2.4 Required design criteria for indications
- 4.2.3.2.5 Criteria for manual opening of AOVs
- 4.2.3.2.6 Criteria for operation of MOVs

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.2.3.3 Meeting design features and the above criteria will show compliance with local controls/alternate control location requirements (including instrumentation).

4.2.4 Vent Monitoring

Plant operators must be able to readily monitor the radiological conditions that exist during venting operations of the HCVS at all times.

Order Reference: 1.2.9 - The HCVS shall include a means to monitor the effluent discharge for radioactivity that may be released from operation of the HCVS. The monitoring system shall provide indication from the control panel required by 1.2.4 and shall be designed for sustained operation during an extended loss of AC power.

4.2.4.1 The HCVS design should provide a means to allow plant operators to readily determine, or have knowledge of, the following system parameters:

4.2.4.1.1 HCVS vent valves position (open or closed).

4.2.4.1.2 HCVS vent pipe radiation levels. The range of the instrument should be consistent with the dose rates anticipated during severe accident venting. The use of a multi-range instrument that will span the expected dose rates is acceptable.

4.2.4.1.2.1 The effluent discharge radiation monitor is required to provide additional knowledge of HCVS operation not as a required change for Emergency Preparedness off-site dose functions.

4.2.4.1.3 HCVS system should include indications of effluent temperature. Permanently installed gauges that are at, or nearby, the HCVS control panel is an acceptable method to address this item.

~~4.2.4.1.34.2.4.1.4~~ 4.2.4.1.4 Other important information includes the status of supporting systems, such as availability of electrical power and pneumatic supply pressure.

~~4.2.4.1.3.14.2.4.1.4.1~~ 4.2.4.1.4.1 Monitoring by means of permanently installed gauges or meters that are at, or nearby, the HCVS control panel or in the Control Room with communication to the HCVS control panel is acceptable.

~~4.2.4.1.3.24.2.4.1.4.2~~ 4.2.4.1.4.2 Alternative approaches for system status instrumentation may be considered provided a justification for alternative approaches must be provided.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.2.4.1.5 The HCVS system should include indications for the Containment Pressure and Wetwell level for determination of vent operation. These indications may be either at the local controls/alternate control location for the HCVS systems or at another location with communication to the Primary Controls location or local controls/alternate control location.

4.2.4.1.44.2.4.1.6 Alternative approaches for system status instrumentation may be considered provided a with appropriate justification provided for alternative approaches must be provided.

4.2.4.2 The means to monitor system status should support sustained operations during an ELAP, and be designed to operate under ~~potential~~ environmental conditions that would be expected following a loss of containment heat removal capability and an ELAP. "Sustained operations" may include the use of portable equipment to provide an alternate source of motive force to components used to monitor HCVS status.

Note: Additional instrumentation required to comply with Order EA-12-049 as discussed in NEI 12-06 may be useful in support of HCVS operation, but are not required for HCVS functionality.

4.2.4.3 Instrument reliability should be demonstrated via an appropriate combination of design, analyses, operating experience, and/or testing of channel components for the conditions described in Section 2 of this guide.

4.2.4.4 The following criteria are acceptable approaches for HCVS monitoring:

4.2.4.4.1 Need to monitor HCVS vent pipe conditions including radiological releases, vent pipe pressure and temperature.

4.2.4.4.2 Sustained operation of HCVS vent pipe condition instrumentation and other required indications during an ELAP condition (limiting analysis).

4.2.4.4.3 Requirements for assessment of radiological, temperature and pressure conditions in the area of HCVS monitoring instruments.

4.2.4.5 Meeting design features and the above criteria will show compliance with HCVS monitoring.

4.2.5 Operational Hazards

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Order Reference: 1.1.2 - The HCVS shall be designed to minimize plant operators' exposure to occupational hazards, such as extreme heat stress, while operating the HCVS system.

Order Reference: 1.1.3 - The HCVS shall also be designed to account for radiological conditions that would impede personnel actions needed for event response.

- 4.2.5.1 HCVS controls should be located in areas where sustained operation is possible accounting for expected temperatures and radiological conditions in the HCVS vent pipe and attached components without extreme heat stress or radiological over exposure to the operators.
- 4.2.5.1.1 HCVS operation must be possible without placing the operators in dose fields above those allowed by the ERO guidance to conduct local equipment operation. [The use of shielding may provide acceptable radiation levels for operator access](#)
- 4.2.5.1.2 HCVS operating locations (Primary/Alternate) must account for the expected lack of ventilation that is encountered during an ELAP event.
- 4.2.5.1.3 HCVS operating locations should not place the operators in areas above the maximum safe entry points in the applicable plant safety manual/guidance.
- 4.2.5.1.4 HCVS controls should be located in areas where sustained operation is possible accounting for radiological conditions in the HCVS vent pipe and attached components within allowed doses per the ERO guidance to the operators for non-heroic actions. These conditions should include estimation of the impact during an ELAP event and following core damage required vent operations.
- 4.2.5.1.5 The HCVS vent pipe routing [and shielding](#) must be considered for other actions required of the plant staff/ERO during the event should venting be required during severe accident conditions. Guidance for the allowable dose fields/dose during required actions with the source term in the HCVS vent pipe would be the limits prescribed in the ERO guidance.

Note: Any deviation from the above can be considered provided justification is submitted.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.2.5.2 The following criteria are acceptable approaches for HCVS operational hazards at local controls/primary and alternate control locations:

4.2.5.2.1 Temperature conditions at the HCVS proposed operating stations meet plant safety manual/guidance or justification is provided to the Staff.

4.2.5.2.2 Radiological conditions at the HCVS proposed operating stations meets ERO allowable dose guidance or justification is provided.

4.2.5.2.3 Other plant actions required by the plant staff/ERO should account for the expected radiological conditions caused by HCVS vent pipe routing with severe accident source term release through the HCVS vent pipe. The expected limits imposed on the dose/dose field from the ERO guidance should be used for these actions.

4.2.5.3 Meeting design features and the above criteria will show compliance with HCVS operational hazards at Primary Controls and Local/Alternate Valve Control Locations.

4.2.6 Designed to minimize Operator Actions

HCVS system should be designed to maximize the probability of successful operator action to operate vents when required.

Order Reference: 1.1.1 - The HCVS shall be designed to minimize the reliance on operator actions.

4.2.6.1 Design features consistent with this approach include:

4.2.6.1.1 Environmental considerations

4.2.6.1.1.1 Heat stress impact on ability to vent

4.2.6.1.1.2 Radiological condition impact on ability to vent

4.2.6.1.2 Sustained operational capability

4.2.6.1.2.1 Independent 24 hour electrical and pneumatic supplies.

4.2.6.1.2.2 The system will be capable of multiple valve cycles during the first 24 hour period without the need to recharge pneumatic or electrical power supplies.

4.2.6.1.3 Ease of vent valve operation

4.2.6.1.3.1 Readily accessible under all operational conditions (e.g., accessible location without need for ladders or scaffolds)

4.2.6.1.3.2 Operation achievable at a localized location.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

4.2.6.1.3.3 Operation does not require the use of jumpers or lifted leads to defeat valve interlocks.

4.2.6.1.3.4 System comprised of installed equipment. No need for system or component disassembly/reassembly.

4.2.6.2 The following criteria are acceptable approaches for HCVS minimize operator actions that could prevent vent operations when required:

4.2.6.2.1 Compliance with other sections of this guidance as listed above.

4.2.6.3 Meeting design features and the above criteria will show compliance with HCVS to minimize operator actions that could prevent vent operations when required.

5. PROGRAMMATIC CONTROLS

5.1. Environmental Conditions

The HVCS is required to be capable of functioning during severe accidents in which the containment function is not compromised by the severe accident conditions. The HCVS equipment is designed to provide reasonable assurance of operation in the severe accident environment for which they are intended to function and over the time span for which they are needed. However, the environmental requirements of 10CFR50.49 are design basis regulatory requirements and as such are not applicable under severe accident conditions.

Order Reference: 1.2.10 – The HCVS shall be designed consistent with containment pressures and temperatures during severe accident conditions as well as dynamic loading resulting from system actuation. The design is not required to exceed the current capability of the limiting containment components.

- 5.1.1. The resultant design conditions for the HCVS equipment to provide reasonable protection to assure functionality may be different for the wetwell vent and/or the drywell vent, thus the following environmental conditions should be considered in the design of the system:
 - 5.1.1.1. The limiting wetwell conditions are assumed to be 350°F and 80 psig based on the saturation temperature at the drywell failure pressure.
 - 5.1.1.2. The drywell conditions are assumed to be 545°F and 80 psig corresponding to the temperature and pressure at which the drywell head may exhibit some leakage. Although some range of temperatures above this may be encountered due to stratification in areas in the drywell, the HCVS equipment should be designed using a temperature of 545°F consistent with the boundary conditions as detailed in Section 2 of this document.
 - 5.1.1.3. Drywell radiological conditions should be consistent with the conditions assumed in the plant's current licensing basis (CLB) for a major accident. (i.e., the most severe design basis accident during or following which the equipment is required to remain functional, including the radiation resulting from recirculating fluids for equipment located near the recirculating lines and including dose-rate effects.)
 - 5.1.1.3.1. Such accidents have generally been assumed to result in substantial meltdown of the core with subsequent release of appreciable quantities of fission products (e.g., Technical Information Document (TID) 14844, "Calculation of Distance Factors for Power and Test Reactor Sites (March 1962)," or NUREG-1465, "Accident Source Terms for Light-Water Nuclear Power Plants" consistent with the current design basis of the plant.) [Refer to Appendix G for further details.](#)
 - 5.1.1.3.2. The evaluation of HCVS functionality should consider the potential conditions resulting from accidental events, whether postulated, hypothesized or otherwise identified, which do not

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

exceed the conditions resulting from any credible accident as identified in the plant's CLB.

- 5.1.1.4. If the drywell vent and wetwell vent are interconnected, interaction between the two vent flowpaths should be considered although only one flowpath is required to be operated at any one time.
- 5.1.1.5. Environmental effects of the areas traversed by the system should be considered in both standby and operating conditions.
- 5.1.1.6. Tornado and wind loading and missile impacts are required to be considered for portions of the HCVS.
 - 5.1.1.6.1. Current design of the structure is acceptable regarding wind and missile protection for portions of the HCVS enclosed within a seismic category 1 (or equivalent) building/enclosure or through the plants existing elevated release point (e.g., meteorological stack)
 - 5.1.1.6.2. Reasonable protection evaluations per the guidance in NEI 12-06 as endorsed by JLD-ISG-12-001 for Order EA-12-049 should be performed for portions of the HCVS not covered in 5.1.1.6.1 above.
- 5.1.1.7. The system should be designed to provide reasonable assurance of operation for up to 7 days consistent with the sustained operation definition.

5.2. Seismic and External Hazard Conditions

Order Reference: 2.1 – The HCVS vent path up to and including the second containment isolation barrier shall be designed consistent with the design basis of the plant. These items include piping, piping supports, containment isolation valves, containment isolation valve actuators and containment isolation valve position indication components.

Order Reference: 2.2 – All other HCVS components shall be designed for reliable and rugged performance that is capable of ensuring HCVS functionality following a seismic event. These items include electrical power supply, valve actuator pneumatic supply and instrumentation (local and remote) components.

- 5.2.1. HCVS components should be designed, as a minimum, to meet the seismic design requirements of the plant.
- 5.2.2. Components that are not required to be seismically designed by the design basis of the plant should be designed for reliable and rugged performance that is capable of ensuring HCVS functionality following a seismic event. ([reference ISG-JLD-2012-01 and ISG-JLD-2012-03 for seismic details.](#))
- 5.2.3. The components external to a seismic category 1 (or equivalent building or enclosure should be designed to meet the external hazards that screen in for the plant as defined in guidance NEI 12-06 as endorsed by JLD-ISG-12-001 for Order EA-12-049.

5.3. Quality Requirements

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Order Reference: 2.1 – The HCVS vent path up to and including the second containment isolation barrier shall be designed consistent with the design basis of the plant. These items include piping, piping supports, containment isolation valves, containment isolation valve actuators and containment isolation valve position indication components.

Order Reference: 2.2 – All other HCVS components shall be designed for reliable and rugged performance that is capable of ensuring HCVS functionality following a seismic event. These items include electrical power supply, valve actuator pneumatic supply and instrumentation (local and remote) components.

5.3.1. HCVS components should, as minimum, meet the quality design requirements of the plant, ensuring HCVS functionality.

5.3.1.1. The HCVS up to and including the second isolation valve is designed to the same requirements of the connected system or the equivalent of ASME Class 2 criteria

Formatted: Font color: Black

5.3.1.2. HCVS elements that are not covered by 5.3.1.1 should be reliable and rugged to ensure HCVS functionality following a seismic event

5.3.1.3. Additionally, non-safety equipment installed to meet the requirements of Order EA-13-109 must be implemented so that they do not degrade the existing safety-related systems

Formatted: Font color: Black

5.3.1.4. Design requirements and supporting analysis documentation should be auditable, consistent with generally accepted engineering principles and practices, and controlled within the configuration document control system

5.4. Maintenance Requirements

Order Reference: 1.2.13 – The HCVS shall include features and provision for the operation, testing, inspection and maintenance adequate to ensure that reliable function and capability are maintained.

5.4.1. HCVS equipment should be initially tested or other reasonable means used to verify performance conforms to the design and operational requirements.

5.4.2. Validation of source manufacturer quality is not required.

5.4.3. The HCVS maintenance program should ensure that the HCVS equipment reliability is being achieved in a manner similar to that required for FLEX equipment.. Standard industry templates (e.g., EPRI) and associated bases may be developed to define specific maintenance and testing

5.4.3.1. Periodic testing and frequency should be determined based on equipment type and expected use (further details are provided in Section 6 of this document).

5.4.3.2. Testing should be done to verify design requirements and/or basis. The basis should be documented and deviations from vendor recommendations and applicable standards should be justified.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 5.4.3.3. Preventive maintenance should be determined based on equipment type and expected use. The basis should be documented and deviations from vendor recommendations and applicable standards should be justified
- 5.4.3.4. Existing work control processes may be used to control maintenance and testing
- 5.4.4. HCVS permanent installed equipment should be maintained in a manner that is consistent with assuring that it performs its function when required.
 - 5.4.4.1. HCVS permanently installed equipment should be subject to maintenance and testing guidance provided ~~in INPO AP-913, Equipment Reliability Process~~, to verify proper function.
- 5.4.5. HCVS non-installed equipment should be stored and maintained in a manner that is consistent with assuring that it does not degrade over long periods of storage and that it is accessible for periodic maintenance and testing.

6. OPERATIONAL CONSIDERATIONS

6.1. Operator Actions

During the extended loss of AC power condition at the Fukushima Dai-ichi units, operators faced many challenges while attempting to restore adequate core cooling in addition to complications associated with controlling containment pressure via the containment venting system. The difficulties faced by the operators related to operation of the containment venting system included the location of their vent valves, ambient temperatures and radiological conditions, loss of all alternating current electrical power, loss of motive force to open the vent valves, and exhausting DC battery power. The use of a hardened containment vent provides an important method of containment heat removal which can become necessary for an ELAP/loss of UHS event. Indirectly, an elevated containment pressure may prevent the injection from a low head water supply to the RPV. Operator actions are a vital part of normal and off-normal plant activities and are expected to play an important role in mitigation of beyond design basis external events. It is fully recognized that operator actions will be needed to implement the EA-13-109 severe accident capable HCVS; however, the licensees should consider design features for the system that will minimize the need and reliance on operator actions to the extent possible during a variety of plant conditions, as further discussed in this guidance. Actions should be simple and easily accomplished with direct feedback to indicate when the action is successfully accomplished.

The HCVS should be designed to be operated from a control panel located in the main control room or a remote but readily accessible location. The HCVS should be designed to be fully functional and self-sufficient with permanently installed equipment in the plant, without the need for portable equipment or connecting thereto, until such time that on-site or off-site personnel and portable equipment become available. At least one method of operation of the HCVS should be capable of operating with permanently installed equipment for at least 24 hours during the extended loss of AC power, ~~unless a shorter period is justified by the licensee.~~ The system should be designed to function in this mode with permanently installed equipment providing electrical power (e.g., DC power batteries) or (electrical or pneumatic operation) valve motive force (e.g., N₂/air cylinders). The HCVS operation in this mode depends on a variety of conditions, such as the cause for the extended loss of AC power (e.g., seismic event, flood, tornado, high winds), severity of the event, and time required for additional help to reach the plant, move portable equipment into place, and make connections to the HCVS. The system should be designed to function in this mode for a minimum duration of 24 hours with no operator actions required or credited to replenish electrical power and pneumatic supplies. Operator action is expected to perform system alignment and monitoring functions from either the primary (1.2.4) or alternate (1.2.5) locations as needed for event mitigation. Durations of less than 24 hours will be considered if justified by adequate supporting information from the licensee. Include in the justification an evaluation of the expected number of valve operations. To ensure continued operation of the

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

HCVS beyond 24 hours, licensees may credit manual actions, such as moving portable equipment to supplement electrical power and valve motive power sources.

For ~~justifying the periods of sustained operation beyond the initial less than~~ 24 hours ~~from~~after event initiation, the licensee should consider the number and complexity of actions and the cumulative demand on personnel resources that are needed to maintain hardened vent functionality ~~(e.g., installation of portable equipment during the first 24 hours to restore power to the HCVS controls and/or instrumentation)~~ as a result of design limitations. The use of supplemental portable power or pneumatic sources may be acceptable if the supplemental power or pneumatic source is readily available, could be quickly and easily moved into place, and installed through the use of pre-engineered quick disconnects, and the necessary human actions were identified along with the time needed to complete those actions. Conversely, supplemental power sources located in an unattended warehouse that require a qualified electrician or mechanic to temporarily wire into the panel or connect to a piping system would not be considered acceptable because its installation requires a series of complex, time-consuming actions in order to achieve a successful outcome. ~~There are similar examples that could apply to mechanical systems, such as pneumatic/compressed air systems.~~

6.1.1. Feasibility and Accessibility

During an extended loss of AC power, the drywell, wetwell (torus or suppression pool), and nearby areas in the plant where HCVS components are expected to be located will likely experience elevated temperatures due to inadequate containment cooling combined with loss of normal and emergency building ventilation systems. In addition, installed normal and emergency lighting in the plant may not be available. Licensees should take into consideration plant conditions expected to be experienced during applicable beyond design basis external events when locating valves, instrument air supplies, and other components that will be required to safely operate the HCVS system. Components required for manual operation should be placed in areas that are readily accessible to plant operators, and not require additional actions, such as the installation of ladders or temporary scaffolding, to operate the system.

6.1.1.1. The design strategy should evaluate potential plant conditions and use acquired knowledge of these areas to provide input to system operating procedures, training, the choice of protective clothing, required tools and equipment, and portable lighting. The evaluation should include considerations such as, how temperatures would elevate due to extended loss of AC power conditions and the lighting that would be available following beyond design basis external events. Use of handheld or portable lighting is acceptable.

6.1.1.2. The design of the HCVS should account for radiological conditions resulting from the beyond design basis external event including dominant severe accident impacts. During the Fukushima event,

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

personnel actions to manually operate the containment vent valves were impeded due to the location of the valves in the torus rooms. The HCVS should be designed to be placed in operation by operator actions at a control panel, located in the main control room or in a suitable alternate location (Requirements 1.2.4 and 1.2.5). The design of the severe accident capable HCVS system will take into account the radiological conditions that may be encountered during system operation. The use of shielding and locating components having significant source term away from system control stations where the system will be operated are the primary means available to control operational dose. Additional means of minimizing potential radiological dose to the operators may include, but are not limited to:

- 6.1.1.2.1. Simplification of operator actions needed to initiate, control and isolate the system including replenishment of electrical power and pneumatics during the sustained operational period
- 6.1.1.2.2. Use of rupture diaphragms are an acceptable component to address inadvertent actuation and leakage, but require operator action to initiate venting at lower pressures than the rupture diaphragms setting. Thus the ability to open the vent path by reasonable operator actions must be addressed if rupture diaphragms are installed in the HCVS.
- 6.1.1.2.3. Minimizing the time operators need to spend at the vent controls or monitoring locations during system operation under severe accident conditions
- 6.1.1.2.4. Minimizing the number of operators needed to operate and maintain the system functional under severe accident conditions
- 6.1.1.2.5. Developing a strategy to rotate operators through the various venting actions to minimize the dose received by any one operator
- 6.1.1.3. In response to Generic Letter (GL) 89-16, a number of facilities with Mark I containments installed vent valves in the torus room, near the drywell, or both. Licensees may continue to use these venting locations or select new locations, provided that the requirements of this guidance document are satisfied.
- 6.1.1.4. The HCVS ~~in conjunction with active core debris cooling~~ improves the chances of mitigating a core damage accident by removing heat from containment and lowering containment pressure. Radiological and thermal impacts to the plant from the HCVS within the plant and at the location of the external release could impact the event response from on-site operators and off-site help arriving at the plant. An adequate strategy to minimize radiological consequences that could impede personnel actions should include the following:
 - 6.1.1.4.1. Provide permanent radiation shielding where necessary to facilitate personnel access to valve controls that allow manual operation of the valves at a remote manual location. Other

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

alternatives to facilitate personnel access besides radiation shielding can be utilized, such as:

- 6.1.1.4.1.1. Provide features to facilitate manual operation of valves from remote locations, as discussed further in this guidance
- 6.1.1.4.1.2. Locate the vent valves in areas that are significantly less challenging to operator access/actions
- 6.1.1.5. In accordance with Requirement 1.2.10 and 1.2.11, the HCVS should be designed for pressures that are consistent with the higher of the primary containment design pressure and the primary containment pressure limit (PCPL), as well as including dynamic loading resulting from system actuation and hydrogen deflagration or detonation if the gases passing through the system cannot be maintained below flammability limits. In addition, the system should minimize leakage. As such, ventilation duct work (i.e., sheet metal) should not be utilized in the design of the HCVS. Licensees should perform appropriate testing, such as hydrostatic or pneumatic testing, to establish the leak-tightness of the HCVS. System actuation should consider the dynamics of the driving force for the venting such as the pressure fluctuations from SRV actuations, etc.
- 6.1.1.6. The HCVS release to outside atmosphere should be at an elevation higher than adjacent power block plant structures. Release through existing plant metrological stacks is considered acceptable, provided the guidance under Requirements 1.2.3 and 1.2.11 are satisfied. If the release from HCVS is through a vent stack different than the plant metrological stack, the elevation of the stack should be higher than the nearest power block building or structure. The routing should be such that radiological conditions resulting from operation of the HCVS would allow event response by the on-site operators and off-site help arriving at the plant without requiring heroic actions.
- 6.1.1.7. The required Operator actions to operate the HCVS under the design conditions required by Order items 1.1.2 and 1.1.3 at the plant specified operating locations need to be evaluated.
 - 6.1.1.7.1. The operations should be feasible for the control locations for conducting the operations under the beyond design basis external event conditions. These expected conditions can be obtained from available generic or plant-specific accident analysis.
 - 6.1.1.7.2. The timing of the operations should be taken into consideration (e.g., operation of the equipment during the worst source term release is not required if the station could be accessed prior to the release and after the release for control of radiological dose) for this accessibility/feasibility evaluation.
 - 6.1.1.7.3. Guidance is supplied in Appendix E of this guide for this evaluation. Elements of the evaluations can utilize NUREG 1921/1852 guidance and/or procedural controls.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

6.1.1.8. Environmental conditions and effects on operators need to be considered during event response and sustained operation timelines.

6.1.2. Procedural Guidance

6.1.2.1. Procedures to operate, test, and maintain the severe accident capable HCVS during ELAP conditions should include the following elements:

6.1.2.1.1. HCVS operation including system startup, shutdown and off-normal conditions

6.1.2.1.2. HCVS standby status verification

6.1.2.1.3. System out of service controls

6.1.2.1.4. Location of system components and equipment lineups (may be part of other plant system procedures)

6.1.2.1.5. HCVS instrumentation available that supports HCVS operation

6.1.2.1.6. Directions for sustained operation using portable equipment and supplies, that supports HCVS operation

6.1.2.1.7. Storage location of portable equipment

6.1.2.1.8. Equipment testing and maintenance

6.1.2.1.9. If applicable, the nexus between containment accident pressure (CAP) and ECCS pump net positive suction head during a DBLOCA and how an inadvertent opening of the vent valve could have an adverse impact.

6.1.2.2. HCVS procedures should be developed and implemented in the same manner as other plant procedures.

6.1.2.3. HCVS procedures for operation need to be validated for operator usability/accessibility and should address the following functional operations:

6.1.2.3.1. With power on normal power sources (no ELAP)

6.1.2.3.2. With backup power and from local manual location/alternate remote location during conditions of ELAP/loss of UHS with no core damage for containment heat removal AND containment pressure control (PCPL). (FLEX)

6.1.2.3.3. With backup power and from local manual location/alternate remote location during conditions of ELAP/loss of UHS with core damage **and vessel breach** for containment heat removal AND containment pressure control (PCPL). (Severe Accident Capable Vent)

6.1.2.4. Coordination with guidance and procedures

The Licensee should verify that the procedures for HCVS operation are coordinated with other procedures. The following relationships should be evaluated to address this coordination:

6.1.2.4.1. Coordinate EOPs and SAGs with hardened containment vent operation on normal power sources (no ELAP)

6.1.2.4.2. Coordinate AOPs, EOPs, SAGs and FLEX Support Guidelines (FSGs) with hardened containment vent operation on normal and backup power and from primary and alternate locations during conditions of ELAP/loss of UHS with no core damage.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

System use is for containment heat removal AND containment pressure control

- 6.1.2.4.3. Coordinate SAGs with HCVS operation on normal and backup power and from primary and alternate locations during conditions of ELAP/loss of UHS with core damage and vessel breach. System use is for containment heat removal AND containment pressure control (PCPL) with potential for combustible gases.
- 6.1.2.4.4. Coordinate administrative controls for FLEX and HCVS equipment allowed outage times and compensatory actions.
- 6.1.2.5. Demonstration with other Post Fukushima measures
 - The Licensee should demonstrate use in drills, tabletops, or exercises for HCVS operation as follows:
 - 6.1.2.5.1. Hardened containment vent operation on normal power sources (no ELAP).
 - 6.1.2.5.2. During FLEX demonstrations (as required by EA-12-049: Hardened containment vent operation on backup power and from primary or alternate location during conditions of ELAP/loss of UHS with no core damage. System use is for containment heat removal AND containment pressure control.
 - 6.1.2.5.3. HCVS operation on backup power and from primary or alternate location during conditions of ELAP/loss of UHS with core damage. System use is for containment heat removal AND containment pressure control with potential for combustible gases (Demonstration may be in conjunction with SAG change).
- 6.1.3. Training
 - 6.1.3.1. All personnel expected to operate the HVCS should receive initial and continuing training in the use of plant procedures developed for system operations when either normal or backup power is available and during ELAP/loss of UHS conditions consistent with the specific elements of the plant's training program.
 - 6.1.3.2. The training should be refreshed on a periodic basis consistent with the procedure control process at the plant site or when procedural related changes occur to the HCVS.
 - 6.1.3.3. Training should also ensure that specific guidance and procedures that direct HCVS Operation is referenced and used in formulation of the training (e.g., EOPs, FSGs, SAGs,).
 - 6.1.3.4. Training for use of any FLEX equipment in a support role will be governed by the actions developed for compliance with order EA-12-049.
 - 6.1.3.5. The use of a Systems Approach to Training (SAT) based training program to determine required training and frequency may be used to demonstrate compliance the training requirements of Order EA-13-109 in lieu of the specific elements defined in 6.1.3.1 through 6.1.3.4.

6.2. Testing and Inspection of HCVS

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 6.2.1. The HCVS design should provide a means (e.g., drain valves, pressure and temperature gauge connections) to periodically test system components, including exercising (opening and closing) the vent valve(s).
- 6.2.2. Primary and secondary containment required leakage testing is covered under existing design basis testing programs.
- 6.2.3. The HCVS outboard of the containment boundary should be tested to ensure that vent flow is released to the outside with minimal leakage, if any, through the interfacing boundaries with other systems or units.
 - 6.2.3.1. The testing method can either individually leak test interfacing valves or test the overall leakage of the HCVS volume by conventional leak rate testing methods.
 - 6.2.3.2. The test volume should envelope the HCVS between the outer primary containment isolation barrier and the last isolation point from the plant buildings, including the volume up to the interfacing valves.
 - 6.2.3.3. The test pressure should be based on the HCVS design pressure. Methods for testing system boundary leakage should be consistent with the licensee’s design basis for these tests (e.g., permissible leakage rates for the interfacing valves should be within the requirements of American Society of Mechanical Engineers Operation and Maintenance of Nuclear Power Plants Code (ASME OM) – 2009, Subsection ISTC – 3630 (e) (2), or later edition of the ASME OM Code.)
 - 6.2.3.4. When testing the HCVS volume, allowed leakage should not exceed the sum of the interfacing valve leakages as determined by the licensee’s test program (e.g., ASME OM Code).
 - 6.2.3.5.** For HCVS designs that contain interfacing valves between the HCVS and an isolated system, i.e. systems that do not vent to atmosphere. An assessment of the impact of cumulative leakage past interfacing valves into an isolated system should be performed. The results of the assessment should be used in establishing the leakage limits for interfacing valves between the HCVS and the isolated system(s).
 - 6.2.3.5.0-0.6.2.3.5.1.1. When interfacing components are found to be degraded such that the HCVS function cannot be assured, then an entry into the plants Corrective Action Program shall be made to address the cause(s) of the non-functionality of the HCVS and prevent recurrence.**
- 6.2.4. Licensees should implement the following operation, testing and inspection requirements for the HCVS to ensure reliable operation of the system.

Testing and Inspection Requirements

Description	Frequency
Cycle the HCVS valves and the interfacing system valves not used to maintain containment integrity during operations.	Once per operating cycle
Perform visual inspections and a walkdown of	Once per operating cycle

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

HCVS components.	
Test and calibrate the HCVS radiation monitors.	Once per operating cycle
Leak test the HCVS.	(1) Prior to first declaring the system functional; (2) Once every three operating cycles thereafter; and, (3) After restoration of any breach of system boundary within the buildings.
Validate the HCVS operating procedures by conducting an open/close test of the HCVS control logic from its control panel and ensuring that all interfacing system valves move to their proper (intended) positions.	Once per every other operating cycle

6.3. Allowed out of service time for HCVS

6.3.1. The unavailability of equipment and applicable connection that directly performs an HCVS function should be managed such that HCVS functionality is maximized. The primary control and monitoring elements (1.2.4) and alternate valve control elements (1.2.5) of HCVS operation will normally be functional in Modes 1, 2 and 3. However the HCVS is not a single failure proof system, and as such the primary and alternate methods of HCVS operation do not imply system redundancy.

6.3.1.1. If the primary control and monitoring elements or alternate valve control elements of HCVS render operation of the HCVS non-functional, those elements may be out of service for periods of up to 90 consecutive days without any compensatory actions.

6.3.1.2. If the primary control and monitoring elements and alternate valve control elements of HCVS render operation of the HCVS non-functional, those elements may be out of service for periods of up to 30 consecutive days without any compensatory actions.

6.3.1.3. If the allowed out of service times described in 1 and/or 2 above are exceeded, then through the plant corrective action program determine:

6.3.1.3.1. The cause(s) of the non-functionality,

6.3.1.3.2. The actions to be taken and the schedule for restoring the system to functional status and prevent recurrence, and

6.3.1.3.3. Initiate action to implement appropriate compensatory actions.

6.3.2. The HCVS system is functional when piping, valves, instrumentation and controls including motive force necessary to support system operation are available. Since the system is designed to allow a primary control and monitoring or alternate valve control by Order criteria 1.2.4 or 1.2.5, allowing for a longer out of service time with either of the functional capabilities maintained is justified. A shorter length of time when both primary control and monitoring and alternate valve control are unavailable

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

is needed to restore system functionality in a timely manner while at the same time allowing for component repair or replacement in a time frame consistent with most high priority maintenance scheduling and repair programs, not to exceed 30 days unless compensatory actions are established per 6.3.1.2.

- 6.3.3. The system functionality basis is for coping with beyond design basis events and therefore plant shutdown to address non-functional conditions is not warranted. However, such conditions should be addressed by the corrective action program and compensatory actions to address the non-functional condition should be established. These compensatory actions may include alternative containment venting strategies or other strategies needed to reduce the likelihood of loss of fission product cladding integrity during design basis and beyond design basis events even though the severe accident capability of the vent system is degraded or non-functional. Compensatory actions may include actions to reduce the likelihood of needing the vent but may not provide redundant vent capability.
- 6.3.4. Applicability for Allowed out of service time for HCVS for system functional requirements is limited to startup, power operation and hot shutdown conditions when primary containment is required to be operable and containment integrity may be challenged by decay heat generation.

7. Reporting Requirements

Licensees shall promptly start implementation of the requirements in Attachment 2 to Order EA-13-109, *Order Modifying Licenses with Regard to Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions*, upon NRC issuance of the associated final interim staff guidance (ISG) for each Phase (reference section IV.B of Order EA-13-109). In accordance with NRC Order EA-13-109 the following reporting requirements are established.

7.1. Submittal Guidance

- 7.1.1. All Licensees shall notify the Commission if they are unable to comply with any of the Phase 1 requirements or if any of the Phase 1 (wetwell vent) requirements would adversely affect the safe and secure operation of the facility within twenty (20) days of the issuance date of the final ISG for Phase 1. The notification shall provide the Licensee's justification for seeking relief from or variation of any specific requirement. Reference EA-13-109 C.1 & 2.
- 7.1.2. All Licensees shall notify the Commission if they are unable to comply with any of the Phase 2 requirements or if any of the Phase 2 (drywell vent) requirements would adversely affect the safe and secure operation of the facility within twenty (20) days of the issuance date of the final ISG for Phase 2. The notification shall provide the Licensee's justification for seeking relief from or variation of any specific requirement. Reference EA-13-109 C.3 & 4.
- 7.1.3. All Licensees shall, by June 30, 2014, submit to the Commission for review an Overall Integrated Plan (OIP) including a description of how compliance with the Phase 1 (wetwell vent) requirements will be achieved. Reference EA-13-109 D.1.
- 7.1.4. All Licensees shall, by December 31, 2015, submit to the Commission for review an updated OIP including a description of how compliance with the Phase 2 (drywell vent) requirements will be achieved. Reference EA-13-109 D.2.
- 7.1.5. All Licensees shall provide status reports at six (6)-month intervals following submittal of the Phase 1 (wetwell vent) OIP which delineates progress made in implementing the requirements of Order EA-13-109. Reference EA-13-109 D.3.
 - 7.1.5.1. The issuance of the revision to the OIP which includes Phase 2 scope from 7.1.4 can substitute for the six (6)-month status report due on December 31, 2015.
 - 7.1.5.2. The six (6)-month status reports beginning in 2016 shall include both Phase 1 and 2 scope.
 - 7.1.5.3. Once Phase 1 scope is complete the six (6)-month status reports will only update Phase 2 items and leave the Phase 1 items as historical until compliance with both Phase 1 and 2 scope is complete.
- 7.1.6. All Licensees shall report to the Commission when full compliance with the requirements for Phase 1 and Phase 2 are achieved. Reference EA-13-109 D.4.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

7.2. Overall Integrated Plan Template

The Overall Integrated Plan should include a complete description of the HCVS strategies, including important operational characteristics. The level of detail generally considered adequate is consistent to the level of detail contained in the Licensee's Final Safety Analysis Report (FSAR).

7.2.1. The OIP should provide the following information:

- 7.2.1.1. Extent to which this guidance, NEI 13-02, is being followed including a description of any alternatives to the guidance
 - 7.2.1.2. A milestone schedule of planned actions
 - 7.2.1.3. Description of the strategies and guidance to be developed to meet the requirements contained in Attachment 2 of the Order
 - 7.2.1.4. Operational characteristics contained in this document, NEI 13-02 are being met.
 - 7.2.1.5. Description of how the design features contained in section 4 of this guide are being met for the appropriate phase
 - 7.2.1.6. Description of major installed and portable components used in the strategies, the applicable reasonable protection for the portable equipment, and the applicable maintenance requirements for the HCVS equipment.
 - 7.2.1.7. Description of major system components, including applicable quality requirements
 - 7.2.1.8. Description of the steps for the development of the necessary procedures, guidance, and training for the HCVS strategies including modifications to meet the requirements contained in this document, NEI 13-02.
 - 7.2.1.9. Conceptual sketches, as necessary to indicate equipment which is installed or equipment hookups necessary for the strategies.
 - 7.2.1.9.1. A preliminary or draft piping and instrumentation diagram (P&ID) or a similar diagram that shows system components and interfaces with plant systems and structures is acceptable piping and instrumentation diagrams should be included in the OIP, while as-built P&IDs will be available upon completion of plant modifications
 - 7.2.1.9.2. A preliminary or draft electrical/air motive force functional connection sketch should be included in the OIP.
 - 7.2.1.10. Description of how the portable HCVS equipment will be available to be operable during BDBEE and Severe Accident events as defined in this document, NEI 13-02.
- 7.2.2. Phase 1, wetwell vent OIP shall be submitted by June 30, 2014 that should include a description of how compliance with the "Phase 1" requirements described in Attachment 2 of the Order will be achieved within the required schedule.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 7.2.2.1. The Phase 1 OIP should include the items delineated in section 7.1.1 as well as the following items:
 - 7.2.2.1.1. A description of how the design objectives contained in section 2 of this guide, NEI 13-02 are met
 - 7.2.2.1.2. When applicable to a specific Licensee, include details on how this issue will be addressed for all situations when CAP credit is required
- 7.2.2.2. An industry template will be provided that defines the essential information for this submittal.
- 7.2.3. By December 31, 2015, a revision of the Phase 1 OIP including a description of the approach to the Phase 2 requirements described in Attachment 2 of the Order will be achieved within the required schedule shall be submitted.
 - 7.2.3.1. The Phase 2 OIP revision should address the items delineated in section 7.1.1 as it relates to Phase 2 as well as the following items:
 - 7.2.3.1.1. A description of how the design objectives contained in section 3 of this guide, NEI 13-02 are met
 - 7.2.3.1.2. When applicable to a specific Licensee, include details on how this issue will be addressed for all situations when CAP credit is required
 - 7.2.3.2. A justification for meeting Phase 2 via conditions allowed in Phase 2 B.2 option from the Order and delineated in Appendix C of this guide can replace the criteria from 7.2.3.1 above
 - 7.2.3.3. An industry template will be provided that defines the essential information for this submittal (revision).
- 7.1 Six (6)-Month Updates
 - 7.2.4. The 6-month status submittal should delineate progress made in implementing the requirements of the Order and include the following information
 - 7.2.4.1. An update of the milestone schedule from the OIP
 - 7.2.4.2. A brief summary of the milestones from the OIP completed in the preceding six-month period
 - 7.2.4.3. Changes to the compliance method as stated in the OIP or OIP revision
 - 7.2.4.3.1. Revisions to the OIP detailed implementation details that follow the criteria of NEI 13-02 and comply with the Order requirements need not be submitted to the NRC, but should be documented for inspection after compliance is obtained.
 - 7.2.4.4. Changes to the compliance schedule as required by the Order or revised in other NRC communication on this topic
 - 7.2.4.5. Provide update of any open items from the OIP, RAIs or Draft SE.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- 7.2.5. The 6-month status submittal should not be a revised OIP except for the December 31, 2015 update which could be replaced with the Phase 2 OIP revision submittal.
- 7.2.6. An industry template will be provided that defines the essential information for the 6-month status submittal.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

8 REFERENCES

1. USNRC, Order EA-13-109, "Order Modifying Licenses with Regard to Reliable Hardened Containment Vents Capable of Operation Under Severe Accidents," June 6, 2013 (ADAMS Accession No. ML13143A321).
2. USNRC, Order EA-12-050, "Order Modifying Licenses with Regard to Reliable Hardened Containment Vents," March 9, 2012 (ADAMS Accession No. ML12054A696).
3. USNRC, SRM SECY-12-0157, "Staff Requirements - SECY-12-0157, "Consideration Of Additional Requirements For Containment Venting Systems For Boiling Water Reactors With Mark I And Mark II Containments", March 19, 2013 (ADAMS Accession No. ML13078A017).
4. USNRC, Order EA-12-049, "Order Modifying Licenses with Regard to Requirements For Mitigation Strategies For Beyond-Design-Basis External Events," March 12, 2012 (ADAMS Accession No. ML12054A735).
5. USNRC, "Compliance with Order EA-12-050, Reliable Hardened Containment Vents", Interim Staff Guidance, JLD-ISG-2012-02, Revision 0, August 29, 2012 (ADAMS Accession No. ML 12229A475).

APPENDIX A - GLOSSARY OF TERMS

This glossary provides definitions of key terms used in this guidance document and an acronym listing.

A-1 Definitions:

These definitions have been made consistent with other external definitions, to the degree possible, but the definitions herein represent the expressed intent of the terms as used in this guidance.

Active Function: A function that requires mechanical motion or a change of state (e.g., the closing of a valve or relay contacts or the change in state of a transistor

Containment: For the purpose of this [Standard guidance](#), the principal enclosure that acts as a leak-tight barrier, to prevent the release of radioactive material from the structure, system, and component (SSC) containing the radioactive material under DBE conditions.

Hardened Containment Vent System (HCVS): A group of physically interconnected components that together perform the specified design function as defined by Order EA-13-109 and this guide.

Hardened pathway:

- Release of hydrogen or radionuclides at an elevation above the reactor building roof.
A vent pathway designed to withstand pressures consistent with existing containment design and avoid steam impacts within the Reactor Building. This will likely include the use of piping instead of ductwork.
- A vent pathway designed to withstand PCPL pressures and avoid hydrogen or radionuclide releases or re-entrainment within unacceptable locations such as the Reactor Building or Control Building. This will likely include the use of piping instead of ductwork.
- New venting capability should not change the design basis. The vent capability should be seismically and flooding informed, analogous to risk-informed. The containment function must be protected.

Elevated release: Release of steam outside the reactor building and other critical buildings necessary for safe shutdown

Passive Function: A function that is not an active function (e.g., the pressure-retaining function of a valve, a structural element, pipe support, cable, etc. that is not required to change position in order to perform its design function).

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Performance Based: Performance objectives for the design of hardened vents to ensure reliable operation and ease of use (both opening and closing) during a prolonged SBO, ELAP

Primary Containment Pressure Limit (PCPL): Defined in Rev 4 BWROG EPGs in order to maintain containment integrity

Public: For the purpose of this [Standard guidance](#), all individuals outside a geographic boundary within which public access is controlled and activities are governed by the operator of a ~~non~~-reactor nuclear facility.

Redundant Equipment or System: Equipment or system that duplicates the essential function of another piece of equipment or system to the extent that either may perform the required function regardless of the state of operation or failure of the other.

Regulatory Requirement: For the purpose of this [Standard guidance](#), ~~a regulation~~ ~~or~~ a requirement stemming directly, or indirectly, from a regulation established by a regulatory agency (e.g., the Code of Federal Regulations (CFR), or an NRC license, ~~or a DOE Order~~).

Reliable: Capable of performing its required function in the desired manner under all the relevant conditions and on the occasions or during the time intervals when it is required so to perform. [Source: A.E. Green and A.J. Bourne, Reliability Technology, Wiley-Interscience, 1972.] The vent can be used when needed by procedures, and be usable across a spectrum of events to include both prevention and mitigation of severe core damage

Severe Accident Hardened Containment Vent System

- The containment venting function should presume the occurrence of significant core damage and the presence of hydrogen. [This is a defense-in-depth requirement and should be considered one of the missions of the hardened vent system]
- The vent should be capable of operation to limit pressure to the PCPL, and to permit depressurization at any time, for example, to enable low pressure coolant injection into the RPV
- Operators should be able to vent containment from the wetwell and drywell(if chosen as the Phase 2 option) using permanently installed equipment under prolonged SBO conditions, ELAP
- Venting system should minimize the use of common systems between units and not interfere with the operation of other safety and non-safety equipment

Shall, Should, and May: The word "shall" denotes a requirement, the word "should" denotes a recommendation, and the word "may" denotes permission, neither a requirement nor a recommendation.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Single Failure: A random failure (e.g., single component failure or operator error) and its consequential effects, in addition to an initiating occurrence, which result in the loss of capability of a component to perform its intended function. Fluid and electrical systems are considered to be designed against an assumed single failure if neither (1) a single failure of any active component (assuming passive components function properly) nor (2) a single failure of any passive component (assuming active components function properly) results in a loss of capability of the system to perform its safety function(s).

Seismically rugged design: A term used to describe the design of components beyond the second containment isolation barrier to ensure that the HCVS is able to remain functional following a design basis seismic event. While the design and construction must meet the plant's design basis earthquake seismic requirements, licensees may use commercial grade components and materials beyond the second containment isolation barrier. Thus, licensees are not required to qualify piping, supports and other related components in accordance with NRC requirements for safety related structures, systems, and components, including Appendix B, "Quality Assurance Criteria for Nuclear Power Plants and Fuel Reprocessing Plants," for this portion of the system.

Severe Accident: An accident that involves extensive core damage and fission product release into the reactor vessel and containment with potential release to the environment. Severe accidents include both scenarios in which all core debris is cooled in-vessel (similar to the accident at TMI-2) and scenarios in which core debris breaches the reactor coolant boundary and at least some core debris relocates into containment.

Sustained Operation: The ability to operate 7 days or a shorter time if an alternative method of containment heat removal is put in place by using installed or portable equipment (e.g., a means of shutdown cooling aligned directly to the RPV, drywell or a means of suppression pool cooling). Use of the Hardened Containment vent should not be the means of containment heat removal after this time. Some containment source term control is inherent with the longer term (>7 day or alternate means) containment heat removal function; however, addressing site source term control functionality will be governed by the ERO Recovery actions versus activities associated with NEI 13-02 or Order EA-13-109. This definition does not apply to Order EA-12-049 phase 1, 2, or 3 equipment unless the equipment is repurposed under Order EA-13-109.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

A-2: Acronyms and Abbreviations

Acronym	Description
AOO	Anticipated Operational Occurrence
ATWS	Anticipated Transients without Scram
BWR	Boiling Water Reactor
BWROG	Boiling Water Reactor Owners' Group
CIV	Containment Isolation Valve
CPSS	Containment Protection Strategy Subcommittee
DOR	Division of Operating Reactor
DRF	Design Record File
EAL	Emergency Action Level
EDMG	Extreme Damage Mitigation Guideline
EOC	End of Cycle
EPGs	Emergency Procedure Guidelines
EPRI	Electric Power Research Institute
EOPs	Emergency Operating Procedures
ESF	Engineering Safety Feature
ESW	Emergency service water
FSWG	Filtering Strategies Working Group
GDC	General Design Criteria
GE	General Electric
GEH	GE Hitachi Nuclear Energy, LLC
HPCI	High Pressure Coolant Injection
HPCS	High Pressure Core Spray
IEEE	Institute of Electrical and Electronics Engineers
LOCA	Loss of Coolant Accident
LPCI	Low Pressure Coolant Injection
LPCS	Low Pressure Core Spray
LTR	Licensing Topical Report
MSIV	Main Steamline Isolation Valves
NEI	Nuclear Energy Institute
NRC	Nuclear Regulatory Commission
NSSS	Nuclear Steam Supply System
NTTF	Near Term Task Force
PAM	Post Accident Monitoring
PCR	Project Change Request
PM	Project Manager
PWP	Project Work Plan
RAI	[NRC] Request for Additional Information
RCIC	Reactor Core Isolation Cooling
RCPB	Reactor Coolant Pressure Boundary
RG	Regulatory Guide
RHR	Residual Heat Removal
RPT	Recirculation Pump Trip

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

Acronym	Description
RPV	Reactor Pressure Vessel
SACV	Severe Accident Capable Vent
SAGs	Severe Accident Guidelines
SER	[NRC] Safety Evaluation Report
SLCS	Standby Liquid Control System
SQUG	Seismic Qualification Utility's Group
QA	Quality Assurance
TDP	Technical Design Procedure
TOC	Table of Contents
TMI	Three Mile Island
UFSAR	Updated Final Safety Analysis Report

APPENDIX B – ROADMAP OF ORDER REQUIREMENTS

The purpose of this appendix is to provide a cross-reference of the requirements contained in the revised Order EA-13-109 against the requirements of the original Order EA-12-050 and identifies where the requirements are addressed in this guidance document.

B-1 Structure of Roadmap

Table B-1 lists each requirement of Order EA-13-109, “Order Modifying Licenses With Regard To Reliable Hardened Containment Vents Capable Of Operation Under Severe Accident Conditions” [Ref. B-1] against the requirements of the original Order [Ref. B-2] and the appropriate section in this document.

REFERENCES

- B-1 USNRC, Order EA-13-109, “Order Modifying Licenses with Regard to Reliable Hardened Containment Vents Capable of Operation Under Severe Accidents,” June 6, 2013 (ADAMS Accession No. ML13143A321).
- B-2 USNRC, Order EA-12-050, “Order Modifying Licenses with Regard to Reliable Hardened Containment Vents,” March 12, 2012 (ADAMS Accession No. ML12054A696).

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

**Table B-1
Roadmap of Technical Requirements from Revised EA-12-050**

EA-13-109 Order Requirement	Changes from EA-12-050	NEI 13-02 Applicable Guidance
HCVS Performance Objectives (Phase I)		
A.1.1.1 - Minimize the reliance on operator actions	No changes	4.2.6
A.1.1.2 - Minimize operators' exposure to occupational hazards	No changes	4.2.5, 6.1.1
A.1.1.3 – Account for radiological conditions that would impede event response	Wording change from “minimize radiological consequences” to “account for radiological consequences”	4.2.5, 6.1.1
A.1.1.4 – Accessible controls and indications	New Item, Specified in order item previously in ISG. “The HCVS shall be accessible and fuctional under a range of plant conditions, including a severe accident environment, extended loss of AC power and inadequate containment cooling”	4.1.3
HCVS Design Features		
A.1.2.1 - Capacity to vent 1 percent of thermal power	Added, “and the primary containment pressure limit (PCPL).” to end of sentence.	4.1.1
A.1.2.2 - Discharge the effluent to a release point above plant structures	No changes but renumbered (1.2.9 in EA-12-050)	4.1.5
A.1.2.3 - Design features to minimize cross flow	No changes but renumbered (1.2.6 in EA-12-050).	4.1.2, 4.1.4, 4.1.6

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

**Table B-1
Roadmap of Technical Requirements from Revised EA-12-050**

EA-13-109 Order Requirement	Changes from EA-12-050	NEI 13-02 Applicable Guidance
A.1.2.4 - Operation from control panel for sustained operations	Similar wording as 1.2.2 in EA-12-050, but included the definition of "sustained operation" in a footnote.	4.2.2
A.1.2.5 – Alternate manual operation capability	New Item, adds additional capability for system operation for defense in depth, not redundancy.	4.2.3
A.1.2.6 - Operation with permanently installed equipment for 24 hours	New Item, added prior ISG item. "The HCVS shall be capable of operating with dedicated and permanently installed equipment for at least 24 hours following the loss of normal power or loss of normal pneumatic supplies to air operated components during an extended loss of AC power."	2.4
A.1.2.7 – Prevention of inadvertent actuation	No changes but renumbered (1.2.3 in Order EA-12-050).	4.2.1
A.1.2.8 – Monitoring of vent status from control panel	No substantive changes but renumbered (1.2.4 in Order EA-12-050). Added, "from the control panel installed in accordance with requirement 1.2.4"	4.2.2
A.1.2.9 - Means to monitor the effluent discharge	No substantive changes but renumbered 1.2.5 in Order EA-12-050). Added, "from the control panel installed in accordance with requirement 1.2.4"	4.2.4

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

**Table B-1
Roadmap of Technical Requirements from Revised EA-12-050**

EA-13-109 Order Requirement	Changes from EA-12-050	NEI 13-02 Applicable Guidance
A.1.2.10 - Design for severe accident & dynamic conditions	Significant changes from 1.2.8 in Order EA-12-050. Added design conditions to account for severe accident service of the HCVS to include temperature, radiation and combustible gas. Design consistent with limiting containment components.	2.3, 4.1.1, 5.1
A.1.2.11 - Flammability control	New item related to hydrogen control. "The HCVS shall be designed and operated to ensure the flammability limits of gases passing through the system are not reached; otherwise, the system shall be designed to withstand dynamic loading resulting from hydrogen deflagration and detonation."	4.1.7, 4.1.7.1, 4.1.7.2
A.1.2.12 - Designed to minimize hydrogen gas migration	New item related to hydrogen control programs. "The HCVS shall incorporate strategies for hydrogen control that minimizes the potential for hydrogen gas migration and ingress into the reactor building or other buildings.	4.1.6
A.1.2.13 - Operation, testing, inspection and maintenance	No changes, renumbered (1.2.7 in Order EA-12-050).	6.2
Quality Standards		

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

**Table B-1
Roadmap of Technical Requirements from Revised EA-12-050**

EA-13-109 Order Requirement	Changes from EA-12-050	NEI 13-02 Applicable Guidance
A.2.1 – Design basis of containment isolation function	No changes.	5.3
A.2.2 - Reliable and rugged performance	No changes.	5.2, 5.3
Programmatic Requirements		
A.3.1 - Develop, implement, and maintain procedures	No significant changes. Changed prolonged SBO to extended loss of AC power.	6.1.2, 6.1.2.1
A.3.2 - Train appropriate personnel	No significant changes. Changed prolonged SBO to extended loss of AC power.	6.1.3
Drywell Vent Functional Requirements (Phase 2)		
B.1.1 Meet performance objectives, design features, quality requirements, and programmatic requirements	New guidance on Drywell venting.	3
B.1.2 Justify confidence drywell vent is not necessary	New guidance on Drywell venting.	Appendix C

APPENDIX C – ASSESSMENT OF NEED FOR DRYWELL VENT

The purpose of this appendix is to provide a repeatable process for determining whether a drywell vent is needed under element B of the order. The idea behind providing a plant-specific example is two-fold: (1) help NRC see how it works so they can accept the methodology and (2) help utilities better understand how to apply it.

C.1 METHODOLOGY FOR EVALUATING THE NEED FOR A DRYWELL VENT

C.2 EXAMPLE PLANT-SPECIFIC EVALUATION OF THE NEED FOR A DRYWELL VENT

C.3 REFERENCES

C-1 xxxxx.

APPENDIX D – INTERFACE WITH FLEX

Order EA-13-109 calls for very clear definition of the boundary conditions to be applied to the design and operational considerations required to implement the HCVS associated with a severe accident capable vent. Compliance with NRC Order EA-12-049, FLEX is clearly a mitigation strategy for a BDBEE without core damage.

D.1. Interaction Between Order EA-12-049 and EA-13-109

- D.1.1. Complying with Order EA-13-109 using components allocated to FLEX do not change the compliance methods or requirements for all aspects of complying with Order EA-12-049 using FLEX.
- D.1.2. References in this guidance to the criteria contained in FLEX guidance, NEI 12-06, invoke those criteria for establishing boundary conditions applicable to compliance with Order EA-13-109 not the reverse.
- D.1.3. Use of specific elements of FLEX to comply with Order EA-13-109 require only those specific elements to have additional criteria applied to ensure the credited function is available to meet the design, operational and maintenance criteria contained in this guide.
 - D.1.3.1. The most likely FLEX functions that could be used for compliance to EA-13-109 are makeup air to the HCVS system connections (either primary or alternate control locations) and requisite power (either AC or DC) to either primary or alternate valve operating stations
 - D.1.3.2. Connections, staging and deployment for portable equipment and support functions must comply with Order EA-13-109 requirements as clarified in this guidance.
 - D.1.3.3. Connections, staging and deployment established for FLEX do not have to be applicable for compliance with Order EA-13-109. If this is the case then additional actions are required to provide compliance with Order EA-13-109 requirements as clarified in this guidance.
- D.1.4. FLEX analysis determines the timing for containment venting under Order EA-12-049 (ELAP/LUHS) conditions. HCVS is not the only available method to operate containment vents. Current Generic Letter 89-16 containment vents for Mark I containments and other installed vents in Mark II containments can be operated under many conditions.
 - D.1.4.1. FLEX will supply the analysis and method of water addition to the RPV. It also supplies AC/DC power, instrumentation, and Spent Fuel Pool makeup independent of HCVS

D.2. Onsite Portable Equipment Use

- D.2.1. The HCVS may use on-site FLEX Phase 2 portable equipment as replenishment source for motive air
- D.2.2. The HCVS may use on-site FLEX Phase 2 portable equipment as source of reliable DC power

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- D.2.3. The HCVS may use on-site FLEX Phase 2 portable equipment as source of AC power
 - D.2.4. The HCVS may use required FLEX Key Parameter instruments for monitoring Torus/DW parameters
 - D.2.5. The HCVS may use FLEX Phase 1 or 2 Safety Support Functions strategies for habitability in HCVS areas
- D.3. Offsite Portable Equipment Use
- D.3.1. The HCVS may use off-site FLEX Phase 3 portable equipment for any longer term actions which they are capable of addressing
 - D.3.2. The HCVS may use any available off-site portable equipment for any longer term actions which they are capable of addressing
 - D.3.3. These sets of off-site equipment will have to perform the functions identified in other sections of this document and only have to address the radiological, and habitability conditions expected to be present at the location and time of connection.
 - D.3.4. Accessibility and deployment conditions should be addressed when determining the appropriate usability of portable equipment.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

APPENDIX E – Interface with Generic Letter 89-16, Installation of a Hardened Wetwell Vent

The purpose of this appendix is to provide a clear understanding of the interface between Generic Letter 89-16, Installation of a Hardened Wetwell Vent, and order EA-13-109, Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions.

In 1989, the NRC issued Generic Letter 89-16, "Installation of a Hardened Wetwell Vent," to all licensees of BWRs with Mark I containments to encourage licensees to voluntarily install a hardened wetwell vent. In response, licensees installed a hardened vent pipe from the wetwell to some point outside the secondary containment envelope (usually outside the reactor building). Some licensees also installed a hardened vent branch line from the drywell. Because the modifications to the plant were performed in accordance with 10 CFR 50.59, "Changes, tests and experiments," detailed information regarding individual plant configurations was not submitted to the NRC staff for review. Subsequently, the NRC has issued orders to each plant via EA-13-109 to install reliable hardened containment vents capable of operation under severe accident conditions to be implemented in two phases; Phase 1 addresses the Wetwell vent path and Phase 2 the Drywell vent path. A review of the requirements of EA-13-109 phase 1 and Phase 2 concludes the requirements of this order bounds the previous requirements of GL 89-16. As such, licensees have a basis for changing commitments to GL 89-16 in accordance with NEI 99-04, Guidelines for Managing NRC Commitment Changes.

Design Elements of GL 89-16 (based on the Pilgrim design included in 89-16)	EA-13-109 requirement equivalent or greater
Provide venting capability equal to approximately 1% decay heat	Item 1.2.1
Vent the wetwell vapor space to a suitable release point (e.g. stack, reactor building or turbine building roof).	Item 1.2.2
Provide operability independent of AC power (note 1)	Item 1.1.4
Prevent inadvertent operation	Item 1.2.7
No single operator error can actuate the system	Item 1.2.7
Provide indication of valve position in the main control room	Item 1.2.8
Piping is safety related and supported as Class I up to the vent valve	Section 2
Class II items with potential to degrade the integrity of a Class I are analyzed.	Section 2

Note 1: It was proposed in the staff recommendation in SECY 89-17 that the hardened vent isolation valves be capable of being opened from the control room under station blackout conditions beyond the then-established coping time; however, the generic letter only requested that the licensee include costs for electrical modifications in a plant-specific basis for why the vent was not cost beneficial if a vent was not voluntarily installed. The installed vents in most cases were dependent on AC power.

References:
SECY 89-17

APPENDIX F – METHOD TO EVALUATE OPERATOR DOSES

The purpose of this appendix is to provide a straightforward, repeatable process for assessing the operator doses expected from use of the wetwell/drywell vent. The degree to which this method is conservative is not known. More importantly, since it has not been applied for this purpose, we don't know what kind of constraints it might create in the HCVS design. The idea behind providing a plant-specific example is two-fold: (1) help NRC see how it works so they can accept the methodology and (2) help utilities better understand how to apply it.

F.1 METHODOLOGY FOR COMPUTATION OF OPERATOR DOSES

Personnel safety and accessibility will be important during the mitigation of a severe core damage accident. Opening of a containment vent with elevated radiation levels will pose some challenges to the operating staff. Various methods for routing the vent piping can reduce the impact on plant operations. Shielding of portions of the vent pipe can also be used to reduce exposure to plant personnel.

The gamma rays are attenuated exponentially as a function of the shield material and length as is generally characterized by:

$$\frac{I}{I_0} = e^{-\mu y}$$

Where:

I is the local radiation intensity
I₀ is the radiation intensity at the source
y is the length over which the attenuation occurs
μ is the attenuation coefficient

Attenuation coefficients can be obtained for various materials such as concrete (0.181 cm⁻¹) and lead (1.289 cm⁻¹) to allow for estimating the local radiation doses to plant personnel. More sophisticated analysis tools are available to assist the plant in evaluation of radiation doses expected during the venting operation for their specific routing. Whether using sophisticated analysis tools or hand calculations, multiple release pathways must be considered when evaluating possible sources of dose for plant personnel. While selectively routing vent pathways may assist in the mitigation of radiation effects on plant personnel, the vent paths themselves must be properly shielded in order to prevent shine through the walls of the vent paths (pipe walls). Furthermore, fission products and aerosols released from the containment have the potential to escape the reactor building through a stack or other pathways, depending upon vent path routing preferences. Any radiation released from the reactor building has the potential to shine back into various compartments of the reactor building, such as the main control room. Thus, it is also important to evaluate the effects of fission products and aerosols that could have potentially been released from the reactor building. While such effects are partially dependent upon scrubbing capabilities prior to

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

the release of any trace gases beyond the boundary of the reactor building walls, meteorological effects, such as wind patterns and precipitation, may also affect overall dose to plant personnel. Wind patterns that force fission products and aerosols to hover over the reactor building increase the amount of risk to plant personnel. Additionally, any precipitation can force airborne sources of radiation to settle on the roof of the reactor building or main control room. As previously mentioned, sophisticated analysis tools are available for calculating such effects.

F.2 EXAMPLE PLANT-SPECIFIC DOSE CALCULATION

Appendix G provides estimates for containment radiation levels during postulated severe core damage accidents. The above attenuation characterization can be used to estimate radiation levels due to shielding by new or existing structures to demonstrate an acceptable environment for plant staff.

For example, using the attenuation above for a one (1) foot concrete shield, a factor of 1000 reduction in the radiation level can be achieved.

F.2.1. Point Source Solution

If the source had been treated as a small hot spot, the exposure rate from the unshielded source would have been given by

$$X = S\Gamma / R^2$$

Where:

- X = unshielded exposure rate = 10 R/hr;
- S = Co-60 activity, Ci;
- Γ = Co-60 gamma ray exposure rate constant, and
- R = distance from source to dose point, 0.02858 m.

Solving for S yields S=0.00619 Ci

F.3 REFERENCES

F.3.1 xxxx.

APPENDIX G - METHOD TO EVALUATE SOURCE TERM FOR VENT

The purpose of this appendix is to provide a straightforward, repeatable process for assessing the severe accident source terms expected from the wetwell/drywell vent path. RTM-96 provides a simple approach that is implied to be consistent with Alternate Source Terms. The degree to which this method is conservative is not known. More importantly, since it has not been applied for this purpose, we don't know what kind of constraints it might create in the HCVS design. The idea behind providing a plant-specific example is two-fold: (1) help NRC see how it works so they can accept the methodology and (2) help utilities better understand how to apply it.

The design of the HCVS should take into consideration the radiological consequences resulting from the event that could impact mitigation activities. During the Fukushima event, personnel actions to manually operate the vent valves were impeded due to the location of the valves in the torus rooms. The HCVS should be designed to be placed in operation by actions at a control panel, located in the main control room or in a remote location. The system should be designed to function in this mode with permanently installed equipment providing electrical power (e.g., DC power batteries) and valve motive force (e.g., N₂/air cylinders). The system should be designed to function in this mode for a minimum duration of 24 hours. Durations of less than 24 hours will be considered if justified by adequate supporting information from the licensee. To ensure continued operation of the HCVS beyond 24 hours, licensees may credit manual actions, such as moving portable equipment to supplement electrical power and valve motive power sources.

In response to Generic Letter (GL) 89-16, a number of facilities with Mark I containments installed vent valves in the torus room, near the drywell, or both. Licensees can continue to use these venting locations or select new locations, provided the requirements of this guidance document are satisfied. The HCVS improves the success of core cooling by removing heat from containment and lowering containment pressure, when core cooling is provided by other systems. Leakage from the HCVS within the plant and the location of the external release from the HCVS could impact the event response from on-site operators and off-site help arriving at the plant.

G.1 METHODOLOGY FOR COMPUTATION OF SOURCE TERM

The U.S. NRC Response Technical Manual RTM-96 (Ref G-1) contains simple methods for estimating the radiation levels within containment during a core damage event. RTM-96 provides expected containment radiation monitor readings based on fission product inventories as defined in NUREG-1465 (Ref G-2). The source terms defined in NUREG-1465 for cladding damage and overheating damage are summarized in Table G-1:

- Cladding damage releases the gap activity, consisting of approximately 5% of the total core inventory of noble gases and volatile fission products.
- Overheating damage, corresponding to the early in-vessel release phase, releases virtually all of the remaining noble gases and larger amounts of the volatile fission products from the fuel pellets themselves—approximately 25% of the total core inventory of iodine and 20% of the cesium. Smaller amounts of less

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

volatile products may also be released primarily tellurium, strontium, and barium. The total radionuclide content in the primary containment following overheating damage is the sum of the gap activity and early in-vessel releases.


Table G-1: Fission Product releases into Containment

	Gap Release***	Early In-Vessel	Ex-Vessel	Late In-Vessel
Duration (Hours)	0.5	1.5	3.0	10.0
Noble Gases**	0.05	0.95	0	0
Halogens	0.05	0.25	0.30	0.01
Alkali Metals	0.05	0.20	0.35	0.01
Tellurium group	0	0.05	0.25	0.005
Barium, Strontium	0	0.02	0.1	0
Noble Metals	0	0.0025	0.0025	0
Cerium group	0	0.0005	0.005	0
Lanthanides	0	0.0002	0.005	0

* Values shown are fractions of core inventory.
 ** See Table 3.8 for a listing of the elements in each group
 *** Gap release is 3 percent if long-term fuel cooling is maintained.

Equivalent plant-specific radiation levels may be calculated using any accepted analytical tool. Figure G-1 provides representative values for the Mark I and II containment design taken from RTM-96. In general, the radiation levels associated with the onset of cladding damage are expected to be at least two orders of magnitude greater than those attributable to coolant releases and the ranges associated with overheating damage are expected to be approximately one order of magnitude greater than those for cladding damage. The cladding damage and overheating damage ranges each span approximately two orders of magnitude.

G.2 EXAMPLE PLANT-SPECIFIC SOURCE TERM CALCULATION

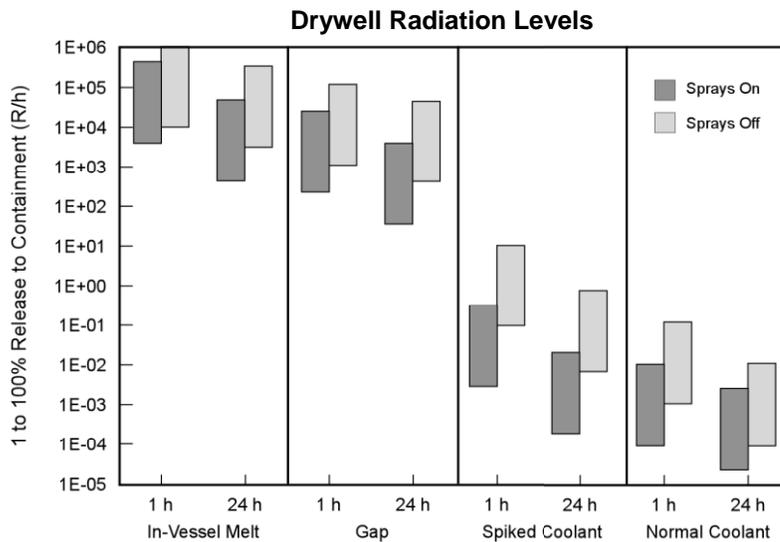

Core Damage and Time After Reactor Shutdown

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

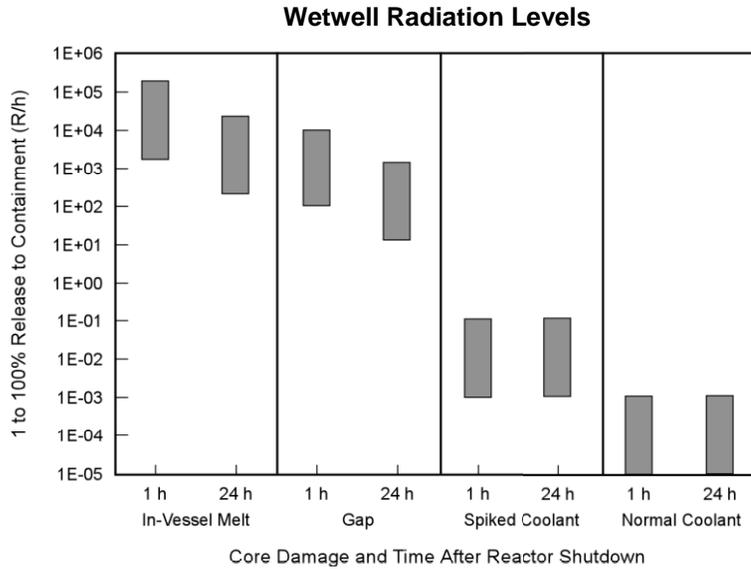


Figure G-1: Mark I/II Primary Containment Radiation Levels (Reference G-1)

The radiation monitor readings as defined in RTM-96 are assumed to provide an adequate estimate for designing the HCVS.

G.3 REFERENCES

- G.3.1 USNRC, "RTM-96, Response Technical Manual," NUREG/BR-0150, Vol. 1, Rev. 4, March 1996.
- G.3.2 Accident Source terms for Light-Water Nuclear Power Plants, NUREG-1465, February 1995

APPENDIX H - METHODS TO ADDRESS CONTROL OF FLAMMABLE GASES

H.1 Bases & Methodology

Order Reference 1.2.11 – The HCVS shall be designed and operated to ensure the flammability limits of gases passing through the system are not reached; otherwise, the system shall be designed to withstand dynamic loading resulting from hydrogen deflagration and detonation.

Hydrogen will be produced as a result of core damage during a severe accident. Although not cited in the requirements section of Reference 2 (in particular Requirement 1.2.11 relative to consideration of “hydrogen deflagration or detonation”), carbon monoxide is cited as a combustible gas in the introduction paragraph to Attachment 2 to that reference. Carbon monoxide (CO) can be produced in sufficient quantities to deflagrate and potentially detonate (in a vent pipe) by the process of Molten Core Concrete Interaction (MCCI). This would occur in the most severe of accidents once the reactor vessel is breached and corium has reached (and interacted sufficiently with) the pedestal or lower liner protecting concrete. It should be noted that the potential to produce sufficient quantities of CO is dependent on the aggregate used in the drywell concrete. The chemical makeup of limestone (which contains large amounts of calcium carbonate - CaCO_3), will produce CO with a corium interaction. Although the amount of CO produced is relatively small as compared to hydrogen produced by gross metal-water reaction, the potential for a deflagration/detonation cannot be ruled out with limestone aggregate. Basalt based aggregate (which has no appreciable carbon constituents) will produce only minor amounts of CO due to MCCI. Therefore CO production for those plants that utilize that type of aggregate should be considered inconsequential (although a final evaluation should be made by the affected plant).

Detonation of either Hydrogen or CO is not expected to occur in containment, given existing plant controls to ensure the containment remains free of Oxygen. Detonation in the HCVS may occur if venting occurs and Oxygen is allowed to enter the HCVS discharge piping. Air/Oxygen would most likely enter the HCVS piping following a vent cycle, either through steam collapse or by rising Hydrogen leaving the HCVS piping (replaced by inflow of air).

Preventing the detonation in HCVS is possible, either through design of the HCVS to ensure Oxygen is not allowed to enter the piping, or by inerting the HCVS piping after venting. If a detonation is not prevented, the piping should be designed to withstand the detonation without failing.

The size of the vent must meet the criteria cited in Section 4.1.1 of this guidance for the primary design objective of the HCVS is to prevent overpressure failure of the containment prior to core damage and subsequent to core damage. In addition, the consideration of the dose impact on such a method of operation is required.

The following sections provide high level methodology and discussion on possible approaches to either prevent or withstand a detonation during or following venting through the HCVS. The approaches discussed below are not considered to be the only possible approaches to protecting the HCVS. Alternative approaches are considered

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

acceptable, given that either detonation in the HCVS is prevented or the system is designed to withstand the possible detonation of Hydrogen or CO.

H.2 Design Systems to Prevent Detonation/Deflagration

Design of the HCVS may include features that prevent air/oxygen backflow into the discharge piping. Use of design features in sections of pipe susceptible to air intrusion from intermittent HCVS operation can also be used to minimize detonation/deflagration potential.

There are several possible approaches to be able to prevent air from entering the discharge piping. One approach is to use an isolation valve or other device (e.g., similar to a loop-seal device) at the discharge point of the vent. If an isolation system is used to prevent air back-flow, the system should account for the possible vacuum created by the cooling of steam in the susceptible piping sections once the HCVS isolation valves are closed. A water-based filter may also prevent air from entering the upstream piping entering the filter. The design should consider that the vacuum generated in the piping could result in sufficient air leakage that can result in a mixture that can detonate.

Another possible approach to prevent detonation is to size the vent such that continuous venting occurs, once the vent is opened. This can also be accomplished through use of a flow-control valve restricting vent flow. This approach would be used if the containment would be expected to remain pressurized for an extended period (e.g., beyond 7 days) given a severe accident has occurred and no containment cooling is provided. The use of a continuous vent operation should include several high level features:

- 1) Procedural guidance should ensure the HCVS operation begins prior to the production of Hydrogen or CO. This will prevent any detonation when the initial venting occurs.
- 2) Spurious Closure of the HCVS isolation valves should be prevented through the use of designing valves using this guidance. Protection from automatic closure signals should be provided.
- 3) The design should include methods for purging the HCVS piping following completion of the containment venting. Use of portable bottles or similar is considered sufficient for this process. See discussion below for attributes important to the use of a purge system.
- 4) As with any containment atmosphere control/venting strategy, controls must be in place (administrative or otherwise) to prevent negative pressure inside containment drawing air/oxygen back into that volume.

H.3 Vent Path Inerting

Use of a purge system in sections of pipe susceptible to air intrusion from intermittent HCVS operation can also be used to minimize detonation/deflagration potential. Given the pressure and significant flow through the HCVS when the vent is initially opened, it is not expected that a detonation would occur in the HCVS line when the vent process begins. Detonation is a concern; however, once the vent line is closed, as air enters the piping following steam condensation or Hydrogen gas leaving the discharge. Therefore,

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

purging of the line may be considered as a mitigation strategy immediately following the closure of the HVCS isolation valves.

Additionally, purge system operation should account for any piping elevation changes, where oxygen, Hydrogen or CO might accumulate at a high point in non-inerted piping in the HCVS.

Alternatively, the design may utilize an inert gas system which provides positive pressure in the vent pipe above atmospheric. Use of a continuously operating system should consider the elevation of the HCVS discharge to ensure positive flow through the system when containment vent is not occurring.

H.4 Design HCVS Piping for Detonation

Methods of designing the HCVS piping/components against flammable gas detonation/deflagration are discussed below. Susceptible portions of the piping should be determined based on where oxygen can be drawn into the piping/interfaces piping.

The evaluation of gas ignition is to document the capability of the HCVS piping to maintain integrity should deflagration or detonation occurs. Deformation of the pipe is acceptable given the integrity of the pipe is shown to be maintained.

The design of the HCVS is required to withstand the dynamic loading resulting from hydrogen deflagration/detonation. For design purposes, the HCVS is not required to consider assumed simultaneous loads that would not be present or occur during the venting of hydrogen (e.g. seismic loads).

The following provides a list of steps to be considered to ensure the HCVS is properly designed to tolerate a possible hydrogen deflagration/detonation:

1. Review the history/commitments of associated site equipment
 - a. Research existing/similar piping system(s) for:
 - i. ASME Code commitments.
 - ii. Seismic Classification.
 - iii. Current Service Level of like/similar equipment.
2. Establish classifications of new piping or piping to be modified (See Section H.2)
 - a. New loading combinations for pipe in standby (with Containment Isolation Valves -CIV(s) closed)
 - i. Consider hydrogen detonation pressure loading (7878 kPa/1143 psia - See H.2 below).
 - ii. If it is determined that a potential carbon monoxide detonation could occur, consider a detonation pressure loading of 9393 kPa (1362 psia) instead of the value for hydrogen cited in 2.a.i (See Note 1).
 - iii. Determine the dynamic loadings both coincident with and caused by the detonation event. Note that, if a filter is used in the vent system, its ability to accommodate a potential hydrogen detonation should be a consideration.

¹ Note: Although Reference 2 cites carbon monoxide as an example of a "severe accident condition" combustible gas in the introduction paragraph of Attachment 2, that compound is not cited again in Requirement 1.2.11 as having the potential to deflagrate or detonate. See further information on carbon monoxide in Section A.4.2.2.1.1.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- b. New loading combinations for pipe in operation
 - i. Determine max pipe metal temperature.
 - ii. Determine max pressure based on “Order” sections 1.2.1 and 1.2.8.
 - iii. Determine applicability of seismic loading.
 - iv. Determine the probability of occurrence and the ASME classification as suggested in the next section.
- 3. Establish configuration for new/modified pipe
 - a. Configure piping to meet applicable requirements of the “Order.”
- 4. Determine maximum stresses on vent piping
 - a. Considerations
 - i. Set load combination using detonation load as dominant for each stress category. For example:
 - 1. General membrane (pipe pressure retaining material shell).
 - 2. Local membrane.
 - 3. Bending.
 - ii. Consider worst case thrust load due to detonation, for example:
 - 1. Maximum pressure.
 - 2. Maximum temperature.
 - 3. Acoustic wave load for each pipe segment.
 - 4. Dynamic responses and bending moments.
 - iii. Design the pipe supports
 - 1. Evaluate the existing pipe supports (if applicable) and allowable loads.
 - 2. Perform stress analysis of the pipe to determine the support system so that all the stresses meet allowable limits.
 - 3. Perform support design and also determine whether the existing supports meet the design requirements.
 - iv. There are many pipe stress analysis codes available in the market and each utility may have their own standard. Individual sites are expected to use pipe stress analysis codes that comply with that station’s design process.

H.4.1 Suggested Classification Approach based on Contemporary Guidance

Code Class - Document 10CFR50.55a recommends RG 1.26 (Reference 9) as offering guidance for Quality Groups which provide an indication for ASME Code classifications. Per the cited regulatory guide (see Section 2. (d)), the piping associated with the HCVS downstream from the second containment isolation valve should be considered as Quality Group C based on the risk of ground level release due to vent integrity failure. This is considered analogous to ASME Code Class III. As such, ASME Section III, Subsection ND is used to provide guidance for the allowable stresses for this material. ND-3600 is used for piping design.

Service Level – NUREG-0661 (Reference 11) provides guidance for consideration of service “limits” in Section 4.3. Note that “limit” and “level” are considered to be interchangeable. Both Service Level C and Service Level D are cited under subsections 4.3.1.3 and 4.3.1.4 (respectively). Both of these service levels are considered to be associated with low-probability events. However, combining this reference with Reference 10, Service Level C is the only level which is cited as

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

applicable to hydrogen detonations (see further information below relative to RG-1.57). As such, Service Level C is considered appropriate for this loading.

Load Combinations - In the "Background" Section of RG 1.57 (Reference 10), 10 CFR 50.44(b)(5)(v)(B) is cited as the basis for a statement saying that, "systems and components necessary to...maintain containment integrity will be capable of performing their functions during and after exposure to the environmental conditions created by the burning of hydrogen, including local detonations, unless such detonations can be shown to be unlikely to occur." This statement specifically refers to Mark III containments as Mark I and Mark II containments require an inert atmosphere. However, in the venting case considered, the isolated vent systems in these models can no longer rely on the inerted containment effluent to prevent hydrogen detonations; therefore, these loads typically reserved for Mark III containments should be considered for this isolated extension of containment in this particular scenario. Such a scenario (conducive to a local detonation) can only be typified as a severe accident.

With respect to the SSE it is understood that (based on the example of Fukushima Dai-ichi) a SSE may well be the precursor to an accident which could evolve into a severe accident (including core damage and hydrogen generation). And aftershocks will likely occur after the initial earthquake. However these aftershocks (along with the earthquake itself) are typically not long duration events. They are more typically lower in magnitude, short and sporadic. Note also that, under the Service Level C load combinations in the referenced regulatory guide (Section 1.2.3.3), all load combinations consider the SSE except for those combinations which deal with pressure from hydrogen generation or hydrogen burning. Considering the minimal opportunity for a hydrogen detonation to occur in a vent pipe, that pipe would not be expected to experience these 2 unlikely loading conditions simultaneously.

H.4.2. Methodology

The loading being considered (hydrogen detonation) is considered as a Service Level C (Emergency) condition. As such the allowable stress allowance provided in ND-3654.1 may be utilized. Section 4.3 of NUREG-0661, Service Level C is characterized as applicable to design basis type events. As the precursor to such a detonation (release of hydrogen during a severe accident) would be characterized as a well beyond design basis accident that deteriorates into a severe accident with core damage, and the aforementioned required conditions for an actual detonation to occur are so remote, Service Level D allowable stresses may be considered appropriate for this scenario. However, it is understood that the intent of the Level D limit is to withstand a single occurrence. It is expected that the vent be capable of withstanding multiple hydrogen detonations; therefore, Service Level D alone would not provide the margin required to ensure system functionality.

The purpose of this evaluation is not to consider the vent system function, only that the occurrence of hydrogen detonations (as stated in this document) will not cause a failure of the pipe's pressure retaining capability. System function will be addressed in the final design detailed analysis for the system.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

H.4.2.1 Bases for Loading due to Detonation

In order to address the Reference 2, Requirement 1.2.11 statement that the system shall be designed to withstand dynamic loading resulting from hydrogen deflagration and detonation, a simplified evaluation can be performed using standard methods.

H.4.2.2 Detonation Pressure Considered for Carbon Monoxide

Once CO is a part of the vented gas, deflagration/detonation (of CO) will occur much the same as it would for hydrogen as outlined above.

H.5 Discussion

Based on the conclusions/positions stated above, the potential scenario of concern would be one in which steam collapses in an HCVS after fuel damage (and after the venting off of the majority of the original nitrogen loading) and draws outside air back into the vent system. This is the only scenario with reasonable potential to cause the formation of a deflagrable mixture. As such, it is the scenario to be considered in an evaluation of a potential hydrogen deflagration and the worst case damage which could occur.

As is understood from the initial conditions discussed above, the likelihood of a hydrogen detonation in a vent line from an inerted containment is extremely remote. However it is understood that it may be required to consider it in the design of such a system. In light of this probable requirement there is reasonable capability that a hardened containment vent system can be designed to accommodate a hydrogen detonation.

With typical calculated pressure loadings using methods above, many standard grades and thicknesses of the commonly used SA-106 pipe could accommodate the stresses from such a loading condition. Stress calculations utilizing contemporary ASME Section III formulae show that such a loading can be accommodated by standard SA-106 Gr A 12" pipe. However, due to the dynamic loading induced on a typical piping system (with bends and elbows) by such a pressure spike, the actual stresses experienced for any given vent system will be dependent on the piping system configuration and support structures.

H.6 References

- H.6.1. J. E. Shepherd, "Structural Response of Piping to Internal Gas Detonation." ASME Pressure Vessels and Piping Conference, 2006. VP2006-ICPVT11-93670, presented July 23-27, 2006 Vancouver BC, Canada.
- H.6.2. USNRC EA-13-109, "Issuance of Order to Modify Licenses with Regard to reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions, " dated June 6, 2013. ML13143A321.
- H.6.3. C-J Detonation Studies in Hydrogen-Chlorine, Carbon Disulfide-Oxygen and Carbon Monoxide-Hydrogen-Oxygen-Nitrogen Mixtures, Christiane M. Guirao, et al, McGill University, July 1972.

Industry Guidance for Compliance with Order EA-13-109: BWR Mark I & II Reliable Hardened Containment Vents Capable of Operation Under Severe Accident Conditions

- H.6.4. "Mitigation of Hydrogen Hazards in Severe Accidents in Nuclear Power Plants," International Atomic Energy Agency, Vienna, 2011.
- H.6.5. NUREG-1367, "Functional Capability of Piping Systems."
- H.6.6. J. E. Shepherd, A. Teodorczyk, R. Knystautas, J. H. Lee, "Shock Waves Produced by Reflected Detonations." Progress in Astronautics and Aeronautics 134, 244-264.
- H.6.7. "Combustion of BWR-Typical Radiolytic Gas Mixtures," Final Report for the International Radiolytic Gas Combustion Project, VGB-Contract SA "AT" 13/04, December, 2007.
- H.6.8. ASME Boiler and Pressure Vessel Code, Section III.
- H.6.9. Regulatory Guide 1.26, "Quality Group Classifications and Standards for Water-, Steam-, and Radioactive-Waste-Containing Components of Nuclear Power Plants," revision 4.
- H.6.10. Regulatory Guide 1.57, "Design Limits and Loading Combinations for metal Primary Reactor Containment System Components," Revision 2.
- H.6.11. NUREG-0661, "Safety Evaluation Report, Mark I Containment, Long-Term Program," March 1980.
- H.6.12. Comparison of critical conditions for DDT in regular and irregular cellular detonation systems; M.S. Kuznetsov et al, May 2000.
- H.6.13. NRC Inspection Manual, Temporary Instruction 2515/121, (as associated with) Verification of Mark I Hardened Vent Modifications (GL 89-16), 5/24/94.
- H.6.14. JLD-ISG-2012-02, Compliance with Order EA-12-050, Reliable Hardened Containment Vents, Interim Staff Guidance, Revision 0, August 29, 2012.