

--- Q200002170007
Scientific Notebooks # 301 & 302

301

LABORATORY NOTEBOOK

CNWRA/SwRI

NOTEBOOK NO. _____
ISSUED TO _____
ON _____ **19** _____
DEPARTMENT _____
RETURNED _____ **19** _____

CNWRA
CONTROLLED
COPY 301

—SCIENTIFIC NOTEBOOK CO.—
2831 LAWRENCE AVE.
P.O. BOX 238
STEVENSVILLE, MI 49127
616-429-8285

INSTRUCTIONS

1. **The primary purpose of this notebook is to protect your and the Company's Patent-Rights by keeping records of all original work in a form acceptable as evidence if any legal conflict arises.**
2.
 - When starting a page, enter the title, project number, and book number.
 - Use ink for permanence -- avoid pencil.
 - Record your work as you progress, including any spur-of-the-moment ideas which may be developed later.
 - Avoid making notes on loose paper to be recopied.
 - Record your work in such a manner that a co-worker can continue from where you stop. You might be ill and to protect your priority it could be urgent that the work continue while you are absent.
3.
 - Give a complete account of your experiments and the results, both positive and negative, including your observations.
 - Record all diagrams, layouts, plans, procedures, new ideas, or anything pertinent to your work including the details of any discussions with suppliers, or other people outside the Company.
 - Do not try to erase any incorrect entries; draw lines deleting them, note the corrections, sign and date the changes. This extra care is worthwhile because of the necessity of original data to prove priority of new discoveries.
4.
 - After entering your data, sign and date the entries.
 - Explain your work to at least two witnesses who are not co-inventors, and have them sign and date the pages in the place provided.
- Record the names of operators and witnesses present during any demonstration and have at least two witnesses sign the page. If no witnesses are present during an experiment of importance, repeat it in the presence of two witnesses.
5. Since computer programs can be patented these instructions apply to the development of computer software. In this case a description of the structure and operation of the program should be recorded in the notebook, together with a basic flow diagram which illustrates the essential features of the program. In the course of developing the code, the number of lines of code written each day should be recorded in the notebook, together with a statement of the portion of the flow diagram to which the section of code is directed.
6. This notebook and its contents are the exclusive property of the Company. It is confidential and the contents are not to be disclosed to anyone unless authorized by the Company. You must return it when completed, upon request, or upon termination of employment. It should be kept in a protected place. **If loss occurs, notify your supervisor immediately, and make a written report describing the circumstances of the loss.**

From Page No. _____

Initial Entry Also see CNWRA notebook 302

this notebook records laboratory experiments and modeling studies of capillary diversion - seepage exclusion from underground openings of unsaturated flow in fractures.

Principal Investigator is Debra L. Hughes
Laboratory Technician Troy

Additional guidance and technical direction provided by Ron Green

Basic idea is to construct an artificial fracture using two glass plates. An underground opening is simulated by creating a hole through the sheets of glass. Unsaturated flow can then be visualized by using dye treated water.

Modeling will be done using analytical expressions and the numerical code MultiFlo ver 1.2B.

Conceptual models will be tested and may be improved or modified as necessary.

The work completed here is expected to relate directly to the problem of seepage into drifts under both thermal and isothermal conditions at Yucca mtn (HLW Repository)

To Page No. _____

Witnessed & Understood by me, _____

Date _____

Invented by Debra Hughes

Date

Recorded by DH

Jan 7
1999

From Page No.

Dec 30. Pick up two pieces of glass
from Glass Service.

Dimensions 15" by 12" by 3/8"

these were taken to the SWRI
fabrication shop to be sand blasted
to roughen the surfaces

To Page No.

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

Dec 30
1999

TITLE

From Page No.

Troy build
frame

Profilemeter runs

Sand Blast Abrasive

Jebro Industrial Abrasives, Inc.

Hwy 71 South 011 8/28/00

Columbus TX ~~78334~~ 78394

409 732 8210

Grade 4 25ml sample collected

Spray distance 80"

Between
12/30/99

To Page No.

Witnessed & Understood by me,

Date

Invented by


Recorded by

Date

From Page No.

First attempt at measuring aperture.

Plates held together by tightened C-clamps & held vertical in a pan of water

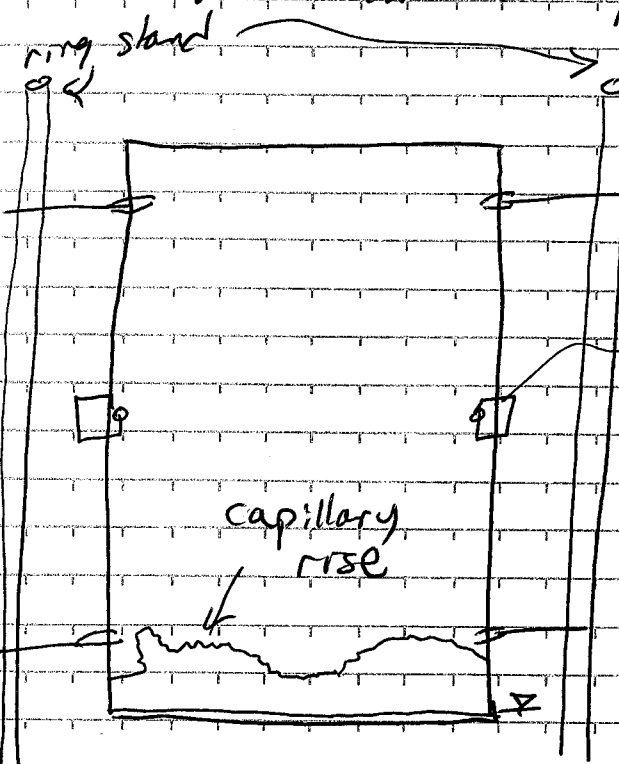

capillary rise

max = 2 1/4 inches left
min = 5/8 inches center
max = 2 inches right
C-clamps

Laplace Formula

$$P_c = \frac{2\sigma_{aw}}{r^*} \quad P_c = P_a - P_w$$

$$h_c = \frac{2\sigma_{aw} \cos \theta}{R \rho_w g} \quad R = \frac{r^*}{\cos \theta}$$

Romm 1966
Cubic law

$$Q = \frac{\rho g b^3}{12\mu} (bw) \frac{dh}{L}$$

Snow (1968)
Equivalent hydraulic conductivity for set of planar fractures

$$K = \frac{\rho g N b^3}{12} \quad K = \frac{N b^3}{12}$$

$N = \#$ of fractures/unit length

Between 10/51/88 and 10/30/89
8/25/00

To Page No.

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

8/28/00

TITLE

USFIC

From Page No.

From Corey pg 18

$$P_c = 2\sigma \cos \theta$$

$$\sigma = 72.75 \text{ dynes/cm}$$

$$\left(\frac{5}{8} \text{ in}\right) \left(\frac{2.54 \text{ cm}}{\text{in}}\right) = 1.59 \text{ cm} \quad @ 20^\circ \text{C}$$

$$\left(1.59 \text{ cm}\right) \left(\frac{998.9 \text{ g}}{\text{cm}^3}\right) \frac{980 \text{ cm}}{\text{s}^2} = 1.553 \times 10^3 \text{ dynes/cm}^2$$

$$b = \frac{2 \left(72.75 \frac{\text{g cm}}{\text{s}^2}\right)}{1.553 \times 10^3 \frac{\text{g}}{\text{cm s}^2}} = 9.37 \times 10^{-2} \text{ cm}$$

For 2 1/4 inches $b = 2.6 \times 10^{-2} \text{ cm}$

Aperture between 0.26 and 0.94 mm
260 to 940 μm

Vol of water $(15 \text{ in}) \left(\frac{2.54 \text{ cm}}{\text{in}}\right) (12 \text{ in}) \left(\frac{2.54 \text{ cm}}{\text{in}}\right) \left(\frac{3}{8} \text{ in}\right) \left(\frac{2.54 \text{ cm}}{\text{in}}\right)$

Vol water $\rightarrow$
8/28/00
 $(30.45 \text{ cm}^2) (2.6 \times 10^{-2} \text{ cm}) = 0.79 \text{ cm}^3$
 $(30.45 \text{ cm}^2) (9.37 \times 10^{-2} \text{ cm}) = 2.86 \text{ cm}^3$

Wt of water .79 to 2.85 grams

$$Q = K A \frac{dh}{L} \quad K = \frac{\rho g b^3}{12\mu} \quad K = \frac{b^3}{12}$$

Intrinsic permeability = $5.6 \times 10^{-5} \text{ cm}^2$ to $7.3 \times 10^{-4} \text{ cm}^2$

Between 10/31/88 and 12/30/89
8/28/00

To Page No.

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

8/28/00

From Page No. _____

try to measure
aperture with picnometer

Ideal Gas law

seems measured to too large

10/31/99

Between
12/30/98
8/28/00

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

8/28/00

To Page No. _____

TITLE _____

From Page No. _____

$$V_r = 781.87 + 3.468 \text{ cm}^3$$

extra vol for correction

$$P_r = \frac{6 \text{ ft} \times 15 \text{ ft}}{8/28/00} \times 1.05 \text{ psi} \quad \text{at } 8/28/00$$

$$\frac{14.275 \text{ psi}}{15.0} \quad \text{at } 8/28/00$$

$$\frac{14.277 \text{ psi}}{14.996} \quad \text{at } 8/28/00 \quad 1 \text{ psi}$$

15"

12"

1161.29 cm²

$$\frac{14.2767 (14.2817)}{15.0127} \quad 1.1 \text{ psi}$$

10/31/99

Between
12/30/98
8/28/00

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

8/28/00

To Page No. _____


From Page No. _____ New Glass Plates

Sandblast Grit Extra fine (close to Grade 5)

sprayed from 80" Torse 10A-16

Initial Flow Rate 3 ml/min

35S for finger from top to bottom 15"

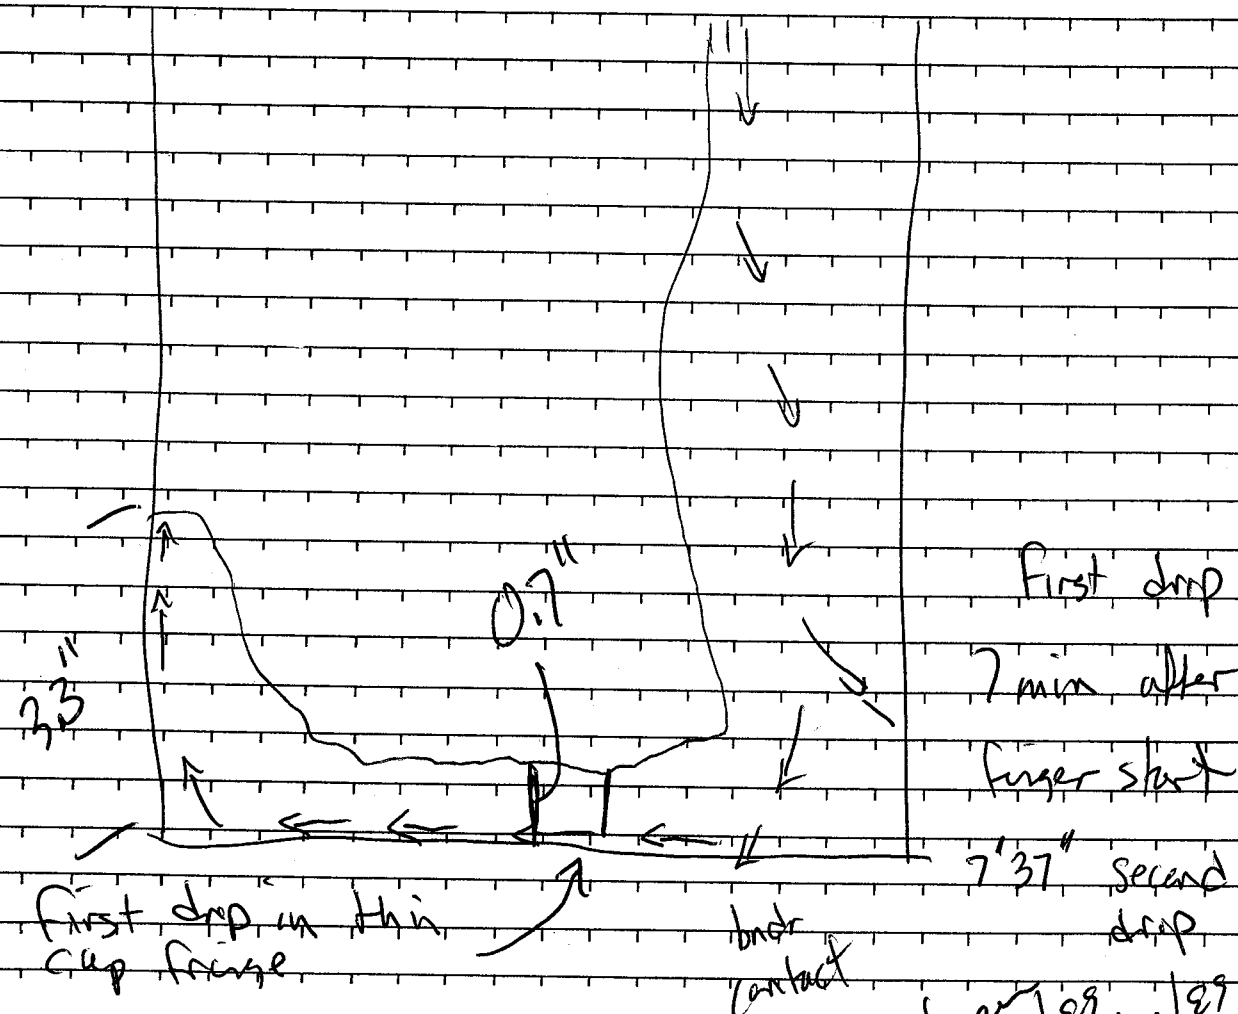advancing finger width ~ 2" - after non wetting
re-inversion ~ thin finger ~ 1 to 2 ~ 14

First drop
7 min after
finger start
7'37" second
drop

Behar 10/31/89 f 12/30/89
8/28/00

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date


From Page No. _____

advancing finger tip ~ 1"

drop	time	drop	time
0	0	0	0
1	27s	1	30s
2	0	2	30s
3	27s	3	29s
4	26s	4	30s
5	26s	5	31s
6	31		

at 45 min into run

drop	time
1	32s
2	30s
3	30s

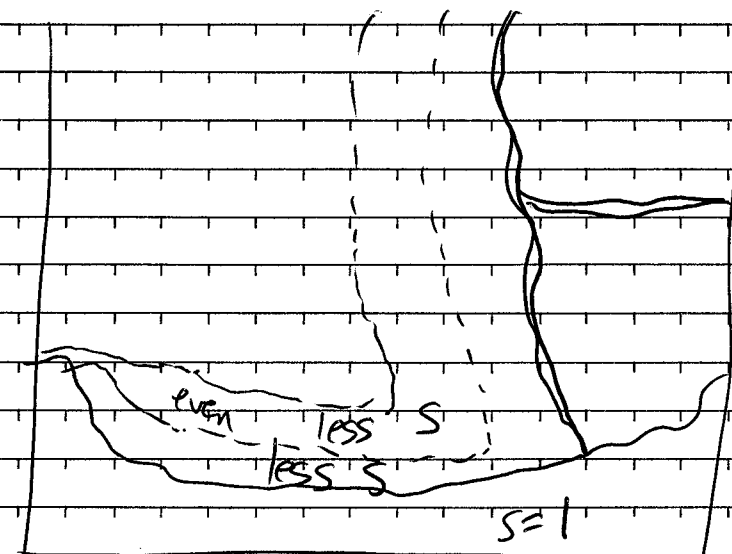

water flows in pulses down active finger
with occasional lateral migration to right edge

lateral migration stole flow from main finger
now all flow goes to right side of along edge

1 hr 10 min ~ lateral flow stopped & flow returned
to main active finger - continued lateral spreading
of "even less S" zone

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

From Page No. _____

1 hr 20 min

drop	time
0	39s
1	38s
2	40
3	38s

~~stop~~
dlh
8/28/00

Bomb flow rate to 7 $\frac{ml}{min}$


at 1 hr 35 min

almost immediately 2 new
fingers - drop from same place

capillary rise

rise ~ 1.2 - 1.3"

approx

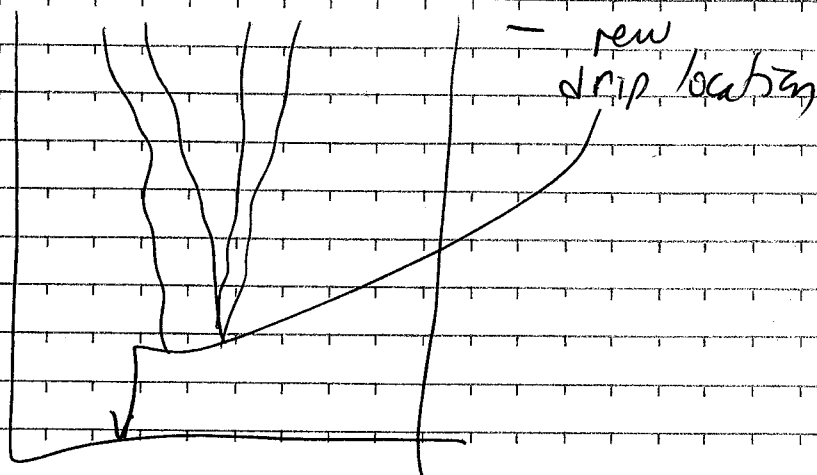

Shut down 1 hr 45 min

before
+ 10/31/99
12/30/99
8/28/00
4/28/00

To Page No. _____

Witnessed & Understood by me,

Date

Invented by


Recorded by

Date

8/28/00

From Page No. _____

3 ml

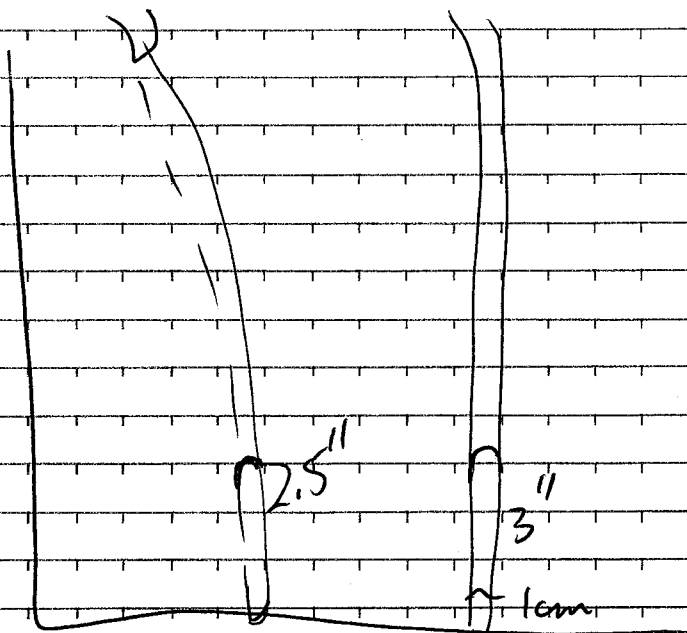

wetted finger ~ 2.5" - 3" length
dropped immediately

flow comes in intermittent pulses -
each saturated tip ~ 2" long on so

before
+ 10/31/99
12/30/99
8/28/00
4/28/00

To Page No. _____

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

8/28/00

From Page No. _____

From CRC handbook

Water @ 20C $\rho = .99821 \text{ g/cm}^3$ $\gamma = 72.75 \text{ mN/m}$

$$\text{dyne} = \text{gcm/s}^2$$

$$\text{Newton} = \text{kgm/s}^2$$

$$P_c/K = \frac{2\sigma \cos \alpha}{b}$$


$$72.5 \text{ dyne/cm}$$

alcohol @ 20C $\rho = .79 \text{ g/cm}^3$ $\gamma = 24 \text{ dyne/cm}$


$$h = \frac{P_c}{\rho g} = \frac{2\sigma \cos \alpha}{\rho g b}$$

$$\text{For water } h_w = \frac{2(72.5 \text{ g/s}^2)}{998.9 \text{ g/cm}^3 \cdot 981 \text{ cm/s}^2} \frac{\cos \alpha}{b} = 0.148 \text{ cm}^2 \frac{\cos \alpha}{b}$$


$$\text{For alcohol } h_a = \frac{2(24 \text{ g/s}^2)}{79 \text{ g/cm}^3 \cdot 981 \text{ cm/s}^2} \frac{\cos \alpha}{b} = 0.062 \text{ cm}^2 \frac{\cos \alpha}{b}$$

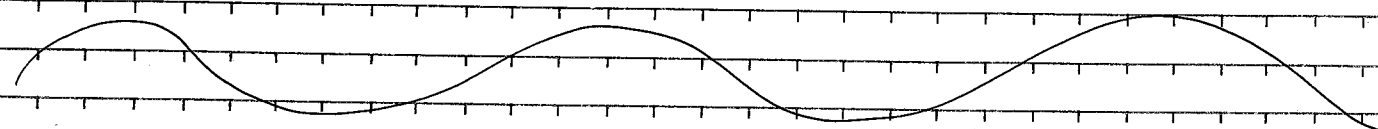

Troy observed theoretical (our hypothesis) behavior while using alcohol to clean the plates.

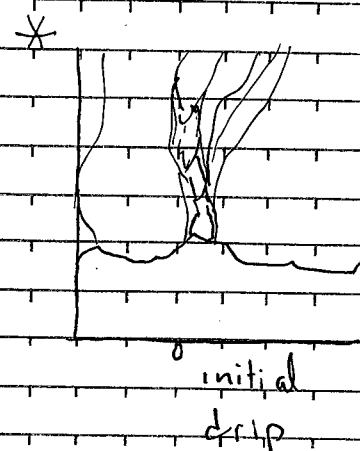

Hypothesis
Wetting liquid invasion
gravity unstable finger
contacts $P_c = 0$ boundary
will flow laterally and
fill up fracture to level
of capillary rise prior
to first drip

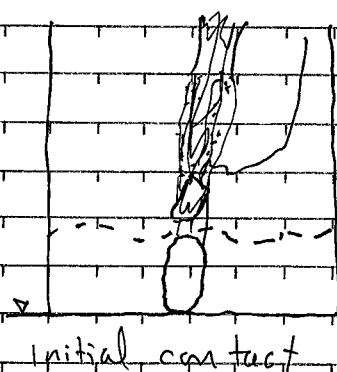

← time ←

To Page No. _____

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

Oct 30
1999

TITLE

Glass fracture

From Page No. _____

Whereas with water he has been unsuccessful in producing this behavior. At low flow rates $\sim .05$ to $.075 \text{ ml/min}$ drops often form ^{at 9/25/00} before lateral diversion has reached $1/3$ to $1/2$ the bottom edge length.

Can use this in our presentation

$$Q = KA \frac{dh}{dl} = \frac{\rho g b^2 (bw)}{12\mu} \frac{dh}{dl} \quad K = \frac{\rho g b^2}{12\mu} = \frac{R\rho g}{\mu}$$

so intrinsic permeability $R = \frac{b^2}{12}$

$$h_c = \frac{P_c}{\rho g} = \frac{2\sigma \cos \alpha}{\rho g b} = \alpha^{-1} \text{ pore size distribution parameter}$$

diversion increases with $\frac{\rho g b^2}{12\mu}$ $\frac{2\sigma \cos \alpha}{\rho g b}$ decreases with $\frac{\rho g b}{2\sigma \cos \alpha}$ ^{8/28/00}

$$\frac{b}{12\mu} \frac{2\sigma \cos \alpha}{\rho g}$$

Return
10/31/99
12/30/99
8/28/00

To Page No. _____

Witnessed & Understood by me,

Date

Invented by

Recorded by

Date

8/28/99


From Page No.

Experiment 1 Glass Initially dry

- 1) Clean glass with solvent and dry *
- 2) as a check, drop water on plate edge. It should imbibite immediately.
- 3) Run low flow rate 0.01 - 0.05 mL/min
- 4) advancing finger should creep slowly downward
- 5) Record progress of finger lateral diversion

6) Photograph First drip

8) Photograph final Steady flow condition.

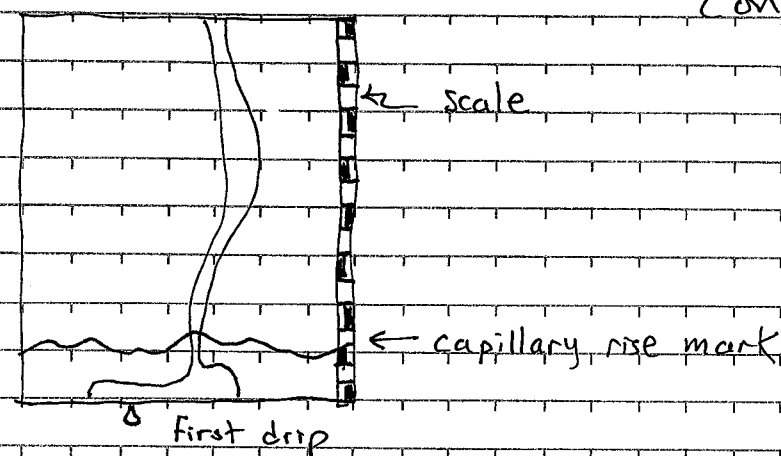

Results

- 2- photographs
- 2- lines on trace paper w/ edge reference
- 1- quantity of drops
- 1- elapsed time

- 7) Record / measure / amount / volume of water dripped from first drip to steady flow conditions. Also record time elapsed

* Find the capillary rise of alcohol
Transfer line to trace paper w/ ref to glass edge

* Mark clearly on the glass the correct location of capillary rise of water. Transfer to trace paper. Also include scale

To Page No.

Witnessed & Understood by me,

Date

Invented by

Recorded by

D11

Date

Oct 31
1999

TITLE

Glass Fracture

From Page No.

Experiment 2 Initially damp

- 1) Drain water from final state result in Experiment 1
- 2) Re-establish same flow rate
- 3) Record progress of lateral diversion
- 4) Photograph first drip
- 5) Measure volume dripped and time elapsed to reach steady condition
- 6) Re Photograph final condition

Results: 2 photographs 1 vol dripped & time elapsed

Experiment 3 Alcohol as wetting phase

- 1) Establish low flow rate of alcohol
- 2) Repeat exercise of 1 and 2 by Recording progress of lateral diversion Initiation of dripping & final steady state condition. Photographs as appropriate to illustrate different behavior.

Repeat, as time permits, to assess repeatability, consistency, and variability of water finger lateral diversion. Measure drip volume and time elapsed from initial drip to steady state condition.

Photograph entire experimental apparatus including pump.

To Page No.

Witnessed & Understood by me,

Date

Invented by

Recorded by

D11

Date

Oct 31
1999

From Page No. _____

2- Propanol or Isopropyl alcohol $.7855 \text{ g/cm}^3 = \rho$

$$\text{dyne} = \text{g cm/s}^2$$

$$\tau = 21.7 \text{ dyne/cm}$$

$$h = \frac{2\sigma \cos \alpha}{\rho g b} \quad b = \frac{2\sigma \cos \alpha}{\rho g h} \quad \text{assume } \alpha = 0$$

$$b = (2) 21.7 \text{ g/s}^2$$

$$.7855 \text{ g/cm}^3, 981 \text{ cm/s}^2, h$$

$$\frac{\text{g}}{\text{cm}^3} \frac{\text{cm}}{\text{s}^2} \text{ cm}$$

For Water $\rho = .987 \text{ g/cm}^3$ $\tau = ?$ $\alpha = ?$
not pureMeas. h , assume b is same as for alcoholFind $\tau \cos \alpha$ for the water.

$$\tau \cos \alpha = \frac{h \rho_w g b}{2} \sim \text{about } 13 \text{ dyne/cm}$$

std = 1.4

10/31/89
 2/11/2000
 8/28/00

To Page No. _____

Witnessed & Understood by me, _____

Date _____


Invented by _____

Recorded by _____

Date _____

8/28/00

From Page No. _____

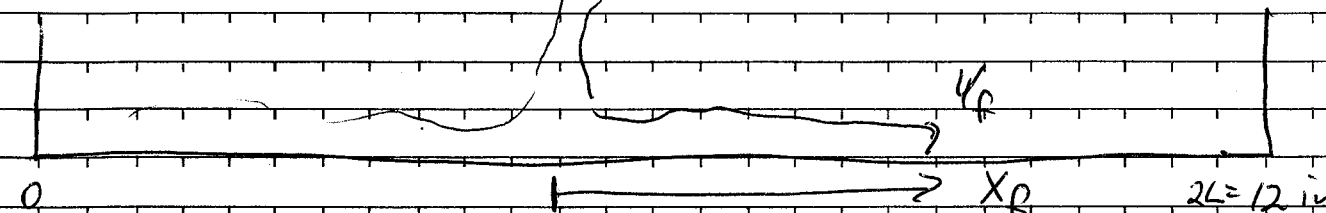

$$q = +K \frac{\psi_f}{x_f} = A_s \frac{dx_f}{dt} \quad \theta_s \sim 1$$

$$\frac{dx_f}{dt} = +K \frac{\psi_f}{x_f} \quad K = \frac{b^2 \rho g}{12 \mu}$$

$$Lq = \frac{b^2 \rho g}{12 \mu} \frac{2\sigma \cos \alpha}{b \rho g} = \frac{b 2\sigma \cos \alpha}{12 \mu}$$

$$A = \frac{b 2\sigma \cos \alpha}{b \rho g} = \frac{2\sigma \cos \alpha}{\rho g}$$

$$qA = Q = \frac{b 2\sigma \cos \alpha}{12 \mu} \frac{2\sigma \cos \alpha}{\rho g} \frac{1}{L}$$

$$Q = \frac{b (2\sigma \cos \alpha)^2}{12 \mu \rho g L} \quad \mu \left[\frac{\text{Ns}}{\text{m}^2} \right]$$

$$\frac{(\text{m}) (\text{N/m})^2}{\left(\frac{\text{Ns}}{\text{m}^2} \right) \left(\frac{\text{kg}}{\text{m}^3} \right) \left(\frac{\text{m}}{\text{s}^2} \right) (\text{m})} = \frac{\text{N}}{\text{s} \frac{\text{kg}}{\text{m}^3} \frac{\text{m}}{\text{s}^2}} = \frac{(\text{kg m})}{\text{s}^2} \frac{1}{\text{m}^2 \text{s}} = \frac{\text{kg}}{\text{m}^2 \text{s}} \frac{\text{m}^3}{\text{s}}$$

Witnessed & Understood by me, _____

Date _____

Invented by _____

Recorded by _____

Date _____

8/28/00

From Page No. _____

From CRC (math & Reference Tables)

1 atm & 300 K

waterpropanol-2 ρ 997.1 kg/m³800 kg/m³ μ 0.00089 Ns/m²0.00192 Ns/m² σ 0.07197 N/m

0.0235 N/m

Plate 1

Alcohol

1 mL/min - 4.2 mL/min

10/31/99

Behr & 2/11/2000

8/20/2000

To Page No. _____

Witnessed & Understood by me, _____

Date _____

Invented by _____

Recorded by _____

Date _____

8/28/00

H52C-10 Dripping Threshold from a Glass Plate Hele-Shaw Fracture Analog

Hughson, D L, Maxwell, T Green, R; Center for Nuclear Waste Regulatory Analyses, 6220 Culebra Road, San Antonio, TX 78238-5166

Abstract

Lateral diversion of unsaturated flow in fractures due to the boundary condition created by open drifts has significant implications for performance assessment of the proposed high-level nuclear waste repository at Yucca Mountain, Nevada. Previous experimental observations, using a glass plate Hele-Shaw model as an analog for a natural fracture, have shown a transition from gravity destabilized to gravity stabilized wetting phase invasion of liquid water fingers at a bottom boundary open to the atmosphere (Nicholl et al., 1993). Lateral flow in the saturated fringe along the bottom edge of Hele-Shaw models suggests a similar process may occur in unsaturated fractured rock at the boundary with underground openings. We postulate the existence of a dripping threshold, as a function of fracture aperture, above which dripping occurs along with gravity stable, capillary driven lateral flow. A simplified model of this threshold is presented that may be sufficient for performance assessment.

Regulatory Background

Tasked by Congress to determine the suitability of Yucca Mountain, Nevada, for geological disposal of high-level radioactive waste, the Department of Energy (DOE) has conducted unique underground field-scale experiments in unsaturated fractured rock. Water dripping into waste emplacement drifts would promote waste package corrosion and radionuclide release. The DOE assumes that unsaturated flow through the Topopah Springs Tuff and into drifts can be modeled by a dual-permeability (DKM) formulation of interacting porous media continua representing fractures and matrix. Reports on studies in niches and alcoves of the Exploratory Studies Facility (ESF) suggest a threshold flux for initiation of seepage into drifts.

The Nuclear Waste Policy Act of 1982 (NWPA), the Nuclear Waste Policy Amendments Act (NWPAA) of 1987, and the Energy Policy Act of 1992 charge the Nuclear Regulatory Commission (NRC) with responsibility for determining if the proposed repository at Yucca Mountain meets standards set by the Environmental Protection Agency (EPA).

Our objective with this poster is to support development of review methods for the NRC Yucca Mountain Review Plan (YMRP).




Figure 1

Experiment Description

Two Hele-Shaw models, labeled **A** and **B**, were constructed by sandblasting $0.3 \times 0.38 \times 0.01$ m plates of glass with extra fine grit then pressing the roughened surfaces together with bolts tightened to a torque of 10.8 N-m and held vertically in a frame. Prior to assembly the glass surfaces were cleaned with an Alconox® solution, rinsed with tap water then rinsed with deionized water. Figure 1 shows the assembled apparatus and the pneumatic pump used to supply a constant flow rate. The pexiglass hood and pan of fluid are to reduce evaporation.

Observations of capillary flow at the bottom boundary open to the atmosphere were made with three liquids in the sequence: nanopure water, tap water, and isopropyl alcohol (2-Propanol). Capillary rise of the liquid was first marked on the glass then a constant flow rate was applied at a point near the center of the top boundary of the initially dry model.

As the advancing liquid finger arrived at the bottom boundary one of two things could happen:

1. The liquid could migrate laterally along the bottom boundary, reaching the edges before dripping.
2. Dripping could occur before lateral flow reached the edges of the model.

In second case we said the **DIPPING THRESHOLD** was exceeded.

Results

Capillary rises of the three liquids are shown in Figure 2 for models **A** and **B**. Properties of surface tension, density, and viscosity used for 2-Propanol and nanopure water are given in Table 1.

Table 1. Properties of fluids from the CRC Handbook			
Liquid	σ [Nm ⁻¹]	ρ [kgm ⁻³]	μ [Nm ⁻²]
Nanopure water	0.072	997	0.00089
2-Propanol	0.0235	800	0.00192




Figure 2. Capillary rise of three fluids at the bottom boundary.

With the properties in Table 1, assuming a zero contact angle, nanopure water should have a greater capillary rise than 2-Propanol by a factor of about 2.5. Apparently the glass, particularly model **A**, developed some kind of thin film or coating which decreased its wettability by water. Our cleaning technique did not remove this film.

Flow rates, in mL/minute, bracketing the dripping threshold, Q^* , for models **A** and **B** are presented in Table 2.

Table 2. Experiment results of flow rates in mL/minute bracketing the dripping threshold Q^* .

Liquid	Model A	Model B
Nanopure water	$Q^* < 0.025$	$Q^* = 7$
Tap water	$Q^* < 0.025$	$20 < Q^* < 40$
2-Propanol	$3 < Q^* < 10$	$1 < Q^* < 5$

An Estimate of Maximum Lateral Flow

Darcy's Law $Q = KAJ$ (1)

Assuming (Green and Ampt approximation)

$$J = \frac{\psi_f}{x_f} \quad (2)$$

Area $A = bh_f$ (3)

From the cubic law $K = \frac{b^3 \rho g}{12\mu}$ (4)

The Laplace-Young formula for capillary rise


$$\psi_f = \frac{2\sigma \cos(\alpha)}{\rho g b} = h_c \quad (5)$$

An approximation for maximum lateral capillary flow

$$Q^* = \frac{b^4 (2\sigma \cos \alpha)^3}{12 \mu g L} \quad (6)$$

x_f	Distance of Lateral Flow [m]
L	Horizontal Length of Boundary [m]
$\psi_f = h_c$	Pressure Head (Suction) at Wetting Front [m]
b	Aperture [m]
σ	Surface Tension [Nm ⁻¹]
μ	Viscosity [Nm ⁻²]
ρ	Density [kgm ⁻³]
α	Contact angle

Schematic for estimate of flow along bottom boundary



Dripping threshold was estimated by first assuming a zero contact angle for 2-Propanol. Capillary rise was digitized at 85 uniformly spaced locations and the aperture calculated from (5) using properties in Table 1 and the capillary rise of 2-Propanol. An estimate of the contact angle for nanopure water, of between 60 and 78 degrees, was obtained from the calculated aperture and the capillary rise of nanopure water using properties from Table 1. For tap water, the product $\sigma \cos(\alpha)$ was estimated from the calculated aperture and the capillary rise of tap water. Since the capillary rise is variable along the bottom boundary, estimated maximum lateral capillary flow is given in Table 3 as minimum and maximum. The estimate from (6) is doubled in Table 3 because the downward flowing finger splits and flows in both directions at the bottom boundary.

Table 3. Estimated dripping threshold flow rates in mL/minute.

Liquid	Model A	Model B
Nanopure water	$1 < Q^* < 17$	$3 < Q^* < 15$
Tap water	$0.05 < Q^* < 14$	$6 < Q^* < 19$
2-Propanol	$1 < Q^* < 4$	$1 < Q^* < 2$

Discussion

The simple "back-of-the-envelope" estimate of dripping threshold gave a reasonably close approximation for 2-Propanol in both models. This suggests that (6) may be an adequate estimate for capillary diversion of a liquid finger flowing in a fracture above an open drift if the assumptions are satisfied. On the other hand, the estimate was poor for both nanopure and tap water, perhaps due to the unknown contact angles. The surprising hydrophobicity of model **A** underscores the importance of the wettability of fracture surfaces in understanding capillary diversion around, and dripping into, underground openings in fractured rock.


Future Work

The unknown contact angles are a weakness in the current work. Should funding be available to continue this project we will obtain the necessary instruments to characterize contact angles and wettability of various surfaces, including fracture surfaces of the lower lithophysal unit of the Topopah Springs tuff.


The experiments presented here are very preliminary and only roughly bracketed the dripping threshold flow rate. Further experiments are planned to more accurately bound the dripping threshold for both horizontal and dipping boundary edges and for irregularly shaped boundaries.

Reference

Nicholl, M.J., R.J. Glass, and H.A. Nguyen, Small-scale behavior of single gravity-driven fingers in an initially dry fracture, *High Level Radioactive Waste Management, Proceedings of the Fourth Annual International Conference*, American Nuclear Society, April 26-30, Las Vegas, NV, pp. 2023-2032, 1993.

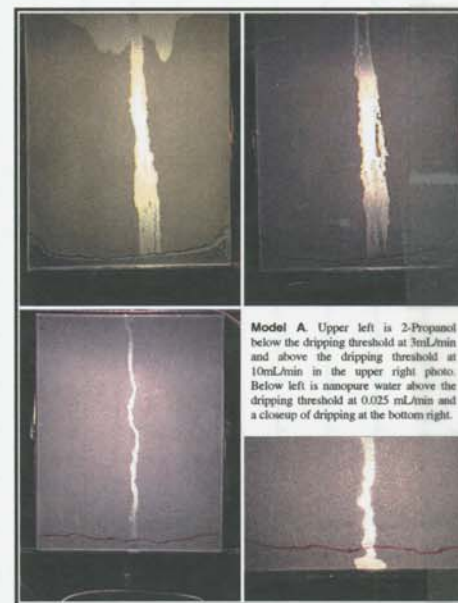

Model A. Upper left is 2-Propanol below the dripping threshold at 3mL/min and above the dripping threshold at 10mL/min in the upper right photo. Below left is nanopure water above the dripping threshold at 0.025 mL/min and a closeup of dripping at the bottom right.

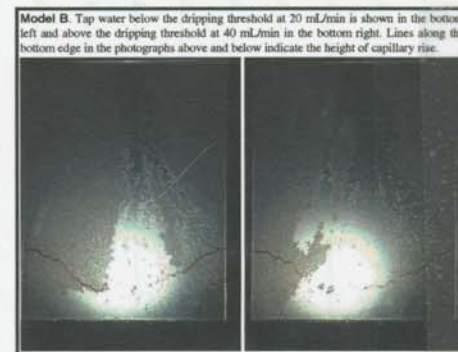

Model B. Tap water below the dripping threshold at 20 mL/min is shown in the bottom left and above the dripping threshold at 40 mL/min in the bottom right. Lines along the bottom edge in the photographs above and below indicate the height of capillary rise.

Acknowledgements

This work is an independent product of the Center for Nuclear Waste Analysis and does not necessarily reflect the views or regulatory position of the U.S. Nuclear Regulatory Commission.



From Page No. _____

The Remainder
of This
Notebook is
BLANK

This Notebook
Appears to comply
with QAP-001.

E.C. Jr

I Have reviewed this
notebook. I still find in it 3/9/2000
general compliance with QAP-001.
There is sufficient information so that another
qualified individual could repeat the Activity.
E.C. Jr 8/25/2000

To Page No. _____

Witnessed & Understood by me, _____

Date _____

Invented by _____

Recorded by _____

Date _____

Feb 11
2000

ADDITIONAL INFORMATION FOR SCIENTIFIC NOTEBOOK #: 301

Document Date:	01/07/1999
Availability:	Southwest Research Institute® Center for Nuclear Waste Regulatory Analyses 6220 Culebra Road San Antonio, Texas 78228
Contact:	Southwest Research Institute® Center for Nuclear Waste Regulatory Analyses 6220 Culebra Road San Antonio, TX 78228-5166 Attn.: Director of Administration 210.522.5054
Data Sensitivity:	☒ "Non-Sensitive" ☐ Sensitive ☐ "Non-Sensitive - Copyright" ☐ Sensitive - Copyright
Date Generated:	01/07/1999 through 02/11/2000
Operating System: (including version number)	Windows
Application Used: (including version number)	Various
Media Type: (CDs, 3 1/2, 5 1/4 disks, etc.)	3 CDs
File Types: (.exe, .bat, .zip, etc.)	Various
Remarks: (computer runs, etc.)	Media contains various files for various software (MS Word, Mathcad, WordPerfect) for Scientific Notebooks 301 and 302.