

- NOTES:**
- BEFORE ANY EXCAVATION TAKES PLACE AT THE JOBSITE THE FIELD PERSONNEL SHALL VERIFY ALL FIELD DIMENSIONS AND CONDITIONS AFFECTING THE WORK AND COORDINATE WITH CIVIL, MECHANICAL, AND ELECTRICAL DRAWINGS TO LOCATE ALL UNDERGROUND UTILITIES IN THE AREA.
 - ANY UNIDENTIFIED PIPE, CONDUIT, OR STRUCTURE UNCOVERED DURING EXCAVATION SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ENGINEER, AND THE EXCAVATION SHALL NOT CONTINUE IN THAT AREA WITHOUT APPROVAL FROM THE ENGINEER.
 - FOR RELOCATION OF THE EXISTING C.P.B., P.S. #602, TELL STUB-UP, AND UNDERGROUND PIPING SEE MECH. DWG. NO. 515415B AND ELECT. DWG. NO. 5149777.
 - NO HEAVY TRUCK LOADS OR OTHER CONSTRUCTION LOADS SHALL BE ALLOWED WITHIN 7'-0" FROM THE EXCAVATION LINES UNLESS ADDITIONAL SHORING IS PROVIDED.
 - SLURRY USED SHALL BE A 3 SACK SLURRY MIX.

PRC APERTURE CARD

Docket # 50-206
Control # 8212070266
Date 12-03-82 of Document
REGULATORY DOCKET FILE

NON-SAFETY RELATED

**SAMPLING STATION BUILDING
T.M.I.
UNIT-1**


LOCATION SAN ONOFRE NUCLEAR GEN. STATION SHEET NO.

LOCATION & EXCAVATION PLAN

SCE EDISON OF SHEETS

5159584-2A

REFERENCE DRAWINGS	REFERENCE DRAWINGS	NO.	REVISIONS	N	DATE	P.E.	G.A.E.	SUPV.	APPROVED	ENGR.	CK'D.	MADE	J.D. NO.	NO.	REVISIONS	N	DATE	P.E.	G.A.E.	SUPV.	APPROVED	ENGR.	CK'D.	MADE	J.D. NO.	
5159588	SECTIONS AND DETAILS														2A											
5159587	SECTIONS AND DETAILS														1											
5159586	SECTIONS AND DETAILS														0											
5159585	ROOF AND FOUNDATION PLAN																									
5159623	GENERAL NOTES																									
DC-684	CALCULATIONS																									

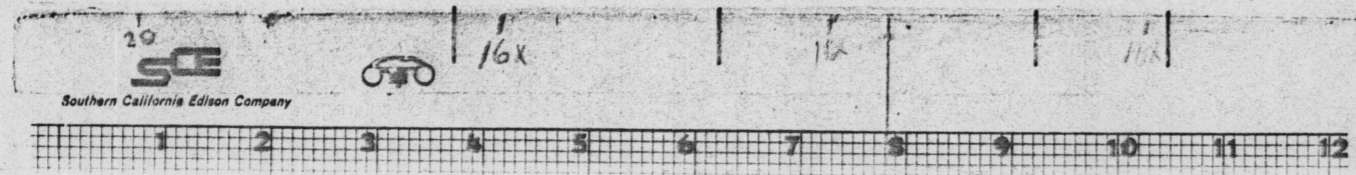

**MICROFILMED FROM
BEST AVAILABLE COPY**

8212070266
REGULATORY DOCKET FILE COPY