

NRR-PMDAPEm Resource

From: RILEY, Jim [jhr@nei.org]
Sent: Wednesday, October 08, 2014 5:37 PM
To: whaley_sheena@yahoo.com; Kuntz, Robert
Cc: Bell, Roderick; Brunette, Pat; Colin Keller; Dean Hubbard (dmhubbard@duke-energy.com); DeMoss, Gary; Don Bentley (DBENTLE@energy.com); Doug True; GASPER, JOSEPH K; Geiger, Charlotte; George Attarian; Giddens, John; Glen D Ohlemacher (ohlemacher@dteenergy.com); Hammons, Mark A.; Heather Smith Sawyer (heather.sawyer@bwsc.net); 'Huffman, Ken'; RILEY, Jim; joe.bellini@aterrasolutions.com; John Lee (John.Lee@dom.com); Kapitz, Jon K.; Lewis, Stuart; Maze, Scott; Michael Proctor (michael.proctor@urs.com); Miller, Andrew; Pete Sena (senap@firstenergycorp.com); POLLOCK, Joseph; Ray Dremel (rdremel@enercon.com); Ray Schneider (schneire@westinghouse.com); Rohrer, Rick J.; rudy_gil@fpl.com; Ruf, Gary (Gary.Ruf@pseg.com); SCAROLA, James; Selman, Penny; Spink, Thomas E <tespink@tva.gov> (tespink@tva.gov); TSCHILTZ, Michael
Subject: FW: LIP Warning Time White Paper
Attachments: Warning Time for Extreme Precipitation Events (NWS Protocol) Rev 2 10-8-14 (markup).docx; Warning Time for Extreme Precipitation Events (NWS Protocol) Rev 2 10-8-14.docx

Sheena, Rob;

The latest version of our LIP warning time white paper is attached including a marked up version so you can see the changes made in response to comments received to date.

Thanks in advance for your review. We will discuss this and any additional comments you may have during our webinar next week.

Jim Riley

NEI

W: (202) 739-8137

C: (202) 439-2459

jhr@nei.org

From: Hubbard, Dean M [<mailto:Dean.Hubbard@duke-energy.com>]

Sent: Wednesday, October 08, 2014 5:08 PM

To: RILEY, Jim

Subject: LIP Warning Time White Paper

Jim, Attached is the current draft of the LIP warning time paper. I have also attached the marked up version so that the NRC can see the changes made in response to their comments.

Dean

NOW AVAILABLE: NEI's Online [Congressional Resource Guide](http://www.NEI.org/CongressionalResourceGuide), JUST THE FACTS!

Web site address: www.NEI.org/CongressionalResourceGuide

FOLLOW US ON

This electronic message transmission contains information from the Nuclear Energy Institute, Inc. The information is intended solely for the use of the addressee and its use by any other person is not authorized. If you are not the intended recipient, you have received this communication in error, and any review, use, disclosure, copying or distribution of the contents of this communication is strictly prohibited. If you have received this electronic transmission in error, please notify the sender immediately by telephone or by electronic mail and permanently delete the original message. IRS Circular 230 disclosure: To ensure compliance with requirements imposed by the IRS and other taxing authorities, we inform you that any tax advice contained in this communication (including any attachments) is not intended or written to be used, and cannot be used, for the purpose of (i) avoiding penalties that may be imposed on any taxpayer or (ii) promoting, marketing or recommending to another party any transaction or matter addressed herein.

Sent through www.intermedia.com

Hearing Identifier: NRR_PMDA
Email Number: 1646

Mail Envelope Properties (30C6EE937716FA468282C3743E7DFC128271C4E0)

Subject: FW: LIP Warning Time White Paper
Sent Date: 10/8/2014 5:37:11 PM
Received Date: 10/8/2014 5:40:36 PM
From: RILEY, Jim

Created By: jhr@nei.org

Recipients:

"Bell, Roderick" <roderick.bell@ge.com>
Tracking Status: None
"Brunette, Pat" <pbrunette@enercon.com>
Tracking Status: None
"Colin Keller" <kellerc@firstenergycorp.com>
Tracking Status: None
"Dean Hubbard (dmhubbard@duke-energy.com)" <dmhubbard@duke-energy.com>
Tracking Status: None
"DeMoss, Gary" <gary.demoss@pseg.com>
Tracking Status: None
"Don Bentley (DBENTLE@entergy.com)" <DBENTLE@entergy.com>
Tracking Status: None
"Doug True" <detrue@erineng.com>
Tracking Status: None
"GASPER, JOSEPH K" <jgasper@oppd.com>
Tracking Status: None
"Geiger, Charlotte" <Charlotte.Geiger@pseg.com>
Tracking Status: None
"George Attarian" <george.attarian@outlook.com>
Tracking Status: None
"Giddens, John" <jimgidden@southernco.com>
Tracking Status: None
"Glen D Ohlemacher (ohlemacher@dteenergy.com)" <ohlemacher@dteenergy.com>
Tracking Status: None
"Hammons, Mark A." <mah@ftn-assoc.com>
Tracking Status: None
"Heather Smith Sawyer (heather.sawyer@bwsc.net)" <heather.sawyer@bwsc.net>
Tracking Status: None
"Huffman, Ken" <khuffman@epri.com>
Tracking Status: None
"RILEY, Jim" <jhr@nei.org>
Tracking Status: None
"joe.bellini@aterrasolutions.com" <joe.bellini@aterrasolutions.com>
Tracking Status: None
"John Lee (John.Lee@dom.com)" <John.Lee@dom.com>
Tracking Status: None
"Kapitz, Jon K." <Jon.Kapitz@xenuclear.com>
Tracking Status: None
"Lewis, Stuart" <slewis@epri.com>
Tracking Status: None
"Maze, Scott" <SxM9@pge.com>

Tracking Status: None
 "Michael Proctor (michael.proctor@urs.com)" <michael.proctor@urs.com>
 Tracking Status: None
 "Miller, Andrew" <APMiller@erineng.com>
 Tracking Status: None
 "Pete Sena (senap@firstenergycorp.com)" <senap@firstenergycorp.com>
 Tracking Status: None
 "POLLOCK, Joseph" <jep@nei.org>
 Tracking Status: None
 "Ray Dremel (rdremel@enercon.com)" <rdremel@enercon.com>
 Tracking Status: None
 "Ray Schneider (schneire@westinghouse.com)" <schneire@westinghouse.com>
 Tracking Status: None
 "Rohrer, Rick J." <Richard.Rohrer@xenuclear.com>
 Tracking Status: None
 "rudy_gil@fpl.com" <rudy_gil@fpl.com>
 Tracking Status: None
 "Ruf, Gary (Gary.Ruf@pseg.com)" <Gary.Ruf@pseg.com>
 Tracking Status: None
 "SCAROLA, James" <jxs@nei.org>
 Tracking Status: None
 "Selman, Penny" <pbselman@tva.gov>
 Tracking Status: None
 "Spink, Thomas E <tespink@tva.gov> (tespink@tva.gov)" <tespink@tva.gov>
 Tracking Status: None
 "TSCHILTZ, Michael" <mdt@nei.org>
 Tracking Status: None
 "whaley_sheena@yahoo.com" <whaley_sheena@yahoo.com>
 Tracking Status: None
 "Kuntz, Robert" <Robert.Kuntz@nrc.gov>
 Tracking Status: None

Post Office: mbx023-e1-nj-2.exch023.domain.local

Files	Size	Date & Time
MESSAGE	2245	10/8/2014 5:40:36 PM
Warning Time for Extreme Precipitation Events (NWS Protocol) Rev 2 10-8-14 (markup).docx	786308	
Warning Time for Extreme Precipitation Events (NWS Protocol) Rev 2 10-8-14.docx	782589	

Options
Priority: Standard
Return Notification: No
Reply Requested: No
Sensitivity: Normal
Expiration Date:
Recipients Received:

Warning Time for Maximum Precipitation Events

Rev 2, 10-8-14

1.0 Introduction

Local Intense Precipitation (LIP) is a hypothetical locally heavy rainfall event that is used to design flood protection features and/or procedures. LIP is typically assumed to be equivalent to the local probable maximum precipitation (PMP) derived from National Weather Service (NWS) Hydrometeorology Reports (HMRs) or from a site-specific PMP study. LIP estimates derived from the HMRs can, in some locations, project rainfall in excess of 19 inches for 1-hour over 1-mi². Local Intense Precipitation (LIP) is a maximum precipitation event postulated using synthetic storms which can project rainfall in excess of 19 inches for 1-hour over 1 mi². If a nuclear site's protection is not permanent and passive, a rainfall event of this magnitude may require actions to be taken prior to the storm to protect or mitigate flooding impacts on required structures, systems, and components (SSC's). As such, warning time is a key component in the planned response to the LIP or a consequential rain event.

Despite improvements in forecasting accuracy of precipitation, the present state of the meteorological science's tools and techniques are not able to accurately reliably predict LIP events explicitly in time and space (Ralph et al. 2010, Olson et al 1995, Sukovich et al 2014). This is due in part to limitations in weather model capabilities and also due to the limited frequency of extreme precipitation events. Yet, despite these limitations, forecasting tools are available to detect the conditions conducive for storms that could lead to extreme events to provide lead time to implement mitigation actions.

1.1 Basis for Methods - Recognizing the limitations in forecasting accuracy for extreme events, methods to establish warning time for maximum precipitation events are based on:

1. Recognition that maximum precipitation events that produce LIP level rainfall require both substantial atmospheric moisture and a sustained atmospheric lifting mechanism which can be recognized and anticipated.
2. Setting warning thresholds conservatively based on less extreme (and more predictable) storms to assure that protection or mitigation can be executed prior to consequential flooding (see section 5.2.1 for a definition of consequential flooding).
3. Including additional conservatism to compensate for forecasting uncertainty by setting monitoring and trigger thresholds that are a fraction of the LIP precipitation level that would result in consequential flooding (see section 5 for a description of consequential flooding).
4. Local thunderstorms (thunderstorms or intense convective showers) have been evaluated for the nuclear site and it has been confirmed that the maximum rainfall from a local thunderstorm will not produce consequential flooding for the site. A local thunderstorm is defined as an extreme rainfall event, not associated with widespread heavy precipitation, that produces rain for durations of 6 hours or less, and is concentrated over an area of 500-mi² or less (Riedel et al 1980).

Using existing forecasting tools and addressing known forecast limitations with conservative measures to compensate for uncertainty can provide a reliable warning time to implement flood protection or mitigation responses for LIP maximum precipitation events.

2.0 Basis for Local Intense Precipitation (LIP) Maximum Precipitation Events

NUREG/CR-7046 recommends that LIP events can be based on the 1-hr, 2.56-km² (1-mi²) Probable Maximum Precipitation (PMP) at the location of the site. Some sites may need to consider longer duration events if they result in higher water level elevations than the 1-hr event. However such an analysis, if performed, should still include a maximum 1 hour rainfall within the assumed duration. NUREG/CR-7046 also recommends the use of the most recent hydrometeorological (HMR) report unless an approved site-specific PMP (or HMR) study is available. PMP is defined as, “theoretically the greatest depth of precipitation for a given duration that is physically possible over a given storm area at a particular geographical location at a certain time of the year” (Hansen et al., 1982). For most nuclear sites east of the 105th meridian, the current HMR’s are: HMR-51 (all season PMP values), HMR-52 (application guidance), and HMR-53 (seasonal guidance).

3.0 Sources of Maximum Precipitation Events

The highest recorded worldwide one hour rainfall event is 15.79” in Shangdi, Inner Mongolia, China in 1975. The highest recorded US rainfall event approaching 1 hour occurred in Holt, Missouri in 1947 with 12” of rain in 42 minutes. The highest estimated 1 hour event occurred in Burnsville, West Virginia in 1943 with an estimated rainfall of 13.8” (NOAA.gov “Record Point Precipitation Measurements for the World and the USA”). It is also noted that it has been shown that there are several instances in which PMP has been exceeded by or are very close in magnitude to observed events (Harrison 2006). These record storms are significant but still less than the 19” maximum precipitation 1 hour storm predicted by HMR-52. Storms that have the potential to deliver rainfall that approaches or exceeds the maximum rainfall projected by the HMR world record rainfall would be detectable in advance with current forecasting methods/models based on the anomalously large amount of moisture and level of atmospheric instability (lift) required to generate precipitation of this magnitude.

Local thunderstorms do not have the capacity to produce LIP or consequential rainfall for the site (must be verified for each site. See Section 1.1 Item 4) because of the short duration of sustained lift, lack of moisture, and transient nature.

General storms that have the potential to produce LIP magnitude or consequential rainfall events would be detectable in advance utilizing current forecasting methods/models. The large weather systems capable of producing LIP or consequential rainfall include:

- Tropical Systems
- Synoptic Storms
- Mesoscale Convective Complexes (Organized Thunderstorms)

These three basic storms types (including combinations of these storms) that could lead to LIP magnitude events are briefly described below along including a discussion on the contribution of orographic effects.

3.1 Tropical Systems

This storm type includes warm core systems with origins over the tropical waters of the Atlantic Ocean or Gulf of Mexico (including the Caribbean Sea). It should be noted that on in extremely rare occasions modified tropical cyclones have made landfall over California and far southern Arizona (e.g. tropical cyclone Nora which arrived in Arizona in 1997 as a tropical storm). Tropical systems can produce PMP and LIP level rainfalls in these locations in a modified form where the storm has begun to transition into

an extra tropical storm. High levels of tropical atmospheric moisture can produce extreme rainfall, especially when enhanced by convection/thunderstorms and slow movement.

Forecasting the track, intensity, storm surge, and potential rainfall accumulation associated with a tropical systems has improved in recent years (Needham and Keim, 2014). This has allowed lead times of forecast tracks to extend out 5-7 days. In all cases, as the time of potential landfall approaches, the forecast track and rainfall amounts become more refined. Three days out, the accuracy of these forecast has become more certain with increasing accuracy each day until event occurrence.

3.2 Synoptic Storms

This storm type includes large scale frontal systems created by the interface between contrasting air masses. Synoptic storms can occur at any location across North America. These occur most often in the winter along the Gulf Coast and southern/mid-Atlantic region and along the West Coast. This pattern shifts northward through the spring and summer, before shifting south again in the fall. This is directly related to the climatologically preferred region of the jet stream (polar and sub-tropical). Synoptic storms are not typically capable of producing LIP level rainfall. However, the frontal systems associated with synoptic storms can include imbedded convection in the form of thunderstorms. These thunderstorms when related to strong synoptic scale events like deep mid-latitude low pressure systems or intense cold fronts can produce heavy rainfall due to atmospheric instability and dynamic lifting. In rare cases rainfall amounts associated with this form of large scale frontal systems with embedded thunderstorms could produce a LIP event **or a less significant event with consequential rainfall** if the system moves slower than normal, especially if there is some additional form of topographic or synoptic enhancement to the updraft. This storm type can also produce PMP level rainfalls for locations where a 24-hour or longer event and 500-square mile or larger basin affects a given site.

Forecasting the location, movement, and potential rainfall accumulation associated with synoptic storm systems has improved in recent years with the advancement of Numerical Weather Prediction. This has allowed lead times of forecast to extend out 5-7 days. In all cases, as the time of the potential storm affecting a given location comes closer, the forecasted movement and rainfall amounts become more refined. Within 3 days, the accuracy of these forecasts has become more certain, increasing each day until event occurrence.

Remnants of tropical storms can interact with synoptic storms, especially slow-moving storm systems, and produce large amounts of rainfall. PMP level rainfalls are possible in these situations. The weather forecasting community including the NWS has long recognized this set-up as a “classic” heavy rainfall and flooding situation and therefore anticipates these events well in advance with current forecasting models.

3.3 Mesoscale Convective Complexes

A Mesoscale Convective Complex (MCC) is an organized group of thunderstorms over a spatial scale larger than individual thunderstorms, but smaller than synoptic-scale storm systems. These systems can occur at any location across North America, but is much more likely in regions away from the stabilizing effects of the cool waters of the Pacific Ocean. These storms are most common in the spring through early fall, though they are possible in the winter months as well. MCC development is directly related to availability of atmospheric moisture which is usually supplied by a low-level jet stream feature and **excessive** lift through a significant portion of the atmospheric column (instability). The atmospheric lift is enhanced through thermodynamic or dynamic processes or a combination of both. Typically, these systems move quickly, helping to limit extreme rainfall amounts. However, this storm type can produce rainfall that can approach LIP levels **or produce consequential rainfall**. Excessive amounts of rainfall

associated with MCCs will most typically occur when the system is moving very slowly producing large amounts of rainfall within heavy downpours.

Forecasting the location, movement, and potential rainfall accumulation associated with a MCC has also improved with the advancement of Numerical Weather Prediction. This has allowed lead times of forecast to extend out 3-5 days. In all cases, as the time of potential storm affecting a given location comes closer, the forecasted storm movement and rainfall amounts become more refined. Within 3 days, the accuracy of these forecasts has become more certain, increasing in accuracy each day until event occurrence. The parameters and physics involved in producing the model forecasts in the Numerical Weather Prediction are designed to best represent average or historical conditions.

3.4 Orographic Effects

Orographic effects can mechanically produce the constant atmospheric lift to generate extreme precipitation in the absence of a synoptic scale event or mesoscale convective forcing. This occurs when terrain (e.g. located in or near mountainous regions) serves as an immovable source of lifting which is the key in enabling an extreme precipitation scenario. Examples where strong orographic lift contributed to three extreme MCC precipitation events include Smethport, PA - 1942, Central West Virginia – 1943, and Simpson KY – 1939. Orographic effects have the potential to reduce warning time.

4.0 NOAA/National Weather Service Severe Weather Forecasting and Notification Tools – The National Weather Service (NWS) has central national monitoring and local branches that monitor developing weather conditions to detect and provide warning for severe weather prior to its arrival. There are a number of different forecasting tools and services for severe rain events provided by the NSW. The skill levels (accuracy of the prediction) and the information provided vary depending on the tool. The accuracy of predictions and the kind of information provided will vary from one tool to another. The recommended tool for a warning time trigger is a quantitative precipitation forecast which provides a specific amount of rain for a given time period. Additional tools are also discussed below which can be used to provide supporting information on the basis for the rainfall amount being forecasted.

4.1 Excessive Rainfall Forecast - The NWS Weather Prediction Center (WPC) mission is to forecast the potential for significant weather events dealing with heavy rainfall or snowfall, to discuss precipitation forecasts and model differences relating to general weather and precipitation forecasts. The WPC issues several focusing tools such as: Quantitative Precipitation Forecasts (QPFs), Probabilistic Quantitative Precipitation Forecasts (PQPFs), and Excessive Rainfall Outlooks.

The WPC short range meteorologist prepares 6 through 60 hour forecasts for the continental U.S. These products are issued twice daily using numerical model output from the National Weather Service's (NWS) Global Forecast System (GFS) and North American Mesoscale model (NAM). Coordination with the surface analysis, model diagnostics, quantitative precipitation, winter weather, and tropical forecast desks is also performed during the forecast process. The short range forecast products include surface pressure patterns (isobars), circulation centers and fronts for 6-60 hours, and a depiction of the types and extent of precipitation that are forecast at the valid time of the chart. The primary goal is to depict accurately the evolution of major weather systems that will affect the continental U.S. during the next 60 hours. In addition, discussions are written on each shift and issued with the forecast packages that highlight the meteorological reasoning behind the forecasts and significant weather across the continental United States. Precipitation levels are not included on the 60-hour forecast chart

4.1.1 Quantitative Precipitation Forecasts (QPF) – QPF’s depict the amount of liquid precipitation expected to fall in a defined period of time (e.g. forecast of total rainfall for 6, 12, 24, and 48 hour periods). In the case of snow or ice, QPF represents the amount of liquid that will be measured when the precipitation is melted. Precipitation amounts can vary significantly over short distances, especially when thunderstorms occur, For this reason QPFs issued by the WPC are defined as the expected "areal average" (on a 20 x 20 km grid) in inches. Methods for producing QPFs are similar to other meteorological forecasts. First, meteorologists analyze the current state of the atmosphere. Then they use model forecasts of pressure systems, fronts, jet stream intensity, etc., to form a conceptual model of how the weather will evolve. The WPC has unique access to the full suite of operational and ensemble model guidance from modeling centers in the U.S., Canada, and Europe (the foreign models are global models, so they also make predictions over the U.S.). The WPC stores output from several consecutive runs of all of these models, allowing for trend analysis of model QPFs

WPC forecasters often engage in discussion with the local National Weather Service Forecast Offices (122 locations), River Forecast Centers (12 locations) in the Continental United States), and other national centers such as the Storm Prediction Center and National Hurricane Center. The WPC provides the rainfall forecast (known as a rainfall statement) that the National Hurricane Center inserts into each tropical cyclone advisory it issues. The WPC is also co-located with NOAA's National Environmental Satellite, Data, and Information Services (NESDIS) Synoptic Analysis Branch (SAB). The SAB provides information on satellite trends which helps refine short range QPFs. Together, the SAB and Day 1 QPF desk at the WPC are known as the National Precipitation Prediction Unit (NPPU). This collaborative process makes WPC forecasts generally more accurate than any individual model (see section 5.2.3 Forecasting Accuracy Limitations).

The QPF contours (isohyets) are drawn to encompass areal average amounts of 0.01, 0.25 inch, 0.50 inch, 1 inch, 1.50 inches, and 2.00 inches (see Attachment 1). Any values greater than 2.00 inches are drawn in one-inch increments. In addition, the location of QPF maxima are indicated on the chart by an "X", with the associated maximum value printed underneath. It is important to note the valid time period when viewing each product. Specifically, for the Day 1, 2, and 3 forecasts, QPFs are manually created for 6-hour periods and an accumulated 24-hour total QPF is also issued. For the Days 4/5 and Day 6/7 QPF, forecasters manually create a 48-hour accumulation of areal average rainfall. Computer programs then take advantage of model forecasts of the timing of precipitation to break the WPC forecast down into 6-hourly QPFs.

4.1.2 Probabilistic Quantitative Precipitation Forecasts (PQPF) - The WPC produces 6-hour QPF’s for forecast projection days one through three at 6-hour intervals (72-hour duration). Deterministic forecast models, including the National Centers for Environmental Prediction (NCEP) Global Forecast System (GFS), the NCEP North American Mesoscale (NAM) model and the global model from the European Centre for Medium-Range Weather Forecasts (ECMWF), along with the NCEP Short-Range Ensemble Forecast (SREF) system produce forecasts covering this time period. These model runs constitute an ensemble from which uncertainty information is obtained to construct a probability distribution about the WPC QPF. This distribution is utilized to generate probabilistic forecasts of precipitation. The 6-hour QPFs are summed to obtain 24-h QPFs, which are the basis for 24-h probabilistic QPFs (PQPF’s) generated using the same multi-model ensemble and the same method as for the 6-h probabilistic QPFs. The probabilistic QPF forecasts provide information in two different forms (see Attachment 1 which shows the tab selected for Precipitation Amount by Percentile for the 95th Percentile of a 24 hour forecast period):

Probability of Precipitation of at Least a Specific Amount show filled contour levels of probability that the 6 or 24-hour accumulation of precipitation will equal or exceed the given threshold.

Precipitation Amount by Percentile show filled contour levels of precipitation amount associated with a given probability percentile in the distribution with a range of values from the 5th to 95th percentile **for 6 or 24-hour accumulation**.

4.1.3 Excessive Rainfall Outlooks - The Excessive Rainfall Outlooks provide a forecast of the risk of flash flooding across the continental United States. A closed contour with an arrowhead delineates the probability forecasts, with risk areas defined to the right of the direction of the arrowhead. The probability categories are based on calibration studies conducted at WPC. The calibration for the excessive rainfall graphics are based on the frequency of events for which observed rainfall exceeded flash flood guidance values for a given risk category. When forecasters outline risk areas they are expecting greater organization of excessive rainfall than would be observed under average conditions. As confidence of excessive rainfall increases the category respectively evolves from Slight to Moderate to High. Day-1 Excessive Rainfall Outlooks (graphic and associated discussion) are issued four times per day: 03, 06, 15, and 18 UTC. Day 2 and Day 3 excessive rainfall forecasts are issued only twice per day. Flash Flood Guidance values incorporate soil type, land coverage, and a host of other factors in an attempt to describe the rain rate necessary to yield significant surface runoff and flash flooding over a given area. The River Forecast Centers issue guidance values for 1-, 3-, and 6-hour periods. Flash Flooding is considered to be caused by rainfall occurring in 6 or fewer hours, whereas longer duration rainfall represents areal flooding or inundation. The WPC excessive rainfall products focus specifically on flash flooding.

4.2 Mesoscale Precipitation Discussions

The WPC provides short term guidance to the National Weather Service (NWS) Weather Forecast Offices during heavy rain events when there is a threat of flash flooding. These are also provided to the media, emergency managers and interested partners. Guidance is given in the form of Mesoscale Precipitation Discussions (MPDs), that are issued 1-6 hours ahead of time. Each MPD consists of a graphic indicating the area of concern and any pertinent meteorological features as well as a brief text discussion focused on the mesoscale features supporting the anticipated heavy rainfall.

4.3 Tropical Public Advisories

The WPC will issue public advisories after the National Hurricane Center (NHC) discontinues its advisories on subtropical and tropical cyclones that have moved inland, but still pose a threat of heavy rain and flash floods in the conterminous United States or adjacent areas within Mexico which affect the drainage basins of NWS River Forecast Centers. The last NHC advisory will normally be issued when winds in an inland tropical cyclone drop below tropical storm strength, and the tropical depression is not forecast to regain tropical storm intensity or re-emerge over water. WPC advisories will terminate when the threat of flash flooding has ended.

4.4 Local Precipitation Climatological Studies

Local NWS offices often produce local climatology studies which focus on specific forecasting problems in the NWS office's specific county warning responsibility area. Some of these studies focus on precipitation forecasting and contain results based on years of accumulated knowledge of local climatology. These studies may be available from the internet, or upon request from the local NWS office. Local NWS forecasters often cite results from these local studies as part of their

daily forecast discussions. Forecast discussions from local NWS offices are available on the internet. Results of local studies, and the additional comments provided by local NWS forecasters in the forecast discussions, can be quite useful when assessing potential and actual heavy rainfall situations for specific locations.

4.5 Severe Weather Forecast Process - the NWS Storm Prediction Center (SPC) employs meteorological forecasting tools and models to generate severe weather forecasting notifications. The Storm Prediction Center receives input from the WPC on excessive rainfall that could lead to flash flooding for severe weather forecast and warnings. SPC Forecast and Discussions are intended for use by qualified personnel such as state, local or commercial meteorologists. Forecasts provided include:

Day 4-8 Severe Weather Outlook - graphic and text issued daily

Day 3 Convective Outlook - issued daily

Day 2 Convective Outlook - issued twice daily

Day 1 Convective Outlook – narrative and graphics with timing and severity, issued 5 times daily

- Flash flooding watches – issued with projection for time, location, and rainfall amount

5.0 Excessive Rain Event Trigger & Warning Time

Rainfall projected for the LIP based on the maximum physically possible synthetic storm cannot be reliably forecast using current models and forecasting methods which were developed and validated based on historical rainfall. However, warning time for maximum precipitation events can be established based on less extreme events that occur infrequently but fall on the high end of normal rain events. These high precipitation forecasts include the general storms systems that contain enough moisture for LIP or consequential rainfalls without relying on the capability to accurately forecast maximum precipitation rainfall levels. This approach establishes monitoring and triggers based on less extreme events that will bound the maximum precipitation LIP event. Locations without terrain that can produce orographic lift can support the longer warning time due to the significant size of the storms required to produce precipitation approaching the maximum LIP or consequential rain event.

Excessive rain event triggers and warning time mechanisms can be developed based on the time needed to implement any flood protection or mitigation measures. Notification levels can be established using a single trigger or multiple triggers. Multiple triggers can be established if the response to an extreme rain event is done in graduated steps (e.g. stage equipment at 48 hours, assemble equipment at 12 hours, and complete implementation at 6 hours).

5.1 QPF Forecast for Monitoring and Triggers:

Medium Range Forecast (monitoring)

Days 4-7 –QPF forecast are issued twice a day with valid periods of 48 hours

Day 3 – QPF and PQPF forecast are issued twice a day with valid periods of 24 hours

Short Range Forecast (trigger)

Day 2 – QPF and PQPF forecast are issued twice a day (WPC forecast model updates every 6 hours) with a valid period of 24 hours. Additional information that can be used to supplement the PQPF include Excessive Rainfall Outlook (ERO) forecasts and event driven updates. Excessive Rainfall Outlook forecast are issued twice a day with a valid period of 24 hours.

Day 1 - PQPF forecast are issued twice a day (WPC forecast model updates every 6 hours) with a valid period of 24 hours. ERO forecasts are issued twice a day with a valid period of 24 hours. ERO forecast are issued four times a day with a valid period of 21 to 30 hours. Unscheduled, event driven updates may be issued as determined by NWS/WPC

Other Monitoring Data Sources include: (NWS) Storm Prediction Center, National Hurricane Center, local National Weather Service Forecast Offices (122 locations nationally), internal licensee meteorologist, and private weather forecasting consulting organizations.

5.2 LIP Warning Time & Trigger: Warning time needed to provide a reliable response time to prepare for a LIP or consequential rain event can be established using NWS forecast. LIP warning thresholds should be set conservatively based on less extreme (and more predictable) events to assure that time is available to implement flood protection or mitigation measures prior to site specific consequential flooding (point at which required SSC's are impacted by flooding levels) occurring.

5.2.1 Consequential Flooding: Consequential flooding may occur prior to the peak LIP flooding level (see Figure 1). Consequential flooding is the point at which flooding rises above the current flooding barriers such that SSCs important to safety are not adequately protected from floods. In addition to identifying consequential flooding levels, the warning time should include the time required to implement flood protection or mitigation measures (e.g. closing doors, installing stop logs, staging equipment, etc) and other conditions (e.g. wind, lightning, personnel availability) that could impact the time to execute the mitigating actions.

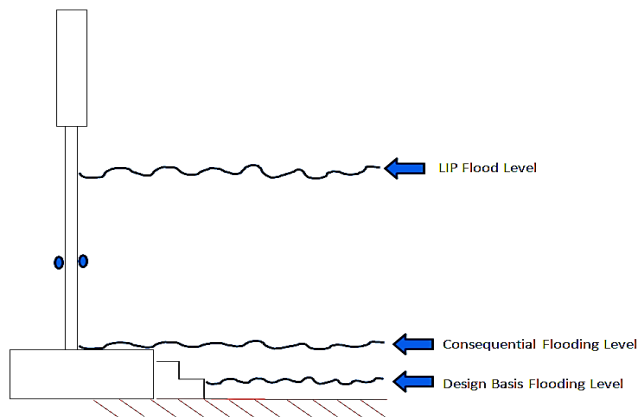


Figure 1 Consequential Flooding Illustration

5.2.2 Monitoring and Action Triggers: LIP warning time should be based on the storms (Tropical, Synoptic, and Mesoscale Convective Complexes) that can produce the LIP or consequential level rainfall for a given nuclear facility location. This assumes that local thunderstorms (see definition in Section 1.1) have been evaluated for the nuclear site and it has been confirmed that the maximum rainfall will not result in consequential flooding for the site. Mesoscale Convective Complexes (thunderstorms) for sites with local terrain that can provide orographic lift, may have the shorter warning times. A meteorologist can determine what storm types apply to a given location including whether terrain has the potential to produce orographic lift. An acceptable method that provides a conservative warning time is to establish a monitoring threshold followed by an mitigation action trigger. The recommended precipitation forecasting tools are QPF's for monitoring during medium range forecast, and PQPF's using the 95th Percentile forecast for the mitigation action trigger for short range forecast for Day 1 and Day 2. This approach can be developed as follows:

Monitoring threshold: a monitoring threshold can be set by establishing a level of extreme rainfall for the basin where the nuclear facility is located. For most locations east of the 105th meridian a value of 2.0 to 3.1 inches in 24 hours would be considered an extreme rainfall based on a threshold of 0.01 frequency (the top 1% of days with rainfall) (Ralph et al 2010). This threshold can be set using the medium range forecast 3 to 7 days prior to the event. If this threshold still is met based on short range forecast on Day 2, the nuclear site would be notified (unless an earlier notification is desired) which would initiate site monitoring once per shift as directed by site procedure.

Mitigation Action Trigger: a mitigation action trigger can be set at ½ of the maximum 1 hour LIP rainfall amount that requires protection or mitigation measures to be put in place. For example if a site's maximum 1 hour LIP is determined to be 18" but the site specific consequential flooding occurs with an 8" per hour rain event, the action trigger would be set based on the more limiting event at 4". This trigger value from a 1 hour rainfall event would be applied to a 24 hour rainfall projection based on the Day 1 or 2, 95th Percentile PQPF. Using ½ of the 1 hour LIP (or the more limiting event) would provide a conservative trigger value when applied to a 24 hr rainfall. The 1 hour LIP (or consequential flooding) used in developing the trigger should be based on the site specific LIP or consequential rainfall for the nuclear site using the appropriate HMR (e.g. HMR-52, or an approved site-specific study).

Based on the desired warning time, the 95th Percentile PQPF can be selected from the 24 hour short range forecast on Day 1 or Day 2. The 95th Percentile PQPF is recommended over the QPF for a Day 1 or Day 2 trigger to compensate for uncertainty by including probability distribution. When this trigger is reached, action would be taken to put protection or mitigation measures into place. Multiple triggers can be established if the response to an extreme rain event is done in graduated steps (e.g. stage equipment at 48 hours, assemble equipment at 12 hours, and complete implementation at 6 hours)

Alternate Action Trigger: If the return rate for ½ of the theoretical consequential flood is too high (i.e. results in excessive false triggers), an alternative approach can be used based on historical storms for the drainage basin where the site is located.

Conduct a search of historical storms within the drainage basin where the site is located to determine the historical storm with the maximum one hour rainfall. The maximum historical storm should have an annual exceedance probability of at least 1/100. If a 1/100 year or more historical storm has not occurred within the drainage basin, use additional historical storms from a region determined to be transpositionable to the location. The transpositioned storm would be centered on the location of the nuclear site, with appropriate adjustments for differences moisture and elevation between the original storm location and the nuclear site accounted for. The maximum one hour rainfall amount would then be evaluated to verify that the rainfall amount was not consequential for the site. If the one hour rainfall is not consequential, apply the one hour maximum

rainfall value as the action trigger value for the 24 hour PQPF. For example, if the maximum storm in the region delivered 16 inches over a two day period, the maximum 1 hour rainfall within that period was 5 inches. The annual exceedance for the storm was calculated to be 1/200 and it can be determined that 5 inches of rain in one hour would not be consequential rainfall for the site. The 24 PQPF rainfall trigger would be set at 5 inches for the site.

Other methods can also be used based on government and private forecasting models. Sites located within 50 miles of coastal areas should include monitoring of hurricane and tropical storm advisories from the National Hurricane Center in addition to the Weather Prediction Center precipitation forecasts. Plant sites west of the continental divide need to consider atmospheric river events where heavy bursts of rain can occur within an overall synoptic storm. An atmospheric river is a narrow corridor or filament of concentrated moisture in the atmosphere that develops along the boundaries between large areas of divergent surface air flow. These can occur from October through March, and are a significant source of moisture and flooding.

A meteorologist should evaluate the nuclear site location to validate the acceptability of the monitoring threshold, trigger, and warning time based on the meteorological impacts of the local terrain and a review of weather history for the region associated with the nuclear site.

The above method represents one approach that can be applied. The conservative bias of this approach increases the likelihood of false alarms. However, the consequence of a false alarm are minimal assuming the trigger actions are limited to reversible actions such as securing doors/gates or staging equipment.

5.2.3 Forecast Accuracy Limitations: The accuracy of extreme rainfall forecast decreases as the projected levels exceed climatologically normal values and longer lead times. 24-hour precipitation values of 1/2 of the 1-hour LIP (e.g. 6"-9" from HMR-52) correspond to precipitation return rates on the order of 1/1000 (0.001 or 0.1%), or less, for most sites east of the 105th meridian. In Sukovich et al. 2014, Figure 6 shows a Probability of Detection for the WPC QPF forecasts of the top 0.1% of precipitation events near 0.25 (25%) for the CONUS in 2011. This qualitatively low level of detection is partially a function of the grading metric (full credit or no credit only), but is also a function of the inherent low bias that occurs when forecasting extreme events. The use of "1/2" of the 1 hour LIP or consequential event provides a level of conservatism intended to compensate for uncertainties in the precipitation forecast. Additionally, the use of the 24-hour 95th percentile PQPF as opposed to the QPF (comparable to the 50th percentile PQPF) builds in further conservatism to the methodology. The 95th percentile PQPF is designed such that an event has only a 5 percent chance of exceeding the forecast value, based on an ensemble of QPF model forecasts.


Attachments:

Attachment 1 - Probabilistic Quantitative Precipitation Forecast, Excessive Rainfall Outlooks
Attachment 2 - NWS Web Sites (Source Material), References

Attachment 1

Quantitative Precipitation Forecasts (QPFs) – EXAMPLE

(<http://www.hpc.ncep.noaa.gov/qpf/qpf2.shtml>)

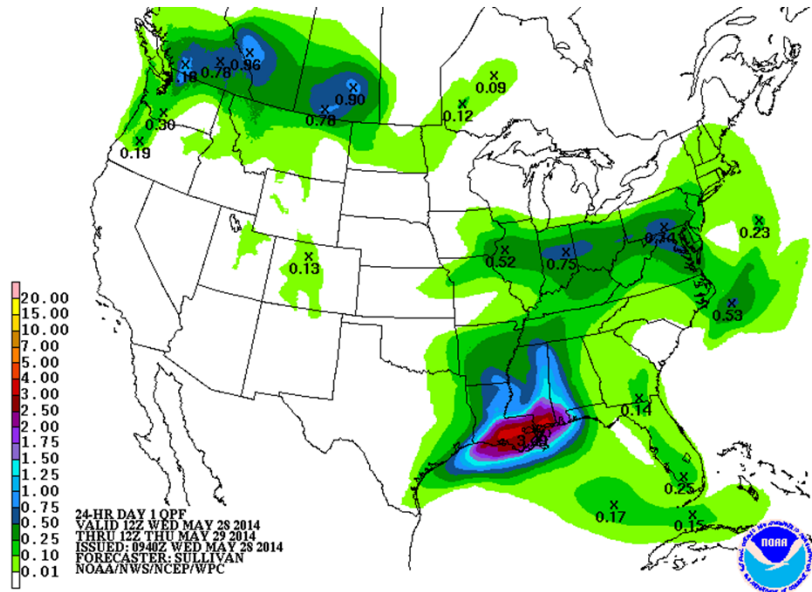

Probabilistic Quantitative Precipitation Forecasts (PQPFs) – EXAMPLE

(http://www.hpc.ncep.noaa.gov/pPQPF/conus_hpc_percentile.php?fpd=24)

6-Hour Forecasts
24-Hour Forecasts

Probability of Precipitation of at Least a Specific Amount	Precipitation Amount by Percentile	Probability of Precipitation of at Least a Specific Amount	Precipitation Amount by Percentile
24-Hour Percentile QPFs valid 12Z May 28, 2014 - 12Z May 29, 2014			
Percentile: 5th 10th 25th 50th 75th 90th 95th			

95th percentile QPF for the 24-hour forecast valid 12Z May 28, 2014 - 12Z May 29, 2014

9.00
8.00
7.00
6.00
5.00
4.00
3.00
2.50
2.00
1.75
1.50
1.25
1.00
0.75
0.50
0.25
0.10
0.01

24-HR QPF EXPECTED NOT TO BE EXCEEDED WITH 95% PROB
VALID 12Z WED MAY 28 2014
THRU 12Z THU MAY 29 2014
ISSUED 0940Z WED MAY 28 2014
WEATHER PREDICTION CENTER
NOAA/NWS/NCEP/WPC

Viewing Options

Choose a percentile for the specified time:

- 5th
- 10th
- 25th
- 50th
- 75th
- 90th
- 95th

OR

Choose a time for the specified percentile:

- 12Z May 28
- 18Z May 28
- 00Z May 29
- 06Z May 29
- 12Z May 29
- 18Z May 29
- 00Z May 30
- 06Z May 30
- 12Z May 30
- 18Z May 30
- 00Z May 31
- 06Z May 31
- 12Z May 31

Attachment 2

NWS Web Sites (Source Material)

NWS Weather Prediction Center (WPC)

<http://www.hpc.ncep.noaa.gov/html/fam2.shtml> - Website describing the WPC Products

<http://www.hpc.ncep.noaa.gov/index.shtml> - Website with QPC's and Excessive Rain Forecast

http://www.hpc.ncep.noaa.gov/pqpf/conus_hpc_percentile.php?fpd=24 – Website for Probabilistic QPF's

NWS National Hurricane Center (NHC)

<http://www.nhc.noaa.gov/> - Home page for NHC

NWS Storm Prediction Center (SPC)

<http://www.spc.noaa.gov/misc/aboutus.html>

<http://www.spc.noaa.gov/misc/about.html#Day 1 Convective Outlook>

NWS Weather Alerts

<http://alerts.weather.gov/>

PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches)¹ (includes recurrence intervals up to 1000 years and includes a 1 hour storm – listed by state)

<http://hdsc.nws.noaa.gov/hdsc/pfds/index.html>

NWS and Non-NWS listings of Weather Service Providers

<http://www.nws.noaa.gov/im/metdir.htm>

References

1. Schreiner, L.C. and J.T. Riedel (1978). "Probable Maximum Precipitation Estimates, United States East of the 105th Meridian." Hydrometeorological Report No. 51, Hydrometeorological Branch Office of Hydrology National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. June, 1978.
2. Hansen, E.M., L.C. Schreiner, and J.F. Miller (1982). "Application of Probable Maximum Precipitation Estimates, United States East of the 105th Meridian." Hydrometeorological Report No. 52, Hydrometeorological Branch Office of Hydrology National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. August, 1982.
3. Ho, F.P. and J.T. Riedel (1980). "Seasonal Variation of 10-Square-Mile Probable Maximum Precipitation Estimates, United States East of the 105th Meridian." Hydrometeorological Report No. 53, Hydrometeorological Branch Office of Hydrology National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. April 1980.

4. Needham, H. and B. Keim (2014). "Correlating Storm Surge Heights with Tropical Cyclone Winds at and before Landfall." *Earth Interact.*, **18**, 1–26.
5. Ralph, F., E. Sukovich, D. Reynolds, M. Dettinger, S. Weagle, W. Clark, and P. J. Neiman (2010). "Assessment of Extreme Quantitative Precipitation Forecasts and Development of Regional Extreme Event Thresholds Using Data from HMT-2006 and COOP Observers." *J. Hydrometeor.*, **11**, 1286-1304.
6. Olson, D.A., N. Junker, and B. Korty (1995). "Evaluation of 33 Years of Quantitative Precipitation Forecasting at the NMC." *Wea. Forecasting*, **10**, 498-511.
7. Sukovich, E., F. Ralph, F. Barthold, D. Reynolds, and D. Novak, (2014). "Extreme Quantitative Precipitation Forecast Performance at the Weather Prediction Center from 2001 to 2011." *Wea. Forecasting*. doi:10.1175/WAF-D-13-00061.1, in press
8. J.T. Riedel and Louis C. Schreiner (1980). "Comparison of Generalized Estimates of Probable Maximum Precipitation With Greatest Observed Rainfalls ." NOAA Technical Report NWS 25, Hydrometeorological Branch, Water Management Information Division, Office of Hydrology, National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. March 1980, 1-2
9. J. Harrison, "Extreme Events: Graphs, Photos, Videos," in Dam Safety 2006: Proceedings of the 2006 Annual Conference of the Association of State Dam Safety Officials, Lexington, KY, September 10-14, 2006.

Contributing Authors

1. William Henson, PhD, AMEC
2. William D. Kappel, President/Senior Meteorologist, Applied Weather Associates
3. Brian Kolts, Meteorologist - First Energy
4. Stanton Lanham, Meteorologist - Duke Energy
5. Peter C. Manousos, Meteorologist - First Energy
6. Erwin T. Prater, PhD, MBA, CCM, CFA, Certified Consulting Meteorologist

Warning Time for Maximum Precipitation Events

Rev 2, 10-8-14

1.0 Introduction

Local Intense Precipitation (LIP) is a hypothetical locally heavy rainfall event that is used to design flood protection features and/or procedures. LIP is typically assumed to be equivalent to the local probable maximum precipitation (PMP) derived from National Weather Service (NWS) Hydrometeorology Reports (HMRs) or from a site-specific PMP study. LIP estimates derived from the HMRs can, in some locations, project rainfall in excess of 19 inches for 1-hour over 1-mi². If a nuclear site's protection is not permanent and passive, a rainfall event of this magnitude may require actions to be taken prior to the storm to protect or mitigate flooding impacts on required structures, systems, and components (SSC's). As such, warning time is a key component in the planned response to the LIP or a consequential rain event.

Despite improvements in forecasting accuracy of precipitation, the present state of the meteorological science's tools and techniques are not able to reliably predict LIP events explicitly in time and space (Ralph et al. 2010, Olson et al 1995, Sukovich et al 2014). This is due in part to limitations in weather model capabilities and also due to the limited frequency of extreme precipitation events. Yet, despite these limitations, forecasting tools are available to detect storms that could lead to extreme events to provide lead time to implement mitigation actions.

1.1 Basis for Methods - Recognizing the limitations in forecasting accuracy for extreme events, methods to establish warning time for maximum precipitation events are based on:

1. Recognition that maximum precipitation events that produce LIP level rainfall require both substantial atmospheric moisture and a sustained atmospheric lifting mechanism which can be recognized and anticipated.
2. Setting warning thresholds conservatively based on less extreme (and more predictable) storms to assure that protection or mitigation can be executed prior to consequential flooding (see section 5.2.1 for a definition of consequential flooding).
3. Including additional conservatism to compensate for forecasting uncertainty by setting monitoring and trigger thresholds that are a fraction of the LIP precipitation level that would result in consequential flooding (see section 5.2.1 for a description of consequential flooding).
4. Local thunderstorms (thunderstorms or intense convective showers) have been evaluated for the nuclear site and it has been confirmed that the maximum rainfall from a local thunderstorm will not produce consequential flooding for the site. A local thunderstorm is defined as an extreme rainfall event, not associated with widespread heavy precipitation, that produces rain for durations of 6 hours or less, and is concentrated over an area of 500-mi² or less (Riedel et al 1980).

Using existing forecasting tools and addressing known forecast limitations with conservative measures to compensate for uncertainty can provide warning time to implement flood protection or mitigation responses for LIP maximum precipitation events.

2.0 Basis for Local Intense Precipitation (LIP) Maximum Precipitation Events

NUREG/CR-7046 recommends that LIP events can be based on the 1-hr, 2.56-km² (1-mi²) Probable Maximum Precipitation (PMP) at the location of the site. Some sites may need to consider longer duration events if they result in higher water level elevations than the 1-hr event. However such an analysis, if performed, should still include a maximum 1 hour rainfall within the assumed duration. NUREG/CR-7046 also recommends the use of the most recent hydrometeorological (HMR) report unless an approved site-specific PMP (or HMR) study is available. PMP is defined as, “theoretically the greatest depth of precipitation for a given duration that is physically possible over a given storm area at a particular geographical location at a certain time of the year” (Hansen et al., 1982). For most nuclear sites east of the 105th meridian, the current HMR’s are: HMR-51 (all season PMP values), HMR-52 (application guidance), and HMR-53 (seasonal guidance).

3.0 Sources of Maximum Precipitation Events

The highest recorded worldwide one hour rainfall event is 15.79” in Shangdi, Inner Mongolia, China in 1975. The highest recorded US rainfall event approaching 1 hour occurred in Holt, Missouri in 1947 with 12” of rain in 42 minutes. The highest estimated 1 hour event occurred in Burnsville, West Virginia in 1943 with an estimated rainfall of 13.8” (NOAA.gov “Record Point Precipitation Measurements for the World and the USA”). It is also noted that it has been shown that there are several instances in which PMP has been exceeded by or are very close in magnitude to observed events (Harrison 2006. Storms that have the potential to deliver rainfall that approaches or exceeds the maximum rainfall projected by the HMR would be detectable in advance with current forecasting methods/models based on the anomalously large amount of moisture and level of atmospheric instability (lift) required to generate precipitation of this magnitude.

Local thunderstorms do not have the capacity to produce LIP or consequential rainfall for the site (must be verified for each site. See Section 1.1 Item 4) because of the short duration of sustained lift, lack of moisture, and transient nature.

General storms that have the potential to produce LIP magnitude or consequential rainfall events would be detectable in advance utilizing current forecasting methods/models. The large weather systems capable of producing LIP or consequential rainfall include:

- Tropical Systems
- Synoptic Storms
- Mesoscale Convective Complexes (Organized Thunderstorms)

These three basic storms types (including combinations of these storms) are briefly described below along including a discussion on the contribution of orographic effects.

3.1 Tropical Systems

This storm type includes warm core systems with origins over the tropical waters of the Atlantic Ocean or Gulf of Mexico (including the Caribbean Sea). It should be noted that on rare occasions modified tropical cyclones have made landfall over California and far southern Arizona (e.g. tropical cyclone Nora which arrived in Arizona in 1997 as a tropical storm). Tropical systems can produce PMP and LIP level rainfalls in these locations in a modified form where the storm has begun to transition into an extra tropical storm. High levels of tropical atmospheric moisture can produce extreme rainfall, especially when enhanced by convection/thunderstorms and slow movement.

3.2 Synoptic Storms

This storm type includes large scale frontal systems created by the interface between contrasting air masses. Synoptic storms can occur at any location across North America. These occur most often in the winter along the Gulf Coast and southern/mid-Atlantic region and along the West Coast. This pattern shifts northward through the spring and summer, before shifting south again in the fall. This is directly related to the climatologically preferred region of the jet stream (polar and sub-tropical). Synoptic storms are not typically capable of producing LIP level rainfall. However, the frontal systems associated with synoptic storms can include imbedded convection in the form of thunderstorms. These thunderstorms when related to strong synoptic scale events like deep mid-latitude low pressure systems or intense cold fronts can produce heavy rainfall due to atmospheric instability and dynamic lifting. In rare cases rainfall amounts associated with this form of large scale frontal systems with embedded thunderstorms could produce a LIP event or a less significant event with consequential rainfall if the system moves slower than normal, especially if there is some additional form of topographic or synoptic enhancement to the updraft. This storm type can also produce PMP level rainfalls for locations where a 24-hour or longer event and 500-square mile or larger basin affects a given site.

Remnants of tropical storms can interact with synoptic storms, especially slow-moving storm systems, and produce large amounts of rainfall. PMP level rainfalls are possible in these situations. The weather forecasting community including the NWS has long recognized this set-up as a “classic” heavy rainfall and flooding situation and therefore anticipates these events well in advance with current forecasting models.

3.3 Mesoscale Convective Complexes

A Mesoscale Convective Complex (MCC) is an organized group of thunderstorms over a spatial scale larger than individual thunderstorms, but smaller than synoptic-scale storm systems. These systems can occur at any location across North America, but is much more likely in regions away from the stabilizing effects of the cool waters of the Pacific Ocean. These storms are most common in the spring through early fall, though they are possible in the winter months as well. MCC development is directly related to availability of atmospheric moisture which is usually supplied by a low-level jet stream feature and lift through a significant portion of the atmospheric column (instability). The atmospheric lift is enhanced through thermodynamic or dynamic processes or a combination of both. Typically, these systems move quickly, helping to limit extreme rainfall amounts. However, this storm type can produce rainfall that can approach LIP levels. Excessive amounts of rainfall associated with MCCs will most typically occur when the system is moving very slowly producing large amounts of rainfall within heavy downpours.

3.4 Orographic Effects

Orographic effects can mechanically produce the constant atmospheric lift to generate extreme precipitation in the absence of a synoptic scale event or mesoscale convective forcing. This occurs when terrain (e.g. located in or near mountainous regions) serves as an immovable source of lifting which is the key in enabling an extreme precipitation scenario. Examples where strong orographic lift contributed to three extreme MCC precipitation events include Smethport, PA - 1942, Central West Virginia – 1943, and Simpson KY – 1939. Orographic effects have the potential to reduce warning time.

4.0 NOAA/National Weather Service Severe Weather Forecasting and Notification Tools – The National Weather Service (NWS) has central national monitoring and local branches that monitor developing weather conditions to detect and provide warning for severe weather prior to its arrival. There are a number of different forecasting tools and services for severe rain events provided by the NSW. The recommended tool for a warning time trigger is a quantitative precipitation forecast which provides a specific amount of rain for a given time period. Additional tools are also discussed below

which can be used to provide supporting information on the basis for the rainfall amount being forecasted.

4.1 Excessive Rainfall Forecast - The NWS Weather Prediction Center (WPC) mission is to forecast the potential for significant weather events dealing with heavy rainfall or snowfall, to discuss precipitation forecasts and model differences relating to general weather and precipitation forecasts. The WPC issues several focusing tools such as: Quantitative Precipitation Forecasts (QPFs), Probabilistic Quantitative Precipitation Forecasts (PQPFs), and Excessive Rainfall Outlooks.

The WPC short range meteorologist prepares 6 through 60 hour forecasts for the continental U.S. These products are issued twice daily using numerical model output from the National Weather Service's (NWS) Global Forecast System (GFS) and North American Mesoscale model (NAM). Coordination with the surface analysis, model diagnostics, quantitative precipitation, winter weather, and tropical forecast desks is also performed during the forecast process. The short range forecast products include surface pressure patterns (isobars), circulation centers and fronts for 6-60 hours, and a depiction of the types and extent of precipitation that are forecast at the valid time of the chart. The primary goal is to depict accurately the evolution of major weather systems that will affect the continental U.S. during the next 60 hours. In addition, discussions are written on each shift and issued with the forecast packages that highlight the meteorological reasoning behind the forecasts and significant weather across the continental United States. Precipitation levels are not included on the 60-hour forecast chart

4.1.1 Quantitative Precipitation Forecasts (QPF) – QPF's depict the amount of liquid precipitation expected to fall in a defined period of time (e.g. forecast of total rainfall for 6, 12, 24, and 48 hour periods). In the case of snow or ice, QPF represents the amount of liquid that will be measured when the precipitation is melted. Precipitation amounts can vary significantly over short distances, especially when thunderstorms occur, For this reason QPFs issued by the WPC are defined as the expected "areal average" (on a 20 x 20 km grid) in inches. Methods for producing QPFs are similar to other meteorological forecasts. First, meteorologists analyze the current state of the atmosphere. Then they use model forecasts of pressure systems, fronts, jet stream intensity, etc., to form a conceptual model of how the weather will evolve. The WPC has unique access to the full suite of operational and ensemble model guidance from modeling centers in the U.S., Canada, and Europe (the foreign models are global models, so they also make predictions over the U.S.). The WPC stores output from several consecutive runs of all of these models, allowing for trend analysis of model QPFs

WPC forecasters often engage in discussion with the local National Weather Service Forecast Offices (122 locations), River Forecast Centers (12 locations) in the Continental United States), and other national centers such as the Storm Prediction Center and National Hurricane Center. The WPC provides the rainfall forecast (known as a rainfall statement) that the National Hurricane Center inserts into each tropical cyclone advisory it issues. The WPC is also co-located with NOAA's National Environmental Satellite, Data, and Information Services (NESDIS) Synoptic Analysis Branch (SAB). The SAB provides information on satellite trends which helps refine short range QPFs. Together, the SAB and Day 1 QPF desk at the WPC are known as the National Precipitation Prediction Unit (NPPU). This collaborative process makes WPC forecasts generally more accurate than any individual model (see section 5.2.3 Forecasting Accuracy Limitations) .

The QPF contours (isohyets) are drawn to encompass areal average amounts of 0.01, 0.25 inch, 0.50 inch, 1 inch, 1.50 inches, and 2.00 inches (see Attachment 1). Any values greater than 2.00

inches are drawn in one-inch increments. In addition, the location of QPF maxima are indicated on the chart by an "X", with the associated maximum value printed underneath. It is important to note the valid time period when viewing each product. Specifically, for the Day 1, 2, and 3 forecasts, QPFs are manually created for 6-hour periods and an accumulated 24-hour total QPF is also issued. For the Days 4/5 and Day 6/7 QPF, forecasters manually create a 48-hour accumulation of areal average rainfall. Computer programs then take advantage of model forecasts of the timing of precipitation to break the WPC forecast down into 6-hourly QPFs.

4.1.2 Probabilistic Quantitative Precipitation Forecasts (PQPF) - The WPC produces 6-hour QPF's for forecast projection days one through three at 6-hour intervals (72-hour duration). Deterministic forecast models, including the National Centers for Environmental Prediction (NCEP) Global Forecast System (GFS), the NCEP North American Mesoscale (NAM) model and the global model from the European Centre for Medium-Range Weather Forecasts (ECMWF), along with the NCEP Short-Range Ensemble Forecast (SREF) system produce forecasts covering this time period. These model runs constitute an ensemble from which uncertainty information is obtained to construct a probability distribution about the WPC QPF. This distribution is utilized to generate probabilistic forecasts of precipitation. The 6-hour QPFs are summed to obtain 24-h QPFs, which are the basis for 24-h probabilistic QPFs (PQPF's) generated using the same multi-model ensemble and the same method as for the 6-h probabilistic QPFs. The probabilistic QPF forecasts provide information in two different forms (see Attachment 1 which shows the tab selected for Precipitation Amount by Percentile for the 95th Percentile of a 24 hour forecast period):

Probability of Precipitation of at Least a Specific Amount show filled contour levels of probability that the 6 or 24-hour accumulation of precipitation will equal or exceed the given threshold.

Precipitation Amount by Percentile show filled contour levels of precipitation amount associated with a given probability percentile in the distribution with a range of values from the 5th to 95th percentile for 6 or 24-hour accumulation.

4.1.3 Excessive Rainfall Outlooks - The Excessive Rainfall Outlooks provide a forecast of the risk of flash flooding across the continental United States. A closed contour with an arrowhead delineates the probability forecasts, with risk areas defined to the right of the direction of the arrowhead. The probability categories are based on calibration studies conducted at WPC. The calibration for the excessive rainfall graphics are based on the frequency of events for which observed rainfall exceeded flash flood guidance values for a given risk category. When forecasters outline risk areas they are expecting greater organization of excessive rainfall than would be observed under average conditions. As confidence of excessive rainfall increases the category respectively evolves from Slight to Moderate to High. Day-1 Excessive Rainfall Outlooks (graphic and associated discussion) are issued four times per day: 03, 06, 15, and 18 UTC. Day 2 and Day 3 excessive rainfall forecasts are issued only twice per day. Flash Flood Guidance values incorporate soil type, land coverage, and a host of other factors in an attempt to describe the rain rate necessary to yield significant surface runoff and flash flooding over a given area. The River Forecast Centers issue guidance values for 1-, 3-, and 6-hour periods. Flash Flooding is considered to be caused by rainfall occurring in 6 or fewer hours, whereas longer duration rainfall represents areal flooding or inundation. The WPC excessive rainfall products focus specifically on flash flooding.

4.2 Mesoscale Precipitation Discussions

The WPC provides short term guidance to the National Weather Service (NWS) Weather Forecast Offices during heavy rain events when there is a threat of flash flooding. These are also provided to the media, emergency managers and interested partners. Guidance is given in the form of Mesoscale Precipitation Discussions (MPDs), that are issued 1-6 hours ahead of time. Each MPD consists of a graphic indicating the area of concern and any pertinent meteorological features as well as a brief text discussion focused on the mesoscale features supporting the anticipated heavy rainfall.

4.3 Tropical Public Advisories

The WPC will issue public advisories after the National Hurricane Center (NHC) discontinues its advisories on subtropical and tropical cyclones that have moved inland, but still pose a threat of heavy rain and flash floods in the conterminous United States or adjacent areas within Mexico which affect the drainage basins of NWS River Forecast Centers. The last NHC advisory will normally be issued when winds in an inland tropical cyclone drop below tropical storm strength, and the tropical depression is not forecast to regain tropical storm intensity or re-emerge over water. WPC advisories will terminate when the threat of flash flooding has ended.

4.4 Local Precipitation Climatological Studies

Local NWS offices often produce local climatology studies which focus on specific forecasting problems in the NWS office's specific county warning responsibility area. Some of these studies focus on precipitation forecasting and contain results based on years of accumulated knowledge of local climatology. These studies may be available from the internet, or upon request from the local NWS office. Local NWS forecasters often cite results from these local studies as part of their daily forecast discussions. Forecast discussions from local NWS offices are available on the internet. Results of local studies, and the additional comments provided by local NWS forecasters in the forecast discussions, can be quite useful when assessing potential and actual heavy rainfall situations for specific locations.

4.5 Severe Weather Forecast Process - the NWS Storm Prediction Center (SPC) employs meteorological forecasting tools and models to generate severe weather forecasting notifications. The Storm Prediction Center receives input from the WPC on excessive rainfall that could lead to flash flooding for severe weather forecast and warnings. SPC Forecast and Discussions are intended for use by qualified personnel such as state, local or commercial meteorologists. Forecasts provided include:

Day 4-8 Severe Weather Outlook - graphic and text issued daily

Day 3 Convective Outlook - issued daily

Day 2 Convective Outlook - issued twice daily

Day 1 Convective Outlook – narrative and graphics with timing and severity, issued 5 times daily

- Flash flooding watches – issued with projection for time, location, and rainfall amount

5.0 Excessive Rain Event Trigger & Warning Time

Rainfall projected for the LIP based on the maximum physically possible synthetic storm cannot be reliably forecast using current models and forecasting methods which were developed and validated based on historical rainfall. However, warning time for maximum precipitation events can be established based on less extreme events that occur infrequently but fall on the high end of normal rain events. These high precipitation forecasts include the general storms systems that contain enough moisture for LIP or consequential rainfalls without relying on the capability to accurately forecast

maximum precipitation rainfall levels. This approach establishes monitoring and triggers based on less extreme events that will bound the maximum precipitation LIP event. Locations without terrain that can produce orographic lift can support the longer warning time due to the significant size of the storms required to produce precipitation approaching the maximum LIP or consequential rain event.

Excessive rain event triggers and warning time mechanisms can be developed based on the time needed to implement any flood protection or mitigation measures. Notification levels can be established using a single trigger or multiple triggers. Multiple triggers can be established if the response to an extreme rain event is done in graduated steps (e.g. stage equipment at 48 hours, assemble equipment at 12 hours, and complete implementation at 6 hours).

5.1 QPF Forecast for Monitoring and Triggers:

Medium Range Forecast (monitoring)

Days 4-7 –QPF forecast are issued twice a day with valid periods of 48 hours

Day 3 – QPF and PQPF forecast are issued twice a day with valid periods of 24 hours

Short Range Forecast (trigger)

Day 2 – QPF and PQPF forecast are issued twice a day (WPC forecast model updates every 6 hours) with a valid period of 24 hours. Additional information that can be used to supplement the PQPF include Excessive Rainfall Outlook (ERO) forecasts and event driven updates. Excessive Rainfall Outlook forecast are issued twice a day with a valid period of 24 hours.

Day 1 - PQPF forecast are issued twice a day (WPC forecast model updates every 6 hours) with a valid period of 24 hours. ERO forecasts are issued twice a day with a valid period of 24 hours. ERO forecast are issued four times a day with a valid period of 21 to 30 hours. Unscheduled, event driven updates may be issued as determined by NWS/WPC

Other Monitoring Data Sources include: (NWS) Storm Prediction Center, National Hurricane Center, local National Weather Service Forecast Offices (122 locations nationally), internal licensee meteorologist, and private weather forecasting consulting organizations.

5.2 LIP Warning Time & Trigger: Warning time needed to provide a reliable response time to prepare for a LIP or consequential rain event can be established using NWS forecast. LIP warning thresholds should be set conservatively based on less extreme (and more predictable) events to assure that time is available to implement flood protection or mitigation measures prior to site specific consequential flooding (point at which required SSC's are impacted by flooding levels) occurring.

5.2.1 Consequential Flooding: Consequential flooding may occur prior to the peak LIP flooding level (see Figure 1). Consequential flooding is the point at which flooding rises above the current flooding barriers such that SSCs important to safely are not adequately protected from floods. In addition to identifying consequential flooding levels, the warning time should include the time required to implement flood protection or mitigation measures (e.g. closing doors, installing stop logs, staging equipment, etc) and other conditions (e.g. wind, lightning, personnel availability) that could impact the time to execute the mitigating actions.




Figure 1 Consequential Flooding Illustration

5.2.2 Monitoring and Action Triggers: LIP warning time should be based on the storms (Tropical, Synoptic, and Mesoscale Convective Complexes) that can produce the LIP or consequential rainfall for a given nuclear facility location. This assumes that local thunderstorms (see definition in Section 1.1) have been evaluated for the nuclear site and it has been confirmed that the maximum rainfall will not result in consequential flooding for the site. Mesoscale Convective Complexes (thunderstorms) for sites with local terrain that can provide orographic lift, may have the shorter warning times. A meteorologist can determine what storm types apply to a given location including whether terrain has the potential to produce orographic lift. An acceptable method that provides a conservative warning time is to establish a monitoring threshold followed by an mitigation action trigger. The recommended precipitation forecasting tools are QPF's for monitoring during medium range forecast, and PQPF's using the 95th Percentile forecast for the mitigation action trigger for short range forecast for Day 1 and Day 2. This approach can be developed as follows:

Monitoring threshold: a monitoring threshold can be set by establishing a level of extreme rainfall for the basin where the nuclear facility is located. For most locations east of the 105th meridian a value of 2.0 to 3.1 inches in 24 hours would be considered an extreme rainfall based on a threshold of 0.01 frequency (the top 1% of days with rainfall) (Ralph et al 2010). This threshold can be set using the medium range forecast 3 to 7 days prior to the event. If this threshold still is met based on short range forecast on Day 2, the nuclear site would be notified (unless an earlier notification is desired) which would initiate site monitoring once per shift as directed by site procedure.

Action Trigger: an action trigger can be set at ½ of the maximum 1 hour LIP rainfall amount that requires protection or mitigation measures to be put in place. For example if a site's maximum LIP is determined to be 18" but the site specific consequential flooding occurs with an 8" per hour rain event, the action trigger would be set based on the more limiting event at 4". This trigger value from a 1 hour rainfall event would be applied to a 24 hour rainfall projection based on the Day 1 or 2, 95th Percentile PQPF. The 1 hour LIP (or consequential flooding) used in developing the trigger should be based on the site specific LIP or consequential rainfall for the nuclear site using the appropriate HMR (e.g. HMR-52, or an approved site-specific study).

Based on the desired warning time, the 95th Percentile PQPF can be selected from the 24 hour short range forecast on Day 1 or Day 2. The 95th Percentile PQPF is recommended over the QPF for a Day 1 or Day 2 trigger to compensate for uncertainty by including probability distribution. When this trigger is reached, action would be taken to put protection or mitigation measures into place. Multiple triggers can be established if the response to an extreme rain event is done in graduated steps (e.g. stage equipment at 48 hours, assemble equipment at 12 hours, and complete implementation at 6 hours)

Alternate Action Trigger: If the return rate for $\frac{1}{2}$ of the theoretical consequential flood is too high (i.e. results in excessive false triggers), an alternative approach can be used based on historical storms for the drainage basin where the site is located.

Conduct a search of historical storms within the drainage basin where the site is located to determine the historical storm with the maximum one hour rainfall. The maximum historical storm should have an annual exceedance probability of at least 1/100. If a 1/100 year or more historical storm has not occurred within the drainage basin, use additional historical storms from a region determined to be transpositionable to the location. The transpositioned storm would be centered on the location of the nuclear site, with appropriate adjustments for differences moisture and elevation between the original storm location and the nuclear site accounted for. The maximum one hour rainfall amount would then be evaluated to verify that the rainfall amount was not consequential for the site. If the one hour rainfall is not consequential, apply the one hour maximum rainfall value as the action trigger value for the 24 hour PQPF. For example, if the maximum storm in the region delivered 16 inches over a two day period, the maximum 1 hour rainfall within that period was 5 inches. The annual exceedance for the storm was calculated to be 1/200 and it can be determined that 5 inches of rain in one hour would not be consequential rainfall for the site. The 24 PQPF rainfall trigger would be set at 5 inches for the site.

Other methods can also be used based on government and private forecasting models. Sites located within 50 miles of coastal areas should include monitoring of hurricane and tropical storm advisories from the National Hurricane Center in addition to the Weather Prediction Center precipitation forecasts. Plant sites west of the continental divide need to consider atmospheric river events where heavy bursts of rain can occur within an overall synoptic storm. An atmospheric river is a narrow corridor or filament of concentrated moisture in the atmosphere that develops along the boundaries between large areas of divergent surface air flow. These can occur from October through March, and are a significant source of moisture and flooding.

A meteorologist should evaluate the nuclear site location to validate the acceptability of the monitoring threshold, trigger, and warning time based on the meteorological impacts of the local terrain and a review of weather history for the region associated with the nuclear site.

The above method represents one approach that can be applied. The conservative bias of this approach increases the likelihood of false alarms. However, the consequences of a false alarm are minimal assuming the trigger actions are limited to reversible actions such as securing doors/gates or staging equipment.

5.2.3 Forecast Accuracy Limitations: The accuracy of extreme rainfall forecasts decreases as the projected levels exceed climatologically normal values and longer lead times. 24-hour precipitation values of 1/2 of the 1-hour LIP (e.g. 6"-9" from HMR-52) correspond to precipitation return rates on the order of 1/1000 (0.001 or 0.1%), or less, for most sites east of the 105th meridian. In Sukovich et al. 2014, Figure 6 shows a Probability of Detection for the WPC QPF forecasts of the top 0.1% of precipitation events near 0.25 (25%) for the CONUS in 2011. This qualitatively low level of detection is partially a function of the grading metric (full credit or no credit only), but is also a function of the inherent low bias that occurs when forecasting extreme events. The use of "1/2" of the 1 hour LIP or consequential event provides a level of conservatism intended to compensate for uncertainties in the precipitation forecast. Additionally, the use of the 24-hour 95th percentile PQPF as opposed to the QPF (comparable to the 50th percentile PQPF) builds in further conservatism to the methodology. The 95th percentile PQPF is designed such that an event has only a 5 percent chance of exceeding the forecast value, based on an ensemble of QPF model forecasts.


Attachments:

- Attachment 1 - Probabilistic Quantitative Precipitation Forecast, Excessive Rainfall Outlooks
- Attachment 2 - NWS Web Sites (Source Material), References

Attachment 1

Quantitative Precipitation Forecasts (QPFs) – EXAMPLE

(<http://www.hpc.ncep.noaa.gov/qpf/qpf2.shtml>)

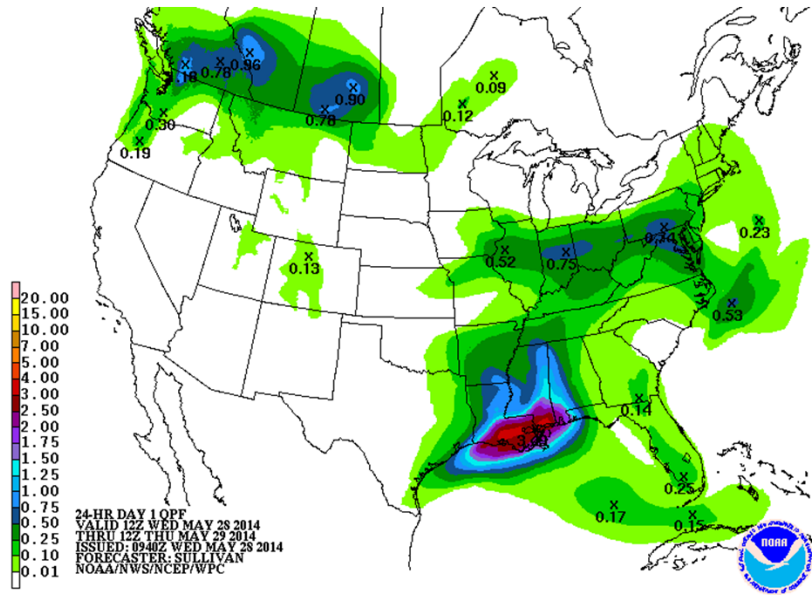

Probabilistic Quantitative Precipitation Forecasts (PQPFs) – EXAMPLE

(http://www.hpc.ncep.noaa.gov/pPQPF/conus_hpc_percentile.php?fpd=24)

6-Hour Forecasts
24-Hour Forecasts

Probability of Precipitation of at Least a Specific Amount	Precipitation Amount by Percentile
24-Hour Percentile QPFs valid 12Z May 28, 2014 - 12Z May 29, 2014	
Percentile: 5th 10th 25th 50th 75th 90th 95th	

95th percentile QPF for the 24-hour forecast valid 12Z May 28, 2014 - 12Z May 29, 2014

24-HR QPF EXPECTED NOT TO BE EXCEEDED WITH 95% PROB
 VALID 12Z WED MAY 28 2014
 THRU 12Z THU MAY 29 2014
 ISSUED: 0940Z WED MAY 28 2014
 WEATHER PREDICTION CENTER
 NOAA/NWS/NCEP/WPC

Viewing Options

Choose a percentile for the specified time:

- 5th
- 10th
- 25th
- 50th
- 75th
- 90th
- 95th

OR

Choose a time for the specified percentile:

- 12Z May 28
- 18Z May 28
- 00Z May 29
- 06Z May 29
- 12Z May 29
- 18Z May 29
- 00Z May 30
- 06Z May 30
- 12Z May 30
- 18Z May 30
- 00Z May 31
- 06Z May 31
- 12Z May 31

Attachment 2

NWS Web Sites (Source Material)

NWS Weather Prediction Center (WPC)

<http://www.hpc.ncep.noaa.gov/html/fam2.shtml> - Website describing the WPC Products

<http://www.hpc.ncep.noaa.gov/index.shtml> - Website with QPC's and Excessive Rain Forecast

http://www.hpc.ncep.noaa.gov/pqpf/conus_hpc_percentile.php?fpd=24 – Website for Probabilistic QPF's

NWS National Hurricane Center (NHC)

<http://www.nhc.noaa.gov/> - Home page for NHC

NWS Storm Prediction Center (SPC)

<http://www.spc.noaa.gov/misc/aboutus.html>

<http://www.spc.noaa.gov/misc/about.html#Day 1 Convective Outlook>

NWS Weather Alerts

<http://alerts.weather.gov/>

PDS-based point precipitation frequency estimates with 90% confidence intervals (in inches)¹ (includes recurrence intervals up to 1000 years and includes a 1 hour storm – listed by state)

<http://hdsc.nws.noaa.gov/hdsc/pfds/index.html>

NWS and Non-NWS listings of Weather Service Providers

<http://www.nws.noaa.gov/im/metdir.htm>

References

1. Schreiner, L.C. and J.T. Riedel (1978). "Probable Maximum Precipitation Estimates, United States East of the 105th Meridian." Hydrometeorological Report No. 51, Hydrometeorological Branch Office of Hydrology National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. June, 1978.
2. Hansen, E.M., L.C. Schreiner, and J.F. Miller (1982). "Application of Probable Maximum Precipitation Estimates, United States East of the 105th Meridian." Hydrometeorological Report No. 52, Hydrometeorological Branch Office of Hydrology National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. August, 1982.
3. Ho, F.P. and J.T. Riedel (1980). "Seasonal Variation of 10-Square-Mile Probable Maximum Precipitation Estimates, United States East of the 105th Meridian." Hydrometeorological Report No. 53, Hydrometeorological Branch Office of Hydrology National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. April 1980.

4. Needham, H. and B. Keim (2014). "Correlating Storm Surge Heights with Tropical Cyclone Winds at and before Landfall." *Earth Interact.*, **18**, 1–26.
5. Ralph, F., E. Sukovich, D. Reynolds, M. Dettinger, S. Weagle, W. Clark, and P. J. Neiman (2010). "Assessment of Extreme Quantitative Precipitation Forecasts and Development of Regional Extreme Event Thresholds Using Data from HMT-2006 and COOP Observers." *J. Hydrometeor.*, **11**, 1286-1304.
6. Olson, D.A., N. Junker, and B. Korty (1995). "Evaluation of 33 Years of Quantitative Precipitation Forecasting at the NMC." *Wea. Forecasting*, **10**, 498-511.
7. Sukovich, E., F. Ralph, F. Barthold, D. Reynolds, and D. Novak, (2014). "Extreme Quantitative Precipitation Forecast Performance at the Weather Prediction Center from 2001 to 2011." *Wea. Forecasting*. doi:10.1175/WAF-D-13-00061.1, in press
8. J.T. Riedel and Louis C. Schreiner (1980). "Comparison of Generalized Estimates of Probable Maximum Precipitation With Greatest Observed Rainfalls ." NOAA Technical Report NWS 25, Hydrometeorological Branch, Water Management Information Division, Office of Hydrology, National Weather Service, National Oceanic and Atmospheric Administration, U.S. Department of Commerce, Silver Spring, MD. March 1980, 1-2
9. J. Harrison, "Extreme Events: Graphs, Photos, Videos," in Dam Safety 2006: Proceedings of the 2006 Annual Conference of the Association of State Dam Safety Officials, Lexington, KY, September 10-14, 2006.

Contributing Authors

1. William Henson, PhD, AMEC
2. William D. Kappel, President/Senior Meteorologist, Applied Weather Associates
3. Brian Kolts, Meteorologist - First Energy
4. Stanton Lanham, Meteorologist - Duke Energy
5. Peter C. Manousos, Meteorologist - First Energy
6. Erwin T. Prater, PhD, MBA, CCM, CFA, Certified Consulting Meteorologist