

S/G Shipment

Contact on the side of steam generators

- 200 mr/hr – 320 mr/hr

Contact on side of shipping shields (personnel barrier)

- 10 – 20 mr/hr


Dose rate at plane from end of steam generator (personnel barrier)

- 15-20 mr/hr

Loose contamination on steam generator

- Contamination will be less than DOT limits
- A fixative will be applied at manway locations
- All other locations <MDA

Expected dose rates on container and various distances from barge

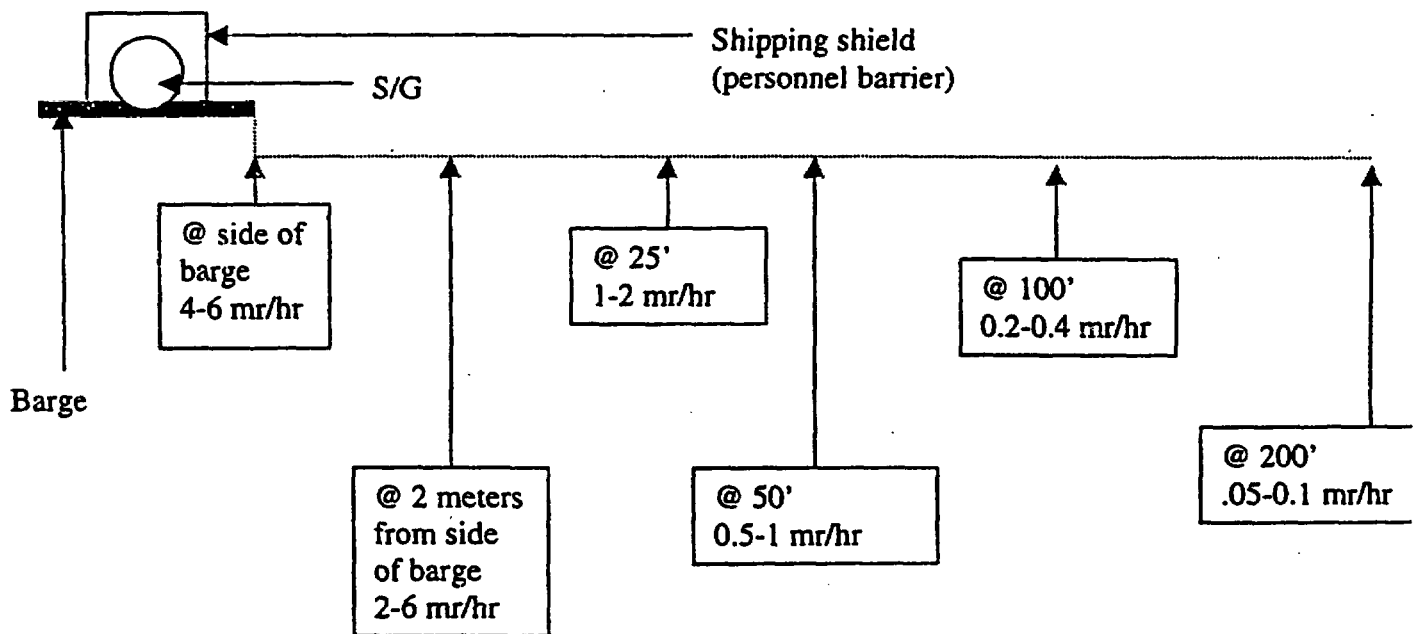

Expected dose rate to bow of barge

- 1.5-2 mr/hr

A-9