


Sample of label

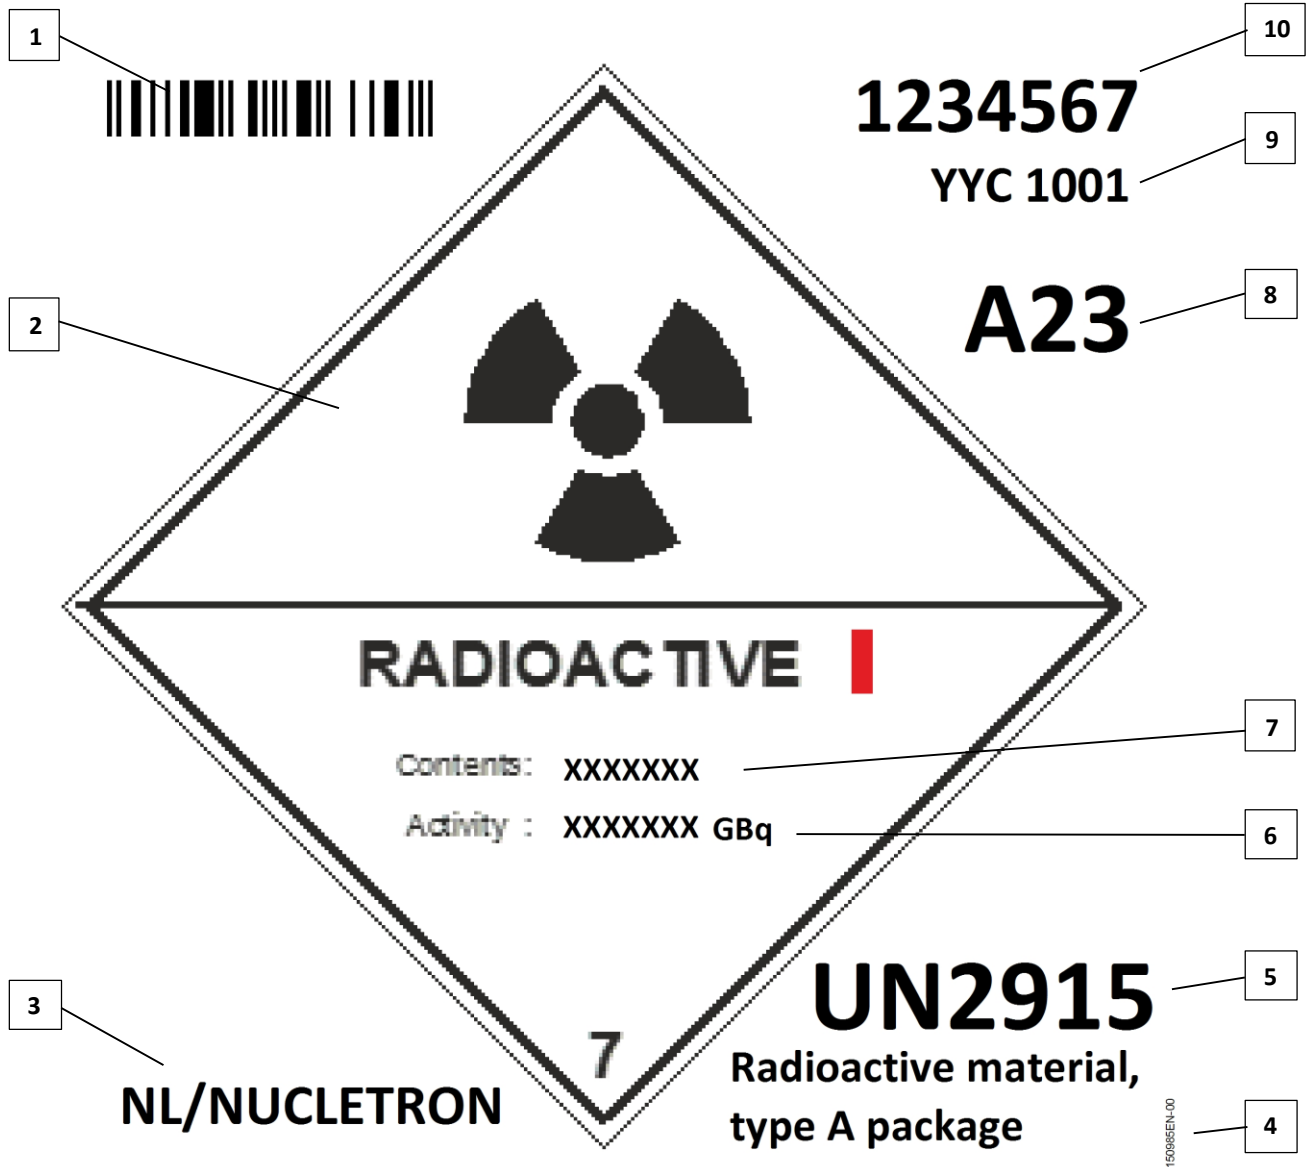

General Specifications	Value
Size (width x height)	149 x 149 mm
Material	Print on prepared label for radioactive. Part number: 050511
Placement instructions	selectSeeds Package Sterile (130002) and non-sterile seeds (in a container)

ID	Field	Variable	Value or instructions	Font or Size
1	Barcode	Y	Parcel ID and format specified by supplier.	
2	Radioactive symbol	N	No part of this template. Preprinted.	
3	Package designer	N	NL/NUCLETRON	Calibri, pt. 20
4	Label Template number	N	Label template number of manufacturer and if necessary template number of supplier	Calibri, pt. 4
5	UN Number	N	UN2915 and Proper Shipping Name in accordance with IATA/ADR transport regulations (current edition).	Calibri, pt. 36 and pt. 16 as a minimum
6	Activity	Y	1,513 GBq	Calibri, pt. 12
7	Content	N	I-125 (= radionuclide)	Calibri, pt. 12 minimum
8	Packing Code	Y	A23 or A23L	Calibri, pt. 36 minimum
9	Route Departure code	Y	Final (air)port identifier with departure time code. For example: YYC 1001	Calibri, pt. 18
10	Parcel ID	Y	Parcel ID number determined during manufacturing. Format: 7 digits	Calibri, pt. 28