

WOLF CREEK

NUCLEAR OPERATING CORPORATION

Jaime H. McCoy
Vice President Engineering

March 2, 2016
ET 16-0006

U. S. Nuclear Regulatory Commission
ATTN: Document Control Desk
Washington, DC 20555

Subject: Docket No. 50-482: 10 CFR 50.55a Request to Use ASME Code Case N-789-2 for the Fourth Inservice Inspection Program Interval

Gentlemen:

Pursuant to 10 CFR 50.55a(z)(1), Wolf Creek Nuclear Operating Corporation (WCNOC) hereby requests Nuclear Regulatory Commission (NRC) approval of the attached 10 CFR 50.55a Request for the fourth 10-year inspection interval of WCNOC's Inservice Inspection (ISI) Program. This 10 CFR 50.55a Request seeks approval to use American Society of Mechanical Engineers (ASME) Boiler and Pressure Vessel Code Case N-789-2, "Alternative Requirements for Pad Reinforcement of Class 2 and 3 Moderate-Energy Carbon Steel Piping for Raw Water Service, Section XI, Division 1," as an alternative to ASME Code Section XI, Paragraph IWA-4000. The attachment provides the details of this 10 CFR 50.55a request.

WCNOC requests approval of the proposed alternative by February 28, 2017. A copy of ASME Code Case N-789-2 is provided as the enclosure for information.

This letter contains no commitments. If you have any questions concerning this matter, please contact me at (620) 364-4156, or Cynthia R. Hafenstine (620) 364-4204.

Sincerely,



Jaime H. McCoy

JHM/rtt

Attachment: 10 CFR 50.55a Request for Approval to Use ASME Code Case N-789-2

Enclosure: ASME Code Case N-789-2

cc: M. L. Dapas (NRC), w/a, w/e
C. F. Lyon (NRC), w/a, w/e
N. H. Taylor (NRC), w/a, w/e
Senior Resident Inspector (NRC), w/a, w/e

A047
NER

Wolf Creek Nuclear Operating Corporation

**10 CFR 50.55a Request for Approval to Use ASME Code Case
N-789-2**

10 CFR 50.55a Request for Approval to Use ASME Code Case N-789-2

Proposed Alternative in Accordance with 10 CFR 50.55a(z)(1) Alternative Provides Acceptable Level of Quality and Safety

1. ASME Code Component(s) Affected

American Society of Mechanical Engineers (ASME) Boiler and Pressure Vessel (B&PV) Code, Section III, Class 2 and 3, moderate energy carbon steel raw water piping systems.

2. Applicable Code Edition and Addenda

ASME B&PV Code Section XI, 2007 Edition with 2008 Addenda.

3. Applicable Code Requirement

ASME B&PV Code, Section XI, IWA-4400 provides the requirements for welding, brazing, metal removal, and installation of Repair/Replacement activities.

4. Reason for Request

In accordance with 10 CFR 50.55a(z)(1), Wolf Creek Nuclear Operating Station (WCNOC) is requesting the proposed alternatives to replacement or weld repair of pipe wall degradation (wall thinning conditions) in Class 2 and 3 moderate energy carbon steel raw water piping systems, in accordance with IWA-4000. The degradation may be the result of erosion, corrosion, cavitation, and pitting mechanisms; but excluded is degradation resulting from flow-accelerated corrosion (FAC), corrosion-assisted cracking, or any other form of cracking. The repairs or replacements shall be in accordance with the Owner's Requirements and the original or later Construction Code. Other alternative repair or evaluation methods are not always practicable because of wall thinness and/or moisture issues.

The reason for this request is to permit installation of technically sound alternative repairs in accordance with code Case N-789-2. This will allow adequate time for evaluation, design, material procurement, planning and scheduling of appropriate permanent repair or replacement of the item in accordance with the Owner's Requirements and the original or later Construction Code, considering the impact on system availability, maintenance rule applicability, and availability of replacement materials.

5. Proposed Alternative and Basis for Use

Proposed Alternative

In accordance with 10 CFR 50.55a(z)(1), WCNOC proposes to implement the requirements of ASME Code Case N-789-2, "Alternative Requirements for Pad Reinforcement of Class 2 and 3 Moderate-Energy Carbon Steel Piping for Raw Water Service, Section XI, Division 1" as an

alternative repair of degradation in Class 2 and 3 moderate energy raw water piping systems resulting from mechanisms such as erosion, corrosion, cavitation, or pitting; but excluding conditions involving FAC, corrosion-assisted cracking, or any other form of cracking. These types of defects are typically identified by small leaks in the piping system or by pre-emptive non-code required examinations performed to monitor the degradation mechanisms. ASME Code Case N-789-2 is provided as the enclosure to this letter.

ASME Code Case N-789-2 was approved on June 23, 2015, by the ASME Board on Nuclear Codes and Standards; however, this Code Case has not been incorporated into Nuclear Regulatory Commission (NRC) Regulatory Guide 1.147, "Inservice Inspection Code Case Acceptability, ASME Code Section XI Division 1." As such, ASME Code Case N-789-2 is not available for application at nuclear power plants without specific NRC approval. Therefore, WCNO requests NRC approval of the proposed alternative to implement this repair technique.

Basis for Use

ASME Code Case N-789-2 applies to Class 2 and 3 moderate energy (that is, systems less than or equal to 200 degrees Fahrenheit and less than or equal to 275 pounds per square inch gauge pressure maximum operating conditions) carbon steel raw water piping. ASME Code Case N-789-2, footnote 1, states that:

Raw water is defined as water such as from a river, lake, or well or brackish/salt water; used in plant equipment, area coolers, and heat exchangers. In many plants it is referred to as "Service Water."

The alternative repair described in ASME Code Case N-789-2 involves the application of a metal reinforcing pad welded to the surface of the piping system that either restores pressure integrity or reinforces the weakened area and retain the system pressure. ASME Code Case N-789-2 requires the design and examinations to comply with the Construction Code or ASME Code Section III. Reconciliation and use of editions and addenda of ASME Code Section III will be in accordance with ASME Code Section XI, Paragraph IWA-4220. If an edition of ASME Code Section III other than the Construction Code is applied, it will have been accepted by the NRC in accordance with 10 CFR 50.55a. The edition of ASME Code Section XI applicable to the WCNO current 10-year inservice inspection (ISI) interval, as defined in Section 2, applies to the repair.

The reinforcing pad may be used for leak prevention only (pressure pad), or for leak prevention plus structural reinforcement of thinned areas including areas that do, or are expected to, penetrate the piping wall (structural pad). Pressure pads are designed to retain pressure and may be used only where the piping is predicted to retain full structural integrity until the next refueling outage assuming a corrosion rate of either 2 times the actual measured corrosion rate in that location, or four (4) times the estimated maximum corrosion rate for the same degradation mechanism in that system or similar system at the same plant site. Structural pads are designed for pressure plus structural reinforcement and may be used where the piping is predicted not to retain full structural integrity until the next refueling outage. In this context, "full structural integrity" means the piping maintains full capability to withstand structural (mechanical) loading for which it is designed without need for additional support or reinforcement. The appropriate repair technique will be determined based on the characterization of the degradation.

Reinforcing pads may be applied on the outside of pipe or fittings for mitigation of internal or external corrosion, except that pressure pads applied externally may not be used to mitigate

externally corroded areas that are subject to bulging due to wall thinning. Reinforcing pads may also be applied on the inside of pipe or fittings for mitigation of internal or external corrosion.

Following discovery of a through-wall flaw, the flaw will be characterized to determine the cause of the degradation. Additionally, the surrounding areas will be examined to bound the degraded area and ensure no other unacceptable locations exist which could affect the integrity of the repaired piping. The area of the reinforcing pad will be determined based on the identified degraded area. Corrosion rates will be established based on the estimated maximum corrosion rate for the same degradation mechanism in that system or similar system at the same plant site. If the development of a corrosion rate based on actual thickness measurements of the degraded area is not feasible due to the time constraints associated with an emergent repair or replacement, then the established corrosion rate will be conservatively multiplied by the safety factor of four established in ASME Code Case N-789-2 to ensure the design of the reinforcing pad (for example, thickness and weld size) will provide a structural or pressure boundary, as appropriate, until the next refueling outage. If the established corrosion rates are less than the actual corrosion, the short duration of the repair, along with the applicable corrosion rate safety factor and inservice monitoring defined in ASME Code Case N-789-2, provide reasonable assurance that the structural integrity and leakage integrity will be maintained during the one-cycle of application.

When a reinforcing pad is installed to a leaking area, precautions will be taken as necessary, such as installation of a gasket or sealant beneath the pad, to prevent welding on wet surfaces.

Externally applied reinforcing pads attached to piping that has not been breached shall be equipped with pressure taps for performance of pressure testing.

Baseline thickness examinations will be performed for completed structural pads, attachment welds (except for the tapered edges), and the surrounding areas, followed by monthly thickness monitoring for the first three months, with subsequent monitoring frequency based on the results of this monitoring, but at a minimum frequency of quarterly. For structural pads on buried piping, provisions will be made for access during plant operation in order to perform these examinations.

In order to verify the leak tightness of the pressure pad, areas containing pressure pads and internally applied structural pads shall be monitored monthly for evidence of leakage. If the areas containing such pads are not accessible for direct observation, then monitoring will be accomplished by visual assessment of surrounding areas or ground surface areas above the pads on buried piping, or monitoring of leakage collection systems, if available.

For all reinforcing pads, regardless of when during an operating cycle they are installed, the repair will be considered to have a maximum service life of the time until the end of the next refueling outage, and by that time a permanent repair or replacement must be performed. Detailed requirements for design of reinforcement pads, installation, examination, pressure testing and inservice monitoring are provided in ASME Code Case N-789-2.

Based on the above, the use of ASME Code Case N-789-2 for temporary repairs is justified, since utilizing ASME Code Case N-789-2 would result in an acceptable level of quality and safety. All other ASME Code Section XI requirements for which relief was not specifically requested and authorized by the NRC staff will remain applicable, including third party review by the Authorized Nuclear Inservice Inspector.

6. Duration of Proposed Alternative

The duration of the proposed request extends to the end of the first refueling outage following the end of WCNOG's Fourth 10-Year ISI Interval, which began on September 3, 2015 and ends on September 2, 2025.

ASME Code Case N-789-2 reinforcing pads (structural or pressure) installed before the end of the 10-year ISI interval are removed before the end of the refueling outage following their installation, even if that refueling outage occurs after the end of the 10-year inspection interval.

7. Precedents

- 1) NRC Safety Evaluation for Exelon Generation Co. LLC, Subject: [Associated plant names listed below] – Request to Use American Society of Mechanical Engineers Boiler and Pressure Vessel Code Case N-789, "Alternative Requirements for Pad Reinforcement of Class 2 and 3 Moderate Energy Carbon Steel Piping for Raw Water Service, Section XI, Division 1" [Associated TAC Numbers listed below], dated May 10, 2012 (ADAMS Accession No. ML12121A637).

Plant Names: Braidwood Station, Units 1 and 2; Byron Station, Units 1 and 2; Clinton Power Station, Unit 1; Dresden Nuclear Power Station, Units 2 and 3; LaSalle County Station, Units 1 and 2; Limerick Generating Station, Units 1 and 2; Oyster Creek Nuclear Generating Station; Peach Bottom Atomic Power Station, Units 2 and 3; Quad Cities Nuclear Power Station, Units 1 and 2; and Three Mile Island Nuclear Station, Unit 1

TAC Nos.: ME7303, ME7304, ME7305, ME7306, ME7307, ME7308, ME7309, ME7310, ME7311, ME7312, ME7313, ME7314, ME7315, ME7316, ME7317, ME7318, and ME7319

- 2) NRC Safety Evaluation for FirstEnergy Nuclear Operating Company, Subject: Beaver Valley Power Station, Unit Nos. 1 and 2 – Relief Request No. BV3-N-789 Regarding Carbon Steel Piping for Raw Water Service (TAC Nos. M4563 and MF4566), dated June 19, 2015 (ADAMS Accession No. ML15163A147).
- 3) NRC Safety Evaluation for Northern States Power Company–Minnesota, Subject: Prairie Island Nuclear Generating Plant, Units 1 and 2 – Relief Requests (1-RR-5-5 and 2 RR-5-5) for the Fifth 10-Year Interval for the Inservice Inspection Program (TAC Nos. MF4839 and MF4840), dated May 4, 2015 (ADAMS Accession No. ML15079A003).

Note: WCNOG is submitting this 10 CFR 50.55a request to use ASME Code Case N-789-2, whereas the precedents cited above requested the use of earlier revisions to this Code Case.

ENCLOSURE

ASME Code Case N-789-2, "Alternative Requirements for Pad Reinforcement of Class 2 and 3 Moderate-Energy Carbon Steel Piping for Raw Water Service, Section XI, Division 1"

(6 pages)

Approval Date: June 23, 2015

Code Cases will remain available for use until annulled by the applicable Standards Committee.

Case N-789-2
Alternative Requirements for Pad Reinforcement of
Class 2 and 3 Moderate-Energy Carbon Steel Piping for
Raw Water Service
Section XI, Division 1

Inquiry: As an alternative to replacement or weld repair in accordance with IWA-4400, what requirements may be applied for wall reinforcement of Class 2 and 3 moderate-energy carbon steel raw water¹ piping systems that have experienced wall thinning from localized erosion, corrosion, and cavitation or pitting?

Reply: It is the opinion of the Committee that, in lieu of meeting IWA-4400, areas of Class 2 and 3 moderate-energy [i.e., less than or equal to 200°F (93°C) and less than or equal to 275 psig (1.9 MPa) maximum operating conditions] carbon steel raw water piping experiencing wall thinning from localized erosion, corrosion, and cavitation or pitting (collectively referred to herein as "corrosion") may have the wall reinforced by applying reinforcing pads to the surface of the piping in accordance with the following requirements. Excluded from these provisions are conditions involving flow-accelerated corrosion (FAC), corrosion-assisted cracking, or any other form of cracking.

1 GENERAL REQUIREMENTS

(a) Application of the reinforcing pad shall be performed in accordance with a Repair/Replacement Plan satisfying the requirements of IWA-4150.²

(b) The design, materials, and installation shall meet the requirements of the Construction Code and IWA-4000, except as stated in this Case.

(c) If the minimum required thickness of reinforcing pad necessary to satisfy the requirements of 3 is greater than the nominal thickness for the size and schedule of the piping, this Case shall not be used.

¹ Raw water is defined as water such as from a river, lake, or well or brackish/salt water; used in plant equipment, area coolers, and heat exchangers. In many plants it is referred to as "Service Water."

² The references to Section XI in this Case refer to the 2015 Edition. For use of this Case with other Editions and Addenda, refer to the Guide-line for Cross-Referencing Section XI Cases, Table 1.

The Committee's function is to establish rules of safety, relating only to pressure integrity, governing the construction of boilers, pressure vessels, transport tanks and nuclear components, and inservice inspection for pressure integrity of nuclear components and transport tanks, and to interpret these rules when questions arise regarding their intent. This Code does not address other safety issues relating to the construction of boilers, pressure vessels, transport tanks and nuclear components, and the inservice inspection of nuclear components and transport tanks. The user of the Code should refer to other pertinent codes, standards, laws, regulations or other relevant documents.

(d) Additional reinforcement or repair is not permitted on top of an existing reinforcing pad.

(e) Reinforcing pads, including those installed during a refueling outage, shall not remain in service beyond the end of the next refueling outage.

(f) This Case may only be applied to piping not required to be ultrasonically examined for inservice inspection.

2 INITIAL EVALUATION

(a) The material beneath the surface to which the reinforcing pad is to be applied and the adjacent area shall be ultrasonically measured to establish the existing wall thickness and the extent and configuration of degradation to be corrected by the reinforcing pad.

(b) The cause and rate of degradation shall be determined. If the cause is determined to be flow-accelerated corrosion (FAC), corrosion-assisted cracking, or any other form of cracking, this Case shall not apply. The extent and rate of degradation in the piping shall be evaluated to ensure that there are no other unacceptable locations within the surrounding area that could affect the integrity of the repaired piping. The dimensions of the surrounding area to be evaluated shall be determined by the Owner, considering the type of degradation present.

(c) The effects of the repair on the piping and any remaining degradation shall be evaluated in accordance with IWA-4311.

3 DESIGN

3.1 TYPES OF REINFORCING PADS

(a) Reinforcing pads may be used for leak prevention only (pressure pad), or for leak prevention plus structural reinforcement of thinned areas including areas that do, or are expected to, penetrate the piping wall (structural pad).

(1) Pressure pads are designed to retain pressure, and may be used only where the piping is predicted to retain full structural integrity until the next refueling outage assuming a corrosion rate of either 2 times the actual measured corrosion rate in that location, or 4 times the estimated maximum corrosion rate for the same degradation mechanism in that system or similar system at the same plant site.

(2) Structural pads are designed for pressure plus structural reinforcement and may be used where the piping is predicted not to retain full structural integrity until the next refueling outage.

(b) Reinforcing pads may be applied as follows:

(1) On the outside of pipe or fittings for mitigation of internal or external corrosion, except that pressure pads applied externally may not be used to mitigate externally corroded areas that are subject to bulging due to wall thinning.

(2) On the inside of pipe or fittings for mitigation of internal or external corrosion.

3.2 GENERAL DESIGN REQUIREMENTS — PRESSURE AND STRUCTURAL PADS

(a) The design of reinforcing pads shall be in accordance with the applicable requirements of the Construction Code or Section III (NC-3100 and NC-3600 or ND-3100 and ND-3600, including Mandatory Appendix II).

(b) The reinforcing pad shall be sized to encompass the unacceptable area with the attachment welds located on adjacent base material of sufficient thickness to accommodate the design stresses.

(c) The plate for the reinforcing pad shall be rolled or otherwise formed to fit the contour of the piping to achieve proper weld fit-up.

(d) The thickness of the reinforcing pad shall be sufficient to maintain required thickness until the next refueling outage.

(e) The tensile strengths of the plate and weld filler metal for the reinforcing pad shall be at least that specified for the base metal to which it is applied.

(f) The predicted maximum degradation of the reinforced piping until the next refueling outage shall be included in the design. The predicted degradation of the piping shall be based on in-situ inspection of, and established data for, similar base metals in similar environments. If the reinforcing pad will be, or is predicted to become, exposed to the raw water, the predicted degradation of the reinforcing pad shall be based upon established data for base metals or weld metals with similar chemical composition to that used for the reinforcing pad.

(g) Material for reinforcing pads shall be ferritic, with welds of compatible weld filler metal.

(h) The following factors shall be included, as applicable, in the design and application of the pad:

(1) shrinkage effects, if any, on the piping

(2) stress concentrations caused by installation of the reinforcing pad or resulting from existing and predicted piping surface configuration

(3) effects of welding on any coating

(4) added weight of the pad with respect to any design analyses that could be affected

(5) for internally applied pads, impact on flow and need for protective coating

(i) If flexibility analysis was required by the original Construction Code, the effect of the reinforcing pad shall be reconciled with the original analysis. For rectangular-shaped reinforcing pads on piping designed to NC-3650 or ND-3650 and aligned parallel or perpendicular to the axis of the piping, unless a lower stress intensification factor [SIF or (i)] is established, an SIF (i) of 2.1 shall be applied for reinforcing pads on straight pipe and adjacent welds. Also, a stress multiplier of 1.7 shall be applied to the SIF (i) for standard elbows, and an SIF (i) of 2.1 shall be applied for tees and branch connections when the toe of the attachment weld is not less than $2.5\sqrt{Rt_{\text{nom}}}$ from any branch reinforcement in Figure 1.

(j) Corners of reinforcing pad plates shall be rounded with radii not less than the reinforcing pad thickness, and the toes of attachment welds at the corners shall have 1 in. (25 mm) minimum radius.

(k) The distance between toes of attachment welds and other attachments or branch reinforcement (Figure 1 and 2) shall not be less than the following equation:

$$d = 2.5\sqrt{Rt_{\text{nom}}}$$

where

d = minimum distance between toes of fillet welds of adjacent fillet welded attachments

R = the outer radius of the piping

t_{nom} = nominal thickness of the piping

(l) If permitted by the design, suitable gasket material or sealant may be applied between the pad and the piping surface to prevent moisture during welding (see Figures 1 and 2). Any residual moisture shall then be removed by heating prior to welding.

3.3 SPECIFIC DESIGN REQUIREMENTS — PRESSURE PADS


Pressure pads shall meet the requirements of 3.2, Figure 2, and the following:

(a) Fillet-welded pressure pads shall be designed to withstand the membrane strain of the piping in accordance with the requirements of the Code specified in 3.2(a) such that the following criteria are satisfied:

(1) The allowable membrane stress is not exceeded in the piping or the pad.

(2) The strain in the pad does not result in fillet weld stresses exceeding allowable stresses for such welds.



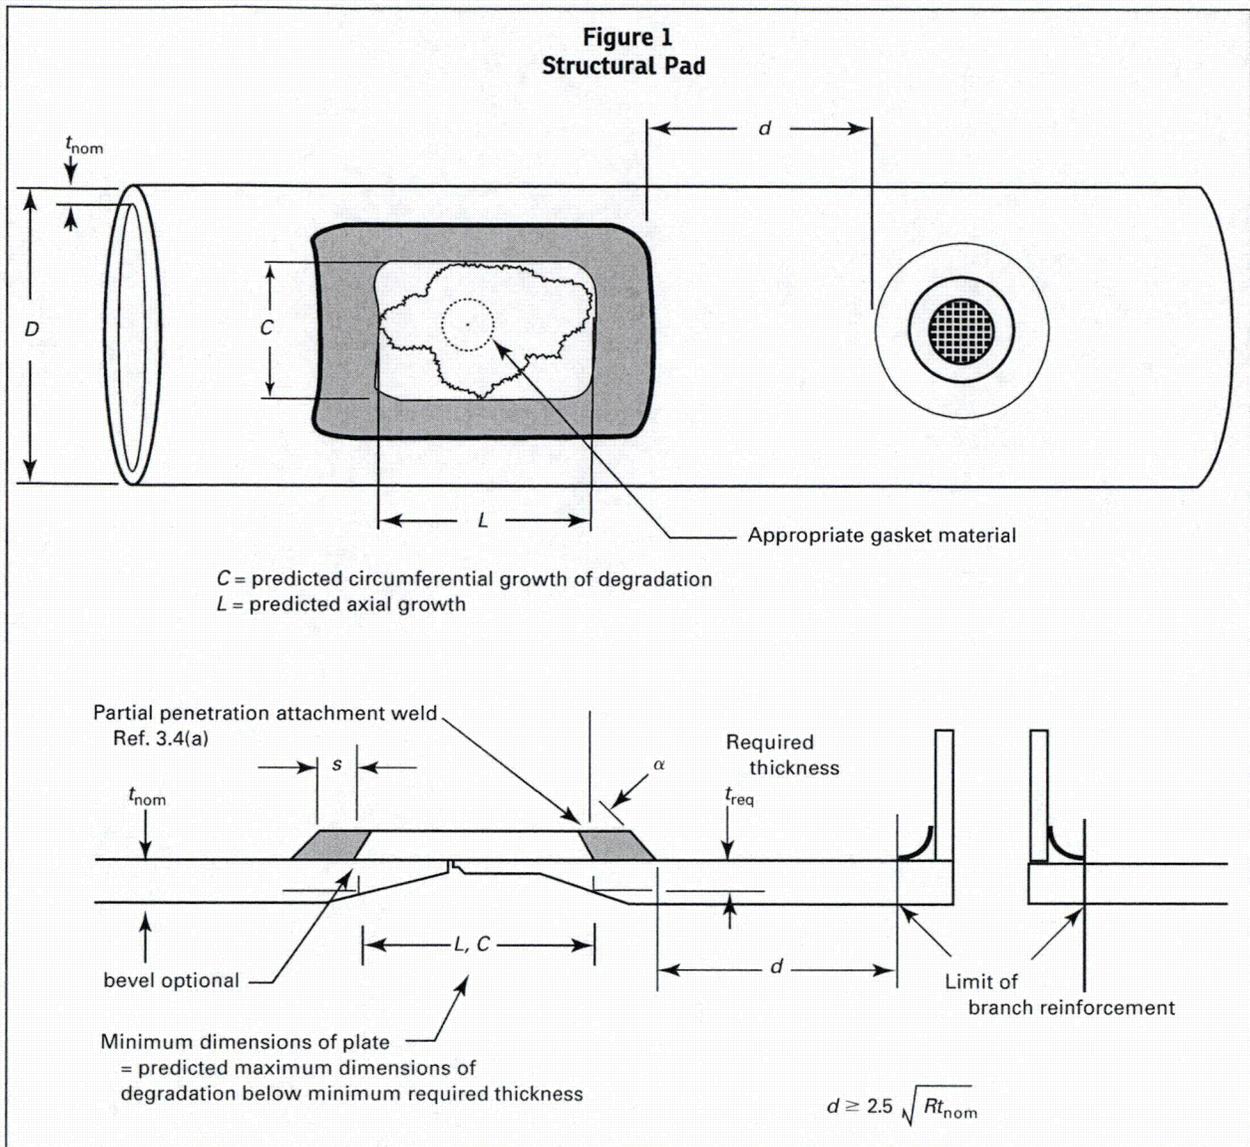

(b) Design as a reinforced opening in accordance with the Construction Code shall satisfy (a).

(c) As an alternative to (a), pressure pads may be designed as structural pads in accordance with 3.4 or as pre-qualified designs in accordance with 3.5.

3.4 SPECIFIC DESIGN REQUIREMENTS — STRUCTURAL PADS

Structural pads shall meet the requirements of 3.2, Figure 1, and the following:

(a) Structural pads shall be attached by partial-penetration welds (see Figure 1) that, unless otherwise established by analysis in accordance with the


requirements of 3.2(a), extend for a distance of at least s in each direction beyond the area predicted, by the next refueling outage, to infringe upon the required thickness,³ where

$$s \geq 0.75 \sqrt{Rt_{nom}} \text{ and } s \geq 1 \text{ in. (25 mm)}$$

where

$R = D/2 =$ outer radius of the piping
 $t_{nom} =$ nominal wall thickness of the piping

³ Design thickness as prescribed by the Construction Code.

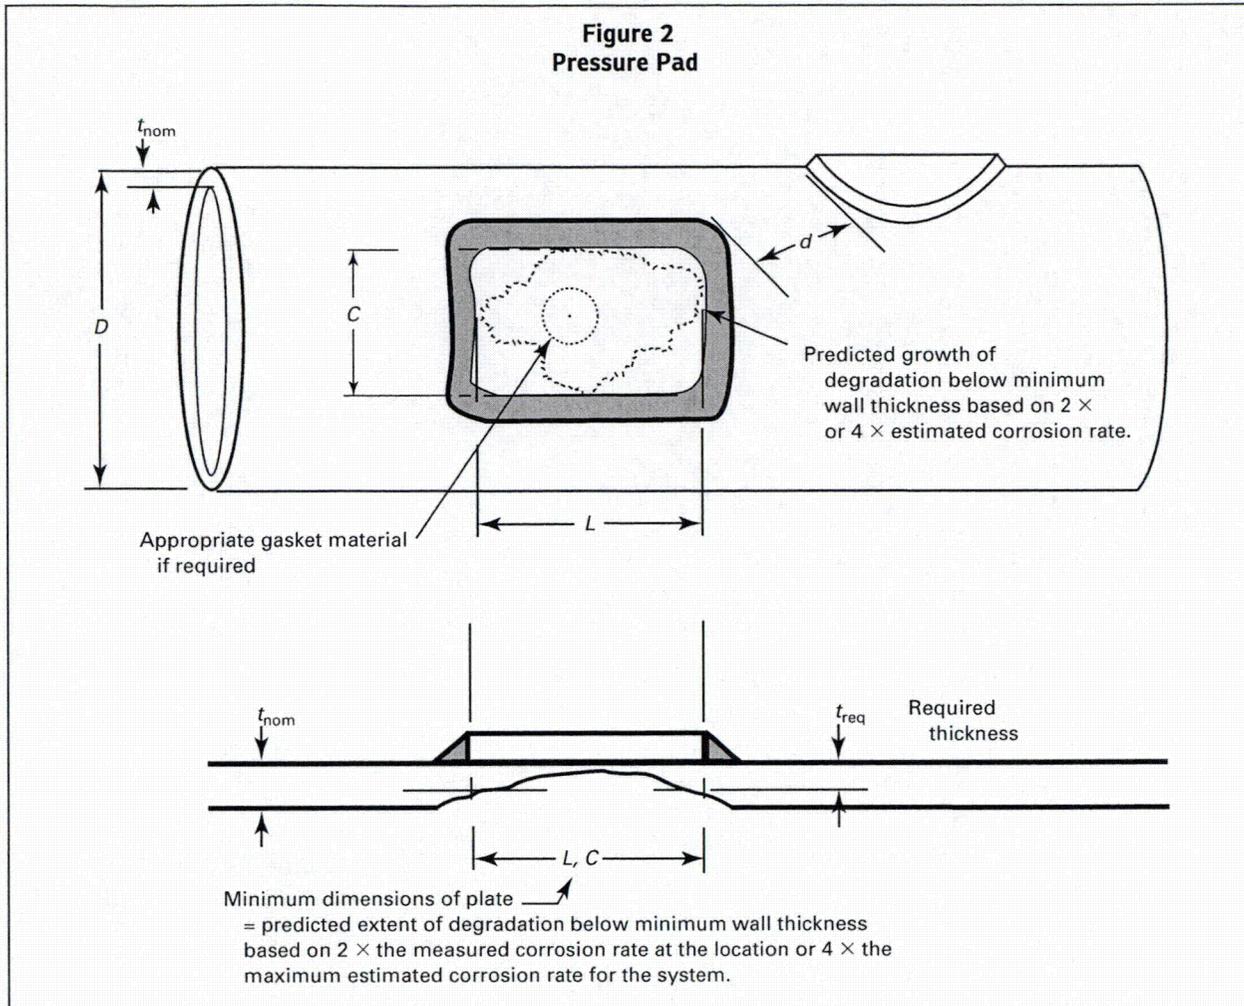

(b) The thickness of the partial penetration attachment welds shall equal the thickness of the pad and the edges of the welds shall be tapered to the piping surface at a maximum angle ("α" in Figure 1) of 45 deg.

(c) Final configuration of the structural pad including attachment welds shall permit the examinations and evaluations required herein, including any required preservice or inservice examinations of encompassed or adjacent welds.

(d) Except for the tapered edges, the structural pad plate and attachment welds shall have a uniform thickness.

(e) Where structural pads are applied on the outside of piping to mitigate externally corroded areas with potential for bulging, the corrosion cavity shall be filled to the original contour of the pipe with hardenable fill to minimize the gap beneath the reinforcing pad. [See Figure 1 sketch (b).]

3.5 PREQUALIFIED DESIGN

Application of structural pads on the outside surface of straight pipe, standard elbows, and associated welds for the mitigation of internal corrosion shall be exempt from the requirements of 3.2(a), provided all of the following conditions are satisfied.⁴

(a) All other requirements of 3.1, 3.2, and 3.4 are satisfied.

(b) The axial length of structural pad plus width of partial penetration attachment welds shall not exceed the greater of 6 in. (150 mm) or the outside diameter of the piping.

(c) The finished structural pad shall be circular, oval, or rectangular in shape.

(1) The maximum dimension compensated by a circular structural pad shall not exceed two-thirds of the nominal outside diameter of the piping.

(2) Rectangular structural pads shall be aligned parallel with or perpendicular to the axis of the piping.

⁴ Prequalified configurations are based on experimental analysis and burst testing reported in EPRI Report TR 108142.

(3) For oval structural pads, the end radii shall not be less than $0.75\sqrt{Rt_{nom}}$, and the axis of the structural pad shall be aligned parallel with or perpendicular to the axis of the piping.

4 WATER-BACKED APPLICATIONS

(a) Attachment welds on water backed piping shall be applied using the SMAW process with low-hydrogen electrodes.

(b) When welding a reinforcing pad to a leaking area, precautions, such as installation of a gasket or sealant beneath the pad, shall be taken to prevent welding on wet surfaces.

(c) For piping materials other than P-No. 1, Group 1, the surface examination required in 6 shall be performed no sooner than 48 hr after completion of welding.

5 INSTALLATION

(a) The base material in the area to be welded shall be cleaned to bare metal.

(b) Weld metal shall be deposited using a groove – welding procedure qualified in accordance with Section IX and the Construction Code.

(c) Provisions for venting during the final closure weld, or for pressurizing for leak-testing, shall be included, if necessary.

(d) The surface of the attachment weld shall be prepared, if necessary, by machining or grinding to permit performance of surface and volumetric examinations required by 6. For ultrasonic examination, a surface finish of 250 RMS or better is required.

6 EXAMINATION

(a) The completed attachment weld shall be examined using the liquid penetrant or magnetic particle method and shall satisfy the surface examination acceptance criteria for welds of the Construction Code or Section III (NC-5300, ND-5300).

(b) Except for the tapered edges, partial penetration attachment welds, including the piping base metal upon which they are applied, shall be ultrasonically measured to verify acceptable wall thickness.

(c) Partial penetration attachment welds shall be volumetrically examined when full penetration girth welds in the piping are required by the Construction Code to be volumetrically examined. Where configuration does not permit meaningful volumetric examination, the first layer, each $\frac{1}{2}$ in. (13 mm) thickness of weld deposit, and the final surface shall be examined in accordance with (a) in lieu of volumetric examination.

(d) If volumetric examination is required, the full volume of the attachment weld, excluding the tapered edges, but including the volume of base metal required for the

intended life of the reinforcing pad, shall be examined in accordance with the Construction Code or Section III, using either the ultrasonic or radiographic method, and shall, to the depth at the surface of the piping, satisfy the acceptance criteria for weldments of the Construction Code or Section III (NC-5320, ND-5320 or NC-5330, ND-5330). Any volume of the piping beneath the reinforcing pad that is credited in the design shall satisfy the volumetric acceptance criteria of Section III (NC-5320, ND-5320 or NC-5330, ND-5330), as applicable.

7 PRESSURE TESTING

In lieu of IWA-4540, a system leakage test of the repair/replacement activity shall be performed in accordance with IWA-5000 prior to, or as part of, returning to service.

Externally applied reinforcing pads attached to piping that has not been breached shall be equipped with pressure taps for performance of pressure testing.

8 INSERVICE MONITORING

(a) Upon completion of the repair, inspections shall be performed for structural pads, using ultrasonic or direct thickness measurement, to record the thickness of the plate, the thickness at the attachment welds, including the underlying base metal, and to the extent examinable in a 3 in. (75 mm) wide band, surrounding the repair, as a baseline for subsequent monitoring of the repair.

(b) The Owner shall prepare a plan requiring additional thickness monitoring for externally applied structural pads using ultrasonic or direct thickness measurement to verify that minimum design thicknesses, as required by the Construction Code or Section III, are maintained until the next refueling outage. Initial monitoring shall be monthly for the first quarter and the subsequent frequency shall be based on corrosion rates calculated using reductions in thicknesses since the previous monitoring inspections, but at least quarterly.

Provisions shall be made for access to structural pads on buried piping during operation to accomplish these examinations.

(c) Areas containing pressure pads and internally applied structural pads shall be monitored monthly for evidence of leakage. If the areas containing such pads are not accessible for direct observation, monitoring shall be accomplished by observation of surrounding areas or ground surface areas above the pads on buried piping; or leakage collection systems, if available, shall be monitored.

(d) If the results of the monitoring program identify leakage or indicate that the structural margins required by 3 will not be maintained until the next refueling outage, additional repair/replacement activities not prohibited by 1(d) shall be performed prior to encroaching upon the design limits.



CASE (continued)
N-789-2

ASME BPVC.CC.NC.S2-2015

(e) All reinforcing pads, regardless of when installed, shall be removed no later than the end of the next refueling outage.

