

MATERIALS LICENSE

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 36, 37, 39, 40, 70 and 71, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s). This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

Licensee		In accordance with letter dated June 8, 2016,	4. Expiration Date: March 31, 2020
1. Aerosol Monitoring & Analysis, Inc.		3. License number: 19-31402-01 is amended in its entirety to read as follows:	5. Docket No.: 030-38246 Reference No.:
2. 1331 Ashton Road, Suite A Hanover, MD 21076			
6. Byproduct, source, and/or special nuclear material	7. Chemical and/or physical form	8. Maximum amount that licensee may possess at any one time under this license	9. Authorized use
A. Cobalt-57	A. Sealed Sources (DuPont Merck Pharmaceutical Co., Model NER-372 or NER-472; Isotope Products Laboratories, Model 3814 or 3901; North American Scientific, Model IND1150 or IND1403; QSA Global, Model CTC.P1)	A. 15 millicuries per source and 15 millicuries total	A. For use in RMD Instruments, LLC, Model No. LPA-1 X-Ray fluorescence devices.
B. Cadmium-109	B. Sealed Sources (Isotope Products Laboratories, Model XFB-3; QSA Global, Model CUC.D1 or CUC.P1)	B. 50 millicuries per source and 50 millicuries total	B. For use in Thermo Scientific Analytical Instruments, Inc. Model XLI and/or XLp Series X-Ray fluorescence devices.

CONDITIONS

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
19-31402-01Docket or Reference Number
030-38246

Amendment No. 2

10. Licensed material may be used or stored at temporary job sites of the licensee anywhere in the United States where the U.S. Nuclear Regulatory Commission maintains jurisdiction for regulating the use of licensed material, including areas of exclusive Federal jurisdiction within Agreement States.

If the jurisdiction status of a Federal facility within an Agreement State is unknown, the licensee should contact the Federal agency controlling the job site in question to determine whether the proposed job site is an area of exclusive Federal jurisdiction. Authorization for use of radioactive materials at job sites in Agreement States not under exclusive Federal jurisdiction shall be obtained from the appropriate state regulatory agency.

11. Licensed material shall be used by, or under the supervision of, individuals who have received the training described in the application dated March 2, 2010, and have been designated, in writing, by the Radiation Safety Officer. The licensee shall maintain records of individuals designated as users for 3 years following the last use of licensed material by the individual.
12. The Radiation Safety Officer for this license is Robert F. Schoennagel, Jr.
13. Sealed sources or detector cells containing licensed material shall not be opened or sources removed from source holders by the licensee.
14. A. Sealed sources and detector cells shall be tested for leakage and/or contamination at intervals not to exceed the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State. In the absence of a registration certificate, sealed sources shall be tested for leakage and/or contamination at intervals not to exceed 6 months, or at such other intervals as specified.
- B. In the absence of a certificate from a transferor indicating that a leak test has been made within the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State, prior to the transfer, a sealed source received from another person shall not be put into use until tested and the test results received.

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
19-31402-01Docket or Reference Number
030-38246

Amendment No. 2


- C. Sealed sources need not be tested if they are in storage and are not being used. However, when they are removed from storage for use or transferred to another person, and have not been tested within the required leak test interval, they shall be tested before use or transfer. No sealed source shall be stored for a period of more than 10 years without being tested for leakage and/or contamination.
- D. The leak test shall be capable of detecting the presence of 185 becquerels (0.005 microcuries) of radioactive material on the test sample. If the test reveals the presence of 185 becquerels (0.005 microcuries) or more of removable contamination, a report shall be filed with the U.S. Nuclear Regulatory Commission in accordance with 10 CFR 30.50(c)(2), and the source shall be removed immediately from service and decontaminated, repaired, or disposed of in accordance with Commission regulations.
- E. Analysis of leak test samples and/or contamination shall be performed by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services. The licensee is authorized to collect leak test samples but not perform the analysis.
- F. Records of leak test results shall be kept in units of becquerels (microcuries) and shall be maintained for 3 years.
15. The licensee shall conduct a physical inventory every six months, or at other intervals approved by the U.S. Nuclear Regulatory Commission, to account for all sources and/or devices received and possessed under the license. Records of inventories shall be maintained for 5 years from the date of each inventory and shall include the radionuclides, quantities, manufacturer's name and model numbers, and the date of the inventory.
16. Maintenance, repair, cleaning, replacement, and disposal of foils contained in detector cells shall be performed only by the device manufacturer or other persons specifically authorized by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
17. The licensee is authorized to transport licensed material in accordance with the provisions of 10 CFR Part 71, "Packaging and Transportation of Radioactive Material."

**MATERIALS LICENSE
SUPPLEMENTARY SHEET**License Number
19-31402-01Docket or Reference Number
030-38246

Amendment No. 2

18. Except as specifically provided otherwise in this license, the licensee shall conduct its program in accordance with the statements, representations, and procedures contained in the documents, including and enclosures, listed below. This license condition applies only to those procedures that are required to be submitted in accordance with the regulations. The U.S. Nuclear Regulatory Commission's regulations shall govern unless the statements, representations, and procedures in the licensee's application and correspondence are more restrictive than the regulations.

A. Application dated March 2, 2010 (ML100630039)

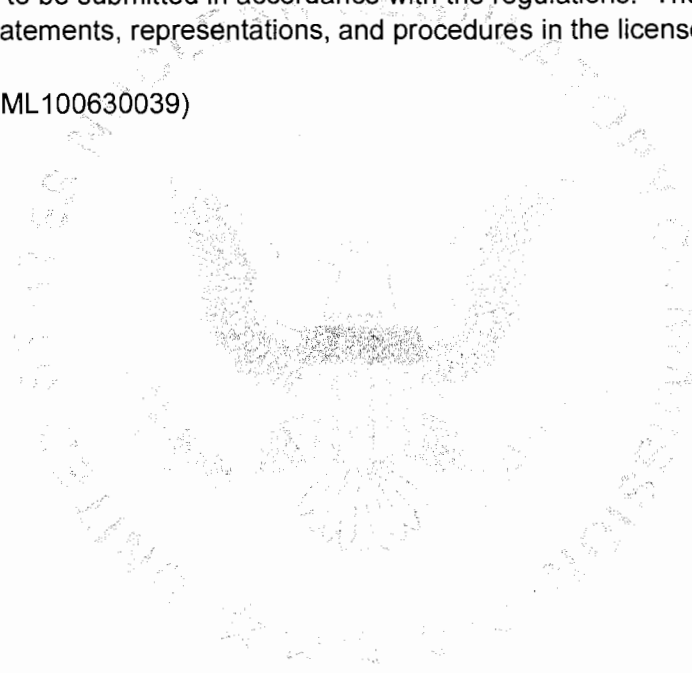

FOR THE U.S. NUCLEAR REGULATORY COMMISSION

Date: July 25, 2016By: Scott Wilson
Region 1