

**MATERIALS LICENSE**

Pursuant to the Atomic Energy Act of 1954, as amended, the Energy Reorganization Act of 1974 (Public Law 93-438), and Title 10, Code of Federal Regulations, Chapter I, Parts 30, 31, 32, 33, 34, 35, 36, 37, 39, 40, 70 and 71, and in reliance on statements and representations heretofore made by the licensee, a license is hereby issued authorizing the licensee to receive, acquire, possess, and transfer byproduct, source, and special nuclear material designated below; to use such material for the purpose(s) and at the place(s) designated below; to deliver or transfer such material to persons authorized to receive it in accordance with the regulations of the applicable Part(s). This license shall be deemed to contain the conditions specified in Section 183 of the Atomic Energy Act of 1954, as amended, and is subject to all applicable rules, regulations, and orders of the Nuclear Regulatory Commission now or hereafter in effect and to any conditions specified below.

<p style="text-align: center;">Licensee</p> <p>1. Construction Testing Services</p>	<p>In accordance with application dated March 30, 2016,</p>	<p>4. Expiration Date: August 31, 2026</p>
<p>2. 3300 E. Bristol Road Burton, MI 48529</p>	<p>3. License number: 21-18680-01 is renewed in its entirety to read as follows:</p>	<p>5. Docket No.: 030-14031 Reference No.:</p>

6. Byproduct, source, and/or special nuclear material	7. Chemical and/or physical form	8. Maximum amount that licensee may possess at any one time under this license	9. Authorized use
A. Cesium-137	A. Sealed Sources (AEA Technology/QSA Inc., Model CDCW556; Isotope Product Laboratories, Model HEG-137)	A. 54 millicuries total	A. To be used in Troxler Electronic Laboratories Models 3400 Series and 3411B surface moisture/density gauges for measuring physical properties of materials.
B. Americium-241	B. Sealed Sources (AEA Technology/QSA, Inc., Model AMNV.997; Isotope Product Laboratories, Model Aml.NO2, 3021 or 3027)	B. 264 millicuries total	B. To be used in Troxler Electronic Laboratories Models 3400 Series and 3411B surface moisture/density gauges for measuring physical properties of materials.

**CONDITIONS**

10. Licensed material may be used at 3300 E., Bristol Road, Burton, Michigan, and at temporary job sites of the licensee anywhere in the United States where the U.S. Nuclear Regulatory Commission maintains jurisdiction for regulating the use of licensed material.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**License Number  
21-18680-01Docket or Reference Number  
030-14031

Amendment No. 11

11. The Radiation Safety Officer for this license is Jack F. Geerlings, P.E.
12. Licensed material shall only be used by, or under the supervision and in the physical presence of, individuals who have received the training described in the application dated March 30, 2016. The licensee shall maintain records of individuals designated as users for 3 years following the last use of licensed material by the individual.
13. A. Sealed sources shall be tested for leakage and/or contamination at intervals not to exceed the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State. In the absence of a registration certificate, sealed sources shall be tested for leakage and/or contamination at intervals not to exceed 6 months, or at such other intervals as specified.
- B. In the absence of a certificate from a transferor indicating that a leak test has been made within the intervals specified in the certificate of registration issued by the U.S. Nuclear Regulatory Commission under 10 CFR 32.210 or by an Agreement State, prior to the transfer, a sealed source received from another person shall not be put into use until tested and the test results received.
- C. Sealed sources need not be tested if they are in storage and are not being used. However, when they are removed from storage for use or transferred to another person, and have not been tested within the required leak test interval, they shall be tested before use or transfer. No sealed source shall be stored for a period of more than 10 years without being tested for leakage and/or contamination.
- D. The leak test shall be capable of detecting the presence of 185 becquerels (0.005 microcuries) of radioactive material on the test sample. If the test reveals the presence of 185 becquerels (0.005 microcuries) or more of removable contamination, a report shall be filed with the U.S. Nuclear Regulatory Commission in accordance with 10 CFR 30.50(c)(2), and the source shall be removed immediately from service and decontaminated, repaired, or disposed of in accordance with Commission regulations.
- E. Analysis of leak test samples and/or contamination shall be performed by persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services. The licensee is authorized to collect leak test samples but not perform the analysis.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**License Number  
21-18680-01Docket or Reference Number  
030-14031

Amendment No. 11

F. Records of leak test results shall be kept in units of becquerels (microcuries) and shall be maintained for 3 years.

14. Sealed sources or source rods containing licensed material shall not be opened or sources removed or detached from source rods or gauges by the licensee.
15. The licensee shall conduct a physical inventory every 6 months, to account for all sealed sources and/or devices received and possessed under the license. Records of inventories shall be maintained for 3 years from the date of each inventory, and shall include the radionuclides, quantities, manufacturer's name and model numbers, and the date of the inventory.
16. Except for maintaining labeling as required by 10 CFR Part 20 or 71, the licensee shall obtain authorization from NRC before making any changes in the sealed source, device, or source-device combination that would alter the description or specifications as indicated in the respective Certificates of Registration issued either by the Commission pursuant to 10 CFR 32.210 or by an Agreement State.
17. Each portable nuclear gauge shall have a lock or outer locked container designed to prevent unauthorized or accidental removal of the sealed source from its shielded position. The gauge or its container must be locked when in transport or storage, or when not under the direct surveillance of an authorized user.
18. Any cleaning, maintenance, or repair of the gauge(s) that requires detaching the source or source rod from the gauge shall be performed only by the manufacturer or by other persons specifically licensed by the U.S. Nuclear Regulatory Commission or an Agreement State to perform such services.
19. The licensee shall develop, implement and maintain operating and emergency procedures that meet the criteria in the section entitled "Radiation Safety Program - Operating and Emergency Procedures" in NUREG-1556, Vol. 1, Rev. 2, dated June 2016.
20. The licensee shall implement and follow procedures for routine maintenance of gauges according to the manufacturer's recommendations and instruction.

**MATERIALS LICENSE  
SUPPLEMENTARY SHEET**

License Number


21-18680-01

Docket or Reference Number

030-14031

Amendment No. 11

21. Except as specifically provided otherwise in this license, the licensee shall conduct its program in accordance with the statements, representations, and procedures contained in the documents, including and enclosures, listed below. This license condition applies only to those procedures that are required to be submitted in accordance with the regulations. The U.S. Nuclear Regulatory Commission's regulations shall govern unless the statements, representations, and procedures in the licensee's application and correspondence are more restrictive than the regulations.
- A. Application dated March 30, 2016 (ML16090A137)
  - B. Letter dated August 12, 2016 (ML16229A564)

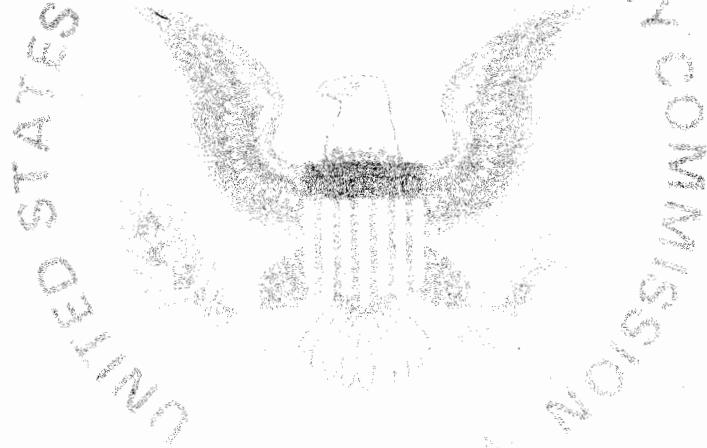

FOR THE U.S. NUCLEAR REGULATORY COMMISSION

By: *Toye L. Simmons*  
Toye L. Simmons  
Materials Licensing Branch  
Region III

Date: August 17, 2016