

*** ISSUED FOR USE BY: _____

DATE: _____

EXPIRES: _____

PACIFIC GAS AND ELECTRIC COMPANY
NUCLEAR POWER GENERATION
DIABLO CANYON POWER PLANT
CORE OPERATING LIMITS REPORT

NUMBER COLR 1-10
REVISION 0
PAGE 1 OF 15
UNIT

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

1

EFFECTIVE DATE

PROCEDURE CLASSIFICATION: QUALITY RELATED

1. CORE OPERATING LIMITS REPORT

This Core Operating Limits Report (COLR) for Diablo Canyon Unit 1 Cycle 10 has been prepared in accordance with the requirements of Technical Specification (TS) 6.9.1.8.

The Technical Specifications affected by this report are listed below:

3/4.1.3.5 - Shutdown Rod Insertion Limit

3/4.1.3.6 - Control Rod Insertion Limits

3/4.2.1 - Axial Flux Difference

3/4.2.2 - Heat Flux Hot Channel Factor - $F_Q(Z)$

3/4.2.3 - RCS Flow Rate and Nuclear Enthalpy Rise Hot Channel Factor

2. OPERATING LIMITS

The cycle-specific parameter limits for the TS listed in Section 1.0 are presented in the following subsections. These limits have been developed using the NRC-approved methodologies specified in TS 6.9.1.8.

2.1 Shutdown Rod Insertion Limit (TS 3/4.1.3.5)

2.1.1 The shutdown rods shall be withdrawn to at least 225 steps.

2.2 Control Rod Insertion Limits (TS 3/4.1.3.6)

2.2.1 The control rod banks shall be limited in physical insertion as shown in Figure 1.

2.3 Axial Flux Difference (TS 3/4.2.1)

2.3.1 The Axial Flux Difference (AFD) Limits are provided in Figure 2.

9903090373 990302
PDR ADDCK 05000275
P PDR

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

2.4 Heat Flux Hot Channel Factor - $F_Q(Z)$ (TS 3/4.2.2)

$$2.4.1 \quad F_Q(Z) < F_Q^{RTP} * K(Z) \quad \text{for } P > 0.5$$

$$F_Q(Z) \leq F_Q^{RTP} * K(Z) \quad \text{for } P \leq 0.5$$

$$\text{where: } P = \frac{\text{THERMAL POWER}}{\text{RATED THERMAL POWER}}$$

$$F_Q^{RTP} = 2.45$$

$K(Z)$ is provided in Figure 7.

2.4.2 The $W(Z)$ curves for TS 4.2.2.2c. Relaxed Axial Offset Control (RAOC) operation, provided in Figures 3 through 6, and tables 2A and 2B are sufficient to determine the RAOC $W(Z)$ versus core height for Cycle 10 burnups through the end of full power reactivity plus a power coastdown of up to 1000 MWD/MTU.

Table 1 shows F_Q margin decreases that are greater than 2% per 31 Effective Full Power Days (EFPD). These values shall be used to increase $F_Q^M(Z)$ as per TS 4.2.2.2e. A 2% penalty factor shall be used at all cycle burnups that are outside the range of Table 1.

2.5 RCS Flow Rate and Nuclear Enthalpy Rise Hot Channel Factor (TS 3/4.2.3)

$$R = \frac{F_{\Delta H}^N}{F_{\Delta H}^{RTP} * [1 + PF_{\Delta H} * (1 - P)]}$$

$$\text{where: } P = \frac{\text{THERMAL POWER}}{\text{RATED THERMAL POWER}}$$

$$F_{\Delta H}^{RTP} = 1.59$$

$$PF_{\Delta H} = 0.3$$

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

3. TABLES

- 3.1 Table 1, "F_Q Margin Decreases in Excess of 2% Per 31 EFPD."
- 3.2 Table 2A, "Load Follow W(Z) Factors at 150 and 3,000 MWD/MTU as a Function of Core Height."
- 3.3 Table 2B, "Load Follow W(Z) Factors at 12,000 and 20,000 MWD/MTU as a Function of Core Height."

4. FIGURES

- 4.1 Figure 1, "Rod Bank Insertion Limits Versus Rated Thermal Power."
- 4.2 Figure 2, "AFD Limits as a Function of Rated Thermal Power."
- 4.3 Figure 3, "Load Follow W(Z) at 150 MWD/MTU as a Function of Core Height."
- 4.4 Figure 4, "Load Follow W(Z) at 3,000 MWD/MTU as a Function of Core Height."
- 4.5 Figure 5, "Load Follow W(Z) at 12,000 MWD/MTU as a Function of Core Height."
- 4.6 Figure 6, "Load Follow W(Z) at 20,000 MWD/MTU as a Function of Core Height."
- 4.7 Figure 7, "K(Z) - Normalized F_Q(Z) as a Function of Core Height."

5. RECORDS

None

6. REFERENCES

Westinghouse Reload Safety Evaluation for Diablo Canyon Power Plant Unit 1 Cycle 10, Revision 0, dated January 1999.

7. SPONSOR

William Bojduj

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

Table 1

F_Q Margin Decreases in Excess of 2% Per 31 EFPD

Cycle Burnup (MWD/MTU)	Max % Decrease In F _Q Margin
0	3.19
150	3.19
314	3.45
478	3.66
642	3.79
806	3.81
970	3.70
1134	3.47
1299	3.14
1463	2.73
1627	2.26
1791	2.00
5236	2.00
5400	2.59
5564	3.12
5728	2.90
5893	2.68
6057	2.49
6221	2.32
6385	2.17
6549	2.05
6713	2.00

NOTE: All cycle burnups outside the range of this table shall use a 2% decrease in F_Q margin for compliance with Specification 4.2.2.2.e. Linear interpolation is adequate for intermediate cycle burnups.

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

Table 2A Load Follow W(Z) Factors at 150 and 3000 MWD/MTU
as a Function of Core Height

HEIGHT (FEET)	150 MWD/MTU W(Z)	HEIGHT (FEET)	3000 MWD/MTU W(Z)
*0.0000	1.0000	*0.0000	1.0000
*0.2000	1.0000	*0.2000	1.0000
*0.4000	1.0000	*0.4000	1.0000
*0.6000	1.0000	*0.6000	1.0000
*0.8000	1.0000	*0.8000	1.0000
*1.0000	1.0000	*1.0000	1.0000
*1.2000	1.0000	*1.2000	1.0000
*1.4000	1.0000	*1.4000	1.0000
*1.6000	1.0000	*1.6000	1.0000
*1.8000	1.0000	*1.8000	1.0000
2.0000	1.3511	2.0000	1.3506
2.2000	1.3254	2.2000	1.3227
2.4000	1.2997	2.4000	1.2947
2.6000	1.2744	2.6000	1.2694
2.8000	1.2494	2.8000	1.2473
3.0000	1.2273	3.0000	1.2232
3.2000	1.2152	3.2000	1.2075
3.4000	1.2125	3.4000	1.2059
3.6000	1.2072	3.6000	1.2026
3.8000	1.2033	3.8000	1.1983
4.0000	1.1995	4.0000	1.1932
4.2000	1.1942	4.2000	1.1871
4.4000	1.1880	4.4000	1.1800
4.6000	1.1809	4.6000	1.1720
4.8000	1.1728	4.8000	1.1632
5.0000	1.1638	5.0000	1.1536
5.2000	1.1543	5.2000	1.1434
5.4000	1.1438	5.4000	1.1324
5.6000	1.1325	5.6000	1.1206
5.8000	1.1302	5.8000	1.1160

NOTE: W(Z) values given above for 150 and 3000 MWD/MTU are plotted in COLR Figures 3 and 4, respectively.

* Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

Table 2A Load Follow W(Z) Factors at 150 and 3000 MWD/MTU
as a Function of Core Height (Continued)

HEIGHT (FEET)	150 MWD/MTU W(Z)	HEIGHT (FEET)	3000 MWD/MTU W(Z)
6.0000	1.1353	6.0000	1.1193
6.2000	1.1469	6.2000	1.1320
6.4000	1.1562	6.4000	1.1436
6.6000	1.1647	6.6000	1.1543
6.8000	1.1720	6.8000	1.1639
7.0000	1.1778	7.0000	1.1721
7.2000	1.1822	7.2000	1.1790
7.4000	1.1851	7.4000	1.1844
7.6000	1.1861	7.6000	1.1881
7.8000	1.1851	7.8000	1.1898
8.0000	1.1817	8.0000	1.1893
8.2000	1.1761	8.2000	1.1868
8.4000	1.1677	8.4000	1.1815
8.6000	1.1565	8.6000	1.1732
8.8000	1.1530	8.8000	1.1735
9.0000	1.1577	9.0000	1.1885
9.2000	1.1739	9.2000	1.2143
9.4000	1.1943	9.4000	1.2439
9.6000	1.2168	9.6000	1.2745
9.8000	1.2391	9.8000	1.3038
10.0000	1.2584	10.0000	1.3286
*10.2000	1.0000	*10.2000	1.0000
*10.4000	1.0000	*10.4000	1.0000
*10.6000	1.0000	*10.6000	1.0000
*10.8000	1.0000	*10.8000	1.0000
*11.0000	1.0000	*11.0000	1.0000
*11.2000	1.0000	*11.2000	1.0000
*11.4000	1.0000	*11.4000	1.0000
*11.6000	1.0000	*11.6000	1.0000
*11.8000	1.0000	*11.8000	1.0000
*12.0000	1.0000	*12.0000	1.0000

NOTE: W(Z) values given above for 150 and 3000 MWD/MTU are plotted in COLR Figures 3 and 4, respectively.

* Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

Table 2B Load Follow W(Z) Factors at 12000 and 20000 MWD/MTU
as a Function of Core Height

HEIGHT (FEET)	12000 MWD/MTU W(Z)	HEIGHT (FEET)	20000 MWD/MTU W(Z)
*0.0000	1.0000	*0.0000	1.0000
*0.2000	1.0000	*0.2000	1.0000
*0.4000	1.0000	*0.4000	1.0000
*0.6000	1.0000	*0.6000	1.0000
*0.8000	1.0000	*0.8000	1.0000
*1.0000	1.0000	*1.0000	1.0000
*1.2000	1.0000	*1.2000	1.0000
*1.4000	1.0000	*1.4000	1.0000
*1.6000	1.0000	*1.6000	1.0000
*1.8000	1.0000	*1.8000	1.0000
2.0000	1.2073	2.0000	1.2229
2.2000	1.1956	2.2000	1.2094
2.4000	1.1836	2.4000	1.1955
2.6000	1.1713	2.6000	1.1815
2.8000	1.1590	2.8000	1.1717
3.0000	1.1528	3.0000	1.1621
3.2000	1.1506	3.2000	1.1607
3.4000	1.1498	3.4000	1.1735
3.6000	1.1542	3.6000	1.1884
3.8000	1.1583	3.8000	1.2022
4.0000	1.1613	4.0000	1.2144
4.2000	1.1634	4.2000	1.2250
4.4000	1.1644	4.4000	1.2335
4.6000	1.1652	4.6000	1.2401
4.8000	1.1677	4.8000	1.2450
5.0000	1.1704	5.0000	1.2467
5.2000	1.1707	5.2000	1.2512
5.4000	1.1712	5.4000	1.2696
5.6000	1.1838	5.6000	1.2929
5.8000	1.1973	5.8000	1.3139

NOTE: W(Z) values given above for 12000 and 20000 MWD/MTU are plotted in COLR Figures 5 and 6, respectively.

* Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10


Table 2B Load Follow W(Z) Factors at 12000 and 20000 MWD/MTU
as a Function of Core Height (Continued)

HEIGHT (FEET)	12000 MWD/MTU W(Z)	HEIGHT (FEET)	20000 MWD/MTU W(Z)
6.0000	1.2088	6.0000	1.3318
6.2000	1.2189	6.2000	1.3470
6.4000	1.2272	6.4000	1.3593
6.6000	1.2336	6.6000	1.3684
6.8000	1.2377	6.8000	1.3742
7.0000	1.2406	7.0000	1.3766
7.2000	1.2442	7.2000	1.3757
7.4000	1.2482	7.4000	1.3709
7.6000	1.2497	7.6000	1.3620
7.8000	1.2488	7.8000	1.3491
8.0000	1.2455	8.0000	1.3320
8.2000	1.2401	8.2000	1.3109
8.4000	1.2320	8.4000	1.2859
8.6000	1.2214	8.6000	1.2596
8.8000	1.2162	8.8000	1.2403
9.0000	1.2179	9.0000	1.2287
9.2000	1.2329	9.2000	1.2185
9.4000	1.2612	9.4000	1.2129
9.6000	1.2866	9.6000	1.2283
9.8000	1.3089	9.8000	1.2518
10.0000	1.3283	10.0000	1.2752
*10.2000	1.0000	*10.2000	1.0000
*10.4000	1.0000	*10.4000	1.0000
*10.6000	1.0000	*10.6000	1.0000
*10.8000	1.0000	*10.8000	1.0000
*11.0000	1.0000	*11.0000	1.0000
*11.2000	1.0000	*11.2000	1.0000
*11.4000	1.0000	*11.4000	1.0000
*11.6000	1.0000	*11.6000	1.0000
*11.8000	1.0000	*11.8000	1.0000
*12.0000	1.0000	*12.0000	1.0000

NOTE: W(Z) values given above for 12000 and 20000 MWD/MTU are plotted in COLR Figures 5 and 6, respectively.

* Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g


TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

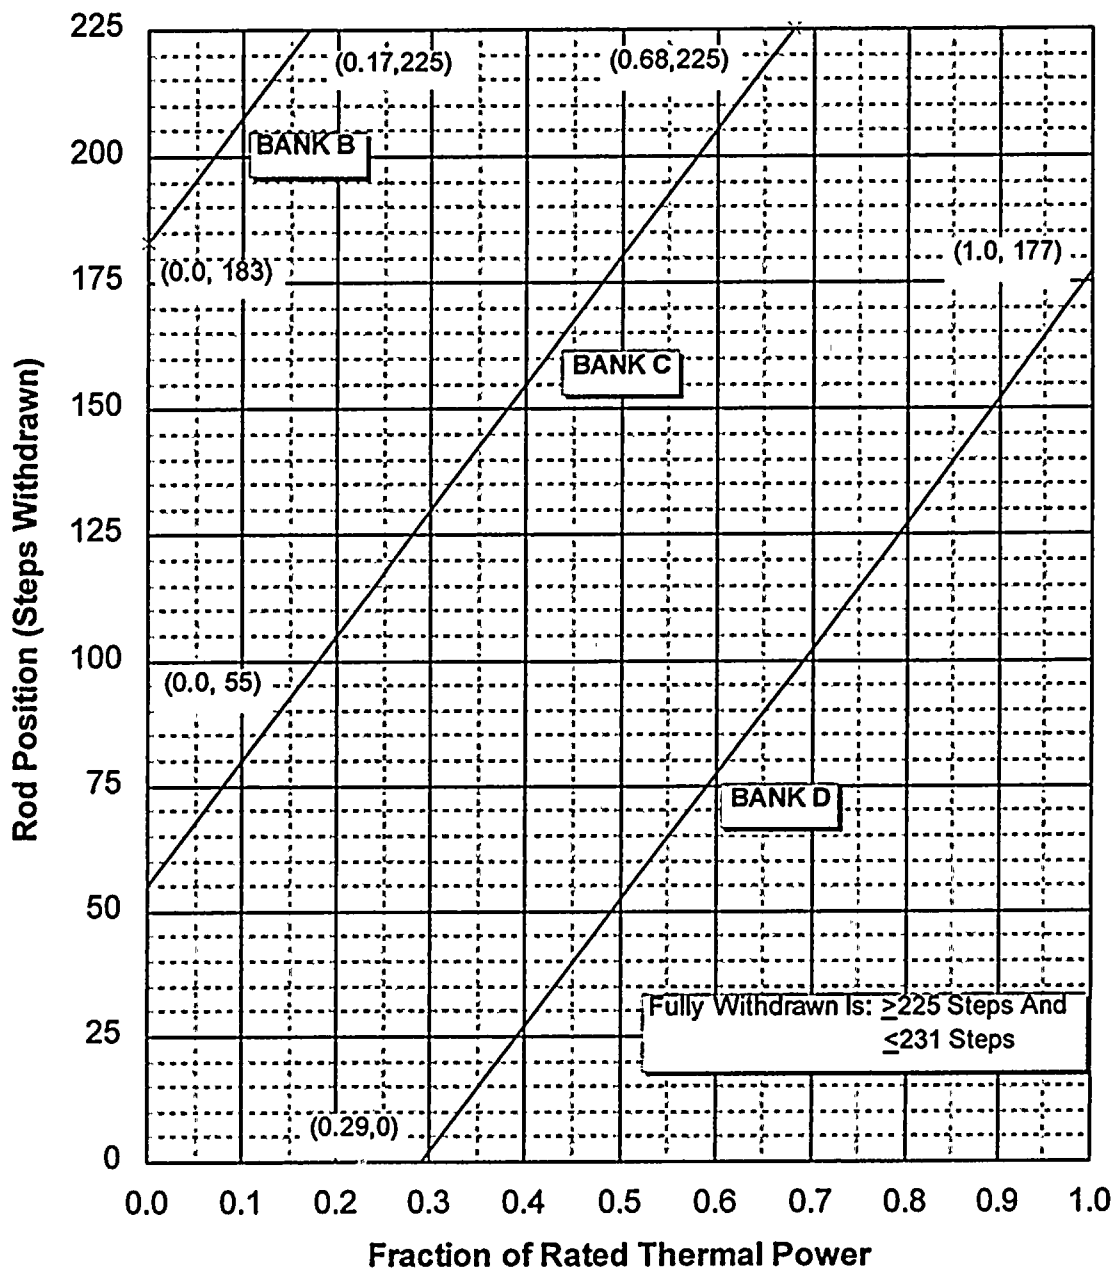

01358801

Figure 1
Rod Bank Insertion Limits Versus Rated Thermal Power

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

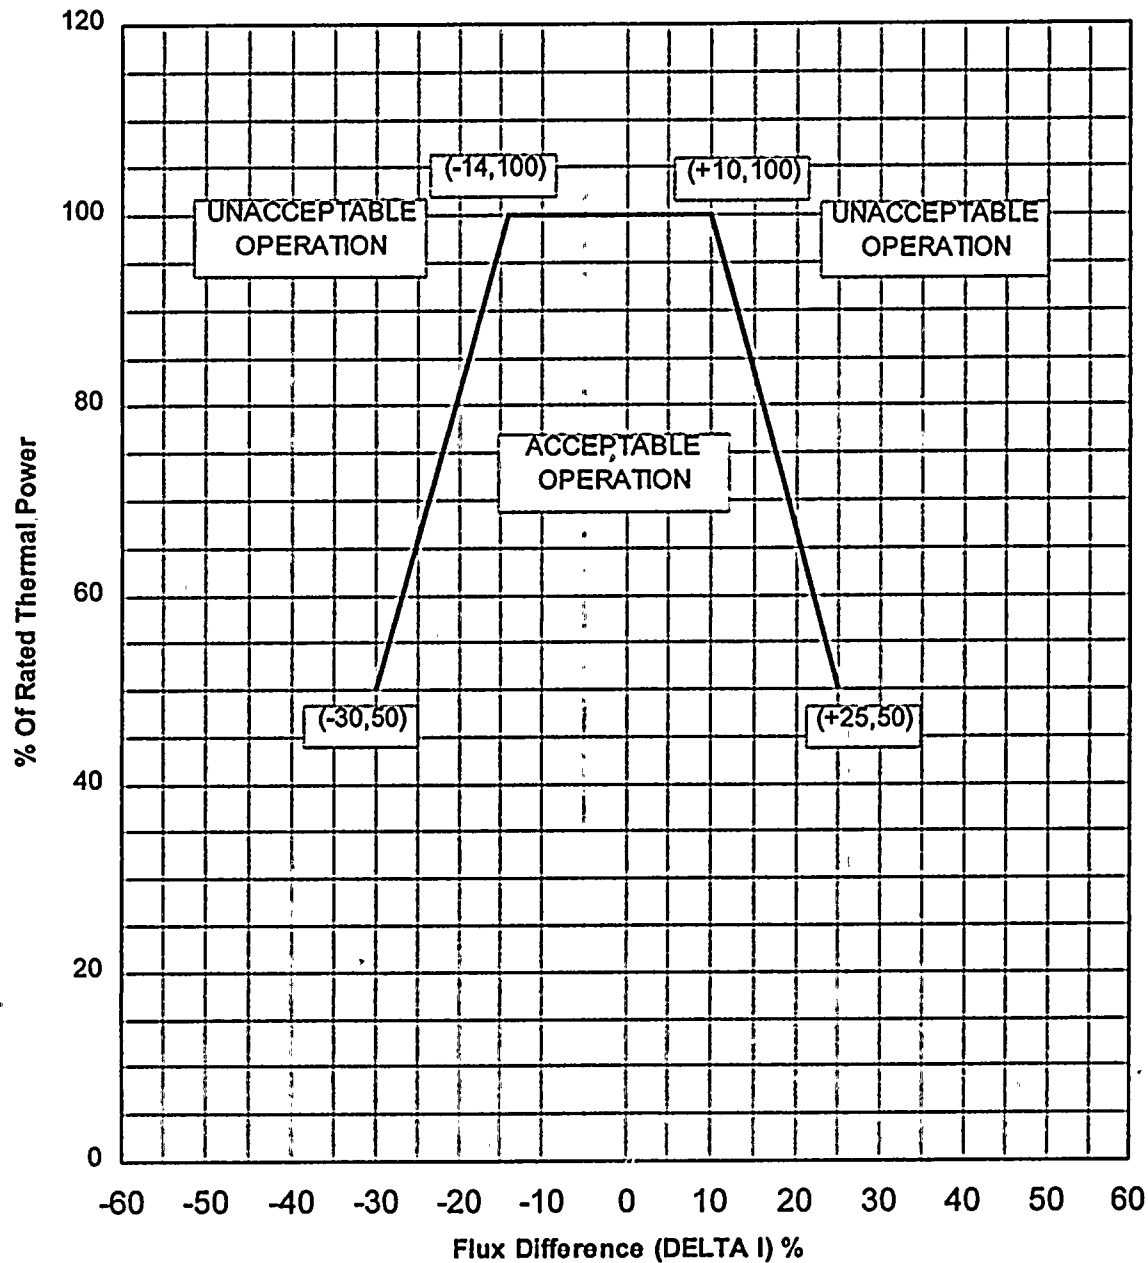

01358802

Figure 2
AFD Limits as a Function of Rated Thermal Power

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

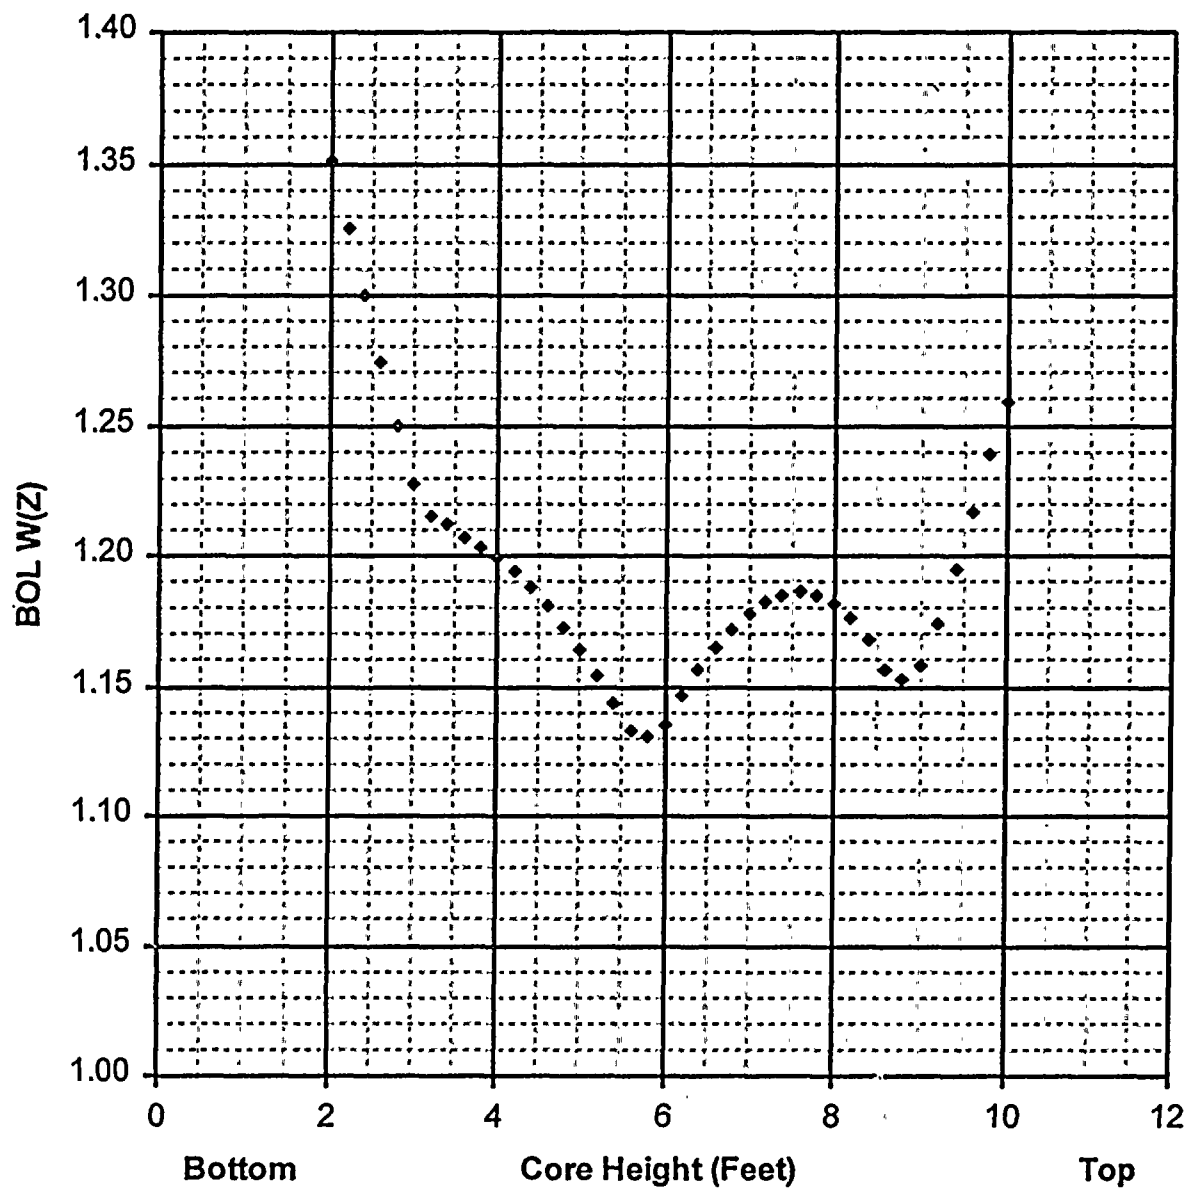


Figure 3
Load Follow W(Z) at 150 MWD/MTU as a Function of Core Height
* Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g

ACRAPH

1 1 1

2 2

22 2

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

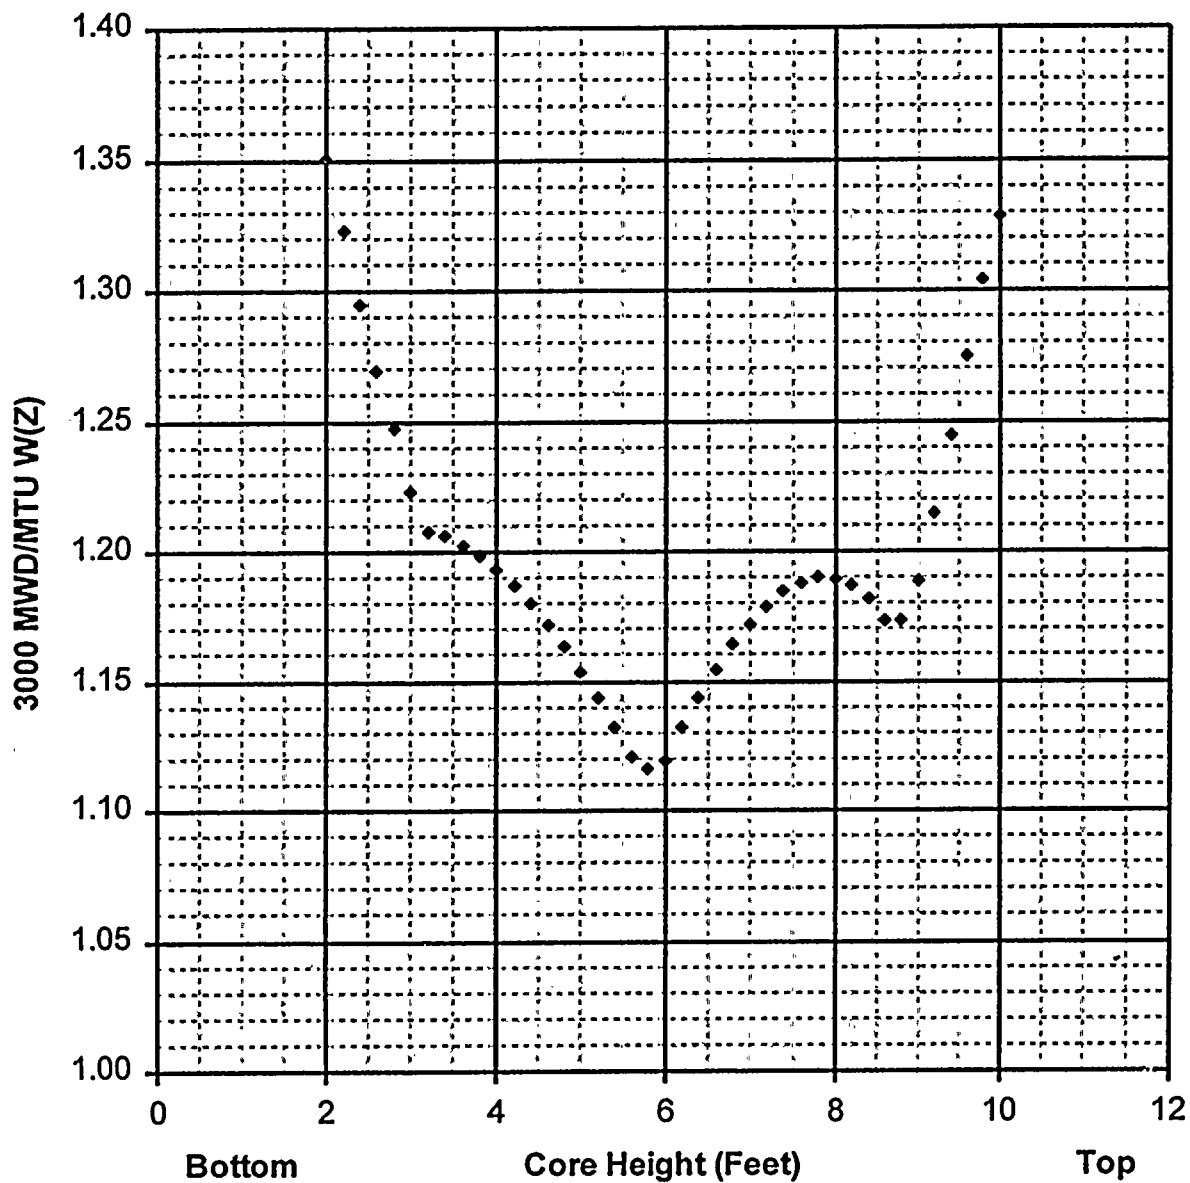


Figure 4
Load Follow W(Z) at 3000 MWD/MTU as a Function of Core Height
*Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

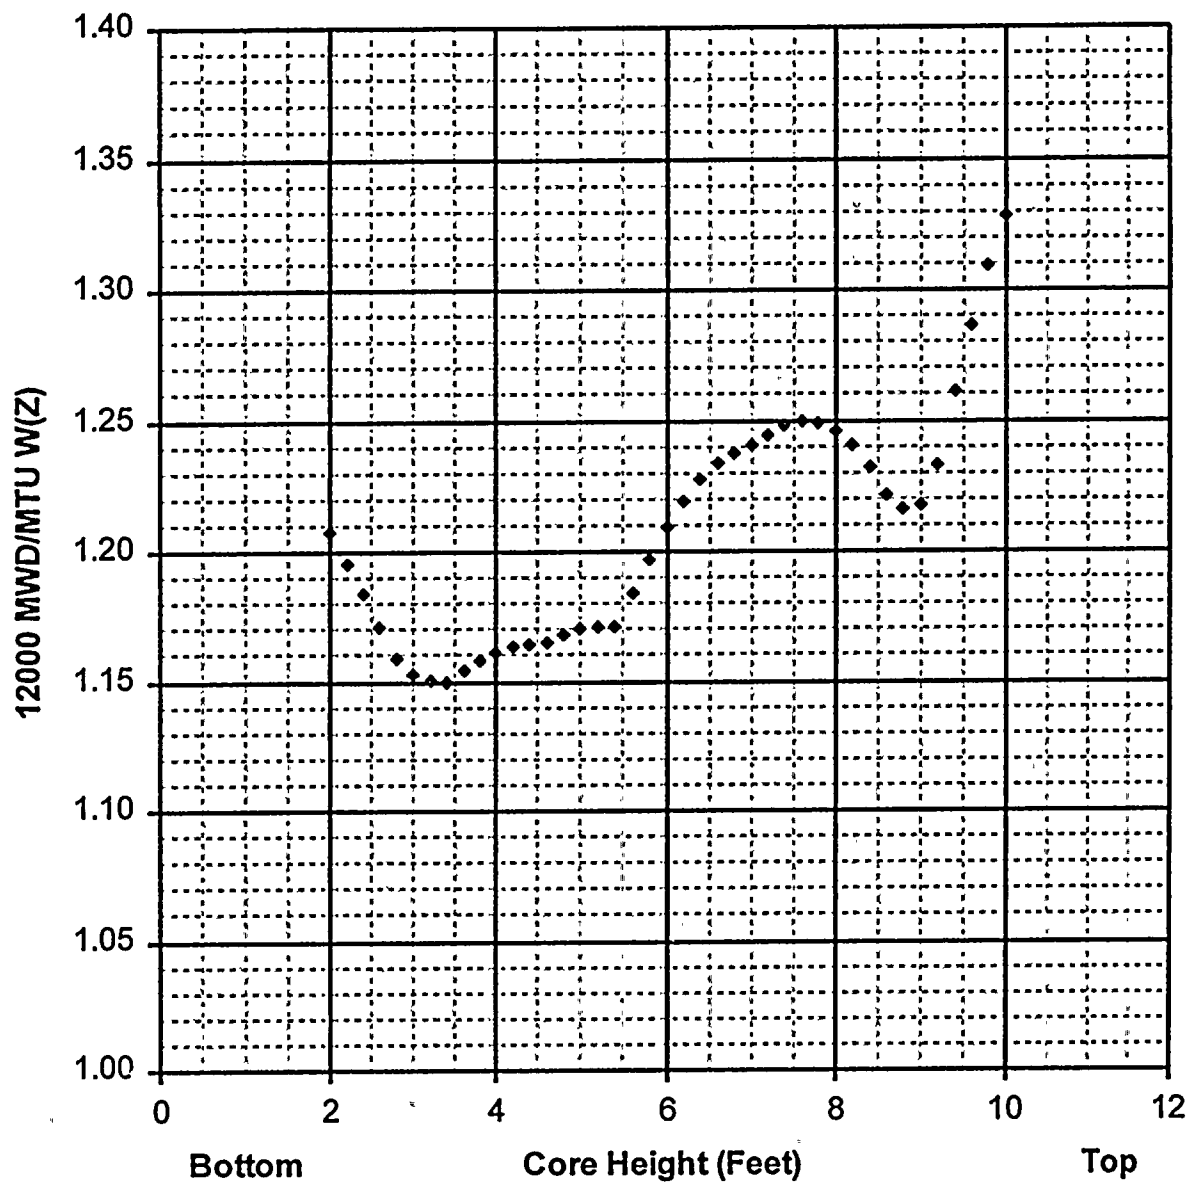


Figure 5
Load Follow W(Z) at 12000 MWD/MTU as a Function of Core Height
* Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10


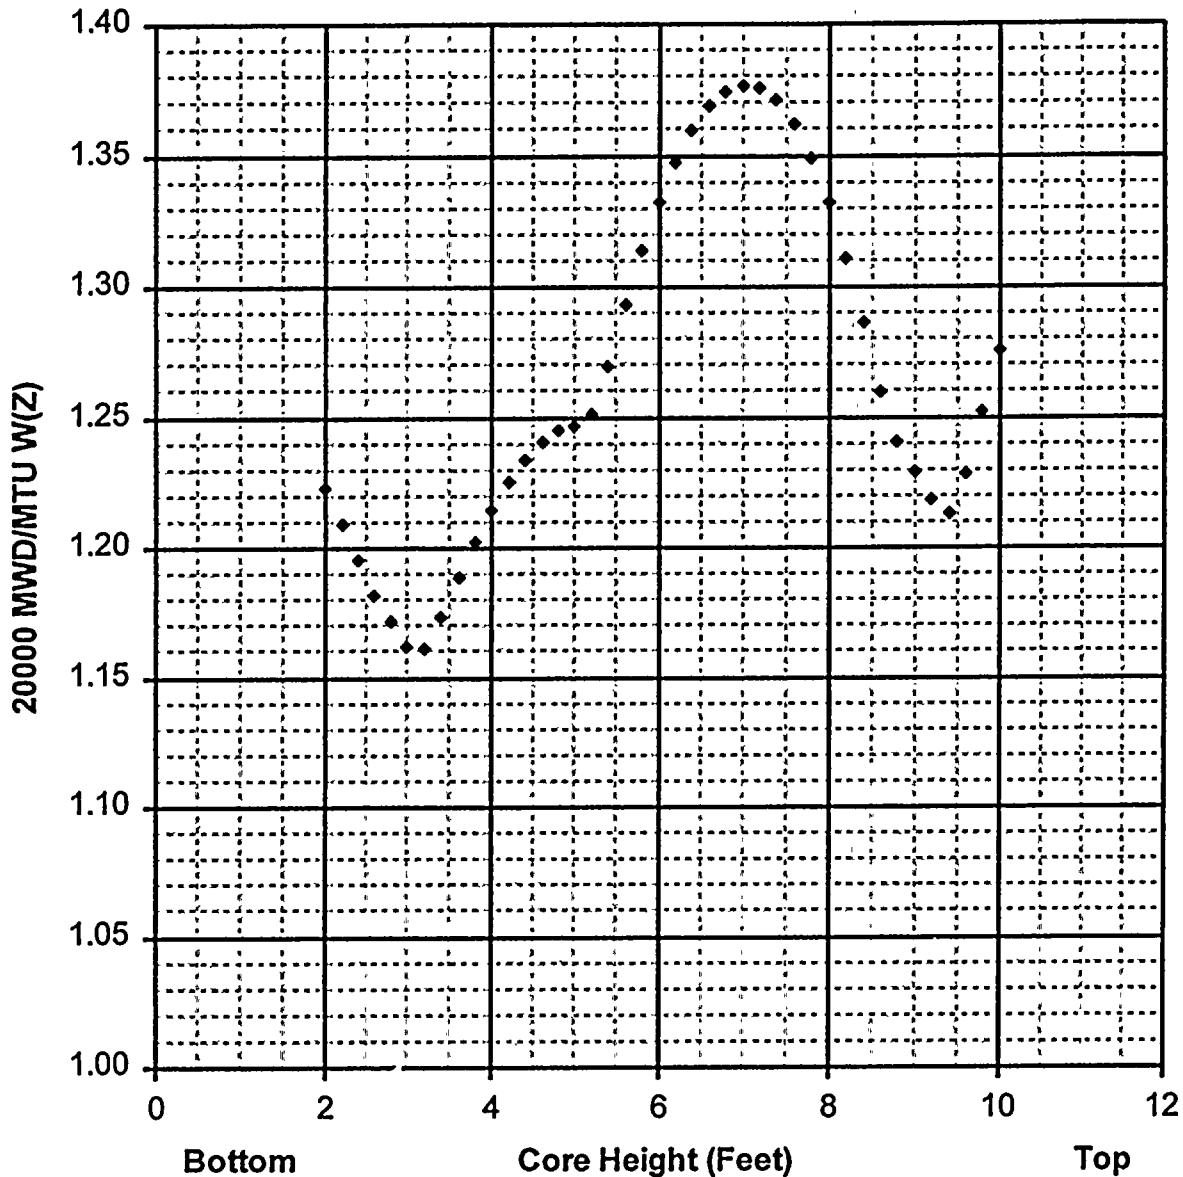


Figure 6
Load Follow W(Z) at 20000 MWD/MTU as a Function of Core Height
* Top and Bottom 15% Excluded Per Tech Spec 4.2.2.2.g

TITLE: COLR FOR DIABLO CANYON UNIT 1 CYCLE 10

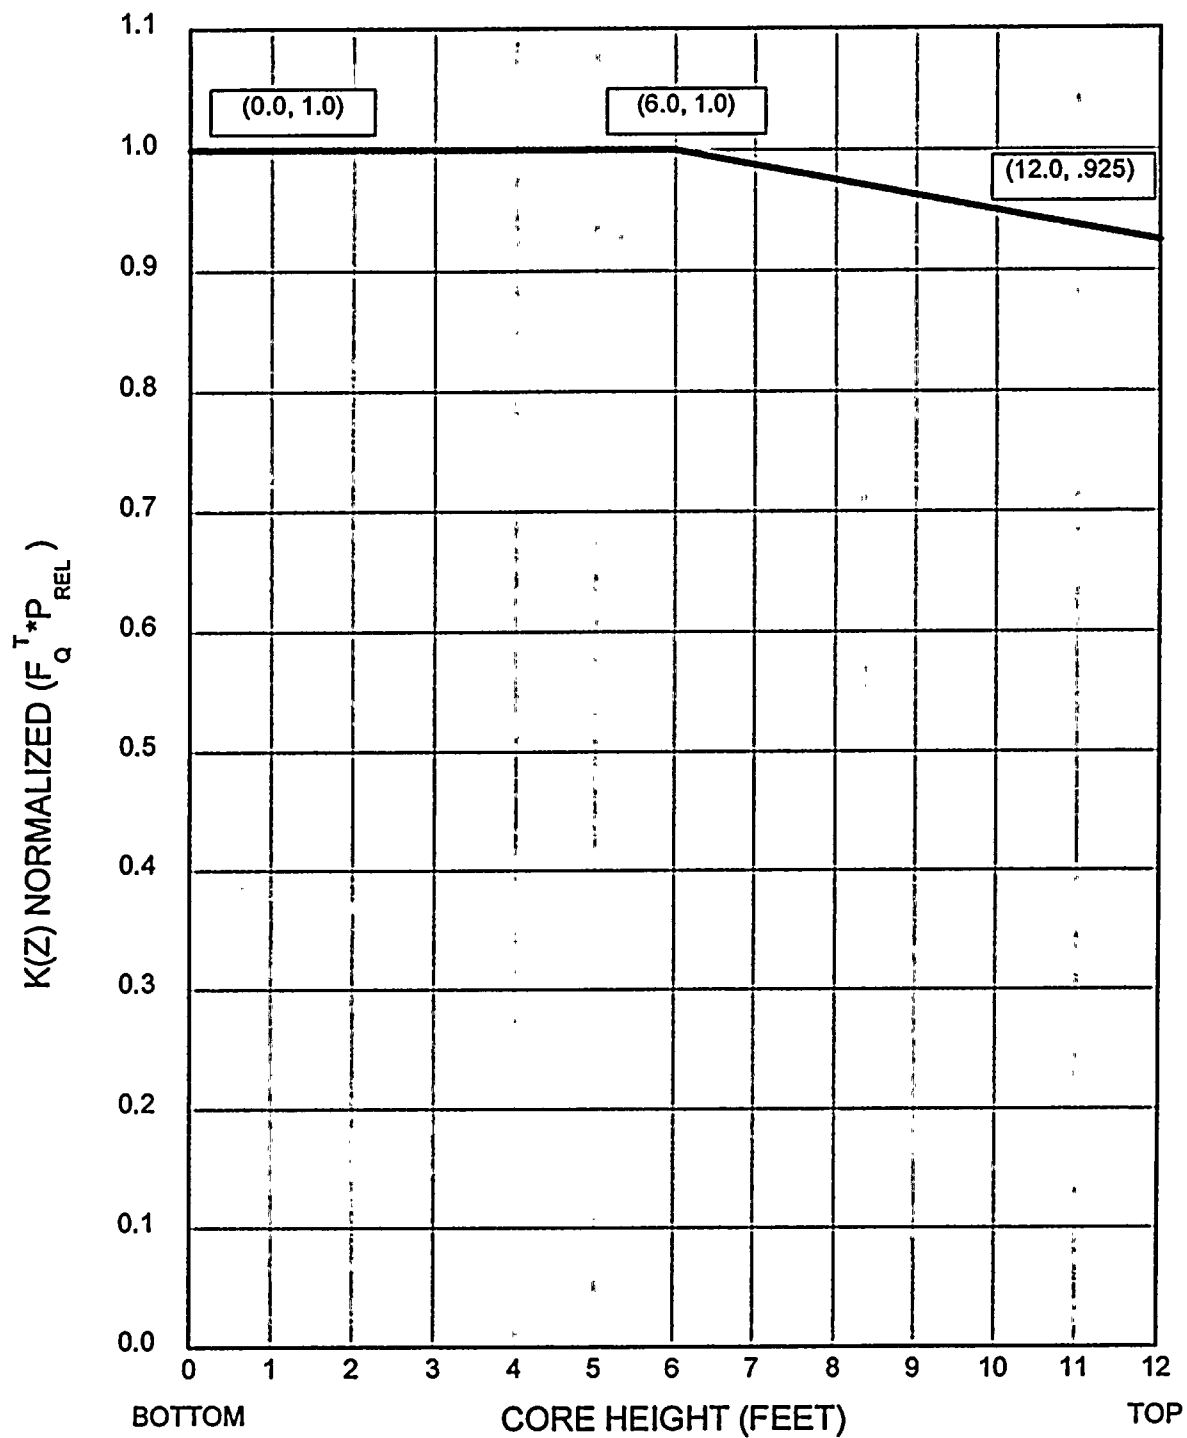

01358807

Figure 7
 $K(Z)$ - Normalized $F_Q(Z)$ as a Function of Core Height

